


Photometric test report

| | | |
|--|---|---|
| Family Silica® 21 | Order number: 51MX21TCTAW EAN: 4058352796610 | LP number 59274_85 |
|  | Version surface-mounted luminaire, reflector, black, direct distribution, narrow distribution, UGR≤19 (L65≤3000cd/m²), tunable white Lamps LED 6500 K CRI ≥ 80 Controlgear ECG-DALI Setting individual position Rated values Net luminous flux = 9300 lm Power consumption = 80.5 W Luminous efficacy = 115.5 lm/W | serial documentation 03.05.2023  |

Luminous intensity in cd/klm C180-0 C270-90 **Imax: 1470 cd/klm**

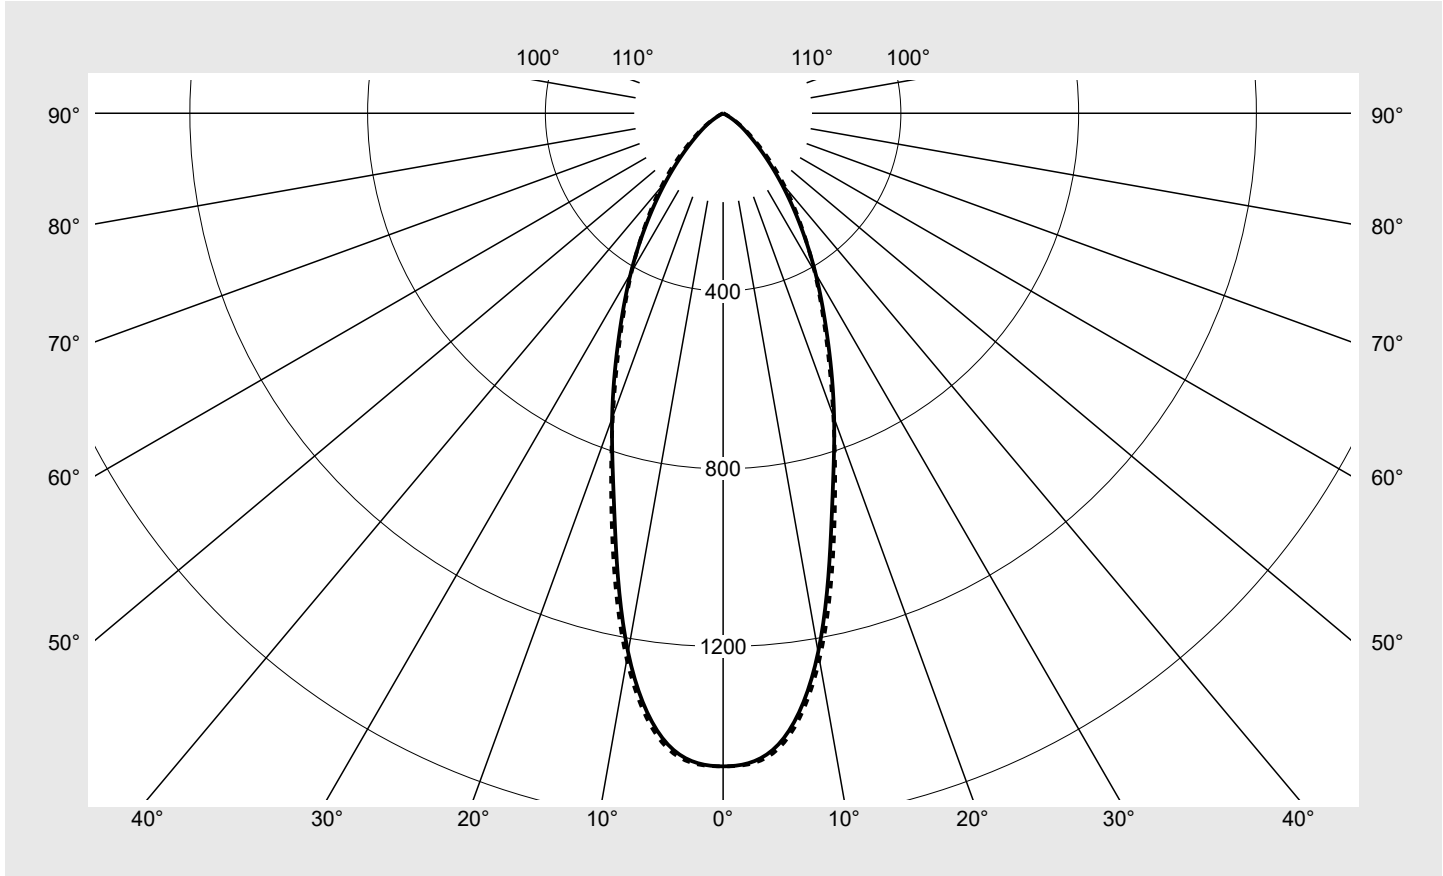

| Classifications | |
|-----------------|-------------------------------------|
| DIN 5040 | A 7 0 |
| CIE | N1=85 N2=99 N3=100 N4=100 N5=100 |

| Luminaire light output ratios | |
|-------------------------------|--------|
| η_{LB} | 100.0% |
| ϕ_u | 100.0% |
| ϕ_o | 0.0% |

Measurement conditions
DIN EN 13032 and DIN 5032

Photometric test report

| | | |
|---|---|-------------------------------------|
| Family Silica® 21 | Order number: 51MX21TCTAW EAN: 4058352796610 | LP number 59274_85 |
| Table of values for luminous intensities | | Maximum luminous intensity |
| | | siteco |

| C-planes γ | 0° 180° | 15° | 30° | 45° | 60° | 75° | 90° 270° | Phi-zone | Total Phi-zone |
|------------------------------|------------|----------------------|----------------------|----------------------|----------------------|----------------------|-------------|-------------------------|-------------------|
| | | 165° 195° 345° | 150° 210° 330° | 135° 225° 315° | 120° 240° 300° | 105° 255° 285° | | | |
| Luminous intensity in cd/klm | | | | | | | | Luminous flux in lm/klm | |
| 0° | 1469.7 | 1469.7 | 1469.7 | 1469.7 | 1469.7 | 1469.7 | 1469.7 | 8.8 | 8.8 |
| 5° | 1425.9 | 1423.7 | 1417.2 | 1426.5 | 1433.0 | 1431.2 | 1434.7 | 68.2 | 77.0 |
| 10° | 1231.5 | 1233.2 | 1235.5 | 1249.4 | 1249.6 | 1243.0 | 1248.1 | 118.2 | 195.2 |
| 15° | 943.7 | 950.9 | 962.6 | 981.4 | 980.5 | 965.2 | 966.6 | 137.0 | 332.2 |
| 20° | 730.3 | 729.1 | 721.8 | 719.8 | 726.6 | 719.9 | 725.4 | 135.8 | 468.0 |
| 25° | 554.7 | 552.6 | 536.3 | 523.0 | 531.2 | 537.4 | 545.0 | 124.7 | 592.7 |
| 30° | 415.7 | 413.6 | 392.8 | 386.6 | 400.6 | 405.5 | 411.7 | 110.2 | 702.9 |
| 35° | 297.0 | 298.7 | 284.3 | 282.2 | 303.6 | 308.4 | 303.5 | 93.1 | 796.0 |
| 40° | 200.5 | 204.3 | 201.1 | 204.4 | 221.4 | 223.2 | 217.2 | 74.2 | 870.2 |
| 45° | 125.8 | 129.2 | 131.9 | 140.1 | 150.2 | 148.5 | 143.7 | 53.9 | 924.1 |
| 50° | 74.7 | 77.5 | 82.6 | 89.5 | 95.9 | 91.3 | 86.7 | 36.2 | 960.3 |
| 55° | 42.1 | 44.5 | 49.0 | 54.2 | 57.0 | 52.1 | 48.8 | 22.6 | 982.9 |
| 60° | 13.9 | 17.2 | 26.8 | 30.8 | 30.6 | 21.8 | 18.2 | 11.3 | 994.3 |
| 65° | 4.2 | 5.3 | 8.3 | 15.7 | 9.7 | 6.0 | 5.5 | 4.1 | 998.4 |
| 70° | 1.8 | 1.9 | 1.6 | 3.1 | 2.1 | 2.4 | 2.5 | 1.1 | 999.6 |
| 75° | 0.4 | 0.5 | 0.5 | 0.7 | 0.7 | 0.7 | 0.5 | 0.3 | 999.9 |
| 80° | 0.1 | 0.1 | 0.1 | 0.1 | 0.2 | 0.2 | 0.2 | 0.1 | 999.9 |
| 85° | 0.1 | 0.1 | 0.1 | 0.1 | 0.2 | 0.2 | 0.2 | 0.1 | 1000.0 |
| 90° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 1000.0 |
| 95° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 1000.0 |
| 100° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 1000.0 |
| 105° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 1000.0 |
| 110° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 1000.0 |
| 115° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 1000.0 |
| 120° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 1000.0 |
| 125° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 1000.0 |
| 130° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 1000.0 |
| 135° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 1000.0 |
| 140° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 1000.0 |
| 145° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 1000.0 |
| 150° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 1000.0 |
| 155° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 1000.0 |
| 160° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 1000.0 |
| 165° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 1000.0 |
| 170° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 1000.0 |
| 175° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 1000.0 |
| 180° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 1000.0 |

Photometric test report

| | | |
|-----------------------------|---|------------------------------|
| Family Silica® 21 | Order number: 51MX21TCTAW EAN: 4058352796610 | LP number 59274_85 |
|-----------------------------|---|------------------------------|

| | | |
|------------------|----------------------|---------------|
| UGR-Table | Standard room | siteco |
|------------------|----------------------|---------------|

| | | | | | | | | | | | |
|------------------------------|---------------------|------|------|------|------|--------------------|------|------|------|------|------|
| Reflection factor of ceiling | 0.7 | 0.7 | 0.5 | 0.5 | 0.3 | 0.7 | 0.7 | 0.5 | 0.5 | 0.3 | |
| Reflection factor of walls | 0.5 | 0.3 | 0.5 | 0.3 | 0.3 | 0.5 | 0.3 | 0.5 | 0.3 | 0.3 | |
| Reflection factor of floor | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 | |
| Room dimensions | View crosswise (C0) | | | | | View endwise (C90) | | | | | |
| x | y | | | | | | | | | | |
| 2H | 2H | 16.6 | 17.9 | 17.0 | 18.2 | 18.5 | 17.2 | 18.5 | 17.6 | 18.8 | 19.1 |
| | 3H | 16.5 | 17.6 | 16.9 | 17.9 | 18.3 | 17.1 | 18.2 | 17.5 | 18.5 | 18.9 |
| | 4H | 16.4 | 17.4 | 16.8 | 17.8 | 18.1 | 17.0 | 18.0 | 17.4 | 18.4 | 18.8 |
| | 6H | 16.4 | 17.2 | 16.8 | 17.6 | 18.0 | 17.0 | 17.9 | 17.4 | 18.2 | 18.6 |
| | 8H | 16.4 | 17.2 | 16.8 | 17.5 | 18.0 | 17.0 | 17.8 | 17.5 | 18.2 | 18.6 |
| | 12H | 16.4 | 17.1 | 16.8 | 17.5 | 17.9 | 17.0 | 17.7 | 17.4 | 18.1 | 18.5 |
| 4H | 2H | 16.6 | 17.6 | 17.0 | 17.9 | 18.3 | 17.2 | 18.2 | 17.6 | 18.5 | 18.9 |
| | 3H | 16.4 | 17.3 | 16.9 | 17.6 | 18.1 | 17.0 | 17.8 | 17.5 | 18.2 | 18.6 |
| | 4H | 16.4 | 17.1 | 16.8 | 17.5 | 17.9 | 16.9 | 17.6 | 17.4 | 18.1 | 18.5 |
| | 6H | 16.3 | 16.9 | 16.7 | 17.3 | 17.8 | 16.9 | 17.5 | 17.3 | 17.9 | 18.4 |
| | 8H | 16.2 | 16.8 | 16.7 | 17.2 | 17.7 | 16.8 | 17.3 | 17.3 | 17.8 | 18.3 |
| | 12H | 16.2 | 16.7 | 16.7 | 17.1 | 17.6 | 16.8 | 17.2 | 17.3 | 17.7 | 18.2 |
| 8H | 4H | 16.2 | 16.8 | 16.7 | 17.2 | 17.7 | 16.8 | 17.3 | 17.3 | 17.8 | 18.3 |
| | 6H | 16.1 | 16.6 | 16.6 | 17.0 | 17.5 | 16.7 | 17.1 | 17.2 | 17.6 | 18.1 |
| | 8H | 16.1 | 16.4 | 16.6 | 16.9 | 17.5 | 16.6 | 17.0 | 17.1 | 17.5 | 18.0 |
| | 12H | 16.0 | 16.3 | 16.6 | 16.8 | 17.4 | 16.6 | 16.9 | 17.1 | 17.4 | 18.0 |
| 12H | 4H | 16.2 | 16.7 | 16.7 | 17.1 | 17.6 | 16.8 | 17.2 | 17.3 | 17.7 | 18.2 |
| | 6H | 16.1 | 16.4 | 16.6 | 16.9 | 17.5 | 16.7 | 17.0 | 17.2 | 17.5 | 18.0 |
| | 8H | 16.0 | 16.3 | 16.6 | 16.8 | 17.4 | 16.6 | 16.9 | 17.1 | 17.4 | 18.0 |

| | | | |
|------------------------|---|--------------------------------------|----------------------------------|
| Luminance table | Max. for $\gamma \geq 65^\circ$ | Photometric dimensions in mm: | L = 2940 B = 49 |
|------------------------|---|--------------------------------------|----------------------------------|

| C-planes | γ | Luminance in cd/m ² | | | | | | | |
|----------|----------|--------------------------------|-----------------------------|-----------------------------|-----------------------------|-----------------------------|-----------------------------|-------------|--|
| | | 0° 180° | 15° 165° 195° 345° | 30° 150° 210° 330° | 45° 135° 225° 315° | 60° 120° 240° 300° | 75° 105° 255° 285° | 90° 270° | |
| 45° | | 11481.0 | 11794.1 | 12044.7 | 12792.5 | 13711.6 | 13561.9 | 13115.7 | |
| 50° | | 7504.0 | 7783.0 | 8297.8 | 8984.0 | 9628.1 | 9169.6 | 8703.1 | |
| 55° | | 4738.3 | 5006.9 | 5511.6 | 6098.8 | 6410.3 | 5861.2 | 5487.0 | |
| 60° | | 1797.5 | 2215.8 | 3464.6 | 3982.0 | 3945.0 | 2813.8 | 2344.9 | |
| 65° | | 640.5 | 811.4 | 1274.4 | 2400.2 | 1484.8 | 922.2 | 835.6 | |
| 70° | | 339.9 | 362.4 | 307.5 | 581.0 | 394.9 | 457.7 | 476.6 | |
| 75° | | 90.3 | 126.0 | 123.7 | 164.1 | 164.1 | 162.9 | 133.2 | |
| 80° | | 32.0 | 35.3 | 42.4 | 51.3 | 63.9 | 78.1 | 78.1 | |
| 85° | | 56.3 | 56.3 | 70.4 | 88.1 | 112.6 | 134.1 | 148.1 | |

Photometric test report

| | | |
|------------------------------------|---|-------------------------------------|
| Family Silica® 21 | Order number: 51MX21TCTAW EAN: 4058352796610 | LP number 59274_85 |
|------------------------------------|---|-------------------------------------|

Luminance values in cd/m² γ 65° γ 70° γ 75° γ 80° γ 85°

