
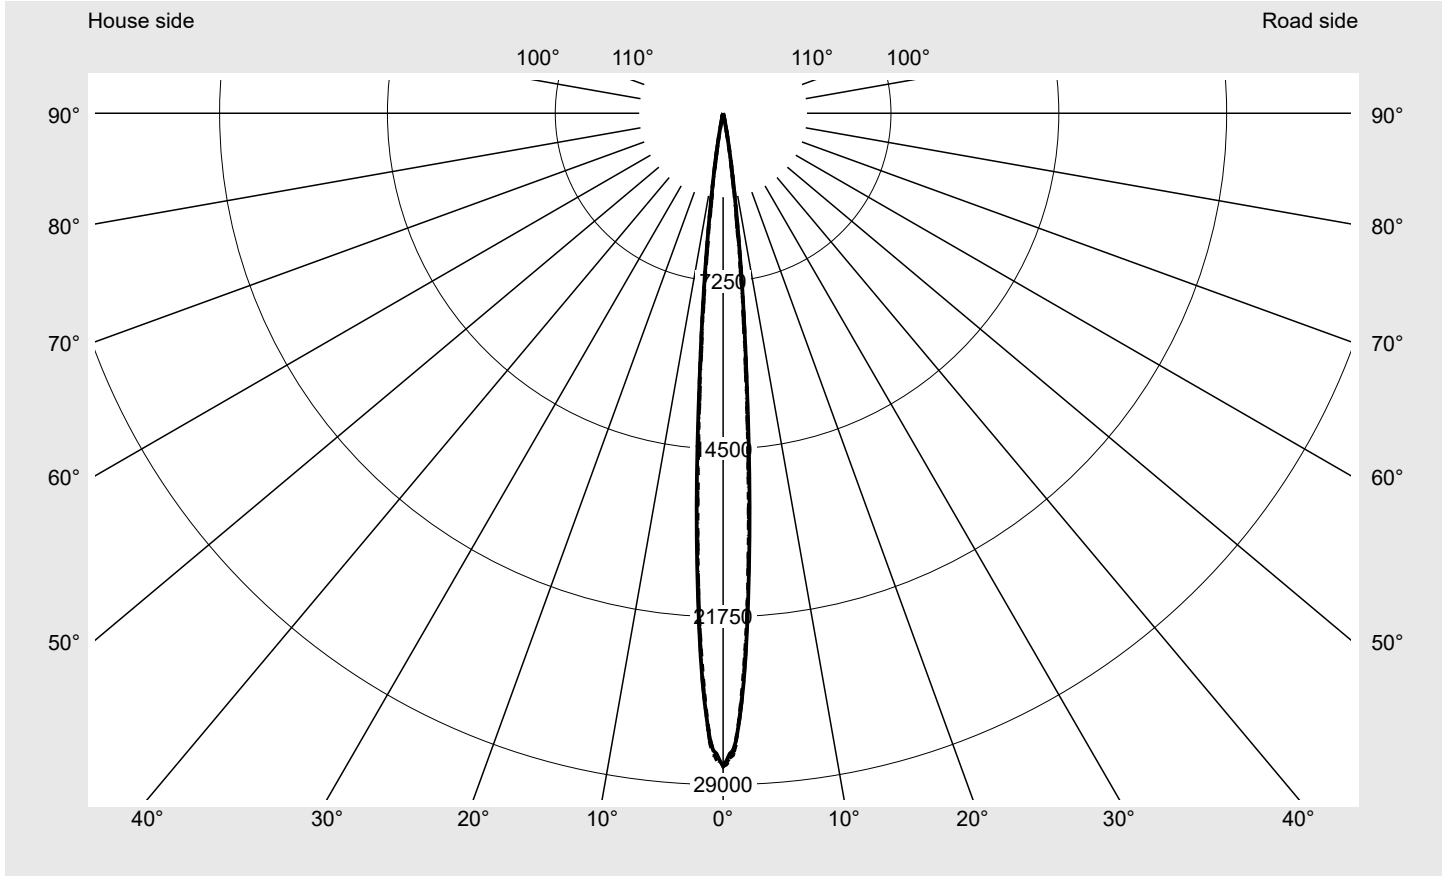


Photometric test report

Family Floodlight FL11	Order number: 5XA779214Q01BA EAN: 4058352537626	LP number 59465_2
	Version standard bracket Optic symmetric distribution RS4 Cover toughened safety glass Lamps LED 5700 K CRI ≥ 90 Controlgear ECG-DMX Rated values Ta = 10 °C Net luminous flux = 81040 lm Power consumption = 707.9 W Luminous efficacy = 114.5 lm/W	serial documentation 21.07.2023



Luminous intensity in cd/klm C180-0 C185-5 C270-90 **Imax: 28210 cd/klm**



Luminaire output ratios	
Eta	100.0%
Eta 0° - 90°	100.0%
Eta 90° - 180°	0.0%


Luminous intensity class acc. to EN13201-2	
Class:	G6
Imax 70°	14.0
Imax 80°	6.3
Imax 90°	0.0
Imax >90°	0.0
Imax >95°	0.0

Measurement conditions
DIN EN 13032 and DIN 5032

Photometric test report

Family Floodlight FL11	Order number: 5XA779214Q01BA EAN: 4058352537626	LP number 59465_2
----------------------------------	--	-----------------------------

Envelope curve in cd/klm **KMK 0°** **siteco**

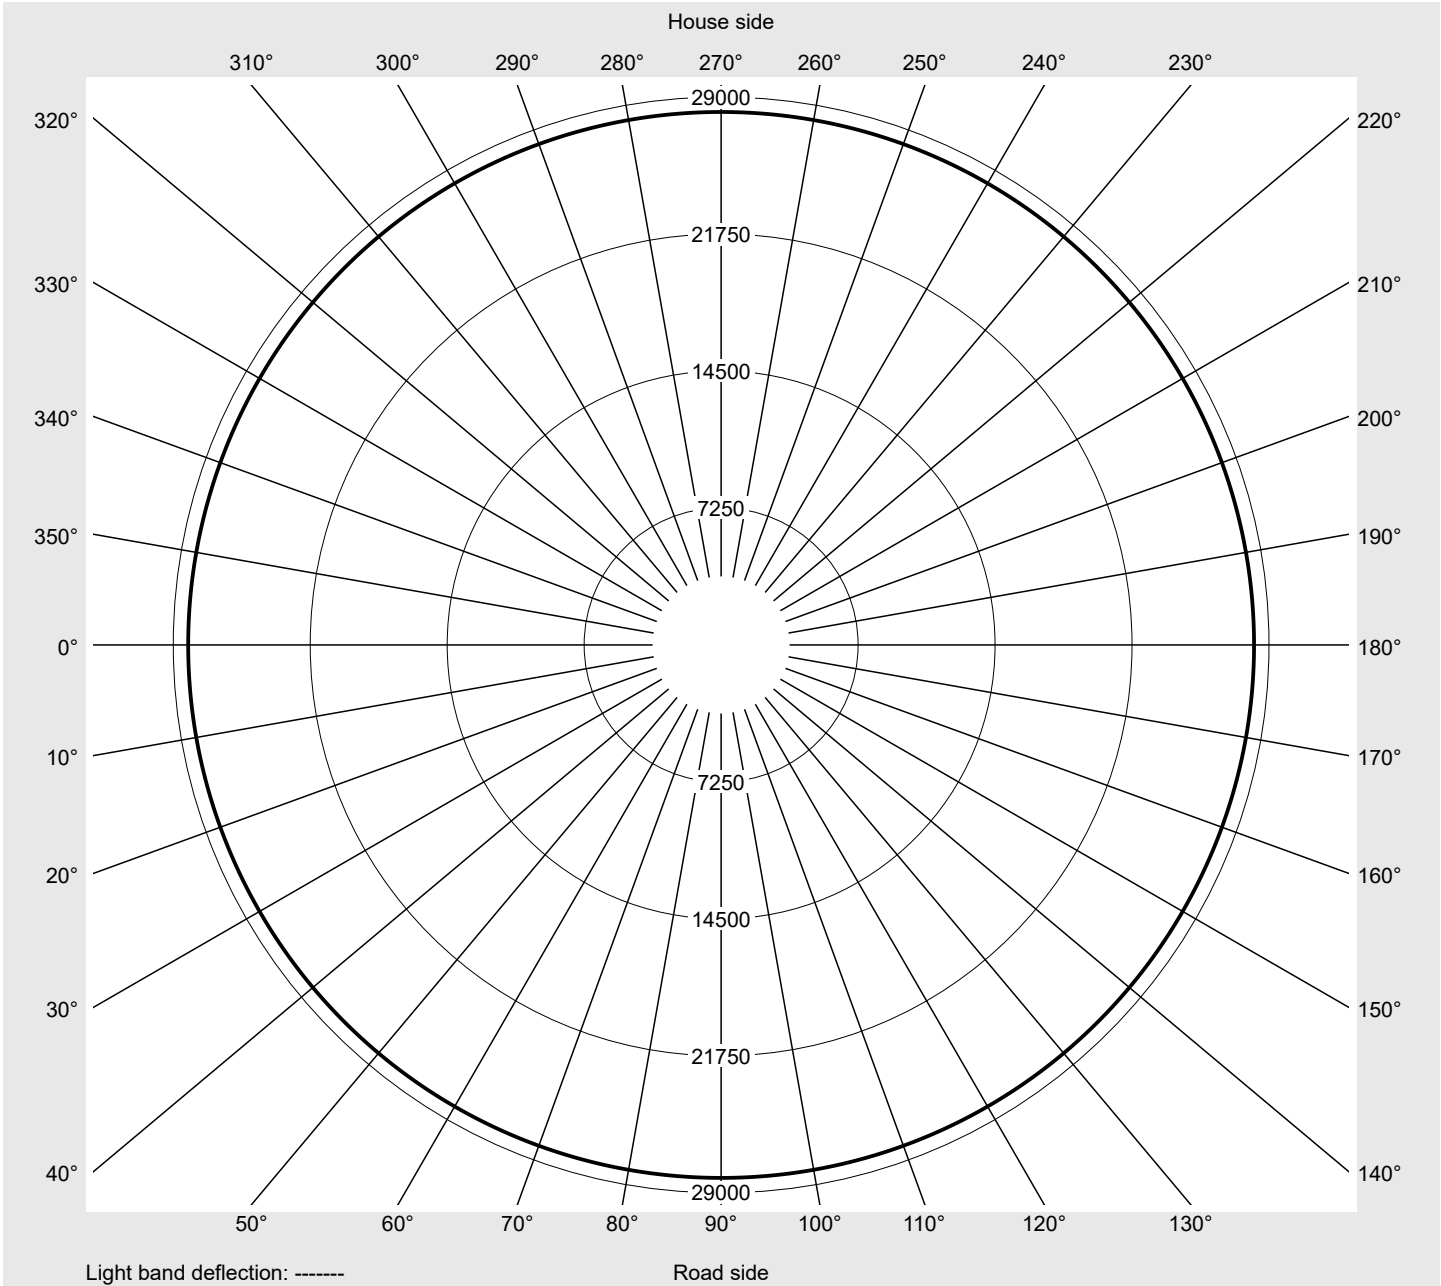

Photometric test report

Family Floodlight FL11	Order number: 5XA779214Q01BA EAN: 4058352537626	LP number 59465_2
----------------------------------	--	-----------------------------

siteco

Table of values for luminous intensities	Maximum luminous intensity
---	-----------------------------------

C- planes	0° 180°	5°	10°	15°	20°	25°	30°	35°	40°	45°
		175° 185° 355°	170° 190° 350°	165° 195° 345°	160° 200° 340°	155° 205° 335°	150° 210° 330°	145° 215° 325°	140° 220° 320°	135° 225° 315°
γ Luminous intensity in cd/klm										
0,0°	28210.3	28210.3	28210.3	28210.3	28210.3	28210.3	28210.3	28210.3	28210.3	28210.3
0,5°	27726.4	27992.9	27732.1	27998.7	27737.9	27998.7	27806.6	28024.5	27769.4	28041.7
1,0°	27422.6	27414.0	27448.4	27422.6	27457.0	27425.5	27474.2	27448.4	27497.1	27459.9
1,5°	26299.1	26233.2	26310.6	26230.3	26293.4	26233.2	26307.7	26247.5	26304.8	26241.8
2,0°	24825.9	24522.1	24828.8	24519.3	24814.5	24522.1	24817.3	24530.7	24820.2	24507.8
3,0°	20807.7	20566.9	20773.3	20544.0	20764.7	20532.6	20779.0	20509.6	20704.5	20446.6
4,0°	16330.9	15663.1	16276.4	15645.9	16276.4	15654.5	16279.3	15640.2	16219.1	15562.8
5,0°	11768.1	11581.8	11791.0	11587.5	11822.6	11636.3	11854.1	11639.1	11831.2	11587.5
6,0°	8292.1	8219.9	8314.2	8256.9	8373.5	8328.5	8438.6	8383.8	8459.2	8324.2
7,0°	5582.5	5471.9	5600.0	5524.1	5688.9	5639.0	5786.3	5693.7	5780.9	5655.3
8,0°	3591.2	3538.2	3625.9	3604.7	3746.5	3755.1	3895.3	3890.4	3964.4	3889.8
9,0°	2245.3	2224.9	2278.2	2284.3	2371.7	2403.5	2516.7	2564.6	2651.1	2631.9
10,0°	1313.2	1276.5	1338.2	1349.3	1427.9	1501.0	1557.7	1589.8	1666.3	1658.6
15,0°	153.9	151.5	153.7	151.9	156.5	156.8	163.2	163.9	170.4	168.4
20,0°	72.2	70.0	71.4	68.3	69.2	66.5	67.8	65.4	67.4	65.1
30,0°	34.1	34.1	34.1	33.8	33.0	33.3	33.6	33.3	33.1	33.0
45,0°	34.6	33.0	33.8	34.0	33.6	32.5	32.0	31.3	31.1	31.4
60,0°	22.8	23.3	24.9	26.3	21.8	19.9	18.9	18.6	19.2	19.1
75,0°	10.0	9.2	8.5	8.2	8.6	8.9	8.8	8.1	8.3	8.2
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Floodlight FL11	Order number: 5XA779214Q01BA EAN: 4058352537626	LP number 59465_2
----------------------------------	--	-----------------------------

siteco

Table of values for luminous intensities	Maximum luminous intensity
---	-----------------------------------

C-planes	50°	55°	60°	65°	70°	75°	80°	85°	90°	Phi-zone	Total Phi-zone	
	130°	125°	120°	115°	110°	105°	100°	95°				
	230°	235°	240°	245°	250°	255°	260°	265°				
	310°	305°	300°	295°	290°	285°	280°	275°				
γ	Luminous intensity in cd/klm										Luminous flux in lm/klm	
0,0°	28210.3	28210.3	28210.3	28210.3	28210.3	28210.3	28210.3	28210.3	28210.3	28210.3	1.7	1.7
0,5°	27786.6	28067.5	27806.6	28093.3	27849.6	28119.0	27869.7	28127.6	27881.2	27881.2	13.4	15.0
1,0°	27508.6	27479.9	27534.4	27500.0	27563.0	27520.0	27586.0	27525.8	27606.0	27606.0	26.3	41.4
1,5°	26276.2	26244.6	26313.4	26250.4	26299.1	26253.2	26310.6	26244.6	26310.6	26310.6	37.7	79.1
2,0°	24780.1	24487.7	24794.4	24464.8	24774.3	24447.6	24765.7	24433.3	24757.1	24757.1	75.2	154.2
3,0°	20650.1	20377.8	20578.4	20309.0	20532.6	20248.8	20483.8	20223.0	20498.2	20498.2	117.9	272.1
4,0°	16150.3	15462.5	16024.2	15319.2	15909.6	15175.9	15815.0	15135.7	15809.3	15809.3	120.8	392.9
5,0°	11742.3	11438.5	11553.1	11243.6	11372.6	11108.9	11240.7	11011.5	11229.3	11229.3	110.2	503.1
6,0°	8299.9	8174.0	8239.1	7966.3	8043.3	7775.1	7897.2	7682.8	7869.1	7869.1	93.8	596.9
7,0°	5698.3	5534.7	5550.7	5338.6	5313.1	5085.6	5105.3	4937.1	5017.9	5017.9	73.3	670.2
8,0°	3904.7	3783.2	3740.8	3552.5	3466.2	3283.9	3249.3	3152.1	3198.0	3198.0	55.5	725.6
9,0°	2617.3	2503.8	2416.7	2267.6	2190.8	2085.1	2056.4	2005.7	2022.3	2022.3	40.2	765.9
10,0°	1658.6	1560.9	1502.1	1391.0	1340.3	1263.2	1226.7	1184.2	1181.6	1181.6	89.8	855.6
15,0°	168.9	158.6	154.8	146.8	144.7	139.0	139.0	135.4	137.1	137.1	21.8	877.4
20,0°	66.6	64.0	65.5	63.5	65.0	63.1	65.0	63.3	65.2	65.2	19.8	897.2
30,0°	33.1	33.2	33.5	33.1	32.6	32.6	32.6	32.7	32.7	32.7	23.6	920.8
45,0°	31.1	30.9	31.1	31.2	31.6	31.8	31.5	30.8	31.6	31.6	37.1	957.9
60,0°	19.1	18.6	18.5	18.2	18.0	21.1	20.5	19.4	19.2	19.2	28.9	986.8
75,0°	8.0	7.6	8.3	8.3	8.0	7.6	7.7	8.2	8.7	8.7	13.2	1000.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family
Floodlight FL11

Order number: 5XA779214Q01BA
EAN: 4058352537626

LP number
59465_2

Dimming levels table

environmental temperature: 10°C

siteco

Luminous flux %	Dimming level linear	Luminous flux [lm]	Power consumption [W]
100	255	81040	707.9
95	238	76938	659.3
90	222	72800	613.5
85	207	68887	571.4
80	192	64786	529.1
75	178	60821	490.0
70	164	56750	451.2
65	150	52539	412.9
60	137	48722	376.5
55	124	44584	341.2
50	112	40661	308.3
45	99	36394	273.0
40	87	32384	239.9
35	75	28199	207.5
30	64	24358	178.4
25	53	20386	149.2
20	42	16350	120.2
15	31	12291	91.5
10	20	8092	62.9
5	10	4241	37.1
2	3	1489	18.1

Dimming levels table

environmental temperature: 25°C

Luminous flux %	Dimming level linear	Luminous flux [lm]	Power consumption [W]
100	255	78240	702.9
95	237	74228	651.7
90	221	70384	606.2
85	205	66434	561.3
80	190	62552	519.3
75	176	58763	480.3
70	162	54888	441.7
65	148	50812	403.2
60	135	47098	367.6
55	122	43097	332.3
50	109	39007	297.2
45	97	35124	264.8
40	85	31204	232.2
35	74	27463	202.8
30	62	23316	171.2
25	51	19415	142.4
20	41	15788	116.3
15	30	11810	88.0
10	19	7640	59.7
5	9	3812	34.2
2	3	1477	17.8

Photometric test report

Family Floodlight FL11	Order number: 5XA779214Q01BA EAN: 4058352537626	LP number 59465_2
----------------------------------	--	-----------------------------

Luminousfluxs table **sITeco**

Temperature °C	Luminous flux lm	Power consumption W
10.0	81040.0	707.9
25.0	78240.0	702.9