


Photometric test report

Family Streetlight 11 mini LED	Order number: 5XC2E51Y08HE EAN: 4058352918944	LP number 58931_160
	Version post-top or side-entry mounting, Smart Interface up/down Optic pedestrian crossing, asymmetric left distribution (PC-L) Cover transparent, PMMA Lamps LED 3000 K CRI ≥ 70 Controlgear ECG SITECO iQ - DALI2 Rated values Net luminous flux = 7210 lm Power consumption = 58.1 W Luminous efficacy = 124.1 lm/W	serial documentation 27.07.2023



Luminous intensity in cd/klm C180-0 C270-90 C335-155 C340-160 **Imax: 835 cd/klm**

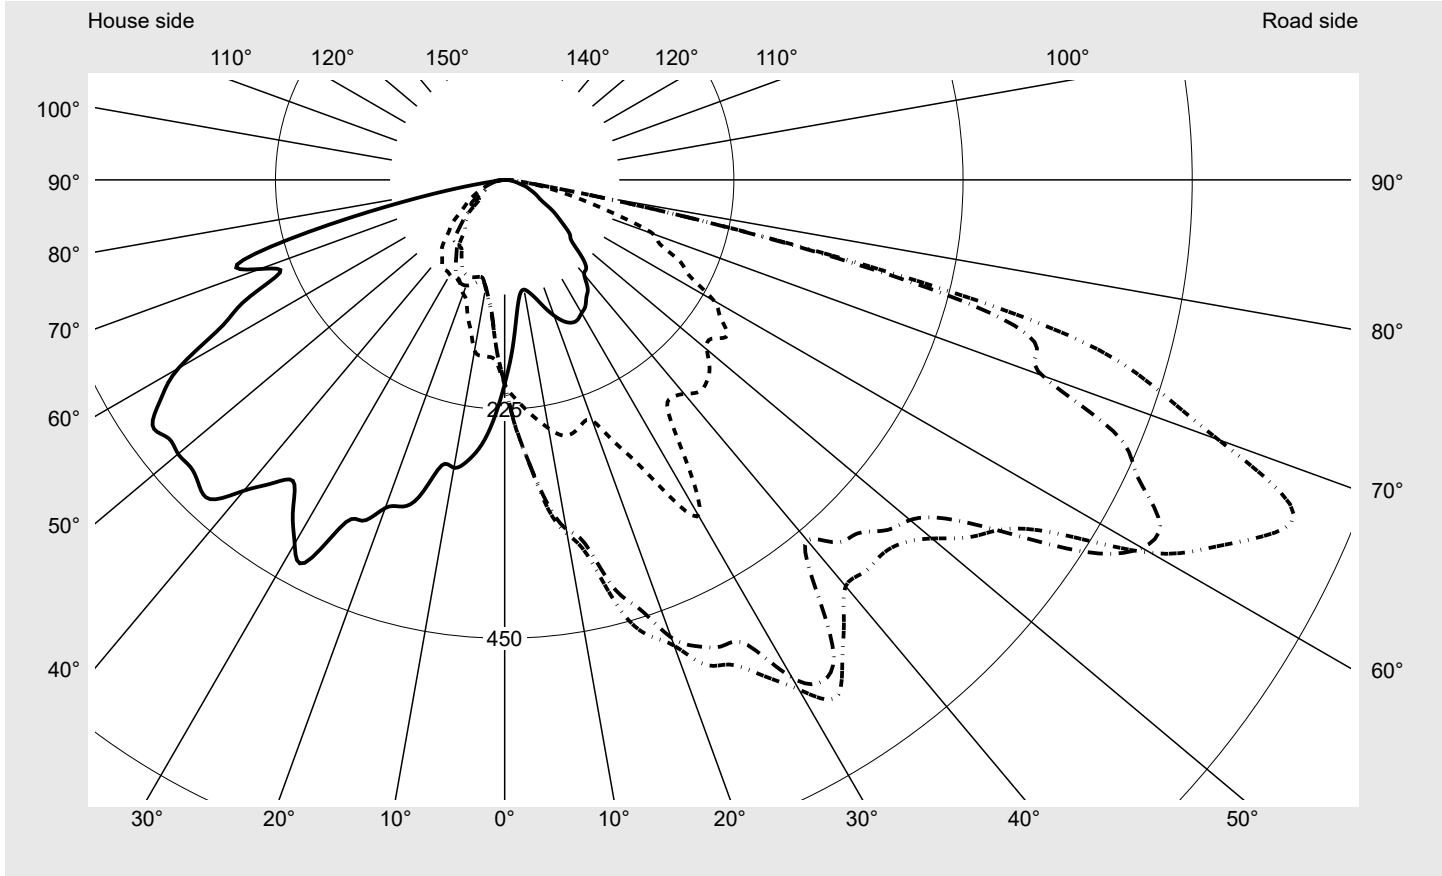

Luminaire output ratios	
Eta	100.0%
Eta 0° - 90°	100.0%
Eta 90° - 180°	0.0%


Luminous intensity class acc. to EN13201-2	
Class:	G3
Imax 70°	745.4
Imax 80°	99.8
Imax 90°	0.0
Imax >90°	0.0
Imax >95°	0.0

Measurement conditions
DIN EN 13032 and DIN 5032

Photometric test report

Family Streetlight 11 mini LED	Order number: 5XC2E51Y08HE EAN: 4058352918944	LP number 58931_160
--	--	-------------------------------

Envelope curve in cd/klm **KMK 67.5°** **KMK 65°** **KMK 62.5°** **KMK 60°** **siteco**

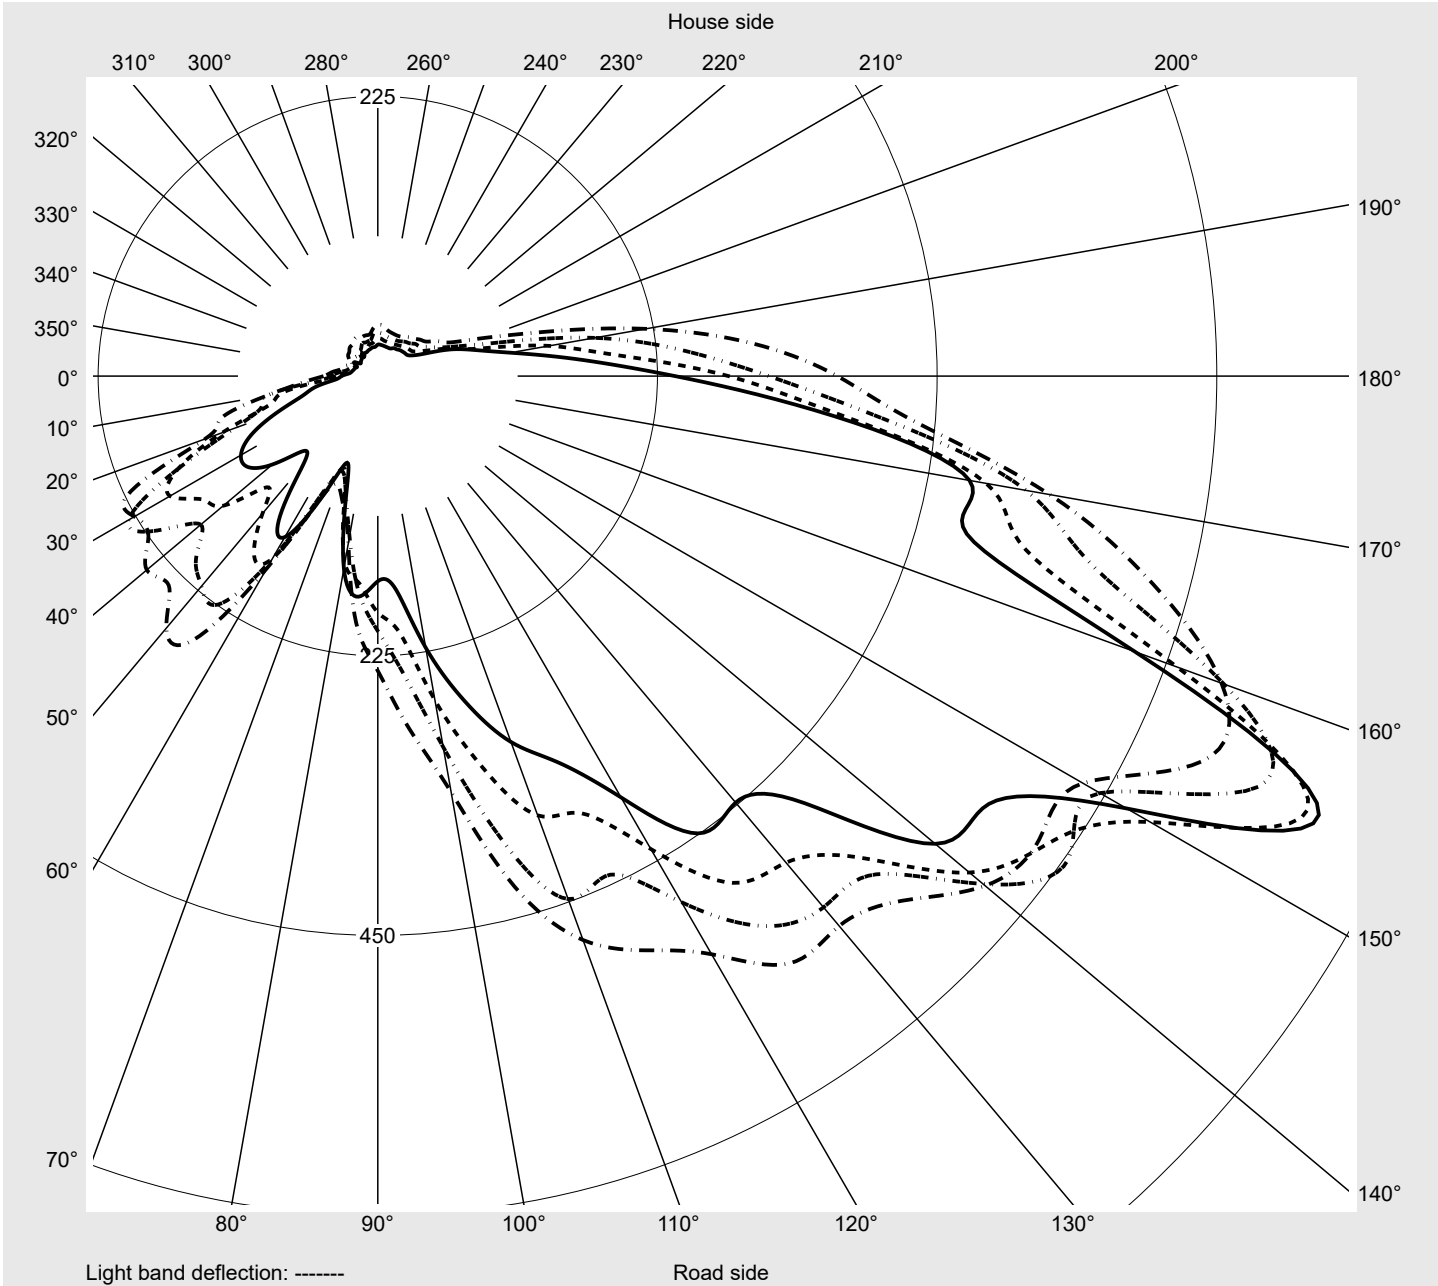

Photometric test report

Family Streetlight 11 mini LED	Order number: 5XC2E51Y08HE EAN: 4058352918944	LP number 58931_160
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°
γ	Luminous intensity in cd/klm													
0,0°	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4
2,5°	167.9	169.0	171.2	173.5	176.5	179.4	180.8	181.8	182.8	184.5	186.5	188.6	190.4	192.8
5,0°	133.9	135.1	138.4	141.8	146.7	150.0	153.9	156.7	161.6	166.9	172.0	176.7	183.4	189.8
7,5°	113.9	115.9	118.8	121.2	125.9	129.4	131.8	134.7	139.8	144.7	150.8	160.2	172.4	177.5
10,0°	109.4	112.0	114.3	116.5	120.0	124.1	126.9	129.0	134.3	141.4	145.7	150.6	157.1	165.1
12,5°	113.7	117.5	119.8	122.4	124.7	127.9	128.1	131.0	132.2	136.9	142.0	153.7	159.8	166.9
15,0°	121.4	126.7	129.2	131.8	133.0	134.5	134.1	134.7	136.1	139.0	141.8	150.4	161.6	167.7
17,5°	131.8	138.6	142.0	144.9	145.5	145.7	143.0	142.2	142.2	144.1	149.4	152.8	156.9	164.3
20,0°	141.8	150.6	155.3	158.1	158.8	158.1	154.9	151.4	150.6	151.4	154.7	154.7	157.5	163.7
22,5°	150.0	161.0	166.9	171.0	172.8	171.8	168.3	162.8	159.4	158.3	157.7	155.1	156.9	164.5
25,0°	154.7	167.3	174.9	180.8	183.7	184.1	180.8	174.3	168.8	165.1	160.6	157.1	157.9	164.7
27,5°	154.9	170.4	180.2	186.5	190.2	192.0	191.0	185.9	180.2	173.0	165.7	160.8	155.9	158.6
30,0°	151.0	167.9	181.6	191.8	195.1	197.1	197.5	194.1	188.8	181.2	173.2	164.1	157.3	158.8
32,5°	147.3	163.2	176.5	188.6	201.8	207.7	204.7	202.6	198.5	191.0	179.8	169.6	159.4	154.3
35,0°	140.0	159.4	177.1	188.3	193.7	206.9	219.6	214.7	206.7	200.0	189.8	175.3	162.4	154.5
37,5°	133.9	149.0	164.3	181.0	199.0	202.2	211.6	227.5	217.5	207.9	196.9	181.6	165.7	154.1
40,0°	121.4	144.1	162.8	178.3	183.9	201.6	218.1	223.6	234.9	218.8	205.7	188.3	167.1	151.6
42,5°	118.4	136.7	150.0	167.9	191.4	199.0	210.0	228.7	235.9	238.3	209.8	192.8	165.5	149.6
45,0°	107.5	125.7	147.1	173.9	190.4	192.6	215.3	224.3	248.1	243.9	223.0	191.8	165.9	144.7
47,5°	89.4	110.4	143.5	160.2	175.5	191.6	211.4	231.0	241.4	260.2	232.6	194.7	162.6	141.6
50,0°	83.7	103.7	124.1	160.8	170.6	191.4	211.6	230.2	249.6	260.4	251.0	204.1	161.8	136.3
52,5°	73.7	99.8	119.0	155.9	201.4	184.3	197.9	232.8	248.3	261.2	270.6	224.7	170.6	129.2
55,0°	63.9	86.7	113.7	151.4	207.9	211.4	202.4	221.2	245.9	266.5	270.4	239.6	177.9	136.9
57,5°	54.9	70.0	100.8	141.6	194.7	242.8	208.5	216.7	251.4	256.1	276.3	253.8	177.3	123.9
60,0°	43.7	61.6	90.6	130.2	147.9	219.2	226.1	225.3	242.6	237.9	264.7	259.6	178.8	108.2
62,5°	37.8	51.2	90.4	96.9	123.0	178.6	231.6	216.5	185.9	206.7	220.8	224.5	169.6	100.8
65,0°	33.7	45.9	78.4	90.8	133.0	177.7	193.0	172.8	162.2	126.5	144.3	173.7	169.2	104.9
67,5°	29.2	34.9	51.2	63.7	86.9	112.6	127.1	127.5	110.6	85.5	93.9	136.9	149.6	109.4
70,0°	25.1	27.3	32.9	43.1	50.2	71.6	75.3	79.2	69.2	73.3	67.3	106.1	116.3	92.0
72,5°	21.6	23.1	25.1	26.5	29.6	34.9	49.6	49.8	55.3	58.6	47.1	63.7	63.9	64.7
75,0°	15.9	17.3	20.8	21.4	23.3	25.3	29.6	36.7	39.2	40.6	38.4	38.8	35.7	46.1
77,5°	12.7	13.7	15.7	16.9	18.4	19.8	22.9	23.5	25.5	26.9	29.0	29.0	29.0	24.9
80,0°	9.8	10.6	11.4	12.9	13.9	14.9	16.9	17.1	18.2	19.4	18.4	19.8	20.6	19.0
82,5°	7.3	7.8	8.6	9.2	10.0	10.8	11.8	12.0	12.7	12.9	12.9	13.5	12.7	13.3
85,0°	5.1	5.5	5.9	6.3	6.7	7.1	7.3	7.8	8.0	8.0	8.0	8.2	7.8	8.4
87,5°	2.4	2.7	2.7	2.9	3.1	3.3	3.3	3.5	3.5	3.7	3.7	3.7	3.7	3.5
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 11 mini LED	Order number: 5XC2E51Y08HE EAN: 4058352918944	LP number 58931_160
Table of values for luminous intensities		Maximum luminous intensity
siteco		

C-planes	70°	75°	80°	85°	90°	95°	100°	105°	110°	115°	120°	125°	130°	135°
γ	Luminous intensity in cd/klm													
0,0°	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4
2,5°	196.3	201.2	205.1	209.4	213.6	217.7	220.2	222.6	225.1	228.3	231.0	231.6	232.8	233.0
5,0°	197.7	207.7	214.1	221.2	225.1	230.8	237.5	248.1	261.8	272.0	279.2	286.1	290.2	294.5
7,5°	188.6	200.4	215.3	225.9	236.5	254.7	268.3	283.4	291.4	305.1	324.0	337.3	344.7	341.6
10,0°	181.0	195.7	210.8	228.3	247.5	265.1	294.3	318.7	346.3	370.4	380.4	382.2	387.1	392.6
12,5°	180.2	199.4	216.5	230.2	256.7	277.3	294.3	333.8	357.9	365.9	380.2	399.3	410.4	401.8
15,0°	178.8	196.9	220.8	241.8	257.5	272.0	302.6	323.4	347.5	372.4	387.3	405.1	418.1	426.9
17,5°	176.5	190.4	208.1	227.7	251.6	265.1	297.7	317.7	347.5	377.7	401.4	426.5	459.7	479.3
20,0°	171.8	192.0	212.4	242.2	251.6	282.6	323.0	328.7	367.1	404.0	449.1	469.5	491.2	502.6
22,5°	176.9	196.7	223.2	253.8	276.7	295.7	328.1	351.2	386.3	457.3	492.8	523.0	517.5	522.2
25,0°	173.2	194.7	231.6	270.6	305.9	317.9	341.0	386.3	430.8	472.4	517.7	540.3	552.4	558.7
27,5°	170.6	192.4	237.9	307.5	349.8	368.5	385.3	434.2	475.5	523.2	555.0	566.1	614.4	640.7
30,0°	164.5	183.2	227.9	291.0	380.6	377.3	411.6	476.5	518.7	534.2	565.4	601.8	647.9	649.5
32,5°	158.3	177.7	209.2	265.3	337.5	338.3	409.1	502.0	548.3	579.3	608.3	657.7	686.7	673.8
35,0°	154.9	167.9	187.3	235.3	280.8	327.3	418.7	514.6	594.0	635.8	669.3	716.7	733.4	719.9
37,5°	153.2	162.4	175.9	214.7	269.4	337.1	427.3	508.1	602.4	678.3	729.7	772.4	773.8	741.8
40,0°	147.5	158.1	169.4	202.4	274.3	351.8	456.3	540.1	627.3	693.2	736.9	783.8	768.9	792.2
42,5°	142.6	155.7	168.6	201.2	282.2	373.4	489.3	560.3	625.2	689.7	716.7	754.0	786.8	747.5
45,0°	138.6	149.8	165.7	206.1	280.4	372.4	494.4	555.9	648.9	678.5	729.5	741.1	764.8	757.7
47,5°	135.7	144.1	167.7	204.7	272.8	363.6	474.6	546.1	636.0	674.4	718.9	731.3	744.4	723.6
50,0°	130.0	137.9	169.6	212.8	259.2	340.6	447.3	513.8	596.1	666.5	687.5	716.2	718.5	679.5
52,5°	121.8	129.4	161.0	207.7	256.1	319.1	403.4	493.8	585.6	636.5	659.5	686.0	685.6	657.1
55,0°	114.7	124.5	163.2	222.0	266.7	305.5	382.6	485.3	576.9	597.1	625.4	632.4	641.6	628.3
57,5°	105.1	118.2	150.6	208.5	251.0	309.8	344.9	471.8	528.7	557.5	567.1	608.7	599.9	604.8
60,0°	93.5	107.5	136.5	199.4	237.1	283.8	340.0	425.3	482.8	509.7	537.1	576.9	577.5	596.9
62,5°	82.0	99.2	131.0	174.7	205.1	241.0	303.0	386.5	447.7	442.6	488.7	540.1	557.9	566.9
65,0°	79.0	104.1	152.6	167.7	190.2	208.1	264.9	326.1	376.1	388.1	439.3	497.7	511.0	547.7
67,5°	74.5	97.7	157.1	178.1	165.1	173.2	221.8	271.0	313.2	342.8	391.4	449.1	447.9	486.1
70,0°	73.9	83.3	127.1	166.1	155.3	146.5	179.4	226.9	255.1	291.0	324.2	392.2	401.0	436.5
72,5°	49.2	47.5	83.9	115.3	118.6	116.5	133.0	181.6	190.2	217.5	259.4	302.8	319.4	364.2
75,0°	29.6	31.4	44.3	67.1	85.1	92.6	107.5	128.4	129.2	162.4	216.7	273.2	266.7	250.4
77,5°	24.3	25.3	29.8	42.6	58.8	66.5	79.2	89.8	91.8	116.9	156.5	205.1	193.4	169.0
80,0°	19.0	20.6	21.4	27.1	38.0	43.7	54.9	61.4	64.7	68.4	86.7	98.5	77.7	98.5
82,5°	16.1	15.5	14.5	17.3	23.1	28.4	34.1	39.0	41.6	41.4	41.6	40.0	33.9	35.7
85,0°	10.0	8.4	7.1	8.8	11.6	15.3	17.8	20.0	22.0	21.4	18.8	16.5	14.3	12.7
87,5°	3.1	3.3	2.7	2.9	3.9	4.7	6.1	7.8	7.8	7.3	6.7	6.5	6.5	6.7
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 11 mini LED	Order number: 5XC2E51Y08HE EAN: 4058352918944	LP number 58931_160
Table of values for luminous intensities		Maximum luminous intensity

C-planes	140°	145°	150°	155°	160°	165°	170°	175°	180°	185°	190°	195°	200°	205°
γ	Luminous intensity in cd/klm													
0,0°	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4
2,5°	235.3	237.7	241.0	242.8	241.6	240.8	237.3	234.9	234.1	227.3	224.3	222.0	219.2	215.1
5,0°	292.2	284.7	280.4	280.2	280.2	280.4	280.2	274.7	261.2	251.2	241.6	235.5	231.8	227.3
7,5°	337.7	334.2	330.8	325.7	320.2	312.2	296.7	285.5	278.1	269.8	260.4	249.4	243.0	238.1
10,0°	385.5	377.7	367.9	353.0	348.1	333.2	317.5	306.5	286.9	273.8	263.6	251.4	241.0	234.9
12,5°	396.5	397.1	389.1	378.3	366.3	341.4	325.9	311.6	287.5	272.0	258.5	244.3	234.1	226.1
15,0°	437.7	454.0	454.0	436.1	415.1	395.9	375.3	348.3	321.0	295.7	281.2	262.4	237.5	219.2
17,5°	496.7	492.8	490.4	468.7	442.0	420.2	394.9	373.0	336.3	298.3	277.9	262.4	241.6	222.0
20,0°	509.9	516.5	499.3	486.7	478.1	451.8	414.0	381.8	342.8	312.6	299.6	269.8	231.2	213.6
22,5°	523.0	528.3	527.7	515.2	495.7	462.8	420.0	388.5	362.2	323.2	287.5	267.9	236.3	212.2
25,0°	591.8	571.6	554.8	525.0	505.0	494.0	474.6	427.1	372.0	328.3	300.6	259.8	224.7	200.8
27,5°	634.2	613.0	576.5	548.5	514.0	496.1	493.6	473.2	423.4	358.5	306.3	262.4	231.8	203.9
30,0°	622.2	609.5	620.1	577.7	564.4	545.0	479.7	439.7	412.4	357.3	304.0	260.6	227.3	200.6
32,5°	661.1	654.6	636.5	603.4	582.8	557.3	500.6	449.1	387.1	353.6	309.4	259.8	229.2	197.9
35,0°	685.4	639.3	638.5	577.9	562.0	492.2	441.8	404.6	361.6	339.8	303.6	254.9	221.0	195.5
37,5°	690.1	660.1	599.9	547.1	498.1	448.7	418.1	403.4	375.7	361.2	333.4	262.4	232.0	194.3
40,0°	724.4	662.4	580.1	520.8	462.0	438.5	417.9	408.5	398.3	366.5	346.7	262.6	226.9	186.3
42,5°	718.5	635.0	558.7	522.4	482.8	445.5	428.3	426.5	425.5	386.5	343.8	274.3	231.8	168.1
45,0°	697.5	603.2	563.4	521.8	490.6	464.6	437.7	435.9	424.2	405.9	333.6	288.9	221.8	144.1
47,5°	654.4	596.5	572.0	528.3	508.9	480.4	448.5	426.1	417.9	405.9	339.1	287.3	203.9	127.5
50,0°	642.0	607.3	586.9	547.7	519.5	489.3	481.0	440.6	418.5	398.9	336.7	268.9	180.6	114.5
52,5°	649.7	628.7	598.9	576.1	546.3	507.7	490.4	441.6	416.3	401.2	318.1	255.7	144.5	101.0
55,0°	618.7	641.6	620.3	597.9	605.4	548.3	494.0	451.2	421.8	390.0	303.2	237.3	111.8	88.4
57,5°	637.3	633.2	630.5	647.5	680.9	614.8	545.7	460.2	400.2	352.8	257.5	196.1	108.2	74.5
60,0°	637.9	649.7	655.0	732.6	722.4	645.4	548.9	436.5	369.8	302.4	219.0	136.9	89.0	64.1
62,5°	635.6	678.1	670.9	781.7	724.4	597.7	529.7	412.4	314.7	244.1	177.1	106.5	70.6	54.5
65,0°	621.4	656.9	717.5	825.4	684.4	539.7	497.1	378.3	282.2	193.2	140.0	86.1	64.9	50.2
67,5°	585.4	600.1	695.6	835.4	648.3	490.6	483.4	368.1	239.2	159.0	108.4	81.0	62.9	43.7
70,0°	510.8	559.9	645.6	745.4	561.4	494.8	476.9	379.3	255.9	158.6	93.5	72.2	52.4	34.7
72,5°	396.5	464.8	568.7	663.8	547.9	489.1	448.3	380.6	275.1	162.2	86.1	61.8	37.5	28.2
75,0°	283.4	345.7	487.3	543.6	476.7	434.2	388.5	315.3	204.5	90.0	57.7	48.4	25.3	22.9
77,5°	172.8	199.0	248.5	275.5	266.1	278.1	224.7	180.8	112.2	64.3	41.6	33.3	20.0	16.7
80,0°	98.7	99.8	99.1	82.4	82.0	96.9	72.4	55.1	47.7	29.0	24.1	21.6	15.9	10.4
82,5°	37.8	41.6	31.6	23.5	21.4	18.4	15.9	14.1	12.2	11.0	9.6	8.4	7.6	6.9
85,0°	12.0	12.0	12.0	12.0	11.4	10.8	9.8	8.8	8.0	6.7	5.9	5.1	4.7	4.3
87,5°	7.1	7.3	7.6	7.6	7.1	6.7	6.1	5.3	3.5	4.1	3.5	3.1	2.7	2.2
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 11 mini LED	Order number: 5XC2E51Y08HE EAN: 4058352918944	LP number 58931_160
Table of values for luminous intensities		Maximum luminous intensity

siteco

C-planes	210°	215°	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°	275°
γ	Luminous intensity in cd/klm													
0,0°	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4
2,5°	210.8	209.0	206.3	204.5	201.4	199.4	196.3	192.8	189.2	186.5	184.5	182.6	179.6	177.1
5,0°	223.4	220.8	213.6	205.1	197.3	190.0	184.5	181.4	179.8	179.0	177.5	176.7	174.5	172.4
7,5°	230.6	225.3	219.0	211.6	196.3	190.0	188.3	185.7	179.8	173.2	169.8	174.7	174.3	173.7
10,0°	232.4	227.9	226.7	218.1	198.8	189.8	178.3	171.2	170.2	169.8	170.4	168.8	170.2	165.1
12,5°	220.8	218.1	206.9	202.0	179.8	170.6	164.7	163.7	158.6	158.3	156.1	157.3	152.6	147.7
15,0°	209.4	203.9	196.9	184.5	165.1	159.6	149.0	149.6	148.8	146.5	143.9	143.2	139.8	128.8
17,5°	205.9	191.8	182.0	179.6	172.6	155.1	146.9	141.8	139.2	135.7	129.4	126.7	124.9	121.2
20,0°	199.2	184.9	176.9	171.6	168.8	161.2	151.6	142.4	134.9	126.3	121.4	118.8	119.0	111.0
22,5°	190.8	175.7	161.4	156.7	156.5	152.6	149.4	141.2	134.3	131.0	123.3	118.6	112.8	99.0
25,0°	182.8	165.9	152.6	143.7	138.4	134.1	136.1	132.6	127.7	132.4	124.5	116.3	107.1	97.1
27,5°	177.3	158.8	145.1	136.7	129.6	123.9	119.8	119.4	119.2	122.6	118.4	117.1	108.4	97.3
30,0°	172.8	154.3	142.8	130.8	122.8	115.9	111.0	114.5	116.9	112.2	114.7	114.3	107.5	100.4
32,5°	173.7	150.8	135.5	125.3	115.1	107.3	103.1	105.9	106.1	100.8	106.7	108.2	105.9	103.1
35,0°	165.1	138.8	127.5	113.5	105.5	98.4	94.7	94.3	97.3	92.4	95.5	104.5	105.9	100.8
37,5°	150.6	127.9	116.9	105.3	94.5	87.9	85.7	85.7	87.1	84.1	84.5	97.9	100.8	95.5
40,0°	135.3	116.7	105.9	93.9	84.7	78.2	76.3	78.2	79.8	76.9	77.5	84.9	95.9	90.8
42,5°	129.0	109.8	96.5	84.1	76.3	71.0	70.2	71.2	71.4	70.8	72.6	79.6	91.4	87.3
45,0°	121.2	102.0	90.0	76.9	70.2	66.1	64.9	64.9	65.3	66.3	69.4	73.3	82.8	80.4
47,5°	112.0	97.3	82.6	72.6	65.9	61.6	60.0	60.2	60.2	62.0	67.7	70.0	73.9	74.7
50,0°	100.2	89.4	76.1	66.3	61.4	57.1	55.3	54.5	55.3	56.9	61.8	63.3	68.4	65.7
52,5°	89.6	79.0	67.5	60.8	56.1	52.4	50.0	49.4	50.2	51.8	56.9	55.5	58.8	57.1
55,0°	77.3	68.2	59.6	54.5	51.0	47.7	45.3	44.7	45.3	46.9	49.4	50.8	50.6	52.2
57,5°	64.9	57.3	51.8	48.8	45.9	43.3	40.8	40.4	40.6	41.6	43.7	46.9	45.1	44.1
60,0°	56.1	48.4	45.3	42.4	40.6	38.4	36.7	36.1	36.3	36.9	38.6	41.0	40.8	39.0
62,5°	47.1	41.4	40.0	37.1	35.7	34.1	32.6	32.2	32.0	32.4	33.3	34.5	35.1	34.9
65,0°	40.2	34.7	33.3	32.4	31.2	30.0	29.2	28.6	28.2	28.6	29.0	30.2	30.2	28.4
67,5°	33.5	29.4	28.6	28.0	27.3	26.3	25.9	24.5	24.3	24.5	24.9	25.3	25.3	23.7
70,0°	27.8	24.7	24.1	23.7	23.3	22.9	22.4	21.0	20.8	21.0	21.2	21.8	21.0	20.2
72,5°	23.3	20.2	19.8	19.4	19.6	19.8	19.2	18.2	17.5	17.3	17.3	18.0	17.1	16.3
75,0°	17.8	16.5	15.7	15.5	15.9	16.5	16.3	15.1	14.7	14.3	14.1	14.1	13.5	13.3
77,5°	13.3	12.7	12.0	12.0	12.9	13.3	13.3	12.0	11.4	11.2	11.2	10.8	10.4	10.2
80,0°	9.6	9.2	8.8	8.8	9.4	10.0	9.8	9.2	8.6	8.4	8.4	8.0	7.3	6.7
82,5°	6.5	6.3	5.9	5.9	6.1	6.3	6.7	6.3	5.7	5.5	5.7	5.5	4.7	3.5
85,0°	3.9	3.7	3.5	3.5	3.3	3.3	3.3	3.3	3.3	3.3	2.7	2.9	2.9	2.4
87,5°	2.0	1.8	1.6	1.6	1.6	1.4	1.4	1.4	1.2	1.2	1.0	1.0	0.8	1.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 11 mini LED	Order number: 5XC2E51Y08HE EAN: 4058352918944	LP number 58931_160
Table of values for luminous intensities		Maximum luminous intensity
siteco		

C-planes	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°	330°	335°	340°	345°
γ	Luminous intensity in cd/klm													
0,0°	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4
2,5°	176.7	177.9	178.8	179.6	179.6	180.4	180.4	178.3	175.3	172.8	170.6	169.8	169.8	169.2
5,0°	170.2	169.2	169.0	168.1	167.7	165.1	156.1	148.4	142.8	140.0	138.4	137.9	136.3	135.3
7,5°	173.0	168.1	159.8	151.8	140.4	129.6	126.3	125.3	124.9	121.2	120.2	119.6	118.8	117.1
10,0°	159.6	156.3	147.7	130.6	124.9	122.6	120.8	116.9	112.6	109.6	108.8	107.7	106.7	106.7
12,5°	141.2	137.7	129.4	120.6	116.5	106.7	102.8	100.4	100.4	99.2	96.7	99.0	101.6	105.1
15,0°	124.9	119.6	110.4	103.3	90.2	87.7	85.9	85.1	85.9	88.2	92.6	98.6	103.9	108.8
17,5°	111.8	100.6	88.6	78.8	75.7	75.7	75.3	76.7	80.4	86.5	93.5	100.2	107.7	114.5
20,0°	94.3	84.3	77.5	72.6	69.4	67.7	69.0	72.4	77.7	84.7	92.4	101.2	110.4	119.2
22,5°	90.2	79.2	70.6	69.0	65.7	65.3	65.3	68.2	73.7	81.0	90.8	100.2	110.6	121.6
25,0°	86.7	76.1	71.6	69.4	65.3	62.6	62.0	63.7	69.2	77.3	86.9	97.3	108.6	121.8
27,5°	88.4	77.5	71.8	70.0	67.3	61.2	57.1	59.8	65.1	73.1	82.0	91.0	103.5	120.2
30,0°	89.6	77.7	73.5	71.0	66.5	59.8	56.9	57.5	61.4	71.8	78.4	84.7	96.1	110.8
32,5°	92.8	76.3	72.8	68.0	63.5	59.8	58.2	58.2	59.2	63.9	70.8	79.4	88.4	104.5
35,0°	86.7	75.9	71.6	63.9	63.5	60.4	60.4	58.8	57.5	58.2	64.5	77.5	81.8	98.4
37,5°	82.4	78.8	72.0	64.5	62.4	60.8	61.4	63.5	57.7	53.7	56.5	66.1	77.1	89.4
40,0°	81.4	77.3	73.3	66.7	61.8	58.2	58.0	60.8	58.4	53.3	55.3	60.8	76.9	79.8
42,5°	78.6	70.8	71.6	65.3	61.4	58.8	57.1	58.4	62.4	64.3	56.9	58.2	68.2	76.5
45,0°	71.0	65.9	65.1	59.6	59.0	58.0	55.7	58.4	68.0	68.4	52.2	51.8	59.2	67.7
47,5°	65.3	61.4	58.8	56.3	53.1	48.6	58.2	68.4	68.2	57.5	50.0	48.0	51.2	64.7
50,0°	58.6	59.4	55.1	52.2	49.6	52.4	66.3	81.4	61.0	48.4	42.9	37.1	42.4	51.4
52,5°	51.4	53.3	50.6	48.4	47.3	61.0	74.9	66.1	48.4	40.6	34.9	31.8	40.6	43.5
55,0°	44.7	46.5	45.3	44.1	55.1	71.4	65.9	56.3	40.4	31.6	31.2	34.1	39.8	38.6
57,5°	39.8	39.8	39.2	40.4	46.7	51.8	49.0	41.4	34.7	29.4	28.0	30.0	33.5	31.4
60,0°	34.7	34.1	34.1	33.9	35.5	33.5	32.4	32.0	30.0	29.2	26.5	25.3	25.7	29.2
62,5°	30.2	29.2	28.8	29.2	26.5	25.1	25.3	23.3	23.7	22.9	23.9	22.2	21.6	23.7
65,0°	26.7	26.3	24.3	24.3	23.5	22.2	20.8	21.4	20.2	19.8	21.4	19.6	20.2	21.4
67,5°	23.5	22.7	22.0	21.2	21.0	19.0	19.2	18.6	17.8	17.8	22.0	18.6	19.2	20.0
70,0°	19.4	19.6	19.2	18.4	17.5	16.7	16.1	15.9	15.9	16.5	19.8	17.5	18.0	18.6
72,5°	16.1	16.3	16.1	15.1	14.7	14.5	14.1	14.1	14.3	14.9	15.9	15.7	15.9	16.3
75,0°	13.1	13.3	13.3	12.4	12.4	12.2	12.2	12.2	12.4	12.9	13.3	13.5	13.9	14.1
77,5°	10.0	10.6	10.6	10.0	10.0	10.0	10.0	10.0	10.2	10.6	10.8	11.0	11.2	11.4
80,0°	7.1	7.8	8.0	7.6	7.6	7.6	7.6	7.8	8.0	8.2	8.4	8.6	8.6	8.8
82,5°	4.5	5.7	5.3	5.3	5.3	5.5	5.7	5.7	5.9	6.1	6.1	6.3	6.5	6.7
85,0°	2.9	3.1	3.3	3.3	3.5	3.7	3.9	4.1	4.1	4.3	4.5	4.5	4.5	4.7
87,5°	1.2	1.4	1.6	1.8	2.0	2.2	2.2	2.2	2.4	2.4	2.4	2.4	2.4	2.4
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 11 mini LED	Order number: 5XC2E51Y08HE EAN: 4058352918944	LP number 58931_160
--	--	-------------------------------

Table of values for luminous intensities	Maximum luminous intensity	sITeco
---	-----------------------------------	---------------

C-planes	350°	355°	Phi-zone	Total Phi-zone
Luminous intensity in cd/lm				
Luminous flux in lm/klm				
0,0°	200.4	200.4	0.3	0.3
2,5°	168.6	167.9	2.4	2.7
5,0°	134.5	133.7	4.8	7.5
7,5°	115.3	113.5	7.3	14.8
10,0°	107.3	107.3	9.9	24.7
12,5°	107.5	110.2	12.2	36.9
15,0°	113.3	116.7	14.9	51.8
17,5°	120.8	125.5	17.6	69.4
20,0°	127.5	134.1	20.6	90.0
22,5°	132.2	140.8	23.7	113.6
25,0°	134.3	144.7	27.0	140.6
27,5°	132.0	142.8	30.9	171.5
30,0°	125.5	138.6	33.9	205.4
32,5°	125.1	135.7	36.8	242.2
35,0°	115.9	126.9	38.9	281.1
37,5°	109.4	122.2	41.1	322.3
40,0°	97.1	109.0	43.3	365.6
42,5°	87.7	103.3	45.3	410.9
45,0°	76.1	92.0	46.9	457.9
47,5°	65.9	80.0	47.9	505.7
50,0°	57.1	70.6	48.6	554.3
52,5°	48.8	56.9	49.2	603.5
55,0°	44.5	51.0	49.8	653.4
57,5°	36.1	44.3	49.8	703.1
60,0°	30.6	36.9	48.9	752.0
62,5°	25.9	31.8	46.3	798.4
65,0°	23.5	27.5	43.5	841.8
67,5°	21.2	23.5	39.4	881.2
70,0°	19.2	20.4	35.2	916.3
72,5°	16.7	17.5	29.9	946.3
75,0°	14.5	15.1	23.8	970.0
77,5°	11.6	12.0	15.3	985.4
80,0°	9.0	9.4	7.8	993.2
82,5°	6.7	6.9	3.8	997.0
85,0°	4.7	4.9	2.0	999.1
87,5°	2.4	2.4	0.9	1000.0
90,0°	0.0	0.0	0.0	1000.0
180,0°	0.0	0.0	0.0	1000.0

Photometric test report

Family Streetlight 11 mini LED	Order number: 5XC2E51Y08HE EAN: 4058352918944	LP number 58931_160
--	--	-------------------------------

Dimming levels table	environmental temperature: 25°C	siteco
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W] start of lifetime	Power consumption [W] end of lifetime	Power consumption [W] average
100	254	254	7210	58.1	60.6	59.4
95	241	252	6841	54.6	56.9	55.8
90	229	250	6500	51.5	53.6	52.6
85	216	248	6131	48.1	50.1	49.1
80	203	246	5762	44.9	46.7	45.8
75	190	243	5393	41.7	43.4	42.6
70	178	241	5053	38.8	40.3	39.6
65	165	238	4684	35.7	37.2	36.4
60	152	235	4315	32.7	34.0	33.4
55	140	232	3974	30.0	31.2	30.6
50	127	229	3605	27.1	28.1	27.6
45	114	225	3236	24.3	25.2	24.8
40	102	221	2895	21.7	22.5	22.1
35	89	216	2526	19.0	19.7	19.4
30	76	210	2157	16.4	17.0	16.7
25	63	203	1788	13.8	14.3	14.0
20	51	195	1448	11.4	11.8	11.6
15	38	184	1079	8.8	9.0	8.9
14	35	181	994	8.2	8.4	8.3