

Photometric test report

Family
Licross® 21 Performance

Order number: 52TD16DN46XGD
EAN: 4069025478641

LP number
58520_301



Version cover frosted, direct-/ indirect distribution
Lamps LED 4000 K | CRI ≥ 80
Controlgear ECG-DALI
Setting AC-mode
Rated values Net luminous flux = 6000 lm
 Power consumption = 32.7 W
 Luminous efficacy = 183.5 lm/W

serial
documentation
10.08.2023


siteco

Luminous intensity in cd/klm

C180-0

C270-90

Imax: 452 cd/klm

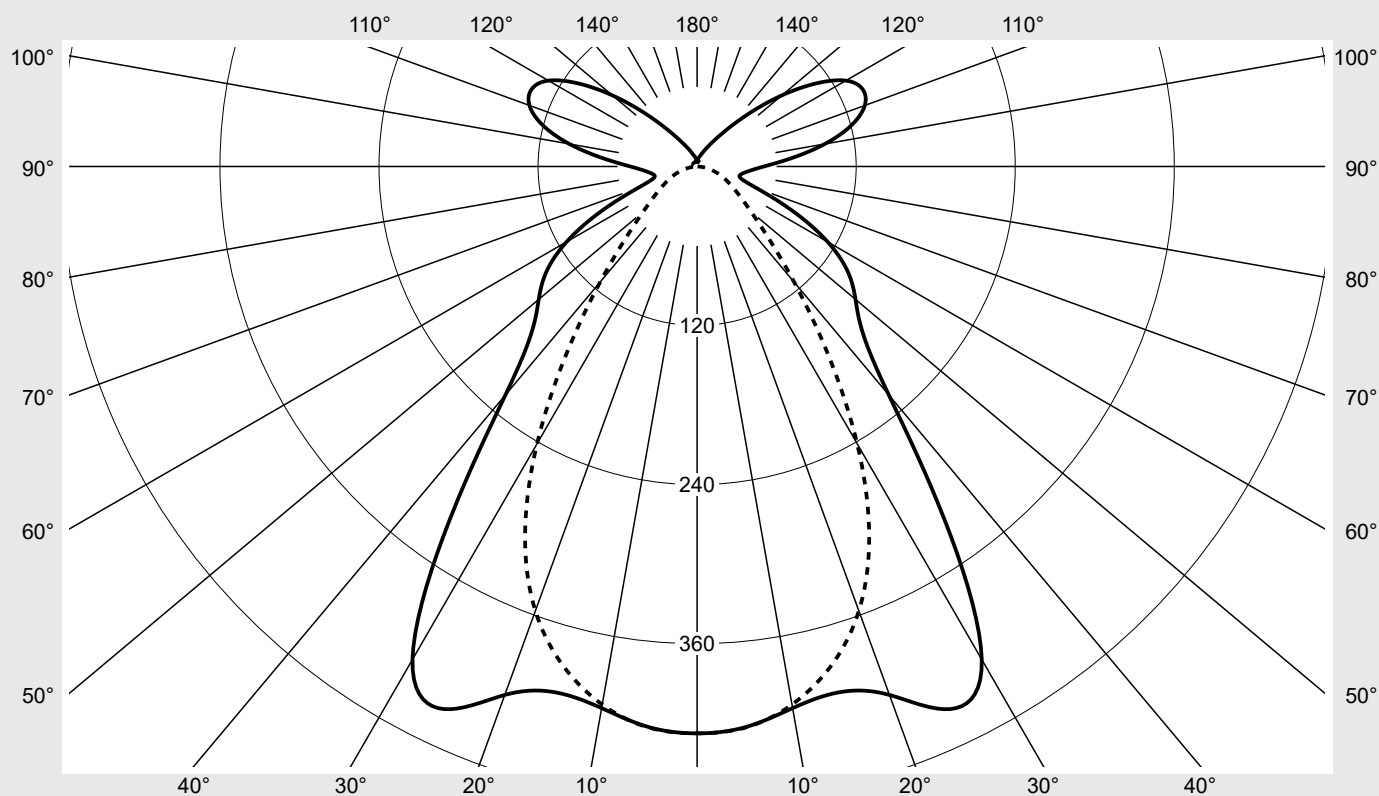

Classifications

DIN 5040 B 5 1
 CIE N1=65 N2=88 N3=96
 N4=79 N5=100

Luminaire light output ratios

η_{LB} 100.0%
 ϕ_u 79.3%
 ϕ_o 20.7%

Measurement conditions

DIN EN 13032 and DIN 5032

Photometric test report

Family Licross® 21 Performance	Order number: 52TD16DN46XGD EAN: 4069025478641	LP number 58520_301
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C- planes	0° 180°	15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°	90° 270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm							Luminous flux in lm/klm	
0°	427.7	427.7	427.7	427.7	427.7	427.7	427.7	2.6	2.6
5°	424.4	422.4	420.2	422.1	424.3	424.4	424.8	20.2	22.8
10°	414.9	412.5	408.9	409.5	411.2	411.6	412.2	39.1	61.9
15°	410.8	406.7	398.1	393.2	390.9	389.7	390.1	56.3	118.2
20°	424.3	415.5	394.5	375.8	364.0	357.7	356.8	71.8	190.0
25°	451.7	439.9	403.9	360.3	329.2	311.6	307.2	85.9	275.8
30°	429.5	430.9	412.5	347.4	284.5	251.0	241.5	94.2	370.0
35°	325.6	344.5	379.3	329.0	231.5	183.8	171.0	89.9	460.0
40°	224.9	238.5	293.1	289.7	177.2	125.7	113.8	76.0	535.9
45°	176.4	174.8	199.5	224.7	128.0	84.3	75.7	60.6	596.5
50°	156.0	144.3	136.6	154.2	90.2	58.9	53.2	48.2	644.7
55°	139.0	122.9	98.4	99.7	63.9	43.4	39.8	38.7	683.4
60°	113.7	99.1	72.2	64.7	46.3	33.0	30.8	30.7	714.1
65°	79.7	70.2	51.6	43.8	34.5	25.6	24.0	23.0	737.1
70°	47.7	43.4	35.6	31.1	26.2	19.7	18.2	16.2	753.3
75°	33.9	31.2	26.1	23.2	19.9	14.4	12.7	12.2	765.5
80°	33.7	30.7	23.7	18.2	15.1	9.9	7.5	10.6	776.1
85°	39.3	35.6	26.3	17.2	11.4	6.2	3.2	10.7	786.9
90°	50.4	45.6	32.3	18.9	10.0	3.9	0.6	12.4	799.3
95°	71.3	63.5	42.3	22.5	11.4	4.6	1.0	16.4	815.7
100°	97.9	84.6	52.5	26.5	12.9	5.3	1.6	20.8	836.6
105°	120.7	101.7	62.6	30.2	14.2	6.1	2.4	24.4	860.9
110°	134.6	112.6	69.4	33.2	15.3	6.7	2.9	26.3	887.2
115°	137.8	115.5	72.0	34.6	16.0	7.2	3.2	26.1	913.3
120°	129.6	108.9	68.7	33.6	15.7	7.4	3.5	23.8	937.1
125°	109.1	92.2	59.5	30.3	14.7	7.4	3.7	19.5	956.6
130°	83.4	71.0	47.4	25.5	13.2	7.2	3.7	14.5	971.2
135°	58.6	50.3	35.1	20.5	11.4	6.8	3.7	10.0	981.2
140°	39.2	34.3	25.3	16.3	9.8	6.3	3.7	6.7	987.9
145°	26.6	23.8	18.6	13.0	8.2	5.4	3.7	4.4	992.3
150°	18.7	17.2	14.2	10.0	6.9	5.0	3.7	2.9	995.2
155°	13.8	12.8	10.8	7.8	6.8	4.4	3.6	2.0	997.2
160°	10.2	9.8	7.9	6.8	5.6	4.6	3.5	1.3	998.5
165°	8.2	7.8	6.5	5.6	5.0	4.1	3.7	0.8	999.3
170°	6.4	5.6	4.7	4.7	5.0	4.1	3.9	0.5	999.8
175°	4.2	3.7	4.1	4.1	4.1	4.2	4.2	0.2	1000.0
180°	3.7	3.7	3.7	3.7	3.7	3.7	3.7	0.0	1000.0

Photometric test report

Family Licross® 21 Performance			Order number: 52TD16DN46XGD EAN: 4069025478641							LP number 58520_301	
UGR-Table			Standard room							siteco	
Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions		View crosswise (C0)					View endwise (C90)				
x	y										
2H	2H	17.3	18.6	17.9	19.1	19.8	13.5	14.8	14.1	15.3	16.0
	3H	17.9	19.0	18.5	19.6	20.3	13.9	15.0	14.5	15.6	16.3
	4H	18.1	19.1	18.7	19.7	20.4	14.1	15.2	14.7	15.8	16.5
	6H	18.3	19.2	19.0	19.9	20.6	14.3	15.2	14.9	15.8	16.6
	8H	18.6	19.4	19.3	20.0	20.8	14.2	15.1	14.9	15.8	16.5
	12H	18.9	19.6	19.6	20.3	21.1	14.3	15.1	14.9	15.8	16.5
4H	2H	17.3	18.4	17.9	19.0	19.6	14.0	15.0	14.6	15.6	16.3
	3H	18.0	18.8	18.6	19.5	20.3	14.5	15.4	15.2	16.0	16.8
	4H	18.2	19.0	18.9	19.7	20.5	14.8	15.6	15.5	16.3	17.1
	6H	18.7	19.3	19.4	20.0	20.9	15.0	15.7	15.7	16.4	17.2
	8H	19.0	19.6	19.7	20.3	21.2	15.1	15.7	15.8	16.4	17.3
	12H	19.5	20.0	20.3	20.8	21.7	15.1	15.7	15.9	16.4	17.3
8H	4H	18.2	18.8	18.9	19.5	20.4	15.0	15.6	15.7	16.3	17.1
	6H	18.8	19.3	19.5	20.0	20.9	15.4	15.8	16.1	16.6	17.5
	8H	19.3	19.7	20.0	20.5	21.3	15.5	16.0	16.3	16.7	17.6
	12H	20.0	20.4	20.8	21.2	22.1	15.6	16.0	16.4	16.8	17.7
12H	4H	18.1	18.7	18.9	19.4	20.3	15.0	15.5	15.8	16.2	17.1
	6H	18.7	19.2	19.5	19.9	20.8	15.5	15.9	16.2	16.6	17.6
	8H	19.3	19.7	20.1	20.4	21.4	15.7	16.1	16.5	16.8	17.8

Luminance table		Max. for $\gamma \geq 65^\circ$		Photometric dimensions in mm:		L = 1480 B = 115	H(C0) = 36 H(C90) = 0	H(C180) = 36 H(C270) = 0
C-planes	γ	0° 180°	15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°	90° 270°
			Luminance in cd/m²					
45°		6698.4	6691.2	7825.1	9172.2	5519.9	3888.4	3771.9
50°		6231.1	5815.8	5660.2	6692.1	4170.4	2947.4	2916.0
55°		5903.6	5276.7	4360.6	4657.0	3209.5	2390.6	2444.7
60°		5197.5	4586.8	3462.6	3297.8	2570.7	2043.4	2171.4
65°		3980.1	3549.7	2720.2	2477.6	2157.5	1821.2	2004.8
70°		2642.2	2442.9	2103.1	1996.1	1885.0	1659.7	1879.3
75°		2132.4	1994.9	1767.8	1730.5	1713.4	1509.5	1731.3
80°		2467.4	2297.8	1896.0	1636.2	1626.6	1379.7	1524.0
85°		3469.6	3235.7	2594.3	1971.2	1649.2	1304.3	1297.6

Photometric test report

Family
Licross® 21 Performance

Order number: **52TD16DN46XGD**
EAN: **4069025478641**

LP number
58520_301

Luminance values in cd/m²

γ 65°

γ 70°


γ 75°

γ 80°

γ 85°

sit

eco

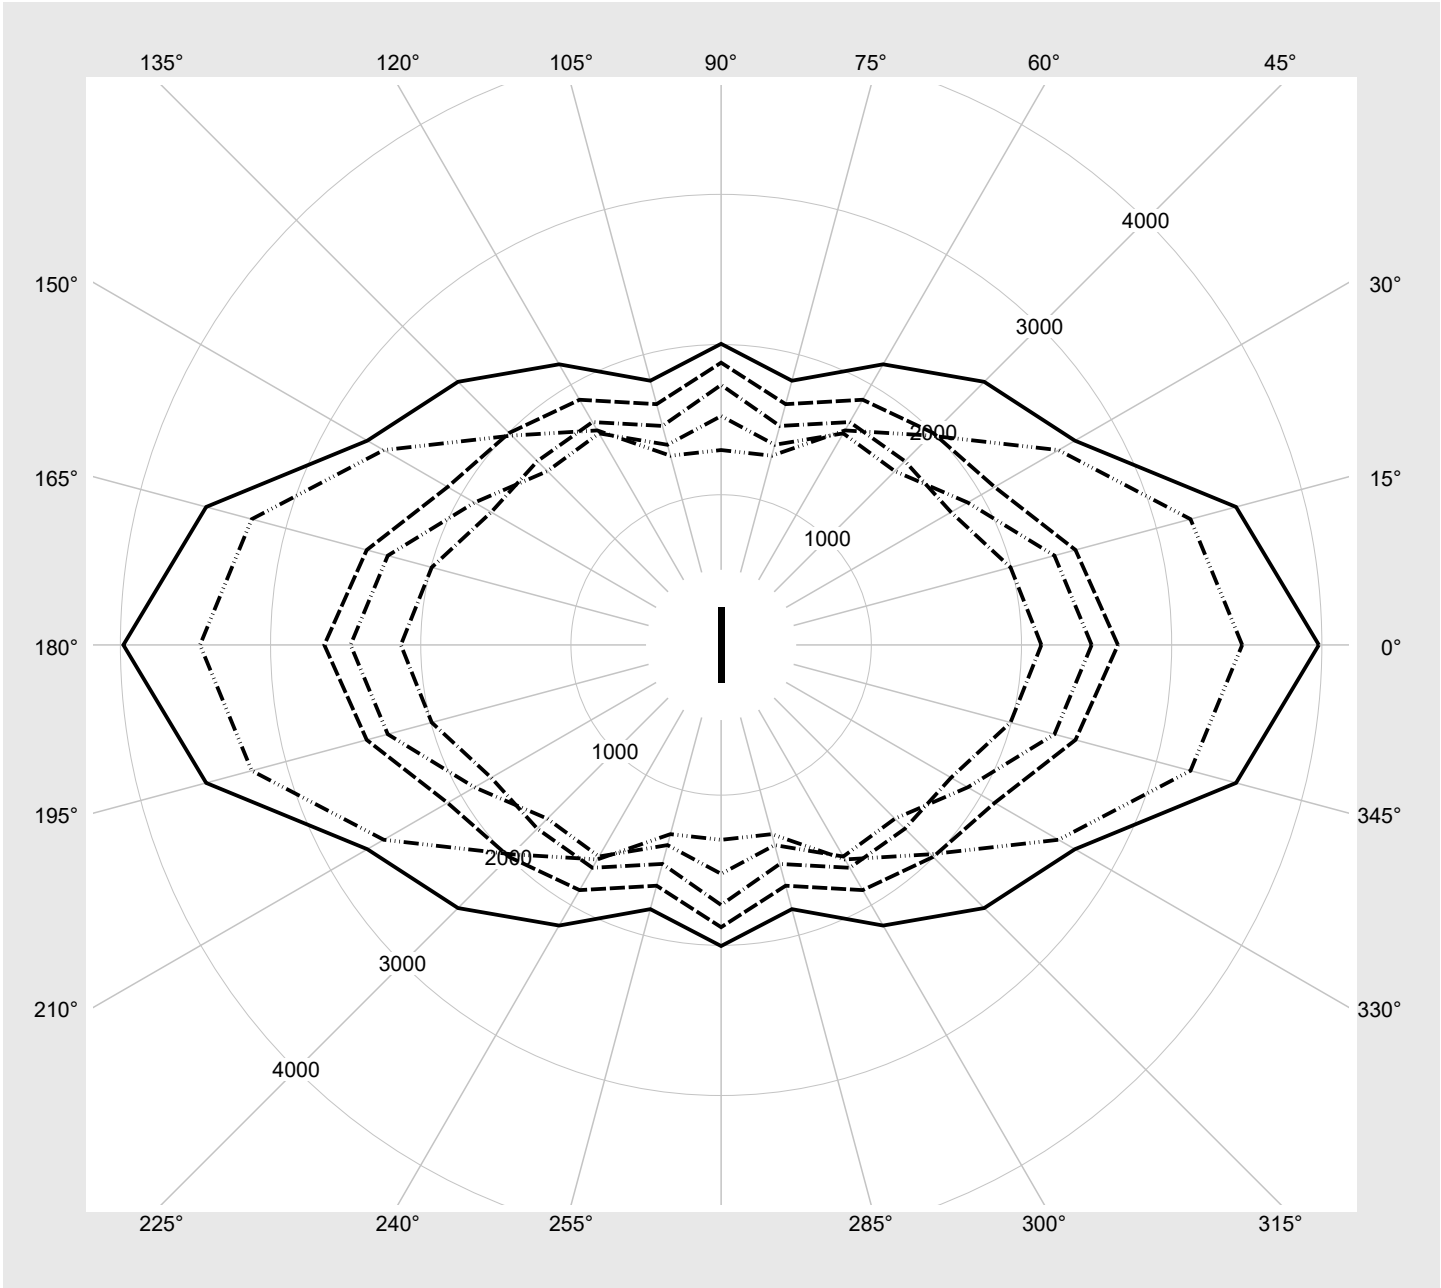

Photometric test report

Family Licross® 21 Performance	Order number: 52TD16DN46XGD EAN: 4069025478641	LP number 58520_301
Dimming levels table environmental temperature: 25°C		

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]
100	254	254	6000	32.7
95	241	252	5706	31.1
90	228	250	5409	29.4
85	214	248	5090	27.8
80	201	245	4789	26.3
75	188	243	4489	24.8
70	176	241	4209	23.4
65	163	238	3906	21.8
60	150	235	3598	20.2
55	137	231	3293	18.6
50	125	228	3008	17.0
45	112	224	2698	15.4
40	99	219	2389	13.7
35	87	215	2100	12.1
30	74	209	1789	10.5
25	62	202	1497	9.0
20	50	194	1207	7.5
15	37	183	889	5.8
14	34	180	816	5.4