




# Photometric test report

<b>Family</b> <b>Licross® 21 Protected</b>	<b>Order number: 52TD1BCN485G</b> <b>EAN: 4058352903254</b>	<b>LP number</b> <b>58522_233</b>
	<b>Version</b> prismatic cover, frosted, wide distribution <b>Lamps</b> LED 4000 K   CRI ≥ 80 <b>Controlgear</b> ECG-Multilumen CLOi <b>Rated values</b> Net luminous flux = 8570 lm Power consumption = 50.4 W Luminous efficacy = 170 lm/W	<b>serial documentation</b> <b>17.08.2023</b>
		

**Luminous intensity in cd/klm** C180-0 C270-90 **Imax: 420 cd/klm**

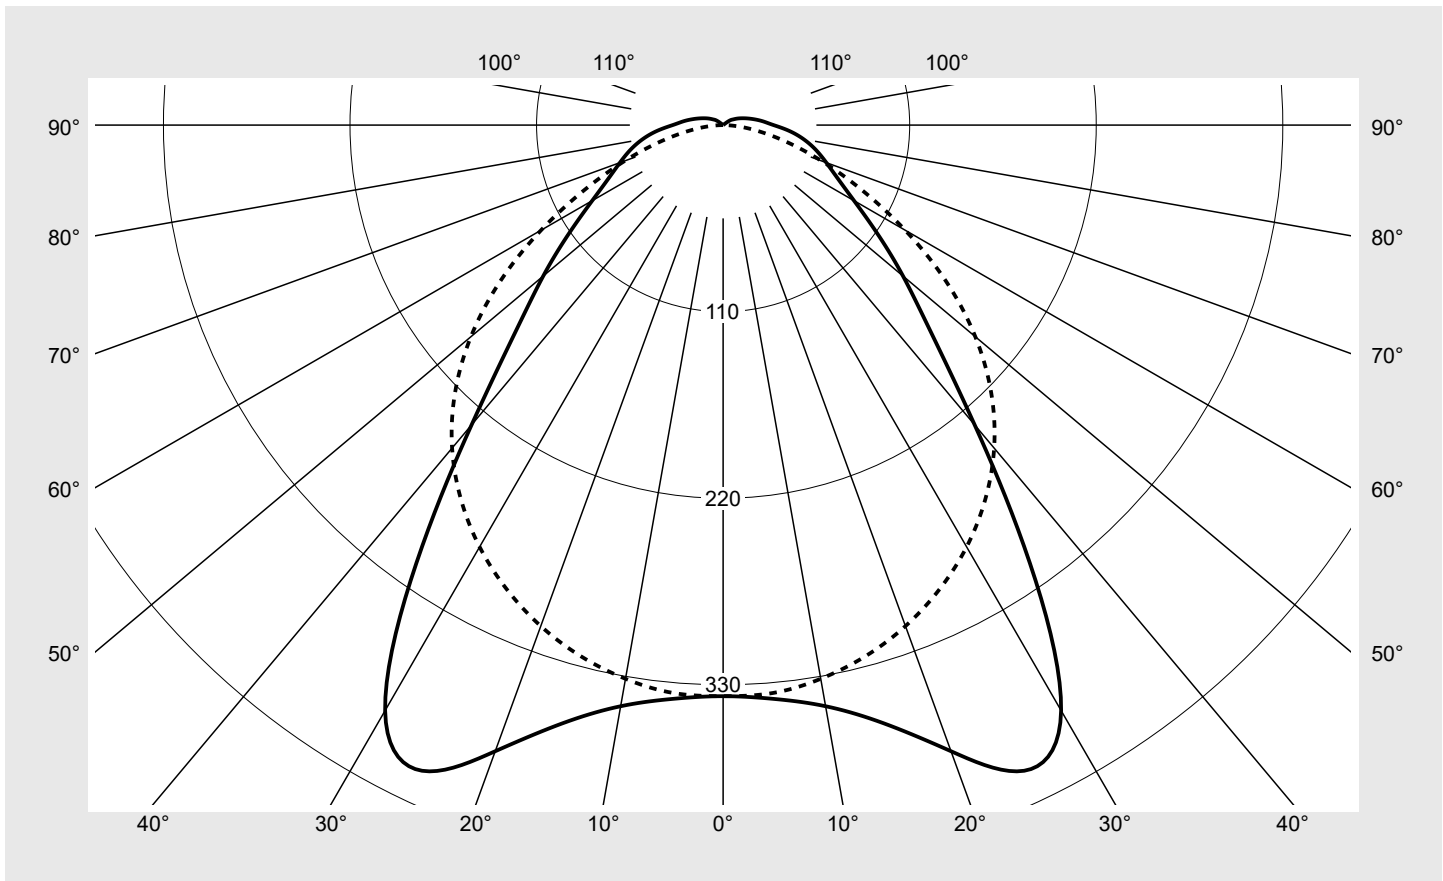

Classifications	
DIN 5040	A 4 1
CIE	N1=54 N2=82 N3=95 N4=97 N5=100

Luminaire light output ratios	
$\eta_{LB}$	100.0%
$\phi_u$	96.8%
$\phi_o$	3.2%

Measurement conditions
DIN EN 13032 and DIN 5032

## Photometric test report

<b>Family</b> <b>Licross® 21 Protected</b>	<b>Order number: 52TD1BCN485G</b> <b>EAN: 4058352903254</b>	<b>LP number</b> <b>58522_233</b>
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>
		<b>siteco</b>

C-planes $\gamma$	0° 180°	15°	30°	45°	60°	75°	90° 270°	Phi-zone	Total Phi-zone
		165° 195° 345°	150° 210° 330°	135° 225° 315°	120° 240° 300°	105° 255° 285°			
Luminous intensity in cd/klm								Luminous flux in lm/klm	
0°	336.7	336.7	336.7	336.7	336.7	336.7	336.7	2.0	2.0
5°	339.6	338.6	335.9	336.3	336.9	336.0	336.1	16.1	18.1
10°	347.9	347.0	341.3	338.0	335.2	332.1	331.5	32.3	50.4
15°	365.1	363.4	352.6	343.0	333.9	326.3	324.2	48.8	99.2
20°	392.9	389.6	370.2	350.5	332.5	318.7	314.4	66.1	165.3
25°	420.1	417.2	393.2	361.7	330.8	309.3	301.9	83.9	249.2
30°	398.6	403.0	395.6	369.9	329.0	297.6	287.2	97.7	346.8
35°	315.4	327.2	346.9	353.5	322.7	283.2	269.5	100.9	447.7
40°	230.7	242.3	270.7	302.4	300.6	265.5	248.6	95.2	542.9
45°	173.9	182.1	205.6	239.8	258.3	240.0	223.6	85.6	628.5
50°	138.5	144.5	161.6	188.3	208.7	204.6	194.1	75.2	703.7
55°	110.6	115.5	130.2	150.3	164.6	163.9	160.4	64.4	768.0
60°	89.1	92.4	103.6	120.9	128.5	124.9	123.9	53.5	821.6
65°	74.6	76.3	82.5	95.4	99.4	91.8	89.8	43.7	865.3
70°	64.8	65.1	66.4	73.4	75.2	65.0	61.7	35.1	900.3
75°	56.7	56.1	54.1	55.3	54.0	43.4	39.3	27.4	927.8
80°	48.3	47.2	43.9	40.6	36.4	26.8	21.9	20.7	948.5
85°	39.1	38.0	34.5	29.4	22.9	14.4	9.1	14.9	963.3
90°	29.8	28.8	25.7	20.2	13.1	5.8	0.8	9.9	973.3
95°	24.0	23.5	21.4	16.6	9.9	3.5	0.7	7.9	981.2
100°	19.2	18.8	17.3	13.3	7.4	1.9	0.6	6.2	987.4
105°	15.1	14.8	13.6	10.2	5.0	0.8	0.6	4.6	992.0
110°	11.8	11.3	10.2	7.3	2.9	0.6	0.6	3.3	995.3
115°	9.0	8.5	7.3	4.7	1.4	0.7	0.7	2.3	997.6
120°	6.6	6.1	4.9	2.7	0.8	0.7	0.7	1.5	999.1
125°	4.4	4.0	2.9	1.3	0.7	0.8	0.8	0.9	1000.0
130°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
135°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
140°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
145°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
150°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
155°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
160°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
165°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
170°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
175°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
180°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

## Photometric test report

<b>Family</b> Licross® 21 Protected	<b>Order number: 52TD1BCN485G</b> <b>EAN: 4058352903254</b>	<b>LP number</b> 58522_233
--	--	-------------------------------

<b>UGR-Table</b>	<b>Standard room</b>	<b>siteco</b>
------------------	----------------------	---------------

Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions	View crosswise (C0)					View endwise (C90)					
x	y										
2H	2H	20.6	22.3	21.0	22.6	22.9	22.5	24.1	22.9	24.5	24.8
	3H	21.8	23.3	22.2	23.6	24.0	23.5	25.0	23.9	25.3	25.7
	4H	22.5	23.9	22.9	24.2	24.6	23.9	25.3	24.3	25.6	26.0
	6H	23.2	24.5	23.7	24.9	25.3	24.1	25.4	24.5	25.8	26.2
	8H	23.7	24.9	24.1	25.2	25.6	24.2	25.4	24.7	25.8	26.2
	12H	24.1	25.2	24.5	25.6	26.0	24.3	25.4	24.7	25.8	26.2
4H	2H	21.5	22.9	21.9	23.2	23.6	23.0	24.3	23.3	24.7	25.1
	3H	22.8	24.0	23.3	24.4	24.8	24.2	25.4	24.7	25.8	26.2
	4H	23.6	24.7	24.1	25.1	25.5	24.7	25.8	25.2	26.2	26.6
	6H	24.5	25.5	25.0	25.9	26.4	25.1	26.0	25.5	26.4	26.9
	8H	25.0	25.9	25.5	26.3	26.8	25.2	26.1	25.7	26.5	27.0
	12H	25.5	26.3	26.0	26.7	27.2	25.3	26.1	25.8	26.5	27.0
8H	4H	24.1	24.9	24.5	25.4	25.8	25.0	25.9	25.5	26.3	26.8
	6H	25.1	25.9	25.6	26.3	26.8	25.5	26.2	26.0	26.7	27.2
	8H	25.7	26.4	26.2	26.8	27.4	25.7	26.4	26.2	26.9	27.4
	12H	26.4	26.9	26.9	27.4	27.9	25.9	26.4	26.4	26.9	27.5
12H	4H	24.1	24.9	24.6	25.3	25.8	25.1	25.8	25.6	26.3	26.8
	6H	25.3	25.9	25.8	26.4	26.9	25.7	26.3	26.2	26.8	27.3
	8H	25.9	26.5	26.4	27.0	27.5	25.9	26.5	26.4	27.0	27.5

<b>Luminance table</b>	<b>Max. for <math>\gamma \geq 65^\circ</math></b>	<b>Photometric dimensions in mm:</b>	<b>L = 1480</b>	<b>H(C0) = 13</b>	<b>H(C180) = 13</b>
			<b>B = 78</b>	<b>H(C90) = 0</b>	<b>H(C270) = 0</b>

C-planes	$\gamma$	Luminance in cd/m <sup>2</sup>							
		0° 180°	15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°	90° 270°	
45°		15646.6	16468.4	18861.6	22521.4	25027.8	24152.9	23477.2	
50°		13342.9	13999.1	15926.2	19070.7	21924.7	22479.4	22419.9	
55°		11558.7	12153.3	13975.5	16651.3	19041.4	19982.2	20756.6	
60°		10269.3	10728.8	12305.5	14904.1	16673.0	17253.1	18402.3	
65°		9658.1	9967.0	11064.8	13382.6	14818.4	14765.3	15778.6	
70°		9641.0	9803.8	10325.4	12038.7	13279.8	12618.4	13391.7	
75°		10018.9	10060.5	10084.7	11007.3	11824.9	10717.4	11267.1	
80°		10611.2	10556.1	10325.1	10396.8	10562.5	9210.3	9346.8	
85°		11455.2	11393.1	11082.4	10674.5	10001.9	8191.8	7770.0	


**Photometric test report**

<b>Family</b> <b>Licross® 21 Protected</b>	<b>Order number: 52TD1BCN485G</b> <b>EAN: 4058352903254</b>	<b>LP number</b> <b>58522_233</b>
---	--	--------------------------------------

**Luminance values in cd/m<sup>2</sup>**

$\gamma$  65°   
   $\gamma$  70°   
   $\gamma$  75°   
   $\gamma$  80°   
   $\gamma$  85°

**siteco**

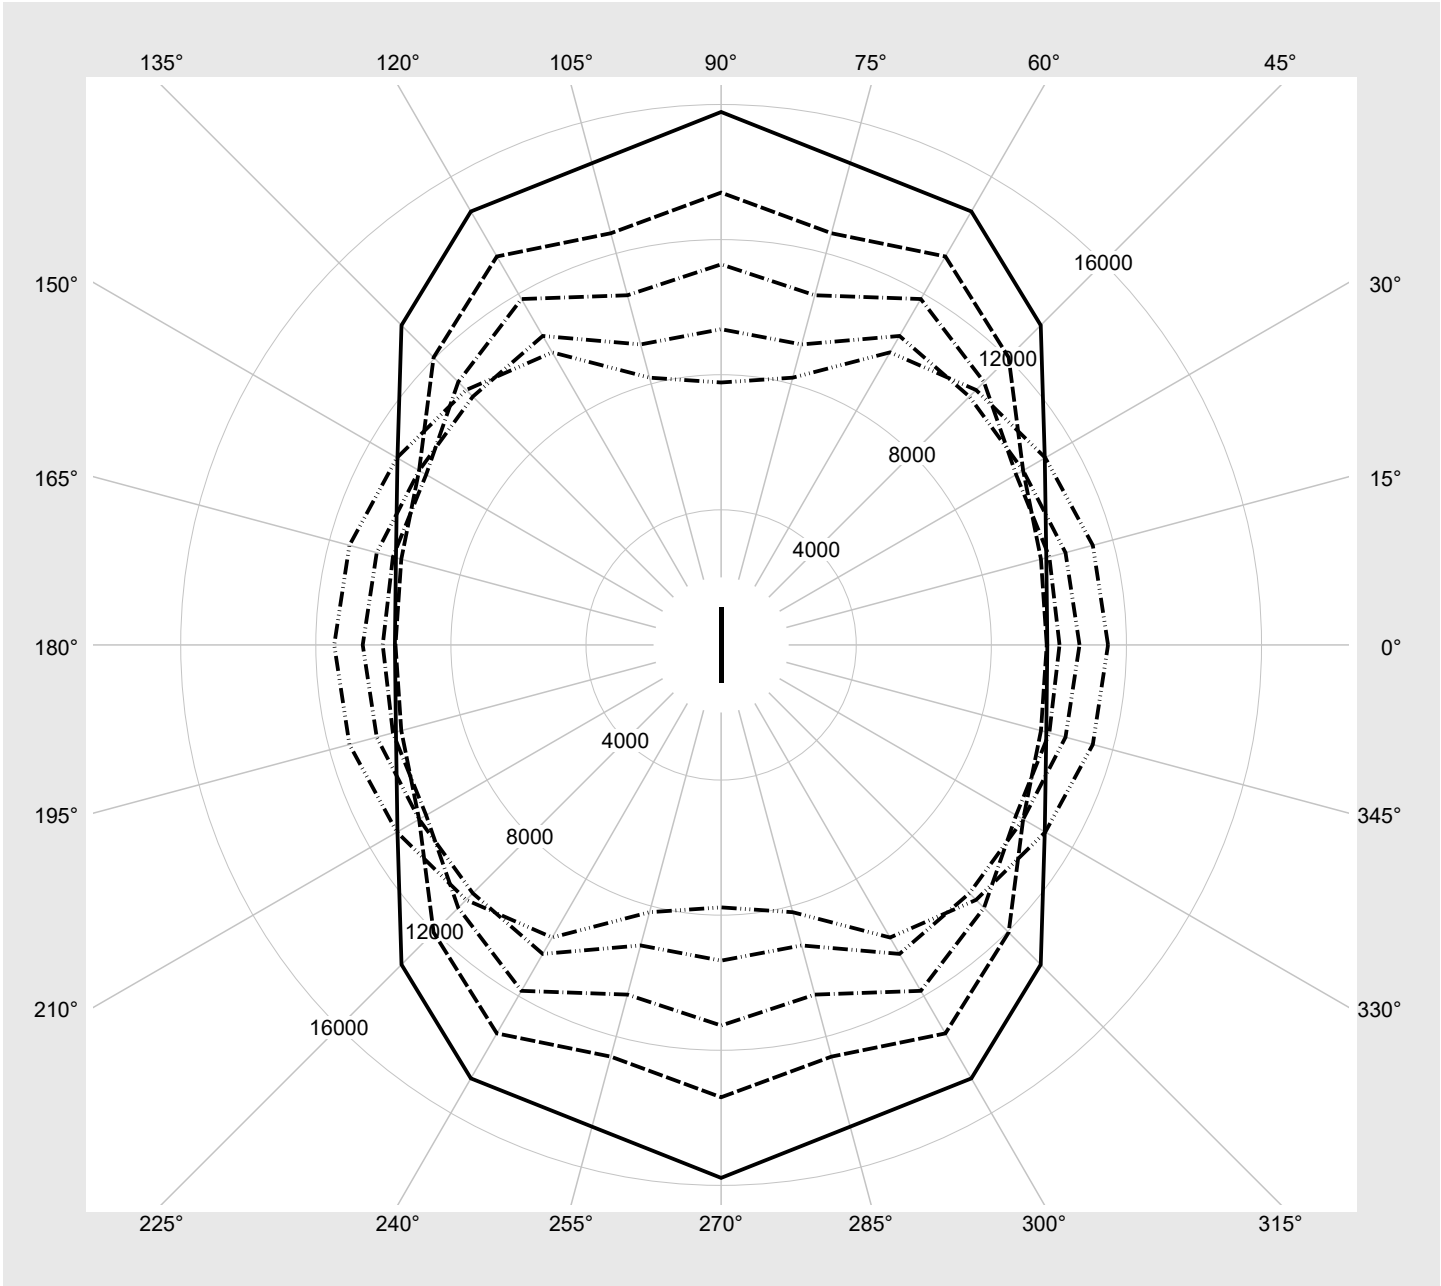

## Photometric test report

Family <b>Licross® 21 Protected</b>	Order number: <b>52TD1BCN485G</b> EAN: <b>4058352903254</b>	LP number <b>58522_233</b>
--	--	-------------------------------

<b>Multilumen Table</b>	environmental temperature: 25°C	<b>sITeco</b>
-------------------------	---------------------------------	---------------

DIP-Step	Switch Setting			Luminous flux [lm]	Power consumption [W]	Power consumption	Power consumption
	1	2	3			[W] end of lifetime	[W] average
1	A	C	E	8570	50.4	60.5	55.4
2	A	C	F	8024	47.0	56.1	51.6
3	A	D	E	7541	43.9	52.6	48.2
4	A	D	F	7047	41.0	48.7	44.8
5	B	C	E	6627	38.4	45.6	42.0
6	B	C	F	6133	35.4	41.7	38.6
7	B	D	E	5703	32.8	38.8	35.8
8	B	D	F	5199	29.9	35.4	32.6