




Photometric test report

Family Streetlight 11 mini LED	Order number: 5XC2N41F08HE EAN: 4058352558492	LP number 59457_75												
	<table border="0"> <tr> <td>Version</td> <td>post-top or side-entry mounting</td> </tr> <tr> <td>Optic</td> <td>asymmetric, extreme wide distribution with Back Light Control (ST1.0aB)</td> </tr> <tr> <td>Cover</td> <td>transparent, PMMA</td> </tr> <tr> <td>Lamps</td> <td>LED 4000 K CRI ≥ 70</td> </tr> <tr> <td>Controlgear</td> <td>ECG SITECO iQ</td> </tr> <tr> <td>Rated values</td> <td> Net luminous flux = 7430 lm Power consumption = 58.6 W Luminous efficacy = 126.8 lm/W </td> </tr> </table>	Version	post-top or side-entry mounting	Optic	asymmetric, extreme wide distribution with Back Light Control (ST1.0aB)	Cover	transparent, PMMA	Lamps	LED 4000 K CRI ≥ 70	Controlgear	ECG SITECO iQ	Rated values	Net luminous flux = 7430 lm Power consumption = 58.6 W Luminous efficacy = 126.8 lm/W	serial documentation 28.09.2023 
Version	post-top or side-entry mounting													
Optic	asymmetric, extreme wide distribution with Back Light Control (ST1.0aB)													
Cover	transparent, PMMA													
Lamps	LED 4000 K CRI ≥ 70													
Controlgear	ECG SITECO iQ													
Rated values	Net luminous flux = 7430 lm Power consumption = 58.6 W Luminous efficacy = 126.8 lm/W													

Luminous intensity in cd/klm **C180-0** **C195-15** **C200-20** **C270-90** **Imax: 754 cd/klm**

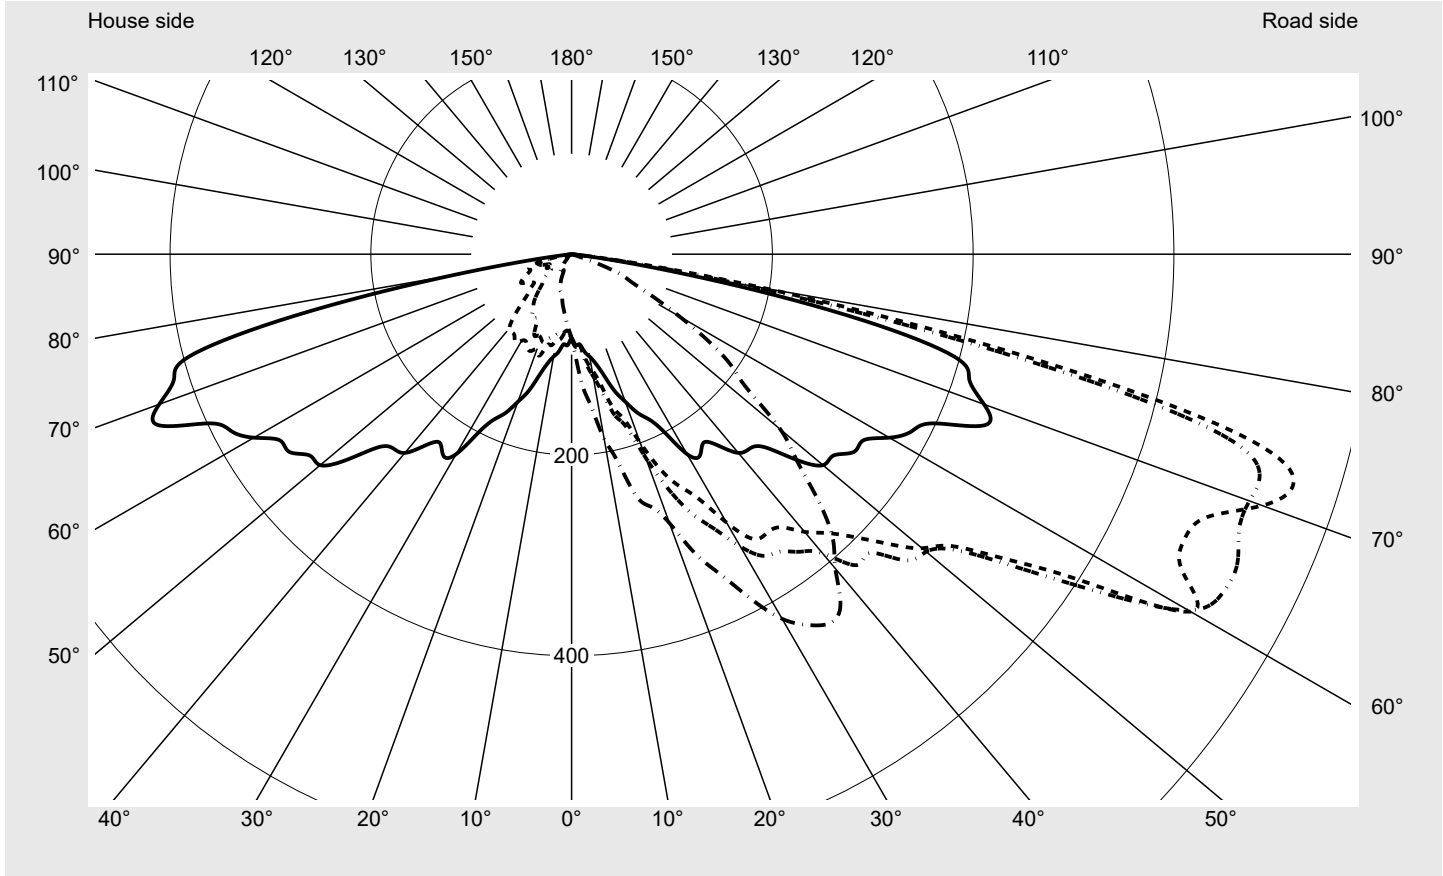

Luminaire output ratios

Eta	100.0%
Eta 0° - 90°	100.0%
Eta 90° - 180°	0.0%

Luminous intensity class acc. to EN13201-2

Class:	G1
Imax 70°	742.9
Imax 80°	194.9
Imax 90°	0.0
Imax >90°	0.0
Imax >95°	0.0


Measurement conditions

DIN EN 13032 and DIN 5032

Photometric test report

Family Streetlight 11 mini LED	Order number: 5XC2N41F08HE EAN: 4058352558492	LP number 59457_75
--	--	------------------------------

Envelope curve in cd/klm **KMK 72.5°** **KMK 70°** **KMK 67.5°** **KMK 65°** **siteco**

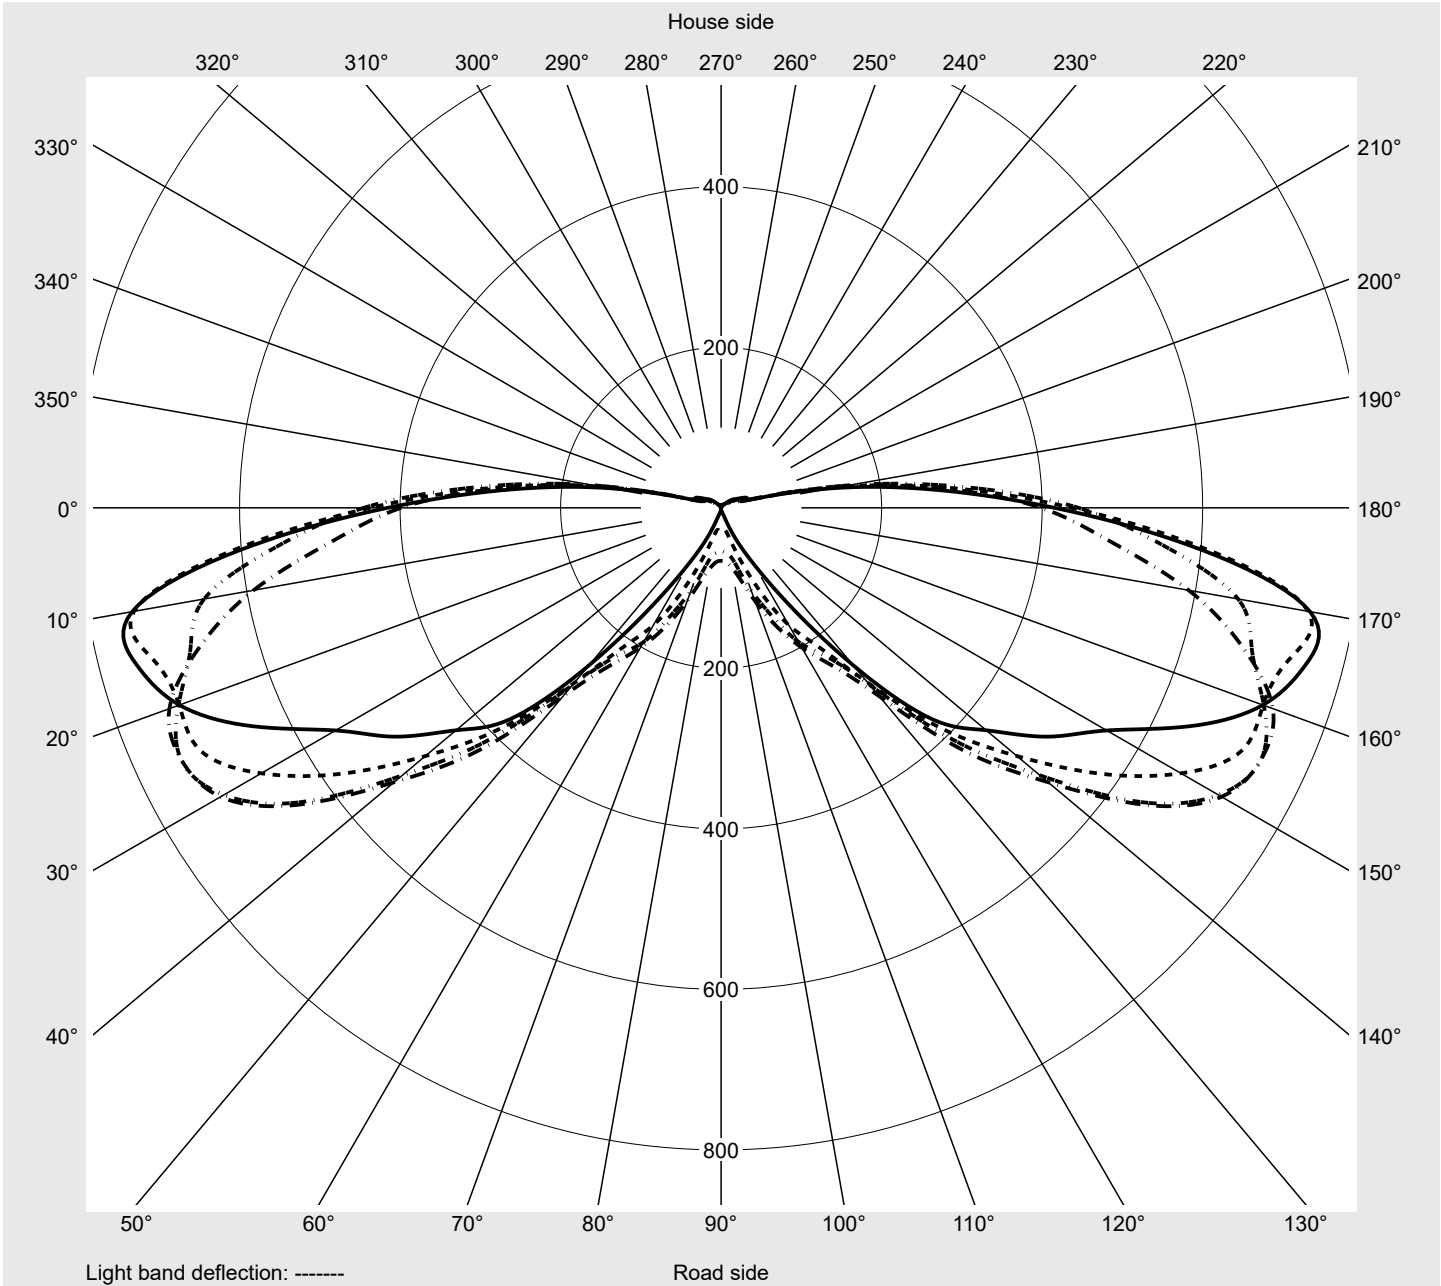

Photometric test report

Family Streetlight 11 mini LED	Order number: 5XC2N41F08HE EAN: 4058352558492	LP number 59457_75
Table of values for luminous intensities		Maximum luminous intensity
siteco		

C-planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
γ	Luminous intensity in cd/klm												
0,0°	83.9	83.9	83.9	83.9	83.9	83.9	83.9	83.9	83.9	83.9	83.9	83.9	83.9
2,5°	90.7	90.4	89.6	89.6	92.6	95.8	96.7	97.7	98.9	99.7	99.4	98.3	98.9
5,0°	90.1	90.9	91.0	90.8	93.4	99.4	105.1	110.0	112.1	113.3	116.6	120.2	123.6
7,5°	97.8	100.7	102.4	105.0	109.4	114.0	119.6	126.7	130.4	132.5	135.6	139.9	145.0
10,0°	103.6	106.4	110.5	116.9	123.4	128.7	132.7	139.3	141.8	143.6	147.6	151.3	157.4
12,5°	111.8	117.3	123.2	132.2	141.1	147.9	152.1	158.1	165.3	172.9	180.1	185.3	193.8
15,0°	125.2	133.6	145.8	157.3	166.0	174.5	179.6	187.6	195.8	203.8	214.1	219.5	222.2
17,5°	143.2	155.5	164.5	171.9	180.0	189.8	197.5	200.1	207.5	218.4	228.9	237.2	238.4
20,0°	156.4	173.2	183.5	200.0	215.7	230.8	239.2	240.9	243.5	246.5	255.5	265.9	271.5
22,5°	170.8	187.0	210.2	232.7	254.6	270.3	278.3	280.9	284.4	287.3	295.1	302.1	306.7
25,0°	181.3	201.9	229.5	255.3	285.9	298.3	297.6	301.1	310.9	320.5	327.1	336.2	345.9
27,5°	199.6	223.0	249.0	275.0	308.8	330.8	334.2	332.9	340.4	347.8	346.0	350.2	361.3
30,0°	229.9	263.1	284.9	308.6	336.3	357.1	363.1	360.8	363.2	367.2	369.3	373.6	377.3
32,5°	237.9	268.2	303.2	336.2	356.3	370.3	380.8	388.7	395.3	396.8	395.5	398.8	401.1
35,0°	229.2	258.8	302.6	339.1	361.7	384.4	397.9	409.4	417.6	415.7	411.6	408.9	410.5
37,5°	240.5	269.2	303.8	342.9	373.6	395.9	415.8	429.1	425.2	416.6	408.2	393.8	398.7
40,0°	258.4	286.2	322.8	361.1	388.8	409.4	426.1	433.8	426.7	417.1	404.6	397.1	398.3
42,5°	262.6	307.8	341.9	376.7	420.2	432.6	432.9	449.5	450.5	420.8	402.7	394.6	390.9
45,0°	271.8	332.1	375.9	398.6	420.7	449.8	466.6	471.6	458.9	428.9	404.4	386.4	378.1
47,5°	302.7	373.9	405.2	426.9	451.5	472.8	491.1	480.4	458.4	436.1	412.4	380.6	357.9
50,0°	327.0	400.8	432.0	455.7	461.1	473.9	487.7	483.4	462.4	434.6	408.1	362.7	325.3
52,5°	329.2	407.3	456.4	477.7	484.5	499.6	505.3	497.0	463.5	423.3	381.5	334.3	311.5
55,0°	343.4	414.5	489.4	530.3	545.3	562.1	551.7	525.4	475.1	419.2	362.9	303.1	278.0
57,5°	344.9	447.4	527.2	608.8	628.7	618.3	599.7	560.8	488.5	413.0	343.5	277.3	248.3
60,0°	365.5	499.4	616.7	712.2	709.4	673.8	648.7	595.7	500.0	408.6	330.9	277.1	243.0
62,5°	382.0	492.2	604.2	686.5	731.0	714.9	688.2	618.4	525.8	415.5	317.6	258.9	222.0
65,0°	398.7	488.0	591.6	673.3	731.6	742.3	720.1	645.3	532.0	427.9	306.2	239.1	201.3
67,5°	445.3	556.0	654.2	684.7	719.6	742.5	715.5	639.3	518.7	408.5	288.1	224.4	192.8
70,0°	437.2	611.3	742.9	732.2	718.6	715.8	661.6	577.7	481.2	388.9	284.8	211.1	168.8
72,5°	415.4	601.1	745.2	754.3	718.3	643.9	554.8	497.1	431.2	372.9	256.3	146.8	79.9
75,0°	395.0	544.9	656.0	682.3	642.3	531.3	429.6	403.8	358.9	245.3	111.8	36.6	10.0
77,5°	280.5	372.5	430.3	442.8	397.4	333.4	289.5	230.9	140.4	47.1	7.8	0.0	0.0
80,0°	118.6	154.3	189.4	194.9	165.3	140.7	101.2	41.4	8.9	0.0	0.0	0.0	0.0
82,5°	22.3	28.1	36.5	41.6	37.9	27.0	8.5	0.0	0.0	0.0	0.0	0.0	0.0
85,0°	0.0	0.0	0.0	0.1	0.2	0.1	0.0	0.0	0.0	0.0	0.0	0.0	0.0
87,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 11 mini LED	Order number: 5XC2N41F08HE EAN: 4058352558492	LP number 59457_75
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
γ	Luminous intensity in cd/klm												
0,0°	83.9	83.9	83.9	83.9	83.9	83.9	83.9	83.9	83.9	83.9	83.9	83.9	83.9
2,5°	98.6	99.1	101.0	101.8	103.4	104.7	86.5	82.9	78.7	76.7	75.0	73.9	74.2
5,0°	124.8	126.6	127.6	127.5	131.0	134.0	86.1	81.9	78.6	77.6	76.4	73.4	71.8
7,5°	147.8	149.0	148.4	151.1	154.5	154.8	94.1	89.6	85.3	81.2	77.6	75.0	71.4
10,0°	165.9	172.0	175.7	184.2	188.3	186.6	98.1	92.3	86.7	81.0	76.7	73.6	68.8
12,5°	202.3	207.5	211.3	213.9	213.7	211.2	104.3	98.4	92.9	85.1	78.2	71.2	63.9
15,0°	225.4	231.4	234.6	245.0	251.8	249.7	113.0	102.9	93.9	86.9	79.3	68.6	59.2
17,5°	239.2	244.6	249.2	255.0	260.6	264.0	129.0	117.8	105.9	92.1	77.5	68.1	58.0
20,0°	275.0	280.6	283.6	284.2	284.2	285.2	138.4	118.6	101.1	89.2	75.4	65.6	58.1
22,5°	310.7	314.2	315.9	318.0	321.4	323.4	151.1	127.7	104.3	87.8	75.3	63.7	53.3
25,0°	341.5	337.6	342.8	348.8	350.3	352.4	160.0	132.2	103.5	88.2	70.6	57.9	50.1
27,5°	374.8	380.5	383.8	387.9	388.0	387.2	175.8	140.1	98.2	74.1	61.4	53.3	44.7
30,0°	379.5	393.7	407.6	411.8	416.2	419.4	184.6	142.5	99.5	73.6	57.7	48.7	38.8
32,5°	401.0	403.5	412.2	426.4	435.0	437.9	193.3	147.6	104.0	73.3	52.0	40.1	35.2
35,0°	419.2	422.4	422.5	435.6	445.7	448.7	186.7	143.1	99.2	66.6	45.2	35.4	29.5
37,5°	415.6	427.1	432.3	432.2	436.8	440.0	190.5	143.1	98.0	62.3	42.1	34.5	27.7
40,0°	400.5	406.3	413.2	412.8	409.8	408.8	203.0	153.5	96.5	55.6	37.1	30.1	23.0
42,5°	402.4	406.8	400.1	383.3	377.8	385.5	209.2	149.2	86.1	47.7	31.6	22.6	19.0
45,0°	383.4	377.9	365.8	363.7	358.0	348.1	205.7	134.1	71.5	41.1	30.5	22.9	20.5
47,5°	353.3	337.4	324.0	320.1	311.0	304.5	216.3	128.3	59.8	39.0	26.5	22.6	19.1
50,0°	320.4	304.1	287.9	281.2	270.4	271.6	232.3	136.7	54.2	32.9	22.4	18.1	14.6
52,5°	296.6	272.2	245.6	233.2	223.2	221.0	232.0	130.6	47.1	26.1	16.7	13.2	11.8
55,0°	263.0	239.0	214.4	195.3	190.2	195.0	233.6	129.2	49.6	25.2	16.6	12.9	10.2
57,5°	227.9	202.7	178.8	161.7	157.9	162.8	233.0	141.0	52.2	21.8	12.8	11.9	9.9
60,0°	196.3	165.8	147.0	132.3	126.4	124.4	242.3	145.8	57.7	27.6	18.5	13.7	11.9
62,5°	173.7	133.9	112.3	100.0	91.8	90.8	260.8	149.2	55.4	27.0	17.3	12.9	11.5
65,0°	162.4	123.5	92.0	75.5	67.7	66.1	276.7	153.3	50.7	24.0	20.2	14.9	10.8
67,5°	147.6	109.8	75.5	60.0	56.1	54.1	300.7	161.7	45.3	26.5	24.0	17.0	11.5
70,0°	114.6	67.0	38.1	28.1	28.5	29.3	285.9	151.3	44.0	31.3	26.4	19.3	14.1
72,5°	41.7	14.3	7.3	4.1	3.4	3.6	262.8	140.2	44.5	34.2	29.4	22.5	18.5
75,0°	1.2	0.0	0.0	0.0	0.0	0.0	249.7	130.7	39.3	34.0	27.6	23.6	19.6
77,5°	0.0	0.0	0.0	0.0	0.0	0.0	174.3	91.4	26.0	27.2	24.0	19.1	12.8
80,0°	0.0	0.0	0.0	0.0	0.0	0.0	70.5	37.2	13.0	14.3	12.9	6.6	2.7
82,5°	0.0	0.0	0.0	0.0	0.0	0.0	13.4	6.6	2.7	3.4	2.6	0.6	0.0
85,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
87,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 11 mini LED	Order number: 5XC2N41F08HE EAN: 4058352558492	LP number 59457_75
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm											Luminous flux in lm/klm	
0,0°	83.9	83.9	83.9	83.9	83.9	83.9	83.9	83.9	83.9	83.9	83.9	0.1	0.1
2,5°	72.4	71.5	72.1	69.9	70.0	69.5	69.6	71.1	73.1	74.4	73.9	1.0	1.2
5,0°	69.8	67.0	66.8	66.5	65.8	65.0	63.6	63.8	64.7	65.0	65.3	2.2	3.3
7,5°	66.2	63.1	60.9	59.1	58.9	56.8	55.7	57.1	56.9	56.7	57.3	3.6	6.9
10,0°	63.9	60.2	57.2	55.3	51.9	47.8	47.7	48.7	48.0	49.2	50.9	5.0	11.9
12,5°	59.7	54.4	51.3	50.0	47.1	45.9	45.2	43.9	43.5	43.8	43.9	7.0	18.9
15,0°	52.0	47.6	45.9	43.8	44.1	43.2	40.8	40.7	40.5	39.4	39.3	9.3	28.2
17,5°	51.8	47.6	44.0	40.1	37.4	33.6	32.6	33.4	35.0	36.6	37.5	11.4	39.6
20,0°	52.3	46.9	42.0	35.9	33.2	30.6	29.2	29.0	29.7	31.7	32.1	14.3	53.9
22,5°	46.0	43.7	40.1	31.9	28.8	29.6	28.2	25.0	24.4	26.4	27.1	17.8	71.7
25,0°	43.9	40.8	37.1	29.8	26.1	24.8	22.4	19.8	18.8	19.1	18.9	21.1	92.7
27,5°	38.8	35.1	31.2	27.2	24.5	22.4	20.6	20.3	20.3	19.6	18.8	24.7	117.4
30,0°	32.0	30.1	27.9	24.3	23.8	24.5	21.8	19.2	19.4	21.4	22.9	28.5	145.9
32,5°	30.5	27.8	24.4	20.6	19.6	20.3	20.5	18.6	17.3	19.6	21.7	31.9	177.8
35,0°	25.0	23.6	21.5	18.1	17.1	17.2	15.9	15.8	16.6	16.1	15.4	34.6	212.4
37,5°	22.7	21.4	18.8	15.2	14.2	13.9	13.4	15.5	15.9	13.9	13.1	36.8	249.2
40,0°	18.9	17.9	16.1	14.6	14.4	12.2	12.0	14.1	13.7	12.2	11.9	38.8	288.0
42,5°	16.9	14.0	13.4	13.7	12.5	12.1	11.5	11.0	11.5	9.4	8.3	40.9	328.9
45,0°	16.6	13.6	12.4	13.6	14.8	13.9	10.8	9.7	11.1	8.3	6.2	42.7	371.5
47,5°	13.3	12.7	12.5	11.3	11.8	12.1	10.4	9.1	8.4	6.4	5.4	44.2	415.7
50,0°	11.2	9.0	9.4	9.3	9.3	9.6	8.6	8.0	8.3	6.6	4.5	45.0	460.7
52,5°	10.2	9.2	9.9	9.0	7.5	8.3	7.7	8.5	8.3	6.1	5.8	45.4	506.2
55,0°	9.1	8.7	6.8	5.8	5.7	6.1	6.5	6.7	6.2	5.1	4.7	47.1	553.2
57,5°	9.4	8.1	7.1	6.0	4.8	4.7	4.6	5.0	5.2	4.2	2.8	49.2	602.4
60,0°	10.5	7.0	5.8	5.7	5.0	4.9	3.8	4.1	4.0	3.1	2.7	52.7	655.1
62,5°	10.0	6.9	5.5	5.6	4.5	4.2	3.7	2.7	2.1	2.2	2.4	53.3	708.4
65,0°	10.1	7.2	6.2	5.5	3.3	3.6	3.8	2.5	1.6	1.3	1.3	54.2	762.6
67,5°	8.5	7.8	6.4	4.1	2.3	2.2	2.3	2.1	1.3	1.0	1.1	55.5	818.1
70,0°	9.4	7.8	5.7	3.1	2.3	1.5	1.2	1.4	0.9	0.6	0.8	54.6	872.7
72,5°	13.7	8.3	4.8	2.2	1.1	0.4	0.3	0.5	0.4	0.0	0.0	49.9	922.6
75,0°	13.4	5.5	1.9	0.6	0.1	0.0	0.0	0.0	0.0	0.0	0.0	41.2	963.8
77,5°	6.3	1.3	0.2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	24.9	988.7
80,0°	0.8	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	9.5	998.3
82,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1.7	1000.0
85,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
87,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family Streetlight 11 mini LED	Order number: 5XC2N41F08HE EAN: 4058352558492	LP number 59457_75
--	--	------------------------------

Dimming levels table	environmental temperature: 25°C	siteco
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]	Power consumption [W]	Power consumption [W]
				start of lifetime	end of lifetime	average
100	254	254	7430	58.6	60.9	59.8
95	241	252	7050	55.1	57.2	56.2
90	229	250	6699	51.9	53.9	52.9
85	216	248	6318	48.6	50.4	49.5
80	203	246	5938	45.3	47.0	46.2
75	190	243	5558	42.2	43.8	43.0
70	178	241	5207	39.3	40.8	40.0
65	165	238	4827	36.2	37.7	37.0
60	152	235	4446	33.3	34.5	33.9
55	140	232	4095	30.6	31.7	31.2
50	127	229	3715	27.6	28.6	28.1
45	114	225	3335	24.8	25.6	25.2
40	102	221	2984	22.3	23.1	22.7
35	89	216	2603	19.5	20.2	19.8
30	76	210	2223	16.7	17.3	17.0
25	63	203	1843	14.1	14.6	14.4
20	51	195	1492	11.7	12.1	11.9
15	38	184	1112	9.2	9.4	9.3
14	35	181	1024	8.6	8.8	8.7