

# Photometric test report

|  |   |  |
|--|---|--|
| <b>Family</b><br><b>Licross® 11 Protected</b>                                    | <b>Order number: 51TD12MN4F5M</b><br><b>EAN: 4058352928745</b>  | <b>LP number</b><br><b>58523_221</b>             |
|  | <b>Version</b> prismatic cover, frosted, wide distribution<br><b>Lamps</b> LED 4000 K   CRI ≥ 80<br><b>Controlgear</b> ECG Multilumen<br><b>Rated values</b> Net luminous flux = 15820 lm<br>Power consumption = 87.4 W<br>Luminous efficacy = 181 lm/W | <b>serial documentation</b><br><b>11.10.2023</b> |
|  |    |  |

**Luminous intensity in cd/klm** C180-0 C270-90 **Imax: 630 cd/klm**



| Classifications |                                   |
|-----------------|-----------------------------------|
| DIN 5040        | A 5 1                             |
| CIE             | N1=70 N2=91 N3=97<br>N4=98 N5=100 |

| Luminaire light output ratios |        |
|-------------------------------|--------|
| $\eta_{LB}$                   | 100.0% |
| $\phi_u$                      | 98.3%  |
| $\phi_o$                      | 1.7%   |

**Measurement conditions**  
DIN EN 13032 and DIN 5032

## Photometric test report

|   |  |                                   |
|---|--|-----------------------------------|
| Family<br><b>Licross® 11 Protected</b>          | Order number: <b>51TD12MN4F5M</b><br>EAN: <b>4058352928745</b> | LP number<br><b>58523_221</b>     |
| <b>Table of values for luminous intensities</b> |  | <b>Maximum luminous intensity</b> |
|   |  | <b>siteco</b>                     |

| C-planes<br>$\gamma$         | 0°<br>180° | 15°                  | 30°                  | 45°                  | 60°                  | 75°                  | 90°<br>270° | Phi-zone                | Total<br>Phi-zone |
|------------------------------|------------|----------------------|----------------------|----------------------|----------------------|----------------------|-------------|-------------------------|-------------------|
|                              |            | 165°<br>195°<br>345° | 150°<br>210°<br>330° | 135°<br>225°<br>315° | 120°<br>240°<br>300° | 105°<br>255°<br>285° |             |                         |                   |
| Luminous intensity in cd/klm |            |                      |                      |                      |                      |                      |             | Luminous flux in lm/klm |                   |
| 0°                           | 568.0      | 568.0                | 568.0                | 568.0                | 568.0                | 568.0                | 568.0       | 3.4                     | 3.4               |
| 5°                           | 570.0      | 568.0                | 563.9                | 564.4                | 565.6                | 564.2                | 564.6       | 27.0                    | 30.4              |
| 10°                          | 575.1      | 572.9                | 563.4                | 557.9                | 553.3                | 549.0                | 548.2       | 53.3                    | 83.7              |
| 15°                          | 590.1      | 586.0                | 566.8                | 548.5                | 532.2                | 519.9                | 516.5       | 78.2                    | 161.9             |
| 20°                          | 611.6      | 603.6                | 568.7                | 531.0                | 496.5                | 471.9                | 464.3       | 100.3                   | 262.2             |
| 25°                          | 630.0      | 617.6                | 564.2                | 499.9                | 441.6                | 401.0                | 387.5       | 117.1                   | 379.3             |
| 30°                          | 598.0      | 589.4                | 536.5                | 452.4                | 368.0                | 311.9                | 293.8       | 123.5                   | 502.8             |
| 35°                          | 487.1      | 490.1                | 463.2                | 383.1                | 284.6                | 222.1                | 203.0       | 114.7                   | 617.4             |
| 40°                          | 351.1      | 360.8                | 359.1                | 297.2                | 205.7                | 150.3                | 134.3       | 94.9                    | 712.3             |
| 45°                          | 241.7      | 250.7                | 257.1                | 211.9                | 140.4                | 100.6                | 89.9        | 72.8                    | 785.1             |
| 50°                          | 168.3      | 174.0                | 178.9                | 144.5                | 94.4                 | 69.8                 | 63.7        | 54.4                    | 839.5             |
| 55°                          | 118.9      | 121.8                | 123.3                | 97.4                 | 64.6                 | 50.4                 | 47.5        | 40.5                    | 880.0             |
| 60°                          | 85.1       | 85.8                 | 84.4                 | 66.1                 | 45.7                 | 37.4                 | 36.1        | 30.1                    | 910.0             |
| 65°                          | 63.8       | 62.6                 | 58.2                 | 45.7                 | 33.4                 | 28.1                 | 27.2        | 22.6                    | 932.7             |
| 70°                          | 50.4       | 47.7                 | 40.8                 | 32.1                 | 24.8                 | 20.7                 | 19.9        | 17.3                    | 949.9             |
| 75°                          | 41.3       | 37.6                 | 29.5                 | 22.7                 | 17.9                 | 14.5                 | 13.5        | 13.2                    | 963.2             |
| 80°                          | 34.0       | 30.0                 | 21.9                 | 15.9                 | 12.4                 | 9.4                  | 8.0         | 10.0                    | 973.1             |
| 85°                          | 27.2       | 23.7                 | 16.4                 | 11.2                 | 8.0                  | 5.3                  | 3.6         | 7.3                     | 980.4             |
| 90°                          | 20.7       | 17.9                 | 12.0                 | 7.4                  | 4.6                  | 2.2                  | 0.4         | 5.0                     | 985.4             |
| 95°                          | 16.6       | 14.7                 | 10.2                 | 6.3                  | 3.6                  | 1.3                  | 0.3         | 4.0                     | 989.4             |
| 100°                         | 13.2       | 11.9                 | 8.5                  | 5.2                  | 2.7                  | 0.8                  | 0.3         | 3.2                     | 992.6             |
| 105°                         | 10.4       | 9.5                  | 6.9                  | 4.1                  | 1.9                  | 0.4                  | 0.3         | 2.5                     | 995.1             |
| 110°                         | 8.2        | 7.4                  | 5.5                  | 3.1                  | 1.2                  | 0.3                  | 0.3         | 1.9                     | 997.0             |
| 115°                         | 6.5        | 5.8                  | 4.2                  | 2.2                  | 0.7                  | 0.4                  | 0.4         | 1.4                     | 998.4             |
| 120°                         | 4.9        | 4.3                  | 3.0                  | 1.4                  | 0.6                  | 0.5                  | 0.5         | 1.0                     | 999.4             |
| 125°                         | 3.5        | 3.0                  | 2.0                  | 0.9                  | 0.6                  | 0.5                  | 0.5         | 0.7                     | 1000.0            |
| 130°                         | 0.0        | 0.0                  | 0.0                  | 0.0                  | 0.0                  | 0.0                  | 0.0         | 0.0                     | 1000.0            |
| 135°                         | 0.0        | 0.0                  | 0.0                  | 0.0                  | 0.0                  | 0.0                  | 0.0         | 0.0                     | 1000.0            |
| 140°                         | 0.0        | 0.0                  | 0.0                  | 0.0                  | 0.0                  | 0.0                  | 0.0         | 0.0                     | 1000.0            |
| 145°                         | 0.0        | 0.0                  | 0.0                  | 0.0                  | 0.0                  | 0.0                  | 0.0         | 0.0                     | 1000.0            |
| 150°                         | 0.0        | 0.0                  | 0.0                  | 0.0                  | 0.0                  | 0.0                  | 0.0         | 0.0                     | 1000.0            |
| 155°                         | 0.0        | 0.0                  | 0.0                  | 0.0                  | 0.0                  | 0.0                  | 0.0         | 0.0                     | 1000.0            |
| 160°                         | 0.0        | 0.0                  | 0.0                  | 0.0                  | 0.0                  | 0.0                  | 0.0         | 0.0                     | 1000.0            |
| 165°                         | 0.0        | 0.0                  | 0.0                  | 0.0                  | 0.0                  | 0.0                  | 0.0         | 0.0                     | 1000.0            |
| 170°                         | 0.0        | 0.0                  | 0.0                  | 0.0                  | 0.0                  | 0.0                  | 0.0         | 0.0                     | 1000.0            |
| 175°                         | 0.0        | 0.0                  | 0.0                  | 0.0                  | 0.0                  | 0.0                  | 0.0         | 0.0                     | 1000.0            |
| 180°                         | 0.0        | 0.0                  | 0.0                  | 0.0                  | 0.0                  | 0.0                  | 0.0         | 0.0                     | 1000.0            |

## Photometric test report

|  |  |                               |
|--|--|-------------------------------|
| <b>Family</b><br>Licross® 11 Protected | <b>Order number: 51TD12MN4F5M</b><br><b>EAN: 4058352928745</b> | <b>LP number</b><br>58523_221 |
|--|--|-------------------------------|

|                  |                      |               |
|------------------|----------------------|---------------|
| <b>UGR-Table</b> | <b>Standard room</b> | <b>siteco</b> |
|------------------|----------------------|---------------|

|                              |                     |      |      |      |      |                    |      |      |      |      |      |
|------------------------------|---------------------|------|------|------|------|--------------------|------|------|------|------|------|
| Reflection factor of ceiling | 0.7                 | 0.7  | 0.5  | 0.5  | 0.3  | 0.7                | 0.7  | 0.5  | 0.5  | 0.3  |      |
| Reflection factor of walls   | 0.5                 | 0.3  | 0.5  | 0.3  | 0.3  | 0.5                | 0.3  | 0.5  | 0.3  | 0.3  |      |
| Reflection factor of floor   | 0.2                 | 0.2  | 0.2  | 0.2  | 0.2  | 0.2                | 0.2  | 0.2  | 0.2  | 0.2  |      |
| Room dimensions              | View crosswise (C0) |      |      |      |      | View endwise (C90) |      |      |      |      |      |
| x                            | y                   |      |      |      |      |                    |      |      |      |      |      |
| 2H                           | 2H                  | 23.6 | 25.0 | 23.9 | 25.3 | 25.7               | 19.4 | 20.9 | 19.8 | 21.2 | 21.5 |
|                              | 3H                  | 24.2 | 25.4 | 24.5 | 25.8 | 26.1               | 19.8 | 21.1 | 20.2 | 21.5 | 21.8 |
|                              | 4H                  | 24.5 | 25.7 | 24.9 | 26.0 | 26.4               | 20.0 | 21.2 | 20.4 | 21.6 | 22.0 |
|                              | 6H                  | 24.9 | 26.0 | 25.3 | 26.3 | 26.7               | 20.2 | 21.3 | 20.6 | 21.7 | 22.1 |
|                              | 8H                  | 25.2 | 26.1 | 25.6 | 26.5 | 26.9               | 20.2 | 21.3 | 20.7 | 21.7 | 22.1 |
|                              | 12H                 | 25.4 | 26.3 | 25.9 | 26.7 | 27.1               | 20.3 | 21.3 | 20.7 | 21.7 | 22.1 |
| 4H                           | 2H                  | 23.6 | 24.8 | 24.0 | 25.2 | 25.6               | 20.1 | 21.3 | 20.5 | 21.6 | 22.0 |
|                              | 3H                  | 24.3 | 25.4 | 24.8 | 25.8 | 26.2               | 20.6 | 21.6 | 21.1 | 22.0 | 22.4 |
|                              | 4H                  | 24.8 | 25.7 | 25.2 | 26.1 | 26.5               | 20.9 | 21.8 | 21.3 | 22.2 | 22.6 |
|                              | 6H                  | 25.4 | 26.1 | 25.8 | 26.6 | 27.0               | 21.1 | 21.9 | 21.6 | 22.3 | 22.8 |
|                              | 8H                  | 25.7 | 26.4 | 26.2 | 26.8 | 27.3               | 21.2 | 21.9 | 21.7 | 22.4 | 22.8 |
|                              | 12H                 | 26.1 | 26.6 | 26.5 | 27.1 | 27.6               | 21.3 | 21.9 | 21.7 | 22.4 | 22.9 |
| 8H                           | 4H                  | 24.8 | 25.5 | 25.3 | 26.0 | 26.5               | 21.2 | 21.9 | 21.7 | 22.3 | 22.8 |
|                              | 6H                  | 25.5 | 26.1 | 26.0 | 26.5 | 27.0               | 21.5 | 22.1 | 22.0 | 22.6 | 23.1 |
|                              | 8H                  | 25.9 | 26.4 | 26.4 | 26.9 | 27.4               | 21.7 | 22.2 | 22.2 | 22.7 | 23.2 |
|                              | 12H                 | 26.4 | 26.8 | 26.9 | 27.3 | 27.8               | 21.8 | 22.2 | 22.3 | 22.7 | 23.3 |
| 12H                          | 4H                  | 24.8 | 25.4 | 25.3 | 25.9 | 26.4               | 21.3 | 21.9 | 21.8 | 22.3 | 22.8 |
|                              | 6H                  | 25.5 | 26.0 | 26.0 | 26.5 | 27.0               | 21.7 | 22.1 | 22.2 | 22.6 | 23.2 |
|                              | 8H                  | 25.9 | 26.3 | 26.4 | 26.8 | 27.4               | 21.8 | 22.3 | 22.4 | 22.8 | 23.3 |

|                        |   |                                      |                 |                   |                     |
|------------------------|---|--------------------------------------|-----------------|-------------------|---------------------|
| <b>Luminance table</b> | <b>Max. for <math>\gamma \geq 65^\circ</math></b> | <b>Photometric dimensions in mm:</b> | <b>L = 1480</b> | <b>H(C0) = 13</b> | <b>H(C180) = 13</b> |
|                        |   |                                      | <b>B = 78</b>   | <b>H(C90) = 0</b> | <b>H(C270) = 0</b>  |

| C-planes | $\gamma$ | Luminance in cd/m <sup>2</sup> |                             |                             |                             |                             |                             |             |  |
|----------|----------|--------------------------------|-----------------------------|-----------------------------|-----------------------------|-----------------------------|-----------------------------|-------------|--|
|          |          | 0°<br>180°                     | 15°<br>165°<br>195°<br>345° | 30°<br>150°<br>210°<br>330° | 45°<br>135°<br>225°<br>315° | 60°<br>120°<br>240°<br>300° | 75°<br>105°<br>255°<br>285° | 90°<br>270° |  |
|          | 45°      | 40152.5                        | 41842.8                     | 43548.7                     | 36731.3                     | 25115.3                     | 18691.5                     | 17429.7     |  |
|          | 50°      | 29937.2                        | 31128.6                     | 32551.9                     | 27012.7                     | 18304.4                     | 14143.9                     | 13584.3     |  |
|          | 55°      | 22942.0                        | 23669.5                     | 24433.2                     | 19915.2                     | 13790.2                     | 11336.4                     | 11354.6     |  |
|          | 60°      | 18098.0                        | 18397.9                     | 18501.0                     | 15050.4                     | 10942.3                     | 9532.9                      | 9883.9      |  |
|          | 65°      | 15237.5                        | 15083.5                     | 14418.7                     | 11821.3                     | 9187.3                      | 8326.1                      | 8811.9      |  |
|          | 70°      | 13843.5                        | 13246.8                     | 11714.3                     | 9716.5                      | 8073.9                      | 7414.2                      | 7963.5      |  |
|          | 75°      | 13471.4                        | 12436.9                     | 10153.2                     | 8351.4                      | 7248.8                      | 6608.8                      | 7150.2      |  |
|          | 80°      | 13784.3                        | 12382.7                     | 9524.1                      | 7540.1                      | 6619.0                      | 5958.3                      | 6327.7      |  |
|          | 85°      | 14702.8                        | 13100.6                     | 9729.3                      | 7484.5                      | 6432.8                      | 5539.4                      | 5693.5      |  |


**Photometric test report**

|  |  |                                      |
|--|--|--------------------------------------|
| <b>Family</b><br>Licross® 11 Protected | <b>Order number: 51TD12MN4F5M</b><br><b>EAN: 4058352928745</b> | <b>LP number</b><br><b>58523_221</b> |
|--|--|--------------------------------------|



**Luminance values in cd/m<sup>2</sup>**

γ 65°   
  γ 70°   
  γ 75°   
  γ 80°   
  γ 85°

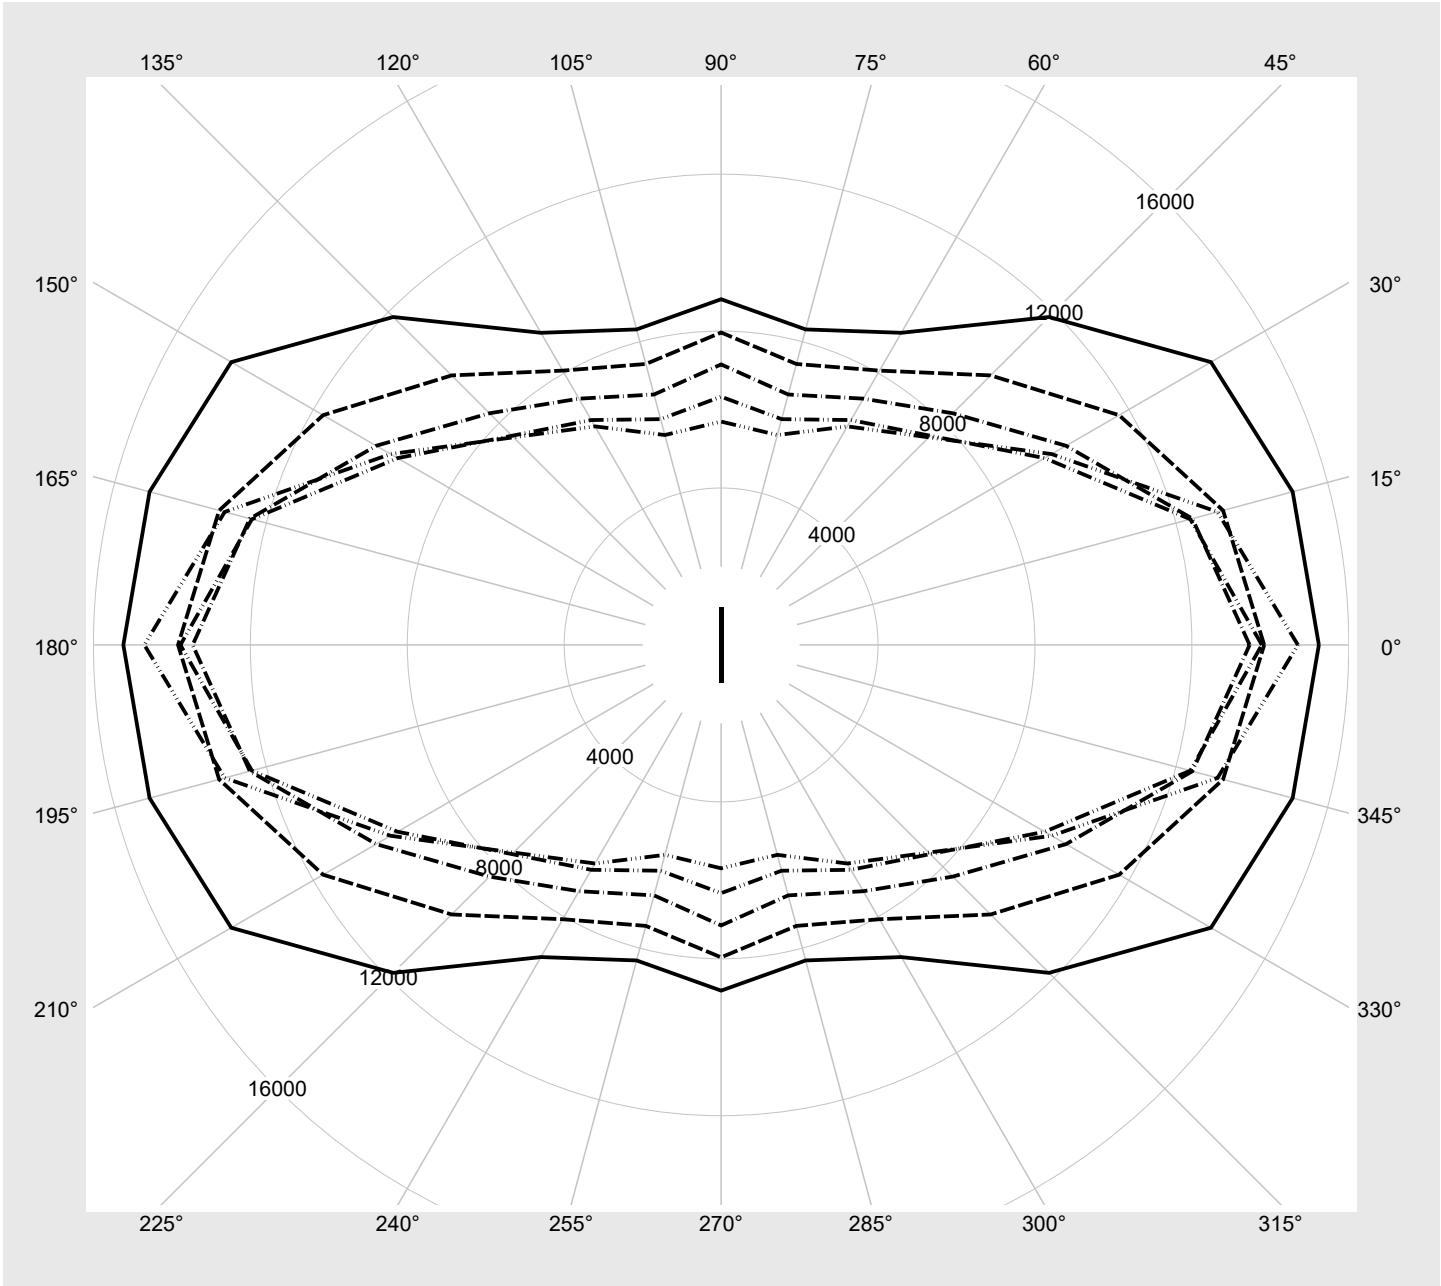

### Photometric test report

|   |  |                                      |
|---|--|--------------------------------------|
| <b>Family</b><br><b>Licross® 11 Protected</b> | <b>Order number: 51TD12MN4F5M</b><br><b>EAN: 4058352928745</b> | <b>LP number</b><br><b>58523_221</b> |
|---|--|--------------------------------------|

|                         |                                 |   |
|-------------------------|---------------------------------|---|
| <b>Multilumen Table</b> | environmental temperature: 25°C |  |
|-------------------------|---------------------------------|---|

| DIP-Step | Switch Setting |   |   | Luminous flux<br>[lm] | Power consumption<br>[W] |
|----------|----------------|---|---|-----------------------|--------------------------|
|          | 1              | 2 | 3 |                       |                          |
| 1        | A              | C | E | 15820                 | 87.4                     |
| 2        | A              | C | F | 15040                 | 82.6                     |
| 3        | A              | D | E | 14020                 | 76.2                     |
| 4        | A              | D | F | 13000                 | 70.1                     |
| 5        | B              | C | E | 12030                 | 64.3                     |
| 6        | B              | C | F | 10980                 | 58.3                     |
| 7        | B              | D | E | 9990                  | 52.6                     |
| 8        | B              | D | F | 8990                  | 47.0                     |