


# Photometric test report

<b>Family</b> <b>DL 11 iQ</b>	<b>Order number:</b> 5XA5575KF14HP00022 + 5XA54000XBS <b>EAN:</b> 4058352956809 + 4050737971445	<b>LP number</b> <b>59424_129</b>
	<b>Version</b> post-top- or mounting to wall arm, shielding on building side <b>Optic</b> asymmetric, wide distribution (ST1.2a) <b>Cover</b> cover transparent, PMMA <b>Lamps</b> LED 4000 K   CRI ≥ 70 <b>Controlgear</b> ECG SITECO iQ <b>Rated values</b> Net luminous flux = 5040 lm Power consumption = 33.6 W Luminous efficacy = 150 lm/W	<b>serial documentation</b> <b>18.03.2024</b>





**Luminous intensity in cd/klm** C180-0 C205-25 C210-30 C270-90 **Imax: 738 cd/klm**

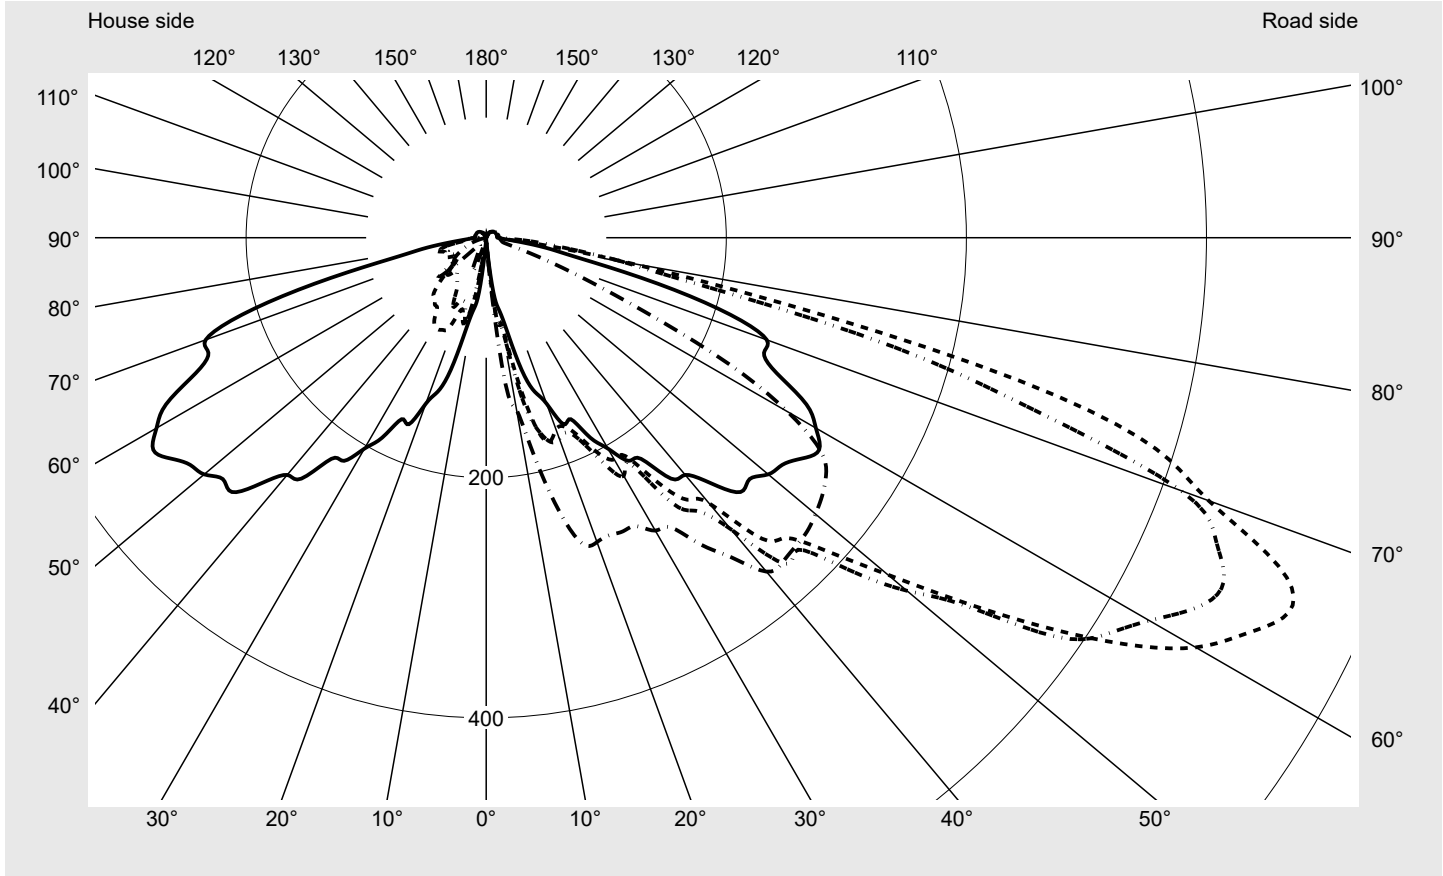


Luminaire output ratios	
Eta	100.0%
Eta 0° - 90°	95.9%
Eta 90° - 180°	4.1%
Measurement conditions	
DIN EN 13032 and DIN 5032	

Luminous intensity class acc. to EN13201-2	
Class:	G2
Imax 70°	640.5
Imax 80°	145.0
Imax 90°	10.9
Imax >90°	10.7
Imax >95°	10.6

**Photometric test report**

<b>Family</b> DL 11 iQ	<b>Order number:</b> 5XA5575KF14HP00022 + 5XA54000XBS <b>EAN:</b> 4058352956809 + 4050737971445	<b>LP number</b> 59424_129
---------------------------	--	-------------------------------

**Envelope curve in cd/klm**      **KMK 65°**    **KMK 62,5°**    **KMK 60°**    **KMK 57,5°**      **siteco**

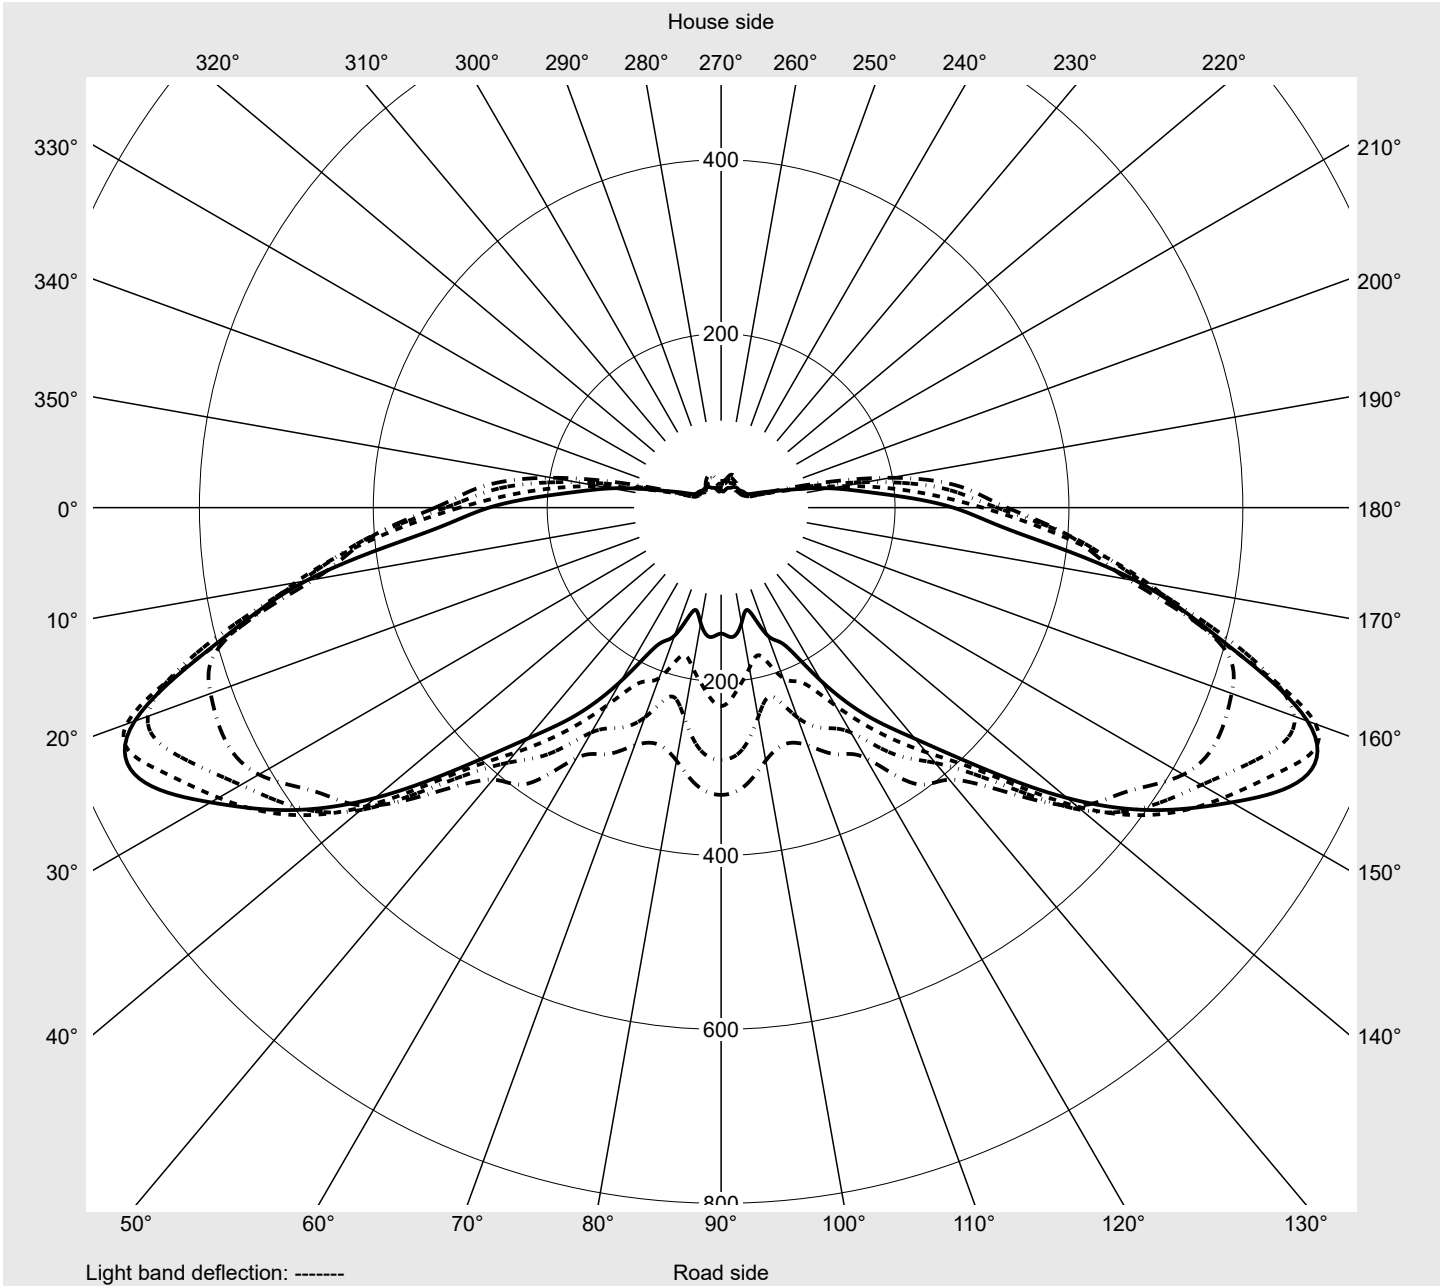

## Photometric test report

<b>Family</b> DL 11 iQ	<b>Order number: 5XA5575KF14HP00022 + 5XA54000XBS</b> <b>EAN: 4058352956809 + 4050737971445</b>	<b>LP number</b> 59424_129
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>



C-planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
$\gamma$	Luminous intensity in cd/klm												
0,0°	4.2	4.2	4.2	4.2	4.2	4.2	4.2	4.2	4.2	4.2	4.2	4.2	4.2
2,5°	4.6	4.8	4.8	5.1	5.5	5.5	5.8	6.0	6.1	6.3	6.4	6.6	6.8
5,0°	10.1	11.7	13.1	14.5	16.5	19.0	23.1	27.6	30.1	31.7	32.7	33.2	33.2
7,5°	45.8	52.7	59.7	65.0	69.6	70.3	69.8	67.6	68.4	68.9	71.8	76.2	84.0
10,0°	60.8	66.5	68.3	71.3	73.4	73.9	77.2	83.0	91.9	106.3	117.1	124.2	130.1
12,5°	78.7	83.8	88.6	94.2	104.3	121.5	134.7	155.2	160.9	155.4	153.1	153.6	162.4
15,0°	113.9	117.7	136.9	148.0	162.0	166.8	165.5	169.0	172.8	176.4	176.2	179.7	187.8
17,5°	134.6	148.1	165.5	173.8	170.8	177.6	178.4	184.7	187.2	192.3	188.5	196.9	200.7
20,0°	147.1	154.1	160.7	167.8	171.6	170.0	178.2	176.6	180.5	185.5	189.8	197.7	204.4
22,5°	168.1	178.7	179.9	173.3	167.5	170.3	175.4	181.4	183.9	191.3	196.3	207.8	216.8
25,0°	166.8	174.4	185.3	189.3	190.6	182.5	187.0	192.8	203.2	211.1	211.8	225.5	237.8
27,5°	187.8	203.9	197.9	195.4	201.2	202.5	211.5	216.8	220.7	231.0	237.4	246.3	256.8
30,0°	202.9	208.0	213.1	210.8	210.6	213.3	229.2	243.5	246.2	255.6	261.4	278.3	282.9
32,5°	220.4	218.6	215.8	217.9	215.1	215.6	222.9	239.2	258.9	277.3	282.1	295.0	298.6
35,0°	224.9	232.8	240.4	234.4	238.6	248.3	269.5	285.4	297.1	316.0	318.4	322.7	332.0
37,5°	253.0	255.6	248.3	254.9	264.2	275.1	286.7	300.4	321.2	337.0	347.0	347.9	358.6
40,0°	257.9	266.5	264.5	258.4	270.2	288.7	316.9	334.1	351.0	363.1	373.8	376.0	384.9
42,5°	277.6	283.4	299.6	295.3	316.1	340.1	368.5	387.2	390.0	404.6	408.5	402.8	398.5
45,0°	299.6	295.1	307.7	303.2	319.8	353.7	367.5	396.3	416.6	428.5	437.5	418.3	416.8
47,5°	297.6	298.6	316.8	330.8	351.5	387.5	409.4	435.3	438.1	439.0	444.1	428.2	428.1
50,0°	306.7	329.2	361.4	387.7	387.9	436.6	457.5	468.9	451.9	444.9	439.0	428.2	414.2
52,5°	310.8	357.1	388.5	464.3	460.5	497.2	503.6	507.2	481.5	460.8	443.4	426.7	396.6
55,0°	320.7	386.4	418.0	524.6	542.5	564.1	579.5	539.5	517.8	470.9	432.4	414.8	357.5
57,5°	328.9	407.2	475.3	591.1	624.8	629.9	613.9	569.4	533.4	461.9	408.4	387.4	332.3
60,0°	317.1	409.4	493.0	614.1	701.7	682.5	637.9	599.3	541.0	446.1	383.2	345.9	298.6
62,5°	300.7	398.1	497.5	596.4	727.6	713.9	667.3	614.9	534.9	432.4	367.4	315.1	262.7
65,0°	267.0	345.2	484.8	599.3	717.7	737.9	677.9	606.4	519.5	422.6	347.0	291.7	230.3
67,5°	250.5	302.1	436.5	557.7	691.6	714.2	657.9	590.9	492.9	388.7	325.9	263.5	194.3
70,0°	248.7	318.9	435.5	549.7	628.9	640.5	615.9	523.1	429.7	354.1	292.6	230.1	166.8
72,5°	213.3	322.6	378.3	517.5	586.3	585.0	481.0	436.0	346.9	275.0	219.7	176.9	141.0
75,0°	148.1	253.8	327.0	444.8	468.9	459.1	351.8	304.2	217.7	181.2	171.1	158.6	130.0
77,5°	82.5	141.9	210.5	281.2	307.0	254.5	186.0	162.2	138.2	122.3	123.0	120.7	110.9
80,0°	54.2	73.1	104.8	127.3	145.0	120.2	115.4	123.7	96.6	68.0	51.4	41.5	50.3
82,5°	31.6	38.4	43.5	55.6	62.3	52.2	68.0	87.5	70.1	45.3	24.8	19.5	15.0
85,0°	17.5	18.4	16.5	16.0	15.0	20.0	41.5	50.4	36.9	22.5	15.7	13.9	11.9
87,5°	12.2	11.9	12.2	12.2	13.1	15.4	19.2	21.8	15.7	12.1	12.1	11.2	11.1
90,0°	9.4	9.8	10.1	10.4	10.7	10.7	10.7	10.7	10.7	10.7	10.7	10.7	10.6
92,5°	9.4	9.8	10.1	10.3	10.4	10.4	10.6	10.7	10.7	10.7	10.6	10.6	10.4
95,0°	9.4	9.6	10.1	10.3	10.4	10.4	10.4	10.4	10.6	10.6	10.6	10.4	10.4
97,5°	9.3	9.4	9.9	10.1	10.4	10.4	10.4	10.4	10.6	10.4	10.4	10.4	10.4
100,0°	9.4	9.4	9.8	10.1	10.1	10.4	10.4	10.4	10.6	10.4	10.4	10.4	10.4
102,5°	9.1	9.4	9.8	9.8	10.1	10.1	10.4	10.4	10.4	10.4	10.4	10.3	10.3
105,0°	9.1	9.4	9.4	9.8	10.1	10.1	10.1	10.3	10.3	10.3	10.3	10.3	10.3
107,5°	8.9	9.3	9.3	9.6	9.8	9.9	10.1	10.1	10.1	10.3	10.1	10.1	10.1
110,0°	8.9	9.1	9.3	9.4	9.8	9.8	9.8	9.9	9.9	9.9	9.9	9.9	9.9
112,5°	8.8	9.1	9.1	9.3	9.4	9.6	9.6	9.8	9.9	9.8	9.9	9.9	9.9

## Photometric test report

<b>Family</b> <b>DL 11 iQ</b>	<b>Order number: 5XA5575KF14HP00022 + 5XA54000XBS</b> <b>EAN: 4058352956809 + 4050737971445</b>	<b>LP number</b> <b>59424_129</b>
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>
		<b>siteco</b>

C-planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
γ	Luminous intensity in cd/klm												
0,0°	4.2	4.2	4.2	4.2	4.2	4.2	4.2	4.2	4.2	4.2	4.2	4.2	4.2
2,5°	6.9	7.1	7.3	7.1	7.3	6.9	4.5	4.3	4.1	4.1	4.1	4.0	4.0
5,0°	32.6	31.4	29.4	28.6	27.3	26.8	8.9	8.3	7.3	6.4	6.0	5.5	5.3
7,5°	94.6	106.3	108.3	112.3	121.9	122.7	37.9	29.3	21.2	15.4	11.1	7.9	6.4
10,0°	137.2	136.7	141.7	140.0	142.7	145.5	63.8	65.8	64.8	56.4	42.2	27.8	17.4
12,5°	172.3	182.7	187.0	186.5	188.8	188.2	74.6	70.4	67.0	65.1	64.3	66.5	60.0
15,0°	200.6	214.6	224.7	231.5	235.8	236.8	101.7	95.2	83.5	77.9	73.9	68.6	59.0
17,5°	209.5	223.0	238.9	252.1	260.4	267.5	111.3	98.5	85.8	72.6	64.5	57.5	51.1
20,0°	217.4	232.0	247.0	258.4	266.9	269.8	133.8	123.0	100.2	81.5	66.6	56.0	43.8
22,5°	224.7	231.6	245.7	257.9	265.7	268.2	164.2	138.7	121.5	105.6	81.5	56.4	38.2
25,0°	247.0	250.0	259.2	265.7	269.8	269.8	163.2	144.7	125.7	105.6	84.8	63.7	40.8
27,5°	267.8	273.5	274.5	275.3	271.5	270.8	182.7	162.0	134.6	103.8	86.3	57.5	34.9
30,0°	293.0	289.0	281.7	282.4	278.8	281.7	194.4	169.0	139.9	115.7	85.1	48.4	31.2
32,5°	312.0	305.9	294.0	290.0	290.0	286.0	210.8	188.0	148.8	113.1	80.2	45.0	28.8
35,0°	328.2	323.4	312.0	309.5	309.3	312.2	206.8	187.5	148.5	111.9	71.3	41.8	27.6
37,5°	358.1	357.5	344.7	333.6	336.6	335.6	240.2	210.1	165.8	126.2	70.3	40.2	29.4
40,0°	388.2	379.1	350.5	343.7	357.0	363.1	248.8	215.3	165.8	121.4	65.8	37.5	31.2
42,5°	404.4	385.9	355.8	357.3	365.4	366.1	262.2	214.9	161.9	113.4	65.1	37.4	33.7
45,0°	415.3	386.9	352.2	357.5	365.1	364.1	293.6	237.1	169.3	107.1	58.5	43.5	42.0
47,5°	415.0	375.3	352.0	359.6	365.2	362.4	286.9	226.7	153.3	94.6	48.8	43.5	37.7
50,0°	407.1	361.4	342.9	353.0	360.9	358.1	287.7	227.5	147.0	81.2	38.5	36.2	31.6
52,5°	384.2	347.5	334.1	341.9	351.5	352.8	286.0	224.4	133.3	67.6	34.4	31.4	28.1
55,0°	347.9	326.0	318.9	326.2	342.6	345.5	289.0	221.7	117.4	58.7	33.7	29.3	26.3
57,5°	313.0	291.0	281.7	295.5	320.6	330.3	276.4	197.9	98.9	43.5	31.4	28.4	27.1
60,0°	279.6	256.8	224.9	244.9	279.3	290.0	255.8	168.6	83.3	39.4	30.8	28.6	28.8
62,5°	222.4	208.7	176.6	187.3	210.6	228.2	219.1	142.5	74.7	45.8	35.2	30.1	29.8
65,0°	175.3	156.6	122.7	134.9	149.3	144.8	184.0	128.0	78.5	52.2	37.4	32.7	31.6
67,5°	141.4	108.3	73.1	82.3	88.8	85.6	177.7	119.4	75.6	48.3	37.7	34.7	34.4
70,0°	117.2	81.2	41.8	38.0	40.8	46.0	171.5	117.9	75.1	44.5	36.0	33.7	35.2
72,5°	94.6	50.4	26.1	20.3	19.2	20.8	152.6	110.3	68.3	42.2	38.5	35.7	36.9
75,0°	74.9	25.1	18.4	15.2	14.7	14.2	107.1	81.8	60.8	42.5	42.3	39.4	37.4
77,5°	43.3	18.2	14.7	13.2	13.2	13.2	62.5	56.5	52.4	39.2	37.9	35.7	25.5
80,0°	17.0	13.9	12.9	12.6	12.6	12.6	47.3	46.1	40.8	33.1	30.6	26.1	16.2
82,5°	13.1	12.1	12.1	11.9	12.1	11.9	30.8	29.9	28.3	23.5	20.0	16.4	13.6
85,0°	11.6	11.4	11.4	11.6	11.6	11.6	17.2	18.2	19.8	21.0	18.8	16.2	12.2
87,5°	10.9	10.7	10.9	10.9	10.9	10.9	12.6	13.6	14.7	15.0	14.1	12.6	11.1
90,0°	10.6	10.7	10.9	10.7	10.7	10.6	9.3	8.9	8.6	7.9	7.6	7.1	6.6
92,5°	10.6	10.6	10.6	10.6	10.6	10.6	9.1	8.6	8.3	7.9	7.3	6.9	6.4
95,0°	10.6	10.6	10.6	10.6	10.6	10.6	9.1	8.6	8.3	7.9	7.3	6.9	6.4
97,5°	10.4	10.6	10.6	10.6	10.6	10.6	9.1	8.6	8.3	7.8	7.3	6.8	6.4
100,0°	10.3	10.4	10.6	10.6	10.6	10.6	9.1	8.6	8.3	7.8	7.3	6.8	6.4
102,5°	10.3	10.4	10.6	10.6	10.6	10.6	8.9	8.6	8.1	7.8	7.4	6.8	6.4
105,0°	10.3	10.3	10.4	10.6	10.6	10.6	8.8	8.6	8.1	7.8	7.3	6.8	6.4
107,5°	10.3	10.3	10.3	10.3	10.3	10.3	8.8	8.4	8.1	7.8	7.3	6.8	6.4
110,0°	9.9	9.9	10.1	10.3	10.3	10.3	8.8	8.4	8.1	7.8	7.1	6.8	6.4
112,5°	9.9	9.9	9.9	9.9	9.9	9.9	8.8	8.4	8.1	7.8	7.1	6.8	6.4

## Photometric test report

<b>Family</b> DL 11 iQ	<b>Order number:</b> 5XA5575KF14HP00022 + 5XA54000XBS <b>EAN:</b> 4058352956809 + 4050737971445	<b>LP number</b> 59424_129
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>
		<b>siteco</b>

C-planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm											Luminous flux in lm/klm	
0,0°	4.2	4.2	4.2	4.2	4.2	4.2	4.2	4.2	4.2	4.2	4.2	0.0	0.0
2,5°	4.1	4.0	4.1	4.3	4.6	5.0	5.1	5.0	5.0	5.0	5.0	0.1	0.1
5,0°	4.8	4.5	4.3	4.1	4.0	3.8	3.8	3.6	3.6	3.5	3.6	0.4	0.4
7,5°	5.5	4.6	4.5	4.3	4.0	4.0	4.0	3.8	3.6	3.5	3.6	1.6	2.1
10,0°	12.4	9.1	6.3	5.1	4.3	4.0	4.0	3.8	3.6	4.0	3.6	3.1	5.1
12,5°	44.3	27.1	15.4	7.8	4.6	4.5	5.0	5.3	4.8	4.1	4.0	5.4	10.5
15,0°	53.9	53.2	49.1	40.8	26.1	15.5	7.3	4.3	3.8	3.5	4.0	8.1	18.6
17,5°	44.1	39.4	37.2	35.9	34.7	34.2	28.3	18.5	11.4	6.4	6.0	10.2	28.8
20,0°	33.7	30.9	29.6	27.9	25.8	25.1	25.1	25.6	26.1	21.8	24.8	11.8	40.6
22,5°	28.3	25.1	23.1	21.2	19.8	19.0	20.7	23.6	29.6	26.5	30.1	13.7	54.3
25,0°	30.6	23.6	19.7	18.2	17.0	16.2	22.0	24.5	24.3	19.3	21.5	15.9	70.2
27,5°	28.3	22.3	19.0	17.2	15.5	14.5	16.9	18.5	17.5	14.5	15.2	18.5	88.7
30,0°	27.0	23.0	19.5	17.4	15.9	14.2	13.9	15.7	14.2	12.1	12.6	21.3	110.0
32,5°	25.5	23.0	19.2	17.2	15.4	13.4	11.9	13.4	12.2	10.3	10.3	23.7	133.7
35,0°	25.8	22.5	18.8	17.5	15.4	13.2	11.2	12.1	10.7	9.1	8.9	27.3	161.0
37,5°	24.8	21.8	18.7	17.0	14.9	13.2	10.7	10.4	9.9	8.4	8.3	31.5	192.4
40,0°	28.1	23.0	19.8	16.4	16.0	13.2	10.9	9.9	9.4	8.1	7.9	35.0	227.4
42,5°	30.8	25.5	20.0	19.0	16.7	15.7	11.6	10.4	9.4	7.9	7.9	39.5	267.0
45,0°	32.1	24.3	23.0	23.3	23.3	22.0	20.5	16.7	11.9	8.8	8.3	43.0	309.9
47,5°	32.1	25.6	27.3	32.1	32.9	31.4	28.4	26.6	26.6	18.7	19.8	46.2	356.2
50,0°	27.9	26.1	30.3	35.2	38.7	38.9	38.4	38.9	34.9	37.0	50.3	49.8	406.0
52,5°	26.0	24.5	28.3	34.4	38.5	41.5	43.3	49.1	44.5	38.2	36.7	53.3	459.3
55,0°	25.0	24.1	27.1	35.2	39.4	46.0	45.0	41.5	36.9	33.7	32.4	56.4	515.8
57,5°	26.6	26.1	27.1	31.1	34.9	38.2	39.8	38.5	33.4	31.1	30.8	58.3	574.1
60,0°	26.8	25.5	25.8	28.9	33.2	34.7	36.0	33.9	28.4	27.6	27.4	58.4	632.4
62,5°	28.6	26.3	27.4	28.6	30.8	30.9	30.3	28.3	24.0	23.3	23.5	56.8	689.3
65,0°	30.1	28.9	29.1	28.6	27.3	25.1	24.3	22.2	19.3	18.7	20.2	54.3	743.6
67,5°	33.4	32.6	30.9	28.9	23.0	19.5	19.3	17.9	15.9	15.7	16.9	50.5	794.0
70,0°	37.2	32.6	30.9	28.4	18.4	14.7	15.0	13.7	12.7	12.6	13.6	46.6	840.6
72,5°	39.5	35.7	30.6	16.9	11.1	10.4	11.1	10.6	9.4	9.3	9.6	40.5	881.1
75,0°	32.7	19.2	10.3	8.3	7.4	6.9	6.9	6.4	6.0	5.8	6.0	31.6	912.7
77,5°	14.2	9.8	7.6	6.6	6.0	5.3	5.0	4.6	4.0	3.3	3.3	20.3	933.0
80,0°	11.4	8.9	7.1	6.0	5.3	4.6	4.3	3.6	3.3	3.0	3.0	11.6	944.6
82,5°	11.1	8.3	6.4	5.3	5.0	4.3	4.0	3.5	3.1	2.6	3.0	6.8	951.4
85,0°	9.1	7.3	6.1	5.1	4.6	4.0	3.6	3.3	3.0	2.6	2.6	4.0	955.4
87,5°	8.6	6.6	5.6	5.0	4.3	4.0	3.6	3.3	3.0	2.6	2.6	2.9	958.3
90,0°	6.1	5.6	5.3	4.6	4.3	4.0	3.6	3.1	3.0	2.6	2.6	2.2	960.6
92,5°	6.0	5.6	5.3	4.6	4.3	4.0	3.6	3.1	3.1	2.6	2.6	2.2	962.8
95,0°	6.0	5.6	5.3	4.6	4.3	4.0	3.6	3.1	3.1	2.8	3.0	2.2	965.0
97,5°	6.0	5.6	5.1	4.6	4.3	4.0	3.6	3.1	3.1	2.8	2.6	2.2	967.2
100,0°	6.0	5.6	5.3	4.6	4.3	4.0	3.6	3.3	3.1	2.8	3.0	2.2	969.3
102,5°	6.0	5.6	5.3	4.6	4.3	4.0	3.6	3.3	3.0	2.8	3.0	2.1	971.5
105,0°	6.0	5.6	5.3	4.6	4.3	4.0	3.6	3.3	3.1	2.8	3.0	2.1	973.6
107,5°	6.0	5.6	5.3	4.6	4.3	4.0	3.6	3.3	3.1	2.8	3.0	2.0	975.6
110,0°	6.1	5.6	5.1	4.6	4.3	4.0	3.6	3.3	3.1	2.8	3.0	2.0	977.6
112,5°	6.0	5.5	5.3	4.6	4.3	4.0	3.6	3.3	3.1	3.0	3.0	1.9	979.5

## Photometric test report

<b>Family</b> DL 11 iQ	<b>Order number:</b> 5XA5575KF14HP00022 + 5XA54000XBS <b>EAN:</b> 4058352956809 + 4050737971445	<b>LP number</b> 59424_129
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>
		<b>siteco</b>

C-planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
γ	Luminous intensity in cd/klm												
115,0°	8.8	8.9	9.1	9.3	9.3	9.4	9.4	9.6	9.6	9.6	9.6	9.6	9.6
117,5°	8.8	8.8	8.9	9.1	9.1	9.1	9.3	9.3	9.3	9.4	9.4	9.4	9.4
120,0°	8.6	8.8	8.8	8.9	8.9	8.9	8.9	9.1	9.3	9.3	9.3	9.3	9.3
122,5°	8.4	8.6	8.6	8.6	8.8	8.8	8.8	8.9	8.9	8.9	8.9	8.9	8.9
125,0°	8.3	8.3	8.4	8.4	8.4	8.4	8.6	8.6	8.6	8.6	8.6	8.6	8.6
127,5°	7.9	7.9	8.1	8.3	8.3	8.3	8.3	8.3	8.3	8.3	8.3	8.4	8.3
130,0°	7.6	7.6	7.8	7.9	7.9	7.9	7.9	7.9	7.9	8.1	8.1	8.3	8.3
132,5°	7.3	7.3	7.4	7.4	7.6	7.6	7.6	7.6	7.6	7.8	7.8	7.9	7.9
135,0°	6.8	6.9	6.9	7.1	7.1	7.3	7.3	7.3	7.3	7.4	7.4	7.4	7.6
137,5°	6.4	6.4	6.6	6.8	6.8	6.8	6.9	6.9	6.9	7.1	7.1	7.3	7.3
140,0°	6.0	6.1	6.3	6.3	6.4	6.4	6.6	6.6	6.6	6.6	6.8	6.8	6.8
142,5°	5.6	5.8	6.0	6.0	6.0	6.1	6.1	6.3	6.3	6.4	6.4	6.4	6.4
145,0°	5.3	5.5	5.5	5.6	5.6	5.8	5.8	6.0	6.0	6.0	6.1	6.1	6.1
147,5°	5.0	5.0	5.0	5.3	5.3	5.3	5.5	5.6	5.6	5.6	5.6	5.8	5.8
150,0°	4.3	4.3	4.6	4.6	4.6	4.8	5.0	5.0	5.0	5.1	5.1	5.3	5.3
152,5°	3.6	3.8	4.0	4.0	4.0	4.0	4.3	4.3	4.3	4.3	4.3	4.3	4.3
155,0°	2.8	3.0	3.0	3.1	3.1	3.3	3.3	3.3	3.5	3.5	3.6	3.6	3.6
157,5°	2.0	2.1	2.3	2.3	2.3	2.3	2.3	2.3	2.5	2.3	2.3	2.3	2.5
160,0°	1.7	1.7	1.7	1.7	1.7	1.7	1.7	1.7	1.7	1.7	1.7	1.7	1.7
162,5°	1.5	1.5	1.5	1.5	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3
165,0°	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3
167,5°	1.3	1.3	1.3	1.5	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3
170,0°	1.2	1.3	1.2	1.3	1.3	1.3	1.2	1.3	1.3	1.3	1.3	1.3	1.3
172,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
175,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
177,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

## Photometric test report

<b>Family</b> DL 11 iQ	<b>Order number:</b> 5XA5575KF14HP00022 + 5XA54000XBS <b>EAN:</b> 4058352956809 + 4050737971445	<b>LP number</b> 59424_129
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>



C-planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
$\gamma$	Luminous intensity in cd/klm												
115,0°	9.6	9.6	9.8	9.8	9.9	9.6	8.6	8.3	8.1	7.6	7.3	6.8	6.4
117,5°	9.4	9.6	9.6	9.4	9.6	9.6	8.6	8.3	8.1	7.6	7.3	6.8	6.4
120,0°	9.3	9.3	9.3	9.3	9.3	9.3	8.4	8.1	7.9	7.6	7.3	6.8	6.4
122,5°	8.9	8.9	8.9	8.9	8.9	8.9	8.3	7.9	7.8	7.4	7.1	6.8	6.4
125,0°	8.6	8.8	8.8	8.6	8.9	8.6	7.9	7.8	7.6	7.3	7.1	6.6	6.3
127,5°	8.4	8.6	8.6	8.6	8.6	8.6	7.8	7.6	7.3	7.1	6.8	6.4	6.1
130,0°	8.3	8.3	8.3	8.3	8.3	8.3	7.4	7.3	7.1	6.8	6.4	6.1	6.0
132,5°	7.9	7.9	7.9	7.9	7.9	7.9	6.9	6.9	6.6	6.6	6.3	6.0	5.6
135,0°	7.6	7.6	7.6	7.6	7.6	7.6	6.6	6.4	6.3	6.1	6.0	5.6	5.5
137,5°	7.3	7.3	7.3	7.3	7.3	7.3	6.3	6.1	6.0	5.6	5.5	5.3	5.1
140,0°	6.9	6.9	6.9	6.9	6.9	6.9	6.0	5.6	5.6	5.5	5.1	5.0	4.8
142,5°	6.6	6.6	6.6	6.6	6.6	6.6	5.6	5.5	5.3	5.1	5.0	4.6	4.6
145,0°	6.3	6.3	6.3	6.3	6.3	6.3	5.3	5.1	5.0	4.8	4.6	4.5	4.3
147,5°	6.0	6.0	6.0	6.0	6.0	6.0	4.6	4.6	4.5	4.3	4.3	4.0	4.0
150,0°	5.3	5.3	5.3	5.3	5.3	5.3	4.3	4.1	4.0	4.0	3.6	3.6	3.5
152,5°	4.6	4.6	4.6	4.6	4.6	4.6	3.6	3.6	3.3	3.3	3.0	3.0	3.0
155,0°	3.6	3.6	3.6	3.6	3.6	3.6	2.8	2.6	2.6	2.5	2.3	2.3	2.3
157,5°	2.6	2.6	2.6	2.6	2.6	2.6	2.0	2.0	2.0	2.0	2.0	1.8	1.8
160,0°	1.7	1.8	1.7	1.8	1.7	2.0	1.7	1.7	1.7	1.7	1.7	1.7	1.7
162,5°	1.3	1.3	1.3	1.3	1.3	1.7	1.5	1.3	1.3	1.3	1.3	1.3	1.3
165,0°	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3
167,5°	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3
170,0°	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3
172,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
175,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
177,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

## Photometric test report

<b>Family</b> DL 11 iQ	<b>Order number: 5XA5575KF14HP00022 + 5XA54000XBS</b> <b>EAN: 4058352956809 + 4050737971445</b>	<b>LP number</b> 59424_129
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>
		<b>siteco</b>

C-planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
$\gamma$	Luminous intensity in cd/klm											Luminous flux in lm/klm	
115,0°	6.0	5.6	5.3	4.8	4.3	4.0	3.6	3.6	3.3	3.0	3.0	1.9	981.4
117,5°	6.0	5.6	5.3	4.6	4.3	4.0	3.8	3.6	3.3	3.0	3.0	1.8	983.2
120,0°	6.1	5.6	5.3	4.6	4.3	4.0	3.6	3.6	3.3	3.0	3.0	1.8	985.0
122,5°	5.8	5.5	5.0	4.6	4.3	4.0	3.6	3.5	3.3	3.0	3.0	1.7	986.7
125,0°	5.8	5.5	5.0	4.6	4.3	4.0	3.6	3.3	3.3	3.0	3.0	1.6	988.2
127,5°	5.8	5.5	5.0	4.5	4.3	4.0	3.6	3.3	3.1	3.0	3.0	1.5	989.7
130,0°	5.5	5.1	4.8	4.5	4.1	4.0	3.6	3.3	3.3	3.0	3.0	1.4	991.1
132,5°	5.5	5.0	4.6	4.3	4.0	3.6	3.6	3.3	3.1	3.0	3.0	1.3	992.4
135,0°	5.1	4.8	4.5	4.1	4.0	3.6	3.3	3.3	3.1	3.0	3.0	1.2	993.6
137,5°	4.8	4.5	4.3	4.0	3.6	3.6	3.3	3.1	3.0	2.8	2.6	1.1	994.6
140,0°	4.6	4.5	4.1	4.0	3.6	3.3	3.3	3.1	3.0	2.8	2.6	1.0	995.6
142,5°	4.5	4.1	4.0	3.8	3.6	3.3	3.3	3.1	3.0	2.8	2.6	0.9	996.5
145,0°	4.1	4.0	4.0	3.6	3.5	3.3	3.1	3.0	2.8	2.8	2.6	0.8	997.3
147,5°	3.8	3.6	3.6	3.3	3.1	3.0	3.0	2.8	2.6	2.6	2.6	0.7	998.0
150,0°	3.3	3.3	3.0	3.0	2.8	2.6	2.6	2.5	2.3	2.3	2.3	0.6	998.5
152,5°	2.6	2.6	2.6	2.3	2.3	2.3	2.3	2.0	2.0	2.0	2.0	0.4	999.0
155,0°	2.3	2.1	2.0	2.0	2.0	1.8	1.8	1.7	1.7	1.7	1.7	0.3	999.3
157,5°	1.7	1.7	1.7	1.7	1.7	1.7	1.7	1.7	1.7	1.5	1.7	0.2	999.5
160,0°	1.5	1.7	1.7	1.5	1.5	1.3	1.3	1.3	1.3	1.3	1.3	0.2	999.7
162,5°	1.3	1.3	1.5	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3	0.1	999.8
165,0°	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3	0.1	999.9
167,5°	1.3	1.5	1.7	1.7	1.3	1.3	1.3	1.3	1.3	1.3	1.3	0.1	999.9
170,0°	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3	0.1	1000.0
172,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
175,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
177,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0



## Photometric test report

<b>Family</b> DL 11 iQ	<b>Order number:</b> 5XA5575KF14HP00022 + 5XA54000XBS <b>EAN:</b> 4058352956809 + 4050737971445	<b>LP number</b> 59424_129
---------------------------	--	-------------------------------

<b>Dimming levels table</b>	environmental temperature: 25°C	<b>siteco</b>
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]	Power consumption [W]	Power consumption [W]
				start of lifetime	end of lifetime	average
100	254	254	5040	33.6	35.9	34.8
95	241	252	4782	31.4	33.5	32.4
90	229	250	4544	29.4	31.4	30.4
85	216	248	4286	27.4	29.2	28.3
80	203	246	4028	25.5	27.1	26.3
75	190	243	3770	23.6	25.2	24.4
70	178	241	3532	21.9	23.3	22.6
65	165	238	3274	20.2	21.5	20.8
60	152	235	3016	18.5	19.6	19.0
55	140	232	2778	16.9	18.0	17.4
50	127	229	2520	15.3	16.2	15.8
45	114	225	2262	13.7	14.5	14.1
40	102	221	2024	12.3	13.0	12.6
35	89	216	1766	10.8	11.4	11.1
30	76	210	1508	9.3	9.8	9.6
25	63	203	1250	7.8	8.2	8.0
20	51	195	1012	6.6	6.9	6.8
15	38	184	754	5.2	5.5	5.4
11	28	173	556	4.1	4.4	4.2