


Photometric test report

Family Floodlight FL11	Order number: 5XA779115X01KB EAN: 4069025139016	LP number 59552_76
	Version Optic	standard bracket asymmetric distribution PL33T with Back Light Control
	Cover Lamps	toughened safety glass LED 3000 K CRI ≥ 70
	Controlgear Rated values	ECG-DALI Net luminous flux = 78200 lm Power consumption = 725.2 W Luminous efficacy = 107.8 lm/W
	serial documentation 07.08.2024	
	siteco	

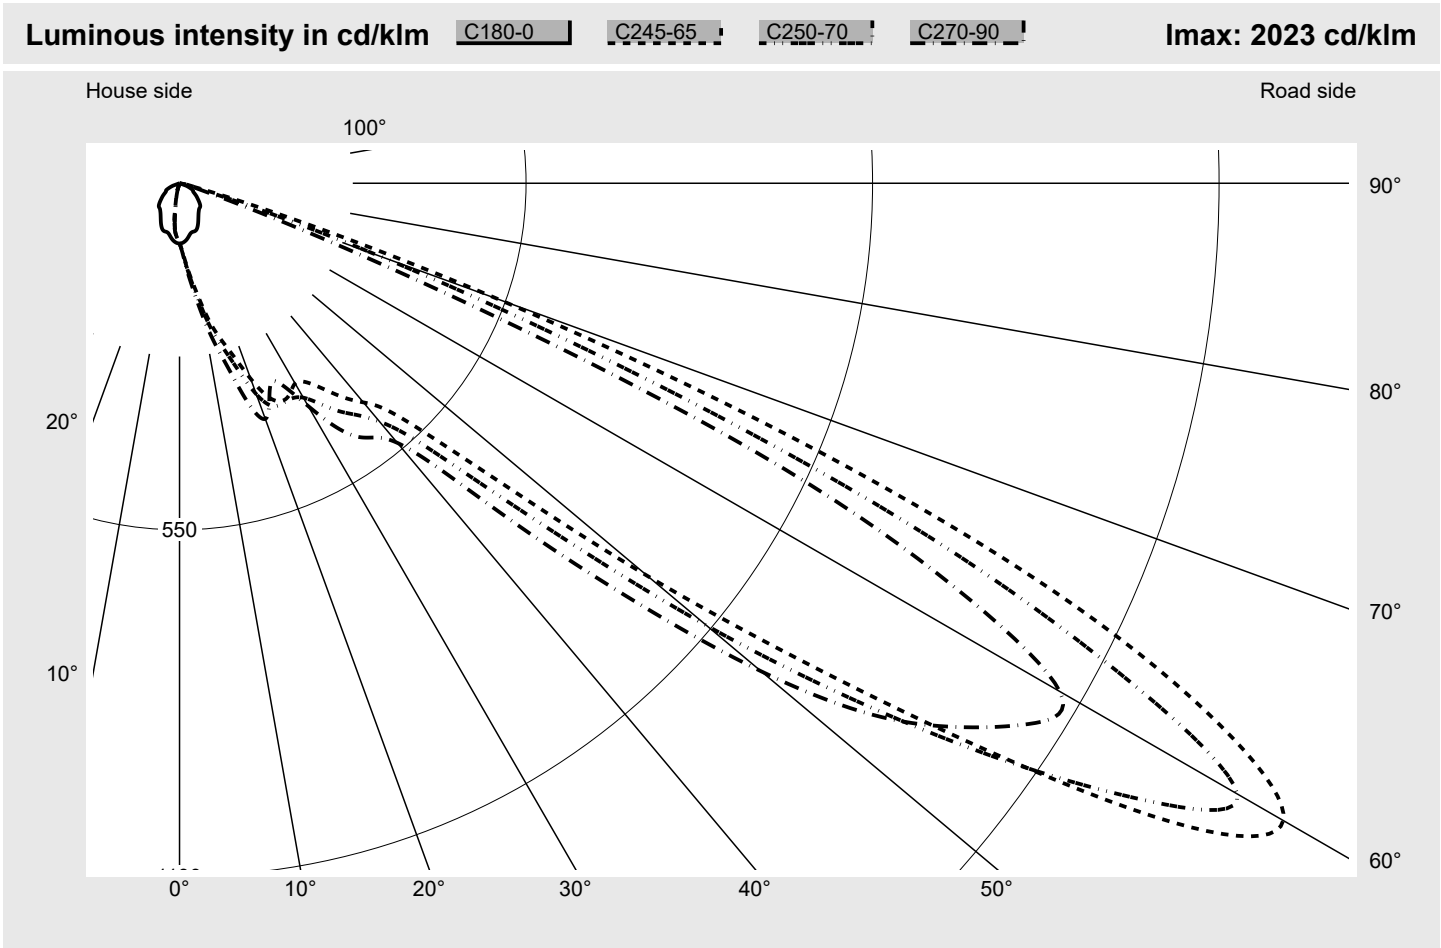

Luminaire output ratios		Luminous intensity class acc. to EN13201-2	
Eta	100.0%	Class:	G3
Eta 0° - 90°	100.0%	Imax 70°	555.3
Eta 90° - 180°	0.0%	Imax 80°	11.9
		Imax 90°	0.0
		Imax >90°	0.0
		Imax >95°	0.0
Measurement conditions			
DIN EN 13032 and DIN 5032			

Photometric test report

Family Floodlight FL11	Order number: 5XA779115X01KB EAN: 4069025139016	LP number 59552_76
Envelope curve in cd/klm		


KMK 60°

KMK 57.5°

KMK 55°

KMK 52.5°

siteco

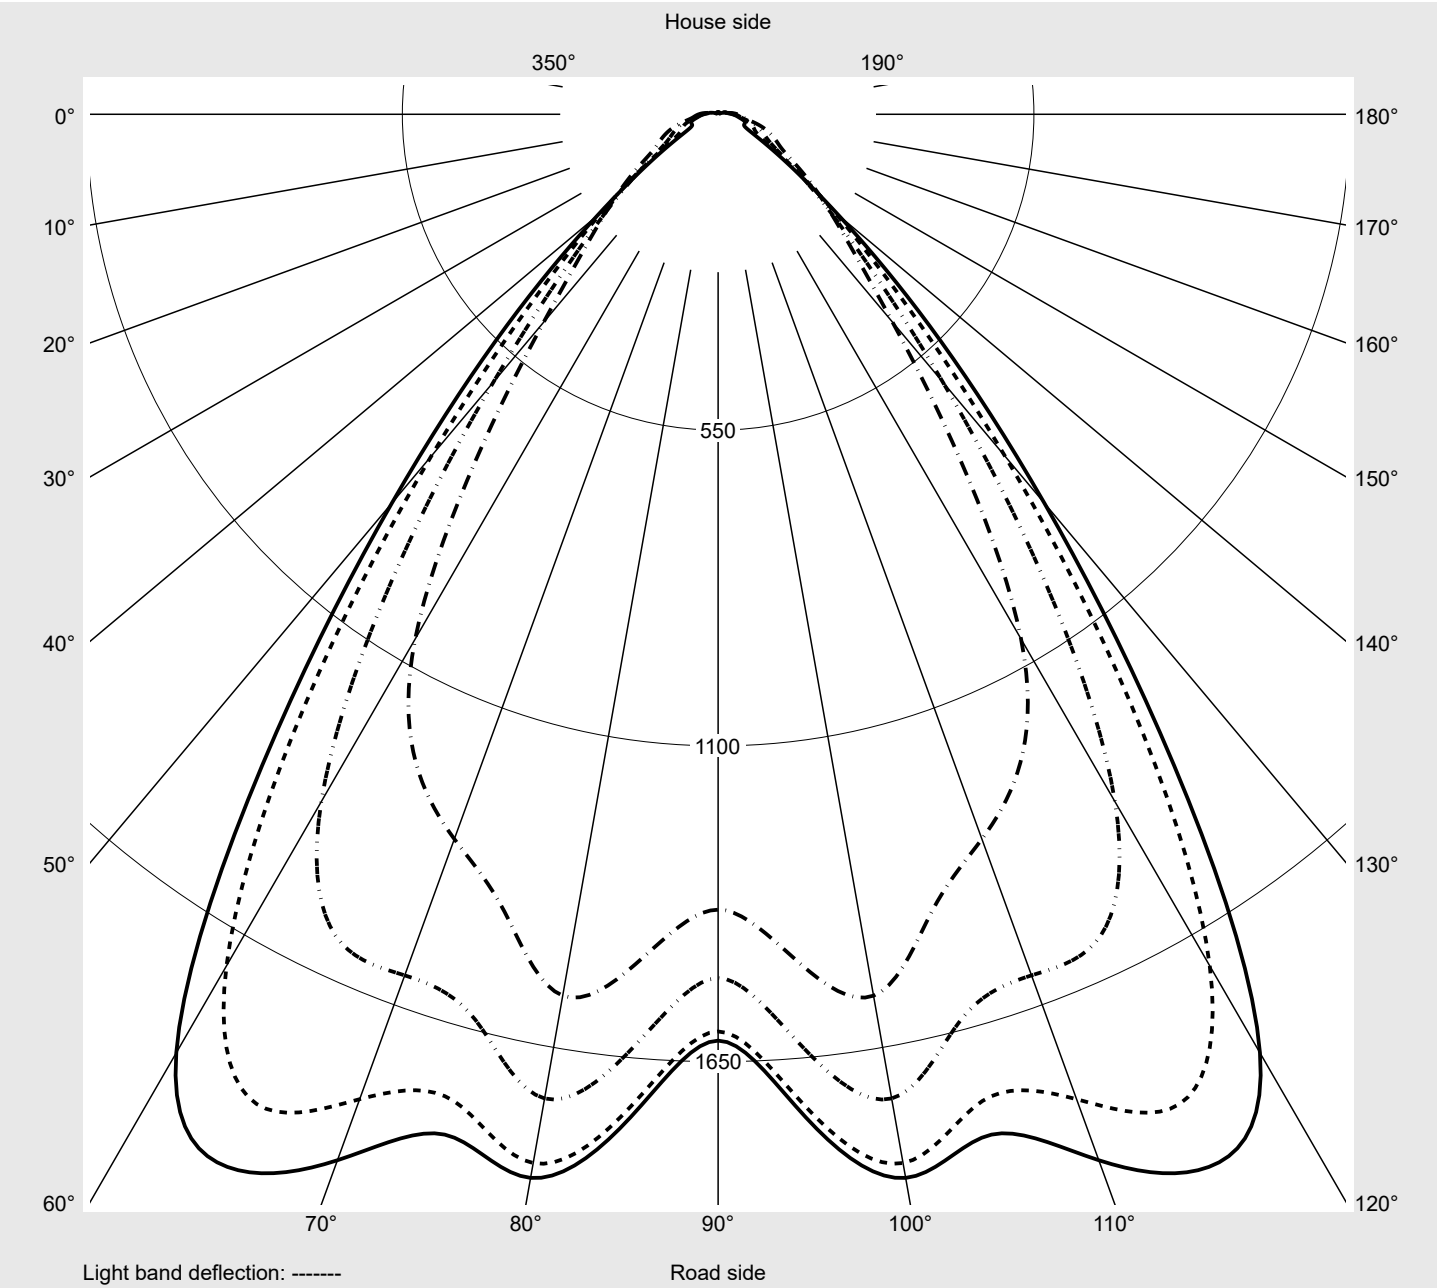

Photometric test report

Family Floodlight FL11		Order number: 5XA779115X01KB EAN: 4069025139016										LP number 59552_76	
Table of values for luminous intensities										Maximum luminous intensity		siteco	
C- planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
γ	Luminous intensity in cd/klm												
0,0°	95.5	95.5	95.5	95.5	95.5	95.5	95.5	95.5	95.5	95.5	95.5	95.5	95.5
2,5°	94.9	95.1	96.2	97.4	98.7	100.0	101.3	102.5	103.7	104.9	106.1	107.2	108.2
5,0°	92.9	94.1	96.5	99.1	101.9	105.1	108.5	112.1	115.8	119.4	122.8	126.1	129.2
7,5°	89.6	91.7	95.3	99.5	104.6	110.3	116.4	122.5	128.8	135.2	141.4	147.7	153.3
10,0°	85.3	88.2	93.2	99.7	107.2	115.3	123.7	132.3	141.2	151.1	161.1	171.3	181.3
12,5°	81.4	85.5	92.1	100.5	109.7	119.7	130.4	142.6	155.6	169.6	184.6	199.3	214.2
15,0°	80.0	85.8	94.3	104.4	114.9	126.4	140.3	156.1	173.8	193.0	211.9	228.4	243.5
17,5°	79.9	87.6	98.4	110.1	122.0	136.6	153.6	172.7	192.5	211.0	228.3	246.4	266.9
20,0°	78.4	87.8	100.5	114.2	129.7	148.2	168.9	189.8	207.9	225.3	246.3	271.3	300.7
22,5°	74.7	85.7	100.2	117.0	137.8	161.0	183.4	203.6	224.9	249.5	278.2	308.8	340.0
25,0°	69.8	81.5	97.2	117.7	143.2	168.1	190.1	215.3	243.0	274.3	308.6	339.3	365.4
27,5°	64.6	75.9	92.4	116.7	146.1	172.4	200.1	232.6	264.3	294.6	321.2	341.9	361.1
30,0°	60.0	70.6	88.4	117.6	151.0	183.3	218.3	257.9	288.5	303.1	310.4	320.4	340.0
32,5°	56.2	66.8	86.9	121.5	159.4	198.1	242.6	290.3	311.0	304.6	295.6	304.3	335.0
35,0°	53.4	64.6	87.2	121.2	163.4	211.4	264.4	309.9	316.0	300.7	293.9	312.3	353.0
37,5°	51.2	64.5	85.1	114.4	163.4	220.4	274.9	303.6	301.2	295.9	301.3	326.5	377.6
40,0°	50.2	64.4	80.3	109.5	160.7	219.2	266.0	276.8	283.6	300.2	315.2	342.8	395.9
42,5°	48.7	63.2	77.3	110.4	162.0	212.2	245.7	253.1	280.4	311.7	330.6	358.7	415.7
45,0°	45.3	60.5	74.0	109.5	158.2	193.8	215.1	238.0	286.5	321.9	342.6	384.6	471.8
47,5°	41.2	55.5	66.2	99.4	140.4	164.7	185.9	226.5	280.1	321.5	356.5	444.4	591.0
50,0°	37.3	48.0	58.4	87.0	116.9	136.3	160.4	207.7	260.3	316.2	394.3	561.6	793.7
52,5°	33.8	41.1	51.6	74.9	95.6	112.8	135.7	183.4	244.2	326.9	472.6	736.5	1055.3
55,0°	29.9	36.4	45.6	64.2	78.8	91.2	111.3	158.3	238.2	366.9	608.8	990.5	1382.4
57,5°	26.4	33.2	42.1	56.2	65.5	72.4	95.1	156.0	263.2	448.0	777.4	1252.6	1712.6
60,0°	24.7	31.8	39.1	47.7	48.9	51.7	77.0	142.7	275.1	520.5	884.1	1384.8	1887.5
62,5°	23.9	29.7	35.4	38.9	34.8	37.6	60.5	121.7	256.3	497.9	841.5	1324.2	1876.0
65,0°	20.0	24.7	30.4	33.6	26.6	27.4	47.5	97.4	195.0	387.8	667.7	1054.4	1586.9
67,5°	15.3	20.0	25.2	23.9	17.3	18.9	30.0	58.8	119.5	239.3	427.2	690.4	1052.9
70,0°	10.8	15.1	19.9	16.4	11.8	10.8	15.6	32.7	72.2	146.6	268.8	415.2	555.3
72,5°	7.1	10.6	13.8	9.8	6.8	6.6	9.5	18.7	41.9	83.9	143.4	210.1	267.5
75,0°	4.2	6.7	6.9	5.1	3.9	4.4	6.7	10.9	21.3	43.9	73.5	88.1	92.5
77,5°	2.7	4.3	3.1	2.5	2.1	2.6	4.1	6.5	11.6	10.8	10.2	10.4	11.7
80,0°	1.3	1.9	1.3	1.0	0.9	1.4	2.5	3.2	3.6	3.8	4.0	4.6	6.1
82,5°	0.5	0.6	0.5	0.4	0.4	0.8	1.3	1.5	1.6	1.8	2.0	2.3	2.9
85,0°	0.4	0.4	0.4	0.3	0.2	0.4	0.6	0.7	0.7	0.8	0.9	1.0	1.1
87,5°	0.2	0.2	0.2	0.1	0.1	0.1	0.2	0.2	0.3	0.3	0.4	0.4	0.4
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Floodlight FL11	Order number: 5XA779115X01KB EAN: 4069025139016	LP number 59552_76
---------------------------	--	-----------------------

Table of values for luminous intensities	Maximum luminous intensity	siteco
--	----------------------------	--------

C- planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
γ	Luminous intensity in cd/klm												
0,0°	95.5	95.5	95.5	95.5	95.5	95.5	95.5	95.5	95.5	95.5	95.5	95.5	95.5
2,5°	109.3	109.9	110.5	111.0	111.2	111.3	93.3	92.6	91.8	91.1	90.5	89.8	89.3
5,0°	132.1	134.7	136.4	137.8	138.8	139.3	90.5	89.0	87.5	86.2	85.0	84.0	82.9
7,5°	158.8	163.8	167.5	170.6	172.4	173.0	86.8	84.6	82.7	81.0	79.2	77.4	75.6
10,0°	191.1	199.5	206.7	212.1	215.3	216.1	82.0	79.5	77.1	74.6	72.2	69.6	66.7
12,5°	228.1	239.7	249.1	255.9	259.8	261.6	77.7	74.9	71.9	68.8	65.5	61.3	55.2
15,0°	258.2	272.7	286.2	297.9	310.0	308.4	74.9	71.2	67.1	63.1	57.8	50.4	42.5
17,5°	289.6	311.9	333.0	351.5	364.1	368.7	73.0	68.0	62.9	57.3	49.3	40.4	32.1
20,0°	330.2	356.3	375.0	388.5	395.9	398.0	69.9	63.4	56.9	49.1	39.9	30.8	24.7
22,5°	366.7	382.4	385.6	381.7	376.1	372.4	65.2	57.4	49.0	39.6	31.0	24.2	20.9
25,0°	381.5	385.8	377.8	364.8	353.0	347.6	59.3	50.2	39.7	30.3	24.2	20.2	12.5
27,5°	378.0	385.2	381.5	374.3	367.8	366.1	54.0	43.5	31.6	24.0	20.5	13.5	10.4
30,0°	366.9	393.0	405.7	407.0	407.2	408.3	49.9	38.4	25.1	20.4	16.8	10.8	9.6
32,5°	374.5	415.0	442.0	451.1	453.3	456.5	46.8	34.3	20.9	18.2	12.4	9.9	8.8
35,0°	398.7	441.7	472.8	485.0	487.9	490.9	44.1	30.6	18.4	16.2	11.0	9.3	7.9
37,5°	428.7	463.9	492.4	505.1	507.0	508.7	41.7	27.4	16.7	13.2	10.3	8.3	7.2
40,0°	454.1	493.9	515.9	532.4	536.8	537.9	38.9	24.3	15.6	11.9	9.5	7.4	6.8
42,5°	489.2	550.5	586.8	619.0	623.4	622.3	35.5	20.4	14.0	11.4	8.8	7.1	6.6
45,0°	576.4	669.3	735.8	795.0	792.8	786.0	32.2	16.7	12.3	11.3	8.4	6.6	6.1
47,5°	733.6	852.2	946.3	1030.3	1010.7	986.2	29.1	14.5	12.0	11.0	7.9	5.9	5.3
50,0°	969.9	1092.1	1200.2	1308.1	1257.4	1205.0	26.9	14.0	12.7	11.1	7.6	5.2	4.6
52,5°	1245.8	1343.3	1437.7	1558.8	1471.9	1385.3	24.6	14.9	13.8	10.9	7.1	4.4	4.1
55,0°	1577.6	1596.0	1633.0	1740.5	1624.7	1504.5	22.4	14.8	12.9	10.2	5.4	3.9	3.7
57,5°	1901.9	1825.5	1779.0	1854.7	1733.5	1597.4	20.0	14.4	11.6	8.8	4.0	3.5	3.4
60,0°	2022.8	1938.6	1839.7	1881.0	1753.9	1613.4	18.1	14.8	10.3	6.6	3.5	3.2	3.0
62,5°	1861.2	1678.3	1551.2	1598.4	1499.9	1383.8	16.1	14.5	8.7	4.0	3.1	2.8	2.6
65,0°	1528.6	1268.7	1152.1	1165.0	1093.8	1008.1	13.1	13.4	6.7	3.1	2.6	2.3	2.2
67,5°	1045.8	751.9	631.8	585.7	520.1	465.0	9.9	10.0	3.9	2.4	2.0	1.9	2.1
70,0°	540.3	336.9	231.7	193.6	156.7	132.9	7.1	6.6	2.5	1.8	1.6	1.6	1.9
72,5°	188.4	85.8	58.9	49.2	41.0	36.1	4.3	3.3	1.9	1.4	1.3	1.4	1.7
75,0°	40.5	29.7	31.6	30.9	24.4	21.3	2.4	2.0	1.3	1.1	1.1	1.2	1.4
77,5°	15.4	17.6	18.3	19.8	14.5	12.2	1.5	1.2	0.9	0.8	0.8	0.9	1.2
80,0°	8.9	9.5	9.4	11.9	8.5	7.0	0.8	0.7	0.5	0.5	0.5	0.7	0.9
82,5°	3.8	4.3	4.1	5.6	4.2	3.3	0.4	0.4	0.3	0.3	0.3	0.5	0.7
85,0°	1.4	1.4	1.3	1.6	1.4	1.2	0.3	0.3	0.2	0.2	0.3	0.3	0.4
87,5°	0.4	0.4	0.4	0.4	0.4	0.4	0.2	0.2	0.1	0.1	0.1	0.2	0.2
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Floodlight FL11		Order number: 5XA779115X01KB EAN: 4069025139016										LP number 59552_76	
Table of values for luminous intensities										Maximum luminous intensity		sīteco	
C- planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm										Luminous flux in lm/klm		
0,0°	95.5	95.5	95.5	95.5	95.5	95.5	95.5	95.5	95.5	95.5	95.5	0.1	0.1
2,5°	88.8	88.4	87.9	87.7	87.4	87.2	87.1	86.9	86.8	86.8	86.7	1.2	1.3
5,0°	82.0	81.1	80.2	79.5	78.7	78.0	77.4	77.0	76.7	76.5	76.4	2.4	3.7
7,5°	73.7	71.9	69.7	67.6	65.2	62.9	60.8	59.3	58.0	57.3	57.0	3.7	7.4
10,0°	62.9	58.0	52.9	48.1	43.7	40.2	37.5	35.4	34.0	33.2	32.9	5.0	12.3
12,5°	48.5	41.5	35.6	30.9	27.6	25.6	24.4	23.7	23.3	23.2	23.1	6.5	18.8
15,0°	35.0	29.2	25.3	23.6	22.8	21.8	19.4	16.8	14.8	13.7	13.9	8.3	27.1
17,5°	26.3	23.7	22.1	17.2	13.0	11.5	10.9	10.6	10.3	10.2	10.2	10.3	37.4
20,0°	22.3	16.7	11.8	10.7	10.2	9.8	9.5	9.3	9.1	9.1	9.0	12.4	49.8
22,5°	13.5	10.8	10.0	9.5	9.1	8.9	8.6	8.4	8.3	8.2	8.2	14.4	64.2
25,0°	10.4	9.6	9.0	8.6	8.3	8.1	7.9	7.8	7.7	7.6	7.6	16.0	80.2
27,5°	9.5	8.7	8.2	7.9	7.6	7.5	7.4	7.3	7.2	7.2	7.1	17.7	97.9
30,0°	8.7	8.0	7.6	7.3	7.1	7.0	6.9	6.8	6.8	6.7	6.7	19.6	117.4
32,5°	7.8	7.4	7.0	6.8	6.6	6.5	6.3	6.2	6.1	6.0	6.0	21.9	139.4
35,0°	7.2	6.9	6.6	6.3	6.1	5.9	5.8	5.6	5.5	5.5	5.5	24.4	163.8
37,5°	6.8	6.4	6.1	5.8	5.5	5.4	5.3	5.2	5.1	5.0	5.0	26.5	190.2
40,0°	6.4	6.0	5.6	5.3	5.2	5.1	5.0	5.0	4.9	4.8	4.8	28.6	218.8
42,5°	6.1	5.7	5.4	5.1	4.9	5.0	4.9	4.8	4.6	4.5	4.5	31.9	250.7
45,0°	5.6	5.2	5.0	4.8	4.7	4.8	4.7	4.5	4.4	4.3	4.2	37.7	288.5
47,5°	5.0	4.7	4.5	4.4	4.4	4.4	4.4	4.3	4.2	4.2	4.1	45.9	334.4
50,0°	4.4	4.3	4.2	4.1	4.1	4.2	4.2	4.2	4.1	4.1	4.1	56.8	391.1
52,5°	4.0	4.0	3.9	3.9	4.0	4.0	4.0	4.0	4.0	4.0	4.0	69.1	460.2
55,0°	3.6	3.6	3.8	3.8	3.9	3.9	3.9	3.9	4.0	4.0	3.9	82.6	542.8
57,5°	3.2	3.4	3.6	3.8	3.8	3.8	3.9	3.9	3.9	3.9	3.9	96.3	639.1
60,0°	2.9	3.1	3.5	3.7	3.8	3.8	3.8	3.8	3.8	3.8	3.7	103.9	743.1
62,5°	2.6	3.0	3.4	3.5	3.7	3.7	3.6	3.6	3.6	3.6	3.6	95.6	838.6
65,0°	2.5	3.0	3.3	3.4	3.5	3.5	3.4	3.4	3.4	3.4	3.4	75.8	914.5
67,5°	2.4	2.8	3.0	3.1	3.2	3.2	3.2	3.2	3.2	3.2	3.2	46.2	960.7
70,0°	2.2	2.5	2.7	2.9	3.0	3.0	3.0	3.0	2.9	2.9	2.9	22.7	983.4
72,5°	2.0	2.3	2.5	2.7	2.9	2.7	2.6	2.6	2.6	2.5	2.5	9.5	992.9
75,0°	1.7	2.0	2.2	2.3	2.3	2.3	2.2	2.2	2.2	2.1	2.1	4.2	997.1
77,5°	1.4	1.6	1.7	1.7	1.8	1.8	1.8	1.8	1.8	1.7	1.7	1.5	998.6
80,0°	1.1	1.2	1.3	1.3	1.3	1.4	1.4	1.4	1.4	1.4	1.3	0.8	999.4
82,5°	0.8	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.4	999.8
85,0°	0.5	0.5	0.5	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.2	999.9
87,5°	0.3	0.3	0.3	0.3	0.3	0.3	0.3	0.3	0.3	0.3	0.3	0.1	1000.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family Floodlight FL11	Order number: 5XA779115X01KB EAN: 4069025139016	LP number 59552_76
Dimming levels table environmental temperature: 25°C		

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]
100	254	254	78200	725.2
95	239	252	74346	683.0
90	223	249	70289	638.1
85	208	247	66355	596.2
80	194	244	62535	557.1
75	180	241	58663	518.4
70	166	238	54697	479.6
65	153	235	50860	444.0
60	140	232	47007	408.2
55	127	229	43078	372.3
50	114	225	38966	336.7
45	102	221	35225	304.5
40	90	216	31244	272.1
35	78	211	27226	239.7
30	67	205	23509	210.9
25	55	198	19484	179.3
20	44	190	15791	144.3
15	32	178	11595	108.7
10	22	164	7983	79.5
5	11	139	3976	46.1
2	4	102	1371	26.7