


Photometric test report

Family Floodlight FL11	Order number: 5XA779215X01KB EAN: 4069025141033	LP number 59552_179
	Version Optic Cover Lamps Controlgear Rated values standard bracket asymmetric distribution PL33T with Back Light Control toughened safety glass LED 3000 K CRI ≥ 70 ECG-DMX Net luminous flux = 78200 lm Power consumption = 725.2 W Luminous efficacy = 107.8 lm/W	serial documentation 17.10.2024



siteco

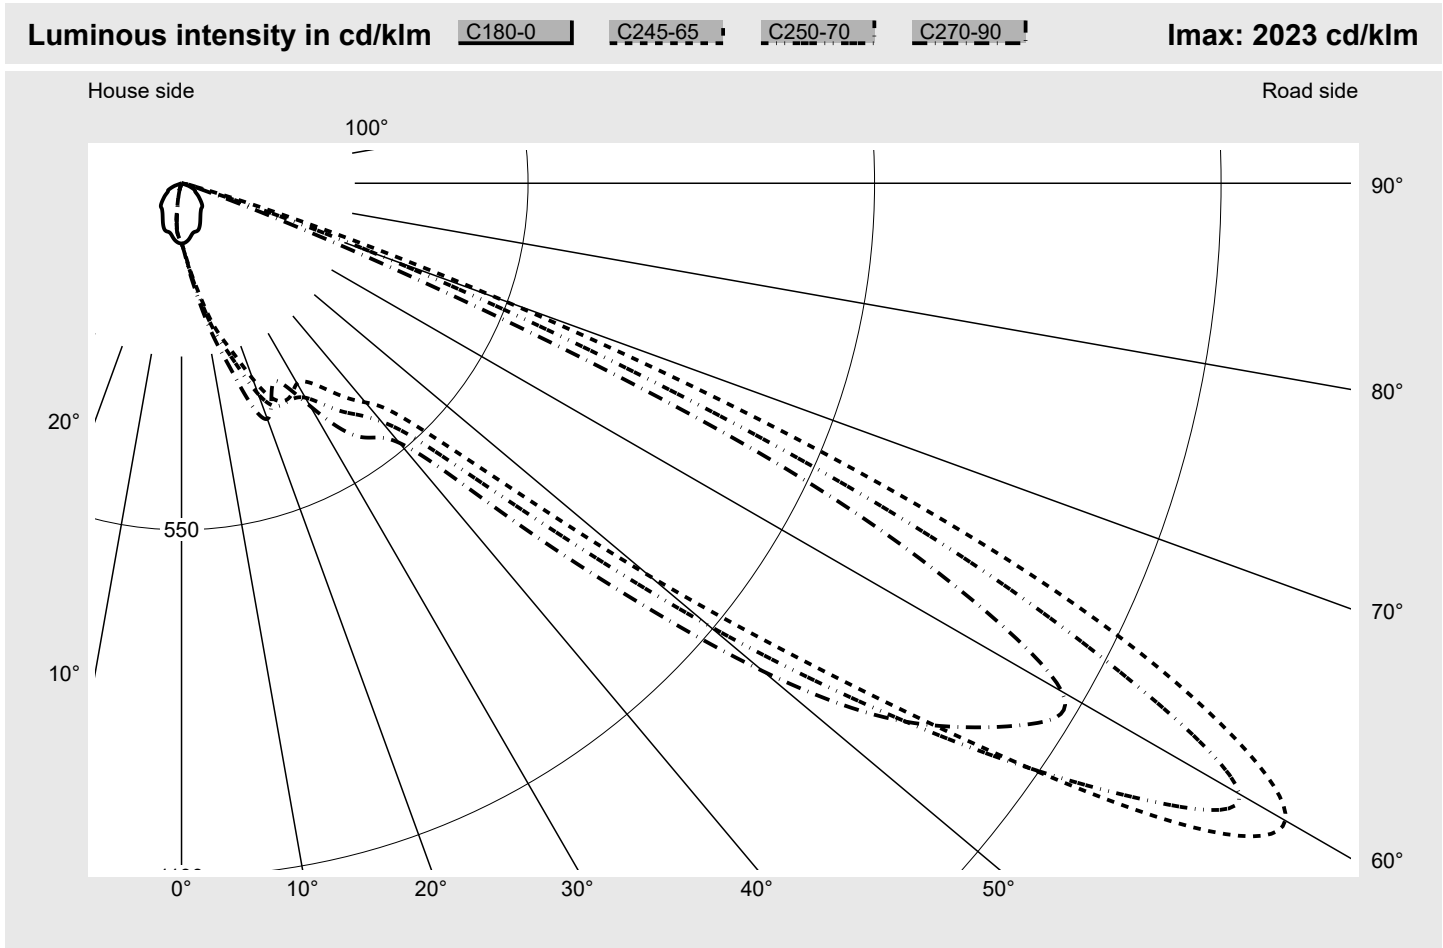


Luminaire output ratios		Luminous intensity class acc. to EN13201-2	
Eta	100.0%	Class:	G3
Eta 0° - 90°	100.0%	Imax 70°	555.3
Eta 90° - 180°	0.0%	Imax 80°	11.9
		Imax 90°	0.0
		Imax >90°	0.0
		Imax >95°	0.0

Measurement conditions	
DIN EN 13032 and DIN 5032	

Photometric test report

Family Floodlight FL11	Order number: 5XA779215X01KB EAN: 4069025141033	LP number 59552_179
Envelope curve in cd/klm KMK 60° KMK 57.5° KMK 55° KMK 52.5°		

siteco

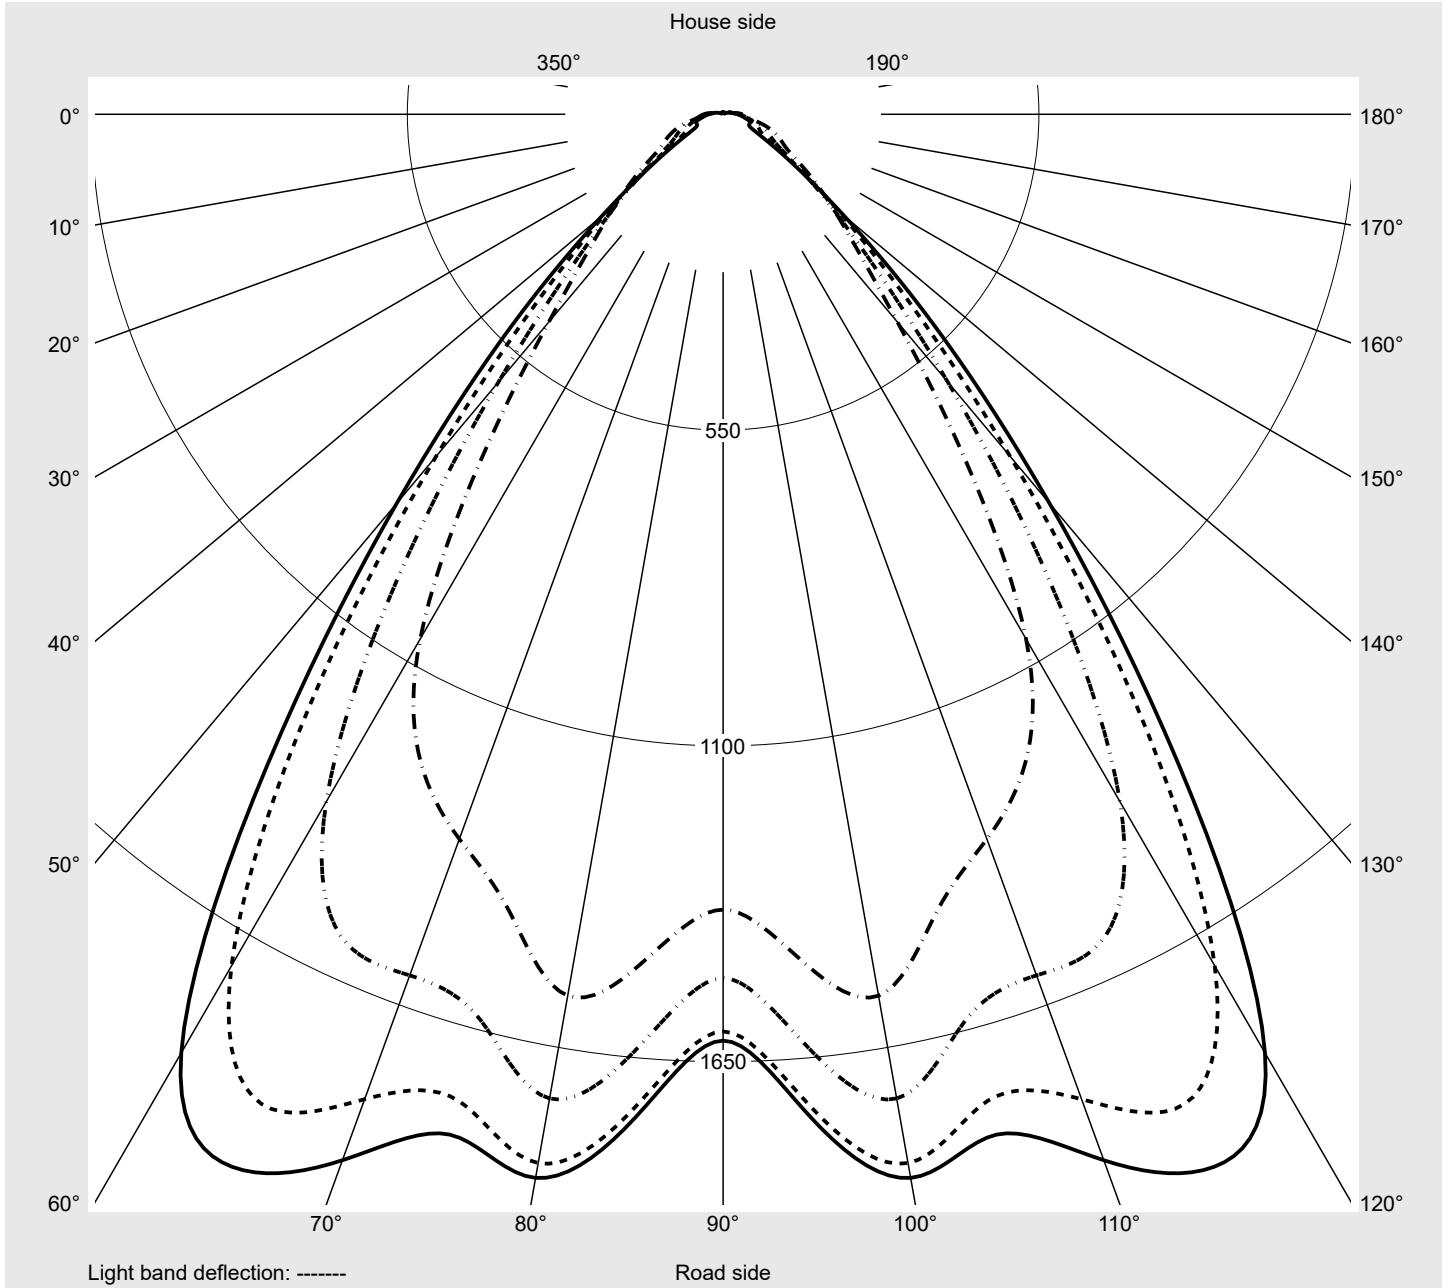

Photometric test report

Family Floodlight FL11	Order number: 5XA779215X01KB EAN: 4069025141033	LP number 59552_179
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C- planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
γ	Luminous intensity in cd/klm												
0,0°	95.5	95.5	95.5	95.5	95.5	95.5	95.5	95.5	95.5	95.5	95.5	95.5	95.5
2,5°	94.9	95.1	96.2	97.4	98.7	100.0	101.3	102.5	103.7	104.9	106.1	107.2	108.2
5,0°	92.9	94.1	96.5	99.1	101.9	105.1	108.5	112.1	115.8	119.4	122.8	126.1	129.2
7,5°	89.6	91.7	95.3	99.5	104.6	110.3	116.4	122.5	128.8	135.2	141.4	147.7	153.3
10,0°	85.3	88.2	93.2	99.7	107.2	115.3	123.7	132.3	141.2	151.1	161.1	171.3	181.3
12,5°	81.4	85.5	92.1	100.5	109.7	119.7	130.4	142.6	155.6	169.6	184.6	199.3	214.2
15,0°	80.0	85.8	94.3	104.4	114.9	126.4	140.3	156.1	173.8	193.0	211.9	228.4	243.5
17,5°	79.9	87.6	98.4	110.1	122.0	136.6	153.6	172.7	192.5	211.0	228.3	246.4	266.9
20,0°	78.4	87.8	100.5	114.2	129.7	148.2	168.9	189.8	207.9	225.3	246.3	271.3	300.7
22,5°	74.7	85.7	100.2	117.0	137.8	161.0	183.4	203.6	224.9	249.5	278.2	308.8	340.0
25,0°	69.8	81.5	97.2	117.7	143.2	168.1	190.1	215.3	243.0	274.3	308.6	339.3	365.4
27,5°	64.6	75.9	92.4	116.7	146.1	172.4	200.1	232.6	264.3	294.6	321.2	341.9	361.1
30,0°	60.0	70.6	88.4	117.6	151.0	183.3	218.3	257.9	288.5	303.1	310.4	320.4	340.0
32,5°	56.2	66.8	86.9	121.5	159.4	198.1	242.6	290.3	311.0	304.6	295.6	304.3	335.0
35,0°	53.4	64.6	87.2	121.2	163.4	211.4	264.4	309.9	316.0	300.7	293.9	312.3	353.0
37,5°	51.2	64.5	85.1	114.4	163.4	220.4	274.9	303.6	301.2	295.9	301.3	326.5	377.6
40,0°	50.2	64.4	80.3	109.5	160.7	219.2	266.0	276.8	283.6	300.2	315.2	342.8	395.9
42,5°	48.7	63.2	77.3	110.4	162.0	212.2	245.7	253.1	280.4	311.7	330.6	358.7	415.7
45,0°	45.3	60.5	74.0	109.5	158.2	193.8	215.1	238.0	286.5	321.9	342.6	384.6	471.8
47,5°	41.2	55.5	66.2	99.4	140.4	164.7	185.9	226.5	280.1	321.5	356.5	444.4	591.0
50,0°	37.3	48.0	58.4	87.0	116.9	136.3	160.4	207.7	260.3	316.2	394.3	561.6	793.7
52,5°	33.8	41.1	51.6	74.9	95.6	112.8	135.7	183.4	244.2	326.9	472.6	736.5	1055.3
55,0°	29.9	36.4	45.6	64.2	78.8	91.2	111.3	158.3	238.2	366.9	608.8	990.5	1382.4
57,5°	26.4	33.2	42.1	56.2	65.5	72.4	95.1	156.0	263.2	448.0	777.4	1252.6	1712.6
60,0°	24.7	31.8	39.1	47.7	48.9	51.7	77.0	142.7	275.1	520.5	884.1	1384.8	1887.5
62,5°	23.9	29.7	35.4	38.9	34.8	37.6	60.5	121.7	256.3	497.9	841.5	1324.2	1876.0
65,0°	20.0	24.7	30.4	33.6	26.6	27.4	47.5	97.4	195.0	387.8	667.7	1054.4	1586.9
67,5°	15.3	20.0	25.2	23.9	17.3	18.9	30.0	58.8	119.5	239.3	427.2	690.4	1052.9
70,0°	10.8	15.1	19.9	16.4	11.8	10.8	15.6	32.7	72.2	146.6	268.8	415.2	555.3
72,5°	7.1	10.6	13.8	9.8	6.8	6.6	9.5	18.7	41.9	83.9	143.4	210.1	267.5
75,0°	4.2	6.7	6.9	5.1	3.9	4.4	6.7	10.9	21.3	43.9	73.5	88.1	92.5
77,5°	2.7	4.3	3.1	2.5	2.1	2.6	4.1	6.5	11.6	10.8	10.2	10.4	11.7
80,0°	1.3	1.9	1.3	1.0	0.9	1.4	2.5	3.2	3.6	3.8	4.0	4.6	6.1
82,5°	0.5	0.6	0.5	0.4	0.4	0.8	1.3	1.5	1.6	1.8	2.0	2.3	2.9
85,0°	0.4	0.4	0.4	0.3	0.2	0.4	0.6	0.7	0.7	0.8	0.9	1.0	1.1
87,5°	0.2	0.2	0.2	0.1	0.1	0.1	0.2	0.2	0.3	0.3	0.4	0.4	0.4
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Floodlight FL11	Order number: 5XA779215X01KB EAN: 4069025141033	LP number 59552_179
---------------------------	--	------------------------

Table of values for luminous intensities	Maximum luminous intensity	siteco
--	----------------------------	--------

C- planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
γ	Luminous intensity in cd/klm												
0,0°	95.5	95.5	95.5	95.5	95.5	95.5	95.5	95.5	95.5	95.5	95.5	95.5	95.5
2,5°	109.3	109.9	110.5	111.0	111.2	111.3	93.3	92.6	91.8	91.1	90.5	89.8	89.3
5,0°	132.1	134.7	136.4	137.8	138.8	139.3	90.5	89.0	87.5	86.2	85.0	84.0	82.9
7,5°	158.8	163.8	167.5	170.6	172.4	173.0	86.8	84.6	82.7	81.0	79.2	77.4	75.6
10,0°	191.1	199.5	206.7	212.1	215.3	216.1	82.0	79.5	77.1	74.6	72.2	69.6	66.7
12,5°	228.1	239.7	249.1	255.9	259.8	261.6	77.7	74.9	71.9	68.8	65.5	61.3	55.2
15,0°	258.2	272.7	286.2	297.9	310.0	308.4	74.9	71.2	67.1	63.1	57.8	50.4	42.5
17,5°	289.6	311.9	333.0	351.5	364.1	368.7	73.0	68.0	62.9	57.3	49.3	40.4	32.1
20,0°	330.2	356.3	375.0	388.5	395.9	398.0	69.9	63.4	56.9	49.1	39.9	30.8	24.7
22,5°	366.7	382.4	385.6	381.7	376.1	372.4	65.2	57.4	49.0	39.6	31.0	24.2	20.9
25,0°	381.5	385.8	377.8	364.8	353.0	347.6	59.3	50.2	39.7	30.3	24.2	20.2	12.5
27,5°	378.0	385.2	381.5	374.3	367.8	366.1	54.0	43.5	31.6	24.0	20.5	13.5	10.4
30,0°	366.9	393.0	405.7	407.0	407.2	408.3	49.9	38.4	25.1	20.4	16.8	10.8	9.6
32,5°	374.5	415.0	442.0	451.1	453.3	456.5	46.8	34.3	20.9	18.2	12.4	9.9	8.8
35,0°	398.7	441.7	472.8	485.0	487.9	490.9	44.1	30.6	18.4	16.2	11.0	9.3	7.9
37,5°	428.7	463.9	492.4	505.1	507.0	508.7	41.7	27.4	16.7	13.2	10.3	8.3	7.2
40,0°	454.1	493.9	515.9	532.4	536.8	537.9	38.9	24.3	15.6	11.9	9.5	7.4	6.8
42,5°	489.2	550.5	586.8	619.0	623.4	622.3	35.5	20.4	14.0	11.4	8.8	7.1	6.6
45,0°	576.4	669.3	735.8	795.0	792.8	786.0	32.2	16.7	12.3	11.3	8.4	6.6	6.1
47,5°	733.6	852.2	946.3	1030.3	1010.7	986.2	29.1	14.5	12.0	11.0	7.9	5.9	5.3
50,0°	969.9	1092.1	1200.2	1308.1	1257.4	1205.0	26.9	14.0	12.7	11.1	7.6	5.2	4.6
52,5°	1245.8	1343.3	1437.7	1558.8	1471.9	1385.3	24.6	14.9	13.8	10.9	7.1	4.4	4.1
55,0°	1577.6	1596.0	1633.0	1740.5	1624.7	1504.5	22.4	14.8	12.9	10.2	5.4	3.9	3.7
57,5°	1901.9	1825.5	1779.0	1854.7	1733.5	1597.4	20.0	14.4	11.6	8.8	4.0	3.5	3.4
60,0°	2022.8	1938.6	1839.7	1881.0	1753.9	1613.4	18.1	14.8	10.3	6.6	3.5	3.2	3.0
62,5°	1861.2	1678.3	1551.2	1598.4	1499.9	1383.8	16.1	14.5	8.7	4.0	3.1	2.8	2.6
65,0°	1528.6	1268.7	1152.1	1165.0	1093.8	1008.1	13.1	13.4	6.7	3.1	2.6	2.3	2.2
67,5°	1045.8	751.9	631.8	585.7	520.1	465.0	9.9	10.0	3.9	2.4	2.0	1.9	2.1
70,0°	540.3	336.9	231.7	193.6	156.7	132.9	7.1	6.6	2.5	1.8	1.6	1.6	1.9
72,5°	188.4	85.8	58.9	49.2	41.0	36.1	4.3	3.3	1.9	1.4	1.3	1.4	1.7
75,0°	40.5	29.7	31.6	30.9	24.4	21.3	2.4	2.0	1.3	1.1	1.1	1.2	1.4
77,5°	15.4	17.6	18.3	19.8	14.5	12.2	1.5	1.2	0.9	0.8	0.8	0.9	1.2
80,0°	8.9	9.5	9.4	11.9	8.5	7.0	0.8	0.7	0.5	0.5	0.5	0.7	0.9
82,5°	3.8	4.3	4.1	5.6	4.2	3.3	0.4	0.4	0.3	0.3	0.3	0.5	0.7
85,0°	1.4	1.4	1.3	1.6	1.4	1.2	0.3	0.3	0.2	0.2	0.3	0.3	0.4
87,5°	0.4	0.4	0.4	0.4	0.4	0.4	0.2	0.2	0.1	0.1	0.1	0.2	0.2
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Floodlight FL11		Order number: 5XA779215X01KB EAN: 4069025141033										LP number 59552_179	
Table of values for luminous intensities										Maximum luminous intensity		sīteco	
C- planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm										Luminous flux in lm/klm		
0,0°	95.5	95.5	95.5	95.5	95.5	95.5	95.5	95.5	95.5	95.5	95.5	0.1	0.1
2,5°	88.8	88.4	87.9	87.7	87.4	87.2	87.1	86.9	86.8	86.8	86.7	1.2	1.3
5,0°	82.0	81.1	80.2	79.5	78.7	78.0	77.4	77.0	76.7	76.5	76.4	2.4	3.7
7,5°	73.7	71.9	69.7	67.6	65.2	62.9	60.8	59.3	58.0	57.3	57.0	3.7	7.4
10,0°	62.9	58.0	52.9	48.1	43.7	40.2	37.5	35.4	34.0	33.2	32.9	5.0	12.3
12,5°	48.5	41.5	35.6	30.9	27.6	25.6	24.4	23.7	23.3	23.2	23.1	6.5	18.8
15,0°	35.0	29.2	25.3	23.6	22.8	21.8	19.4	16.8	14.8	13.7	13.9	8.3	27.1
17,5°	26.3	23.7	22.1	17.2	13.0	11.5	10.9	10.6	10.3	10.2	10.2	10.3	37.4
20,0°	22.3	16.7	11.8	10.7	10.2	9.8	9.5	9.3	9.1	9.1	9.0	12.4	49.8
22,5°	13.5	10.8	10.0	9.5	9.1	8.9	8.6	8.4	8.3	8.2	8.2	14.4	64.2
25,0°	10.4	9.6	9.0	8.6	8.3	8.1	7.9	7.8	7.7	7.6	7.6	16.0	80.2
27,5°	9.5	8.7	8.2	7.9	7.6	7.5	7.4	7.3	7.2	7.2	7.1	17.7	97.9
30,0°	8.7	8.0	7.6	7.3	7.1	7.0	6.9	6.8	6.8	6.7	6.7	19.6	117.4
32,5°	7.8	7.4	7.0	6.8	6.6	6.5	6.3	6.2	6.1	6.0	6.0	21.9	139.4
35,0°	7.2	6.9	6.6	6.3	6.1	5.9	5.8	5.6	5.5	5.5	5.5	24.4	163.8
37,5°	6.8	6.4	6.1	5.8	5.5	5.4	5.3	5.2	5.1	5.0	5.0	26.5	190.2
40,0°	6.4	6.0	5.6	5.3	5.2	5.1	5.0	5.0	4.9	4.8	4.8	28.6	218.8
42,5°	6.1	5.7	5.4	5.1	4.9	5.0	4.9	4.8	4.6	4.5	4.5	31.9	250.7
45,0°	5.6	5.2	5.0	4.8	4.7	4.8	4.7	4.5	4.4	4.3	4.2	37.7	288.5
47,5°	5.0	4.7	4.5	4.4	4.4	4.4	4.4	4.3	4.2	4.2	4.1	45.9	334.4
50,0°	4.4	4.3	4.2	4.1	4.1	4.2	4.2	4.2	4.1	4.1	4.1	56.8	391.1
52,5°	4.0	4.0	3.9	3.9	4.0	4.0	4.0	4.0	4.0	4.0	4.0	69.1	460.2
55,0°	3.6	3.6	3.8	3.8	3.9	3.9	3.9	3.9	4.0	4.0	3.9	82.6	542.8
57,5°	3.2	3.4	3.6	3.8	3.8	3.8	3.9	3.9	3.9	3.9	3.9	96.3	639.1
60,0°	2.9	3.1	3.5	3.7	3.8	3.8	3.8	3.8	3.8	3.8	3.7	103.9	743.1
62,5°	2.6	3.0	3.4	3.5	3.7	3.7	3.6	3.6	3.6	3.6	3.6	95.6	838.6
65,0°	2.5	3.0	3.3	3.4	3.5	3.5	3.4	3.4	3.4	3.4	3.4	75.8	914.5
67,5°	2.4	2.8	3.0	3.1	3.2	3.2	3.2	3.2	3.2	3.2	3.2	46.2	960.7
70,0°	2.2	2.5	2.7	2.9	3.0	3.0	3.0	3.0	2.9	2.9	2.9	22.7	983.4
72,5°	2.0	2.3	2.5	2.7	2.9	2.7	2.6	2.6	2.6	2.5	2.5	9.5	992.9
75,0°	1.7	2.0	2.2	2.3	2.3	2.3	2.2	2.2	2.2	2.1	2.1	4.2	997.1
77,5°	1.4	1.6	1.7	1.7	1.8	1.8	1.8	1.8	1.8	1.7	1.7	1.5	998.6
80,0°	1.1	1.2	1.3	1.3	1.3	1.4	1.4	1.4	1.4	1.4	1.3	0.8	999.4
82,5°	0.8	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.4	999.8
85,0°	0.5	0.5	0.5	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.2	999.9
87,5°	0.3	0.3	0.3	0.3	0.3	0.3	0.3	0.3	0.3	0.3	0.3	0.1	1000.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family Floodlight FL11	Order number: 5XA779215X01KB EAN: 4069025141033	LP number 59552_179
Dimming levels table		environmental temperature: 25°C



Luminous flux %	Dimming level linear	Luminous flux [lm]	Power consumption [W]
100	255	78200	725.2
95	240	74361	683.1
90	224	70320	638.5
85	209	66399	596.7
80	195	62598	557.8
75	181	58743	519.2
70	167	54805	480.6
65	154	50976	445.1
60	140	46843	406.7
55	127	42924	371.0
50	115	39138	338.2
45	102	35099	303.4
40	90	31134	271.2
35	79	27452	241.5
30	67	23427	210.2
25	55	19407	178.7
20	44	15736	143.7
15	33	11893	111.1
10	22	7955	79.2
5	11	3956	46.0
2	4	1366	26.7