

Photometric test report

Family
Lunis 41

Order number: 51DR107FHCA
EAN: 4058352509951

LP number
59234_7

serial
documentation
07.12.2021

siteco

Version diffuse cover, extremely wide distribution,
adjustable color temperature: 4000 K | 5700 K

Lamps LED 4000 K | CRI ≥ 80

Controlgear ECG

Setting individual position: colour temperature 4000K


Rated values Net luminous flux = 2160 lm
Power consumption = 22.0 W
Luminous efficacy = 98.2 lm/W

Luminous intensity in cd/klm

C180-0

C270-90

Imax: 369 cd/klm

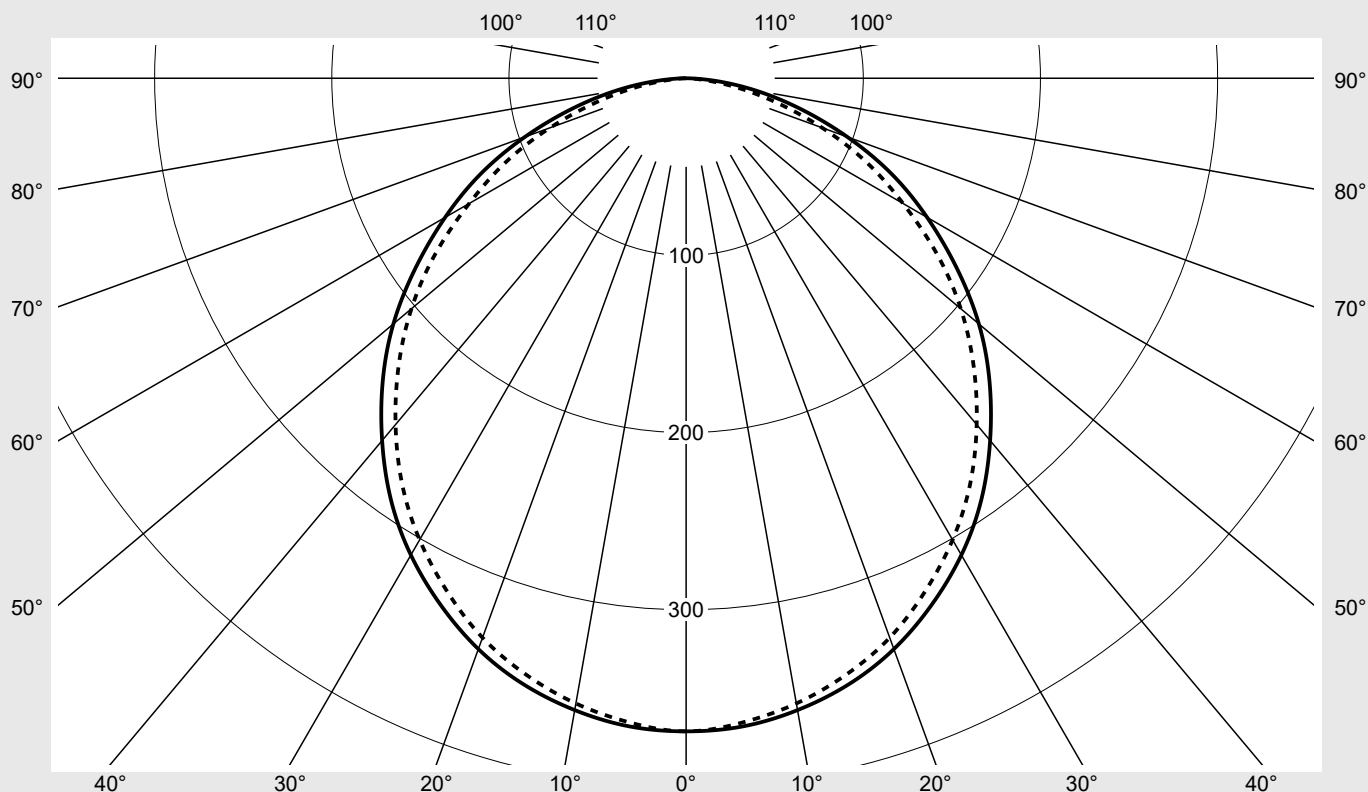

Classifications

DIN 5040 A 4 0
CIE N1=49 N2=80 N3=96
N4=100 N5=100

Luminaire light output ratios

η_{LB} 100.0%
 ϕ_u 100.0%
 ϕ_o 0.0%

Measurement conditions

DIN EN 13032 and DIN 5032

Photometric test report

Family Lunis 41	Order number: 51DR107FHCA EAN: 4058352509951	LP number 59234_7
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C- planes	0° 180°	15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°	90° 270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm							Luminous flux in lm/klm	
0°	368.6	368.6	368.6	368.6	368.6	368.6	368.6	2.2	2.2
5°	367.2	366.8	366.3	365.8	365.5	365.3	365.0	17.5	19.7
10°	362.1	361.4	360.8	360.1	359.5	358.9	358.3	34.3	54.0
15°	354.2	353.1	351.9	350.8	350.1	349.3	348.6	49.8	103.8
20°	342.9	341.5	340.1	338.8	337.8	336.9	336.0	63.6	167.3
25°	327.9	326.3	324.6	323.0	321.8	320.6	319.4	74.9	242.3
30°	310.7	308.8	306.8	304.8	303.5	302.2	300.8	83.7	325.9
35°	290.5	288.3	286.2	284.0	282.5	281.0	279.5	89.4	415.4
40°	267.0	264.6	262.3	260.0	258.4	256.8	255.2	91.8	507.2
45°	242.2	239.7	237.3	234.8	233.0	231.3	229.5	91.2	598.4
50°	215.7	213.2	210.6	208.1	206.2	204.3	202.4	87.6	686.0
55°	186.3	184.1	181.9	179.7	177.4	175.1	172.8	80.7	766.6
60°	157.1	154.5	151.9	149.2	146.6	144.0	141.4	70.8	837.5
65°	128.1	125.1	122.0	118.9	116.8	114.6	112.5	59.4	896.9
70°	96.9	93.9	90.9	87.9	85.9	83.8	81.7	45.6	942.5
75°	66.8	64.2	61.7	59.2	57.0	54.7	52.5	31.5	974.0
80°	40.0	39.6	39.2	38.8	35.1	31.4	27.8	19.6	993.6
85°	16.1	14.5	12.9	11.3	10.3	9.3	8.3	6.4	1000.0
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
95°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
100°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
105°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
110°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
115°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
120°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
125°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
130°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
135°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
140°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
145°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
150°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
155°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
160°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
165°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
170°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
175°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
180°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family Lunis 41	Order number: 51DR107FHCA EAN: 4058352509951	LP number 59234_7
--------------------	---	----------------------

UGR-Table		Standard room							siTeco		
Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions		View crosswise (C0)					View endwise (C90)				
x	y										
2H	2H	24.2	25.9	24.5	26.2	26.5	23.8	25.5	24.2	25.8	26.1
	3H	25.8	27.3	26.2	27.6	28.0	25.2	26.7	25.6	27.1	27.4
	4H	26.4	27.8	26.8	28.2	28.5	25.7	27.1	26.1	27.5	27.9
	6H	26.9	28.2	27.3	28.5	28.9	26.0	27.4	26.5	27.7	28.1
	8H	27.1	28.3	27.5	28.7	29.1	26.2	27.4	26.6	27.8	28.2
	12H	27.2	28.3	27.6	28.7	29.1	26.2	27.4	26.6	27.7	28.2
4H	2H	24.9	26.3	25.3	26.6	27.0	24.6	26.0	25.0	26.4	26.7
	3H	26.6	27.8	27.0	28.2	28.6	26.2	27.4	26.6	27.8	28.2
	4H	27.4	28.4	27.8	28.8	29.3	26.8	27.9	27.2	28.3	28.7
	6H	28.0	28.9	28.4	29.3	29.8	27.2	28.1	27.7	28.6	29.0
	8H	28.2	29.0	28.6	29.5	29.9	27.3	28.2	27.8	28.6	29.1
	12H	28.3	29.1	28.8	29.5	30.0	27.4	28.2	27.9	28.6	29.1
8H	4H	27.6	28.5	28.1	28.9	29.4	27.1	28.0	27.6	28.4	28.9
	6H	28.4	29.1	28.8	29.5	30.0	27.7	28.4	28.2	28.9	29.4
	8H	28.6	29.3	29.1	29.7	30.3	27.9	28.5	28.3	29.0	29.5
	12H	28.8	29.4	29.3	29.9	30.4	27.9	28.5	28.5	29.0	29.5
12H	4H	27.7	28.4	28.2	28.9	29.4	27.2	27.9	27.7	28.4	28.9
	6H	28.4	29.1	28.9	29.5	30.1	27.8	28.4	28.3	28.9	29.4
	8H	28.7	29.3	29.2	29.8	30.3	28.0	28.5	28.5	29.0	29.5

Luminance table		Max. for $\gamma \geq 65^\circ$		Photometric dimensions in mm:		D = 173	
C-planes		15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°	90° 270°
	γ	0° 180°					
Luminance in cd/m²							
45°	31475.8	31155.9	30836.1	30516.0	30285.1	30054.3	29823.3
50°	30837.3	30474.5	30111.8	29749.0	29476.6	29204.6	28932.4
55°	29849.7	29496.1	29142.2	28788.5	28418.6	28048.5	27678.6
60°	28868.8	28388.2	27907.9	27427.4	26947.0	26466.4	25986.0
65°	27863.5	27190.3	26516.9	25843.7	25385.6	24927.5	24469.4
70°	26021.8	25223.9	24425.9	23628.2	23068.9	22509.8	21950.6
75°	23708.4	22807.0	21906.2	21005.1	20220.9	19437.3	18653.0
80°	21153.9	20939.0	20723.7	20508.8	18574.7	16641.0	14706.9
85°	16938.8	15279.3	13620.9	11961.3	10891.2	9821.1	8749.9

Photometric test report

Family
Lunis 41

Order number: 51DR107FHCA
EAN: 4058352509951

LP number
59234_7

Luminance values in cd/m²

γ 65°

γ 70°

γ 75°

γ 80°

γ 85°

siteco

