




Photometric test report

Family Monsun® 21	Order number: 51FB10DL440J EAN: 4058352757123	LP number 59393_7
	Version prismatic diffuser, opal, PMMA, extremely wide distribution Lamps LED 4000 K CRI ≥ 80 Controlgear ECG-DALI Rated values Net luminous flux = 4330 lm Power consumption = 26.8 W Luminous efficacy = 161.6 lm/W	serial documentation 08.02.2023
		

Luminous intensity in cd/klm C180-0 C270-90 **Imax: 335 cd/klm**

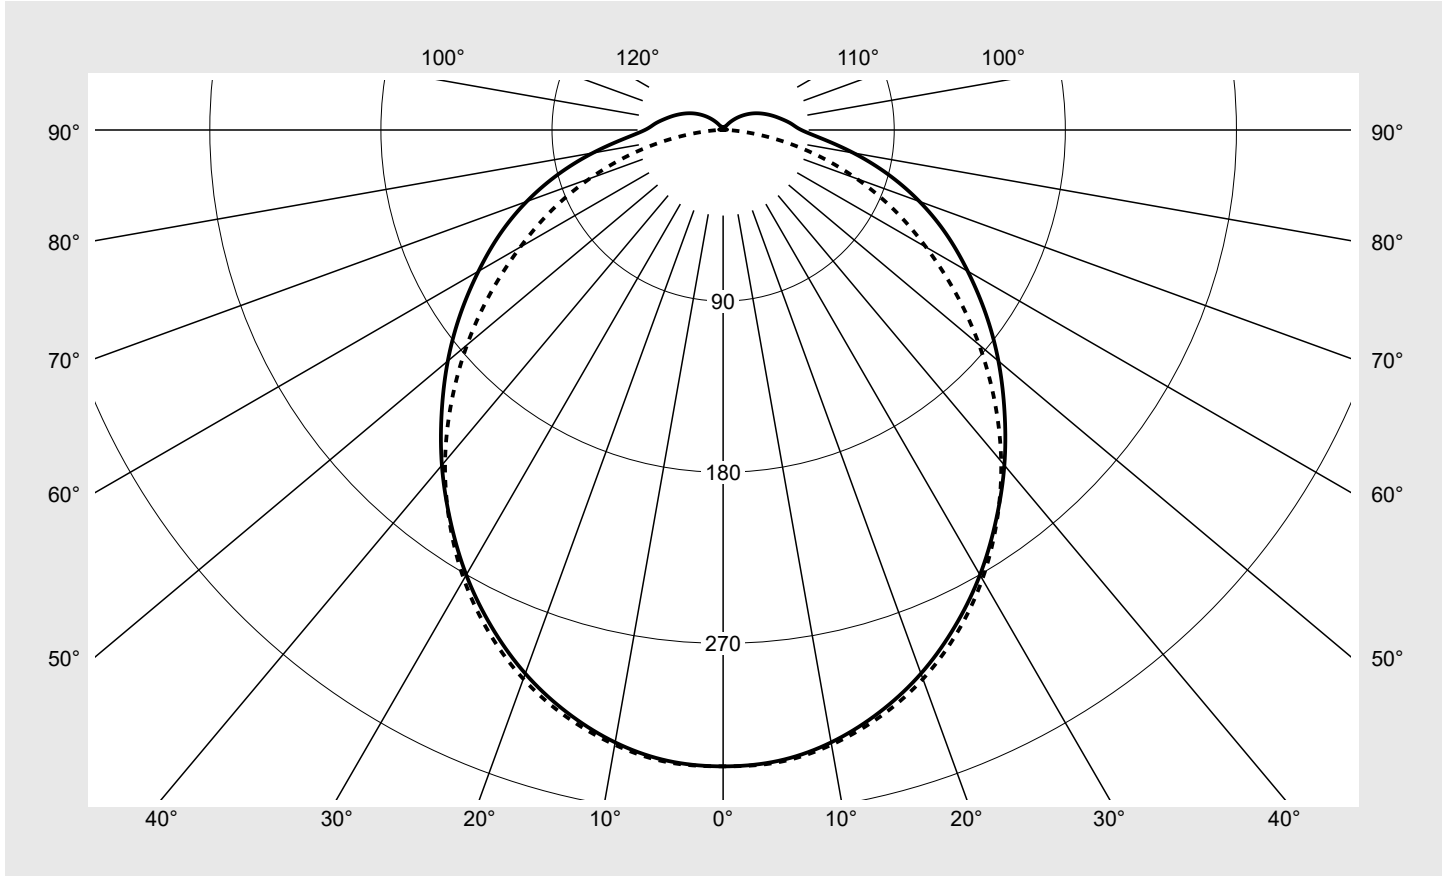

Classifications	
DIN 5040	A 4 1
CIE	N1=46 N2=76 N3=93 N4=94 N5=100

Luminaire light output ratios	
η_{LB}	100.0%
ϕ_u	93.9%
ϕ_o	6.1%

Measurement conditions
 DIN EN 13032 and DIN 5032

Photometric test report

Family Monsun® 21	Order number: 51FB10DL440J EAN: 4058352757123	LP number 59393_7
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes γ	0° 180°	15°	30°	45°	60°	75°	90° 270°	Phi-zone	Total Phi-zone
		165° 195° 345°	150° 210° 330°	135° 225° 315°	120° 240° 300°	105° 255° 285°			
Luminous intensity in cd/klm							Luminous flux in lm/klm		
0°	334.7	334.7	334.7	334.7	334.7	334.7	334.7	2.0	2.0
5°	333.1	333.6	331.1	331.9	332.7	333.2	333.8	15.9	17.9
10°	327.1	327.9	325.6	326.0	327.2	327.9	328.3	31.1	49.0
15°	317.2	318.4	316.4	316.9	317.9	318.6	319.4	45.1	94.1
20°	304.3	305.5	304.0	304.0	305.5	306.0	307.3	57.2	151.3
25°	288.3	289.5	288.3	288.0	289.4	289.8	291.5	67.0	218.3
30°	270.2	271.6	270.4	269.7	270.4	271.0	272.7	74.2	292.5
35°	250.3	251.6	250.4	249.2	249.0	249.3	251.0	78.6	371.1
40°	230.1	230.9	229.3	227.2	226.1	225.6	227.5	80.3	451.4
45°	209.3	209.8	207.4	204.4	202.0	200.5	202.0	79.4	530.9
50°	189.0	188.7	186.0	181.6	177.7	174.7	175.8	76.4	607.2
55°	168.7	168.2	164.8	159.1	153.5	149.2	149.2	71.4	678.6
60°	148.6	147.7	143.7	136.7	130.2	124.3	123.2	64.8	743.4
65°	129.5	127.8	123.0	114.9	108.3	100.8	99.1	57.1	800.4
70°	109.9	108.0	102.2	93.4	85.8	77.4	74.6	48.0	848.4
75°	89.7	87.9	81.7	72.5	63.8	55.3	51.1	38.1	886.5
80°	69.6	67.6	61.9	52.4	43.1	34.0	28.9	27.7	914.2
85°	52.2	49.9	44.6	35.4	25.7	16.3	10.6	18.5	932.7
90°	41.2	39.2	34.0	25.7	16.3	7.4	2.3	13.2	945.9
95°	36.2	34.5	30.1	22.6	13.9	5.6	2.0	11.4	957.3
100°	31.8	30.4	26.2	19.4	11.5	4.0	1.7	9.7	967.1
105°	27.9	26.5	22.5	16.5	9.2	2.5	1.5	8.1	975.2
110°	24.2	22.6	19.2	13.5	6.9	1.5	1.3	6.6	981.8
115°	20.8	19.1	16.0	10.8	4.9	1.4	1.2	5.2	987.0
120°	17.3	15.9	12.9	8.1	3.1	1.3	1.2	4.0	991.0
125°	13.9	12.5	9.8	5.6	1.6	1.3	1.1	2.9	993.8
130°	10.5	9.4	7.0	3.5	1.5	1.3	1.1	2.0	995.8
135°	7.3	6.4	4.4	1.9	1.5	1.2	1.0	1.3	997.1
140°	4.5	3.8	2.3	1.7	1.5	1.2	1.1	0.8	997.9
145°	2.3	2.1	1.9	1.7	1.5	1.3	1.2	0.5	998.4
150°	2.0	2.0	1.9	1.7	1.5	1.4	1.3	0.5	998.9
155°	1.9	1.9	1.8	1.7	1.5	1.4	1.4	0.4	999.3
160°	1.8	1.8	1.7	1.6	1.5	1.5	1.4	0.3	999.6
165°	1.7	1.7	1.6	1.5	1.5	1.5	1.4	0.2	999.8
170°	1.5	1.5	1.5	1.5	1.5	1.5	1.4	0.1	999.9
175°	1.5	1.5	1.5	1.5	1.5	1.5	1.5	0.1	1000.0
180°	1.5	1.5	1.5	1.5	1.5	1.5	1.5	0.0	1000.0

Photometric test report

Family Monsun® 21	Order number: 51FB10DL440J EAN: 4058352757123	LP number 59393_7
-----------------------------	--	-----------------------------

UGR-Table	Standard room	siteco
------------------	----------------------	---------------

Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions	View crosswise (C0)					View endwise (C90)					
x	y										
2H	2H	19.7	21.5	20.1	21.8	22.1	19.6	21.3	19.9	21.6	21.9
	3H	21.6	23.1	21.9	23.4	23.8	21.0	22.6	21.4	22.9	23.3
	4H	22.4	23.9	22.8	24.2	24.6	21.6	23.1	22.0	23.4	23.8
	6H	23.1	24.5	23.6	24.9	25.3	22.0	23.4	22.4	23.8	24.1
	8H	23.5	24.8	23.9	25.1	25.5	22.2	23.4	22.6	23.8	24.2
	12H	23.8	25.0	24.2	25.4	25.8	22.2	23.4	22.6	23.8	24.2
4H	2H	20.5	21.9	20.8	22.3	22.6	20.3	21.8	20.7	22.1	22.5
	3H	22.5	23.7	22.9	24.1	24.5	22.0	23.2	22.4	23.6	24.0
	4H	23.4	24.6	23.9	25.0	25.4	22.7	23.8	23.1	24.2	24.7
	6H	24.3	25.4	24.8	25.8	26.2	23.2	24.2	23.6	24.6	25.1
	8H	24.8	25.7	25.2	26.1	26.6	23.3	24.3	23.8	24.7	25.2
	12H	25.2	26.0	25.6	26.4	26.9	23.5	24.3	23.9	24.7	25.2
8H	4H	23.8	24.7	24.2	25.1	25.6	23.1	24.0	23.6	24.5	24.9
	6H	24.8	25.6	25.3	26.1	26.6	23.8	24.5	24.3	25.0	25.5
	8H	25.4	26.1	25.9	26.5	27.1	24.0	24.7	24.5	25.2	25.7
	12H	25.9	26.5	26.4	27.0	27.5	24.2	24.8	24.7	25.2	25.8
12H	4H	23.8	24.7	24.3	25.1	25.6	23.2	24.0	23.7	24.5	25.0
	6H	24.9	25.6	25.4	26.1	26.6	23.9	24.6	24.4	25.1	25.6
	8H	25.5	26.1	26.0	26.6	27.1	24.2	24.8	24.7	25.3	25.8

Luminance table	Max. for $\gamma \geq 65^\circ$	Photometric dimensions in mm:	L = 1299	H(C0) = 21	H(C180) = 21
			B = 87	H(C90) = 21	H(C270) = 21

C-planes	γ	Luminance in cd/m ²							
		0° 180°	15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°	90° 270°	
45°		9136.0	9186.6	9235.2	9367.1	9645.2	10077.9	10772.3	
50°		8750.4	8768.5	8807.0	8895.6	9129.5	9526.6	10281.2	
55°		8379.2	8393.6	8400.8	8434.1	8598.1	8968.8	9741.5	
60°		8028.0	8020.5	7999.7	7964.8	8091.8	8387.5	9185.3	
65°		7734.8	7680.4	7610.0	7488.1	7614.7	7829.5	8682.0	
70°		7402.0	7322.1	7167.5	6971.4	7012.0	7135.3	8004.1	
75°		6982.7	6897.2	6679.5	6389.1	6288.6	6339.9	7136.8	
80°		6485.7	6362.2	6117.4	5685.6	5391.5	5192.8	5840.6	
85°		6102.4	5910.1	5634.9	5044.4	4452.6	3785.7	3946.4	


Photometric test report

Family Monsun® 21	Order number: 51FB10DL440J EAN: 4058352757123	LP number 59393_7
------------------------------------	--	------------------------------------

Luminance values in cd/m²

γ 65°
 γ 70°
 γ 75°
 γ 80°
 γ 85°

siteco

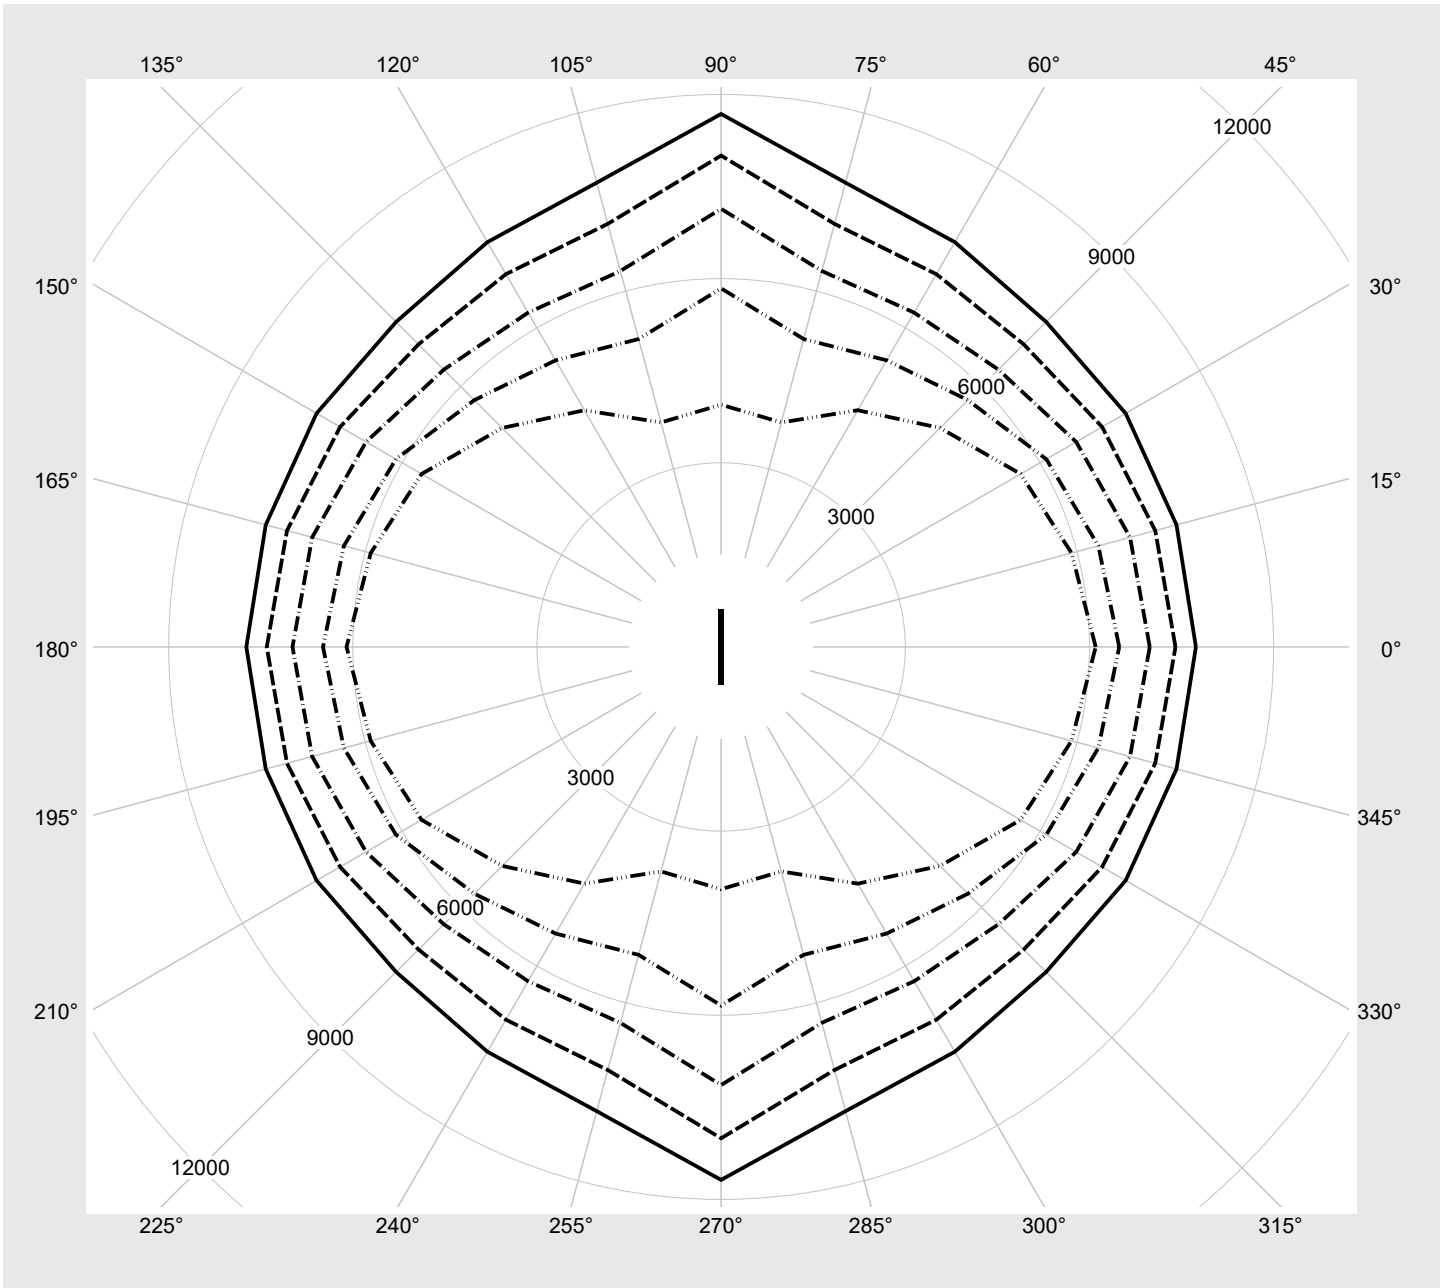

Photometric test report

Family Monsun® 21	Order number: 51FB10DL440J EAN: 4058352757123	LP number 59393_7
------------------------------------	--	------------------------------------

Dimming levels table	environmental temperature: 25°C	sITeco
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]
100	254	254	4330	26.8
95	241	252	4118	25.6
90	228	250	3903	24.3
85	214	248	3673	22.8
80	201	245	3458	21.5
75	188	243	3243	20.2
70	175	240	3025	18.9
65	163	238	2822	17.7
60	150	235	2601	16.5
55	137	231	2379	15.1
50	125	228	2173	14.0
45	112	224	1948	12.7
40	100	220	1740	11.5
35	87	215	1514	10.3
30	75	209	1303	9.1
25	62	202	1075	7.9
20	50	194	862	6.7
15	38	184	650	5.6
10	26	171	436	4.5
5	14	148	221	3.3
1	5	110	59	2.3