




Photometric test report

Family Monsun® 21	Order number: 51FB20DL440J EAN: 4058352757291	LP number 59394_2
	Version prismatic diffuser, opal, polycarbonate, extremely wide distribution Lamps LED 4000 K CRI ≥ 80 Controlgear ECG-DALI Rated values Net luminous flux = 4320 lm Power consumption = 29.7 W Luminous efficacy = 145.5 lm/W	serial documentation 08.02.2023
		

Luminous intensity in cd/klm C180-0 C270-90 **Imax: 318 cd/klm**

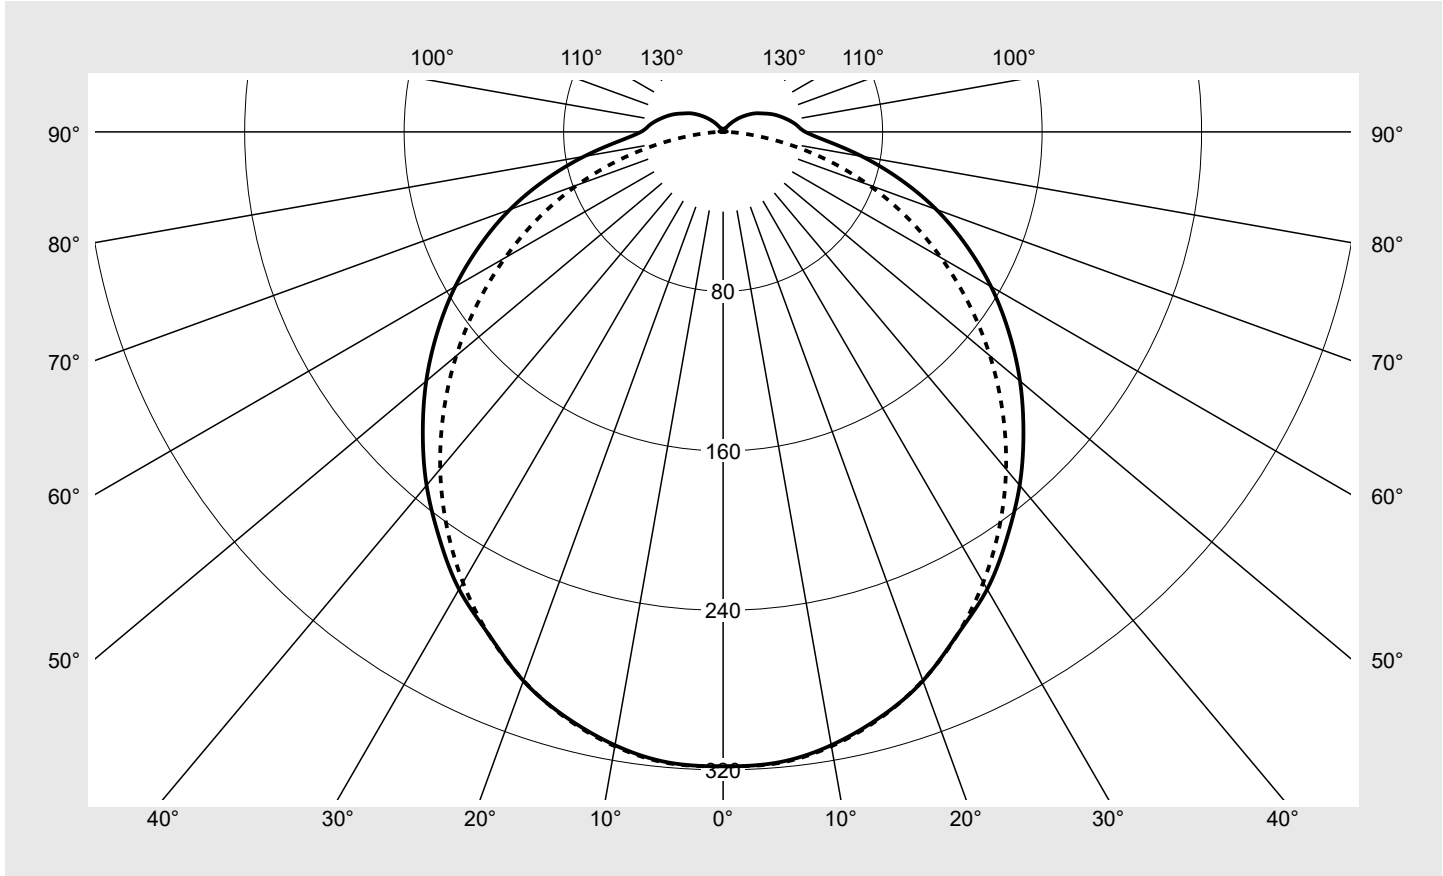

Classifications	
DIN 5040	A 4 1
CIE	N1=45 N2=75 N3=93 N4=94 N5=100

Luminaire light output ratios	
η_{LB}	100.0%
ϕ_u	93.7%
ϕ_o	6.3%

Measurement conditions
 DIN EN 13032 and DIN 5032

Photometric test report

Family Monsun® 21	Order number: 51FB20DL440J EAN: 4058352757291	LP number 59394_2
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes γ	0° 180°	15°	30°	45°	60°	75°	90° 270°	Phi-zone	Total Phi-zone
		165° 195° 345°	150° 210° 330°	135° 225° 315°	120° 240° 300°	105° 255° 285°			
Luminous intensity in cd/klm								Luminous flux in lm/klm	
0°	318.2	318.2	318.2	318.2	318.2	318.2	318.2	1.9	1.9
5°	317.5	317.5	315.1	315.9	316.6	317.2	317.8	15.1	17.0
10°	312.4	312.6	310.3	310.8	311.5	312.2	312.9	29.7	46.7
15°	304.0	304.5	302.1	302.5	303.1	303.6	304.5	43.0	89.7
20°	293.0	293.3	291.0	291.0	291.4	291.9	292.8	54.7	144.5
25°	278.2	280.0	277.5	276.9	276.9	277.3	278.2	64.3	208.8
30°	264.9	265.0	262.4	260.7	260.0	260.0	261.0	71.8	280.6
35°	248.3	248.5	245.7	243.1	241.2	240.6	241.7	76.7	357.3
40°	231.4	230.9	227.8	224.4	221.2	219.7	220.8	79.3	436.6
45°	213.0	212.5	208.9	204.3	200.0	197.3	198.2	79.4	515.9
50°	194.4	193.4	189.5	184.3	178.4	174.4	174.7	77.3	593.2
55°	174.9	174.0	169.9	163.6	156.5	151.3	150.6	73.2	666.4
60°	155.2	153.6	149.3	142.2	134.7	128.1	126.2	67.1	733.5
65°	134.5	133.3	127.9	120.6	112.6	105.3	102.1	59.5	793.0
70°	113.8	111.2	106.2	98.6	90.1	81.8	77.7	50.1	843.1
75°	91.9	90.6	84.2	76.2	67.3	58.7	53.5	39.7	882.8
80°	70.8	68.8	62.9	54.4	45.2	36.1	30.1	28.6	911.4
85°	52.2	50.3	44.7	36.3	26.8	17.6	11.2	18.9	930.2
90°	41.3	39.2	33.7	25.7	16.7	7.7	2.0	13.2	943.5
95°	37.2	35.5	30.5	23.1	14.2	5.7	1.8	11.7	955.1
100°	33.6	31.9	27.2	20.0	11.9	4.1	1.6	10.1	965.3
105°	29.8	28.2	23.6	17.2	9.5	2.6	1.4	8.5	973.8
110°	26.0	24.2	20.2	14.2	7.2	1.5	1.2	7.0	980.8
115°	21.9	20.5	16.9	11.4	5.1	1.4	1.2	5.5	986.3
120°	18.6	17.0	13.7	8.7	3.2	1.3	1.1	4.3	990.6
125°	14.8	13.4	10.4	6.0	1.7	1.3	1.1	3.1	993.6
130°	11.3	10.0	7.4	3.7	1.5	1.3	1.1	2.1	995.7
135°	7.8	6.8	4.7	1.9	1.5	1.3	1.0	1.3	997.1
140°	4.8	4.0	2.4	1.7	1.5	1.2	1.0	0.8	997.9
145°	2.3	2.1	1.9	1.7	1.5	1.3	1.2	0.5	998.4
150°	2.0	2.0	1.9	1.7	1.5	1.4	1.3	0.5	998.9
155°	1.9	1.9	1.8	1.7	1.5	1.4	1.3	0.4	999.3
160°	1.8	1.8	1.8	1.6	1.5	1.5	1.4	0.3	999.6
165°	1.7	1.7	1.6	1.5	1.5	1.5	1.4	0.2	999.8
170°	1.5	1.6	1.5	1.5	1.5	1.5	1.4	0.1	999.9
175°	1.5	1.5	1.5	1.5	1.5	1.5	1.4	0.1	1000.0
180°	1.4	1.4	1.4	1.4	1.4	1.4	1.4	0.0	1000.0

Photometric test report

Family Monsun® 21	Order number: 51FB20DL440J EAN: 4058352757291	LP number 59394_2
-----------------------------	--	-----------------------------

UGR-Table	Standard room	siteco
------------------	----------------------	---------------

Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions	View crosswise (C0)					View endwise (C90)					
x	y										
2H	2H	19.9	21.7	20.3	22.0	22.3	19.6	21.4	20.0	21.7	22.0
	3H	21.8	23.3	22.1	23.7	24.0	21.2	22.8	21.6	23.1	23.5
	4H	22.6	24.1	23.0	24.4	24.8	21.8	23.3	22.2	23.6	24.0
	6H	23.3	24.7	23.7	25.1	25.5	22.2	23.6	22.6	24.0	24.4
	8H	23.7	25.0	24.1	25.3	25.7	22.4	23.7	22.8	24.1	24.5
	12H	24.0	25.2	24.4	25.6	26.0	22.4	23.7	22.9	24.1	24.5
4H	2H	20.7	22.1	21.1	22.5	22.9	20.4	21.9	20.8	22.3	22.6
	3H	22.7	24.0	23.1	24.3	24.8	22.2	23.5	22.6	23.8	24.3
	4H	23.7	24.8	24.1	25.2	25.6	22.9	24.1	23.4	24.5	24.9
	6H	24.5	25.6	25.0	26.0	26.4	23.4	24.5	23.9	24.9	25.4
	8H	24.9	25.9	25.4	26.3	26.8	23.6	24.6	24.1	25.0	25.5
	12H	25.3	26.1	25.8	26.6	27.1	23.7	24.6	24.2	25.0	25.5
8H	4H	24.0	24.9	24.5	25.4	25.9	23.4	24.3	23.8	24.7	25.2
	6H	25.0	25.8	25.5	26.3	26.8	24.0	24.8	24.5	25.3	25.8
	8H	25.5	26.3	26.0	26.7	27.2	24.3	25.0	24.8	25.5	26.0
	12H	26.1	26.7	26.6	27.1	27.7	24.4	25.0	24.9	25.5	26.1
12H	4H	24.0	24.9	24.5	25.4	25.8	23.5	24.3	23.9	24.7	25.2
	6H	25.1	25.8	25.6	26.3	26.8	24.2	24.9	24.7	25.4	25.9
	8H	25.7	26.3	26.2	26.8	27.3	24.5	25.1	25.0	25.6	26.1


Luminance table	Max. for $\gamma \geq 65^\circ$	Photometric dimensions in mm:	L = 1299	H(C0) = 21	H(C180) = 21
			B = 87	H(C90) = 21	H(C270) = 21

C-planes	γ	Luminance in cd/m ²							
		0° 180°	15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°	90° 270°	
45°		9277.6	9284.0	9276.6	9343.4	9528.0	9891.4	10545.0	
50°		8977.9	8963.1	8952.0	9003.3	9141.1	9487.4	10195.5	
55°		8669.5	8659.3	8641.9	8652.8	8745.2	9070.3	9806.9	
60°		8366.5	8324.3	8292.2	8261.9	8348.5	8624.7	9388.0	
65°		8016.3	7990.9	7896.3	7845.1	7903.3	8155.9	8929.6	
70°		7645.4	7525.7	7435.3	7346.9	7348.0	7530.0	8314.2	
75°		7140.8	7097.1	6870.4	6700.9	6610.4	6713.7	7449.0	
80°		6575.7	6451.3	6203.4	5888.8	5642.9	5512.5	6071.5	
85°		6085.9	5943.0	5624.6	5167.8	4623.7	4068.7	4142.0	

Photometric test report

Family Monsun® 21	Order number: 51FB20DL440J EAN: 4058352757291	LP number 59394_2
-----------------------------	--	-----------------------------

Luminance values in cd/m² γ 65° γ 70° γ 75° γ 80° γ 85° **siteco**

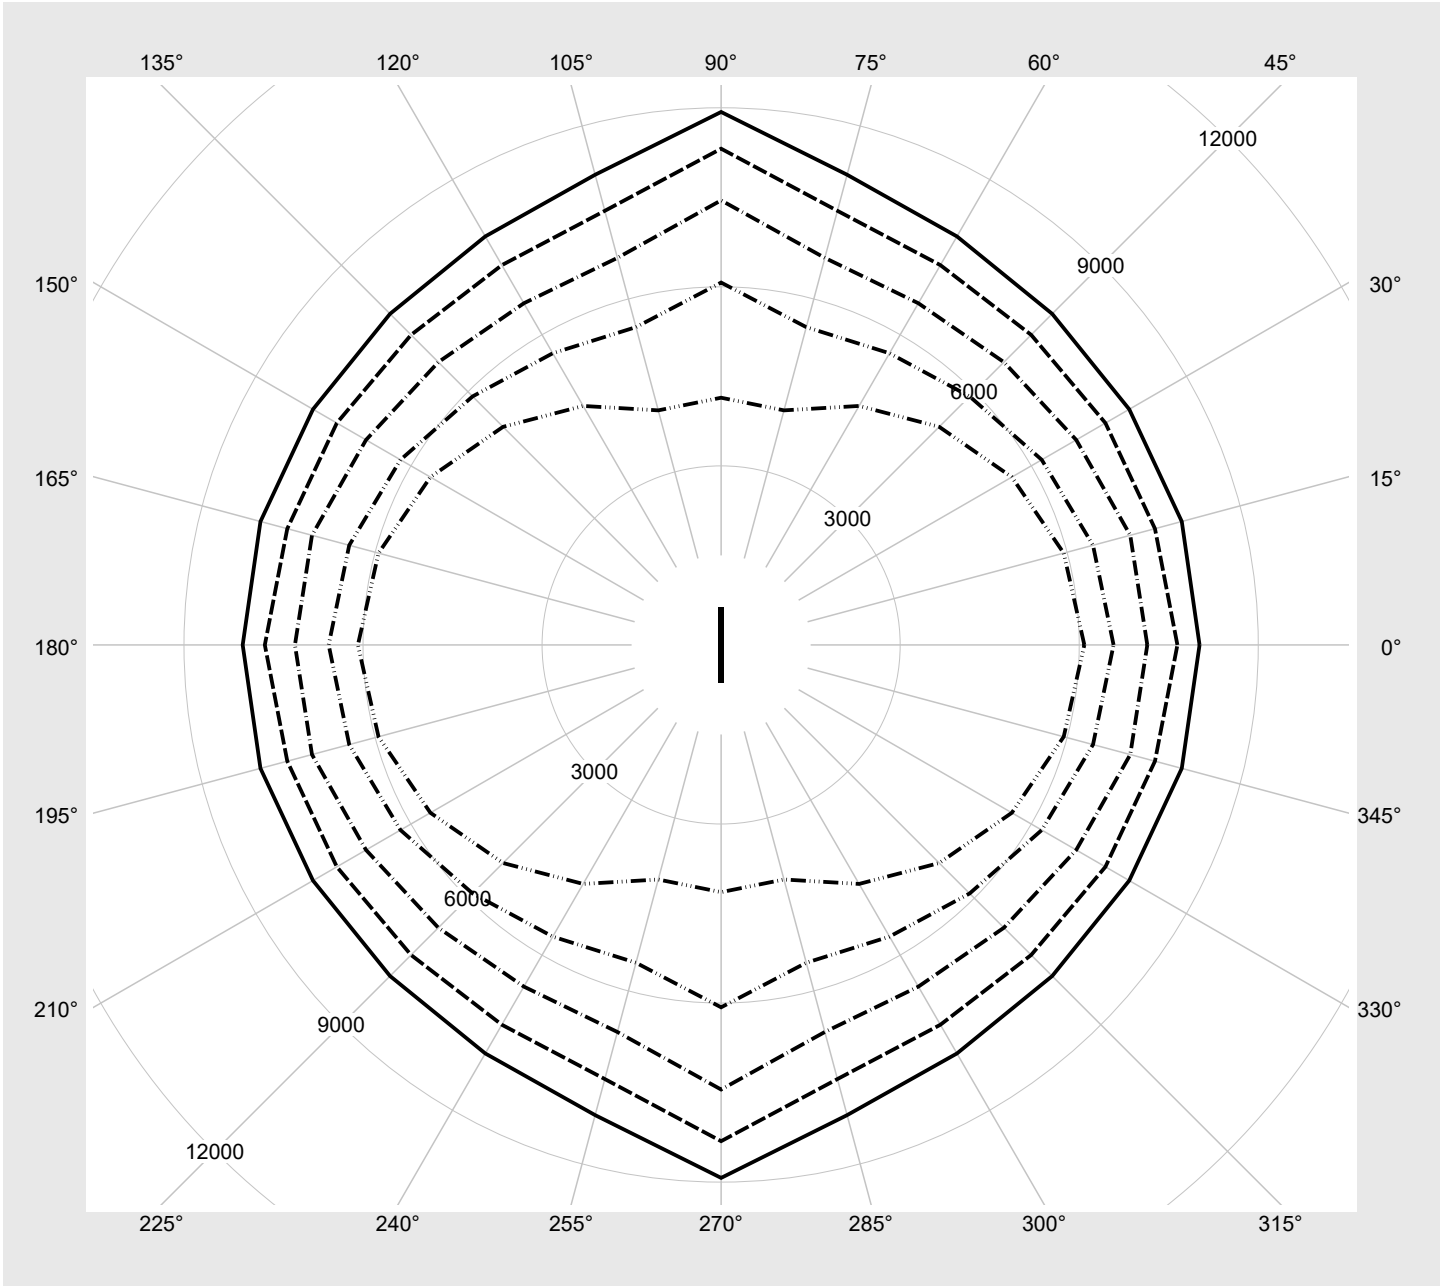

Photometric test report

Family Monsun® 21	Order number: 51FB20DL440J EAN: 4058352757291	LP number 59394_2
-----------------------------	--	-----------------------------

Dimming levels table	environmental temperature: 25°C	sITeco
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]
100	254	254	4320	29.7
95	241	252	4110	28.2
90	227	250	3883	26.7
85	214	248	3670	25.2
80	201	245	3455	23.7
75	188	243	3240	22.3
70	175	240	3023	20.7
65	162	238	2807	19.5
60	149	234	2587	18.0
55	137	231	2383	16.7
50	124	228	2160	15.2
45	111	224	1936	13.8
40	99	219	1728	12.5
35	87	215	1519	11.1
30	74	209	1291	9.9
25	62	202	1080	8.6
20	50	194	867	7.4
15	38	184	654	6.0
10	26	171	440	4.8
5	14	148	225	3.4
1	5	110	63	2.4