

Photometric test report

Family
Silica® 21

Order number: **51MX34DA47B**
EAN: **4058352605653**

LP number
59283_21



Version Suspended luminaire, reflector, black, direct-/indirect distribution, asymmetric distribution
Lamps LED 4000 K | CRI ≥ 80
Controlgear ECG-DALI
Rated values Net luminous flux = 7680 lm
Power consumption = 56.7 W
Luminous efficacy = 135.4 lm/W

serial
documentation
23.03.2022


siteco

Luminous intensity in cd/klm

C180-0

C270-90

Imax: 461 cd/klm

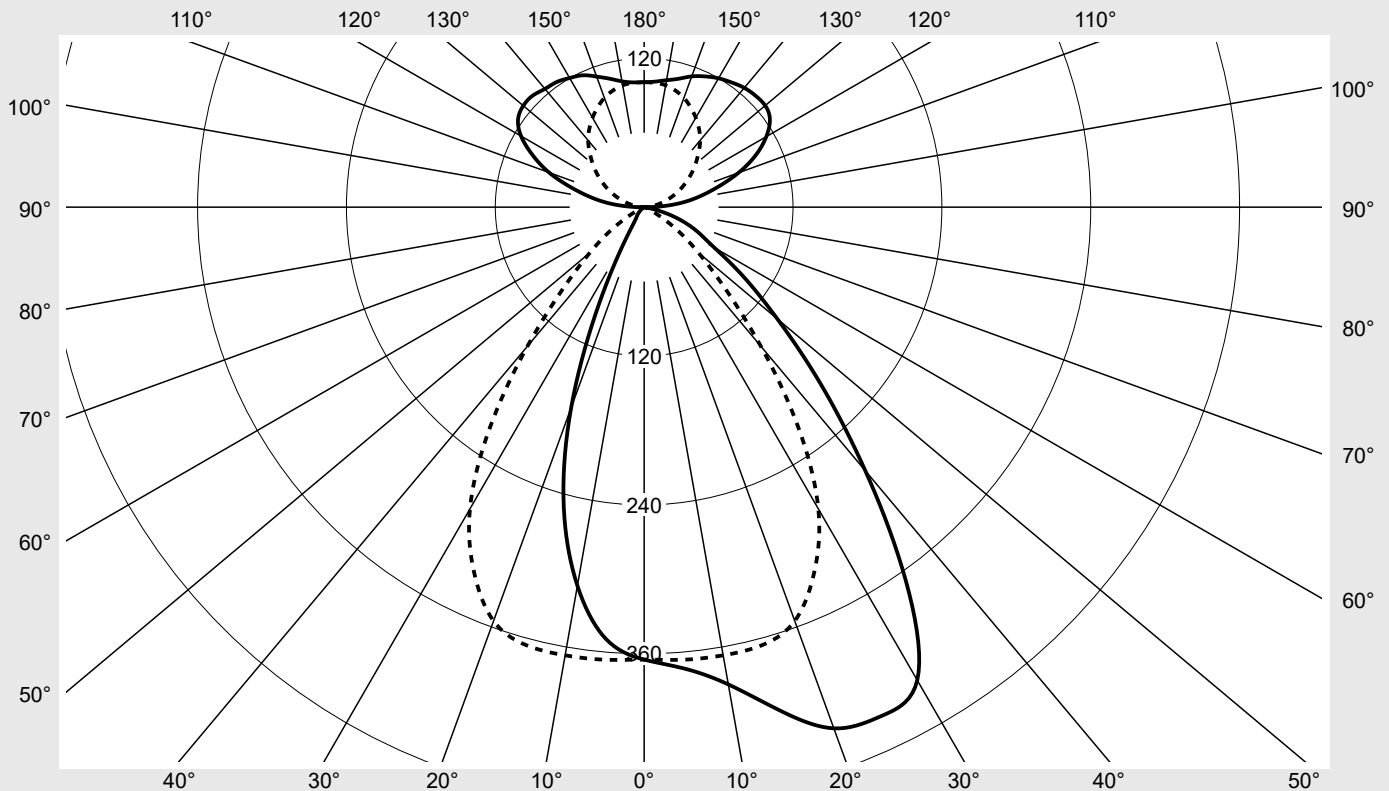

Classifications

DIN 5040 C 6 2
CIE N1=74 N2=94 N3=99
N4=56 N5=100

Luminaire light output ratios

η_{LB} 100.0%
 ϕ_u 56.1%
 ϕ_o 43.9%

Measurement conditions

DIN EN 13032 and DIN 5032

Photometric test report

Family Silica® 21	Order number: 51MX34DA47B EAN: 4058352605653	LP number 59283_21
Table of values for luminous intensities		Maximum luminous intensity
		sITeco

C-planes	0°	15° 345°	30° 330°	45° 315°	60° 300°	75° 285°	90° 270°
γ	Luminous intensity in cd/klm						
0°	364.7	364.7	364.7	364.7	364.7	364.7	364.7
5°	373.4	374.2	373.9	372.4	372.0	370.0	366.2
10°	390.7	390.9	390.3	389.7	385.4	375.2	366.9
15°	419.6	426.1	426.0	420.4	403.3	382.3	365.7
20°	447.1	456.4	458.5	446.1	411.0	376.9	355.0
25°	452.6	460.6	453.6	431.0	395.6	351.4	324.5
30°	440.3	439.8	430.3	390.5	349.9	308.3	280.9
35°	367.9	364.8	361.9	334.1	285.8	241.7	216.7
40°	277.4	282.5	289.0	275.8	227.9	175.0	146.3
45°	200.8	207.3	222.4	214.2	174.3	117.9	91.5
50°	140.2	148.6	163.4	159.9	127.4	79.2	57.1
55°	98.0	104.1	120.3	117.5	94.9	52.4	33.6
60°	65.5	71.2	86.2	87.8	71.3	30.8	14.6
65°	48.2	50.7	59.5	65.1	47.4	16.3	4.7
70°	32.8	36.4	42.5	43.7	27.4	8.4	1.8
75°	16.4	20.5	29.1	21.1	13.2	4.7	0.6
80°	2.7	3.9	8.6	8.4	6.0	1.9	0.3
85°	1.0	1.1	1.6	1.5	0.7	0.5	0.5
90°	5.1	4.9	5.2	5.1	3.1	1.0	0.4
95°	23.6	24.1	25.8	24.5	15.6	8.0	4.1
100°	42.3	43.3	43.7	38.5	25.8	14.5	9.5
105°	60.4	61.7	60.5	51.6	35.4	21.8	16.0
110°	80.9	81.7	76.3	63.6	45.4	29.6	23.0
115°	99.3	98.4	90.6	74.6	54.9	37.4	30.6
120°	113.7	112.0	102.2	83.3	64.1	44.9	38.1
125°	123.7	120.5	109.6	92.0	71.5	52.1	46.1
130°	127.4	124.7	113.0	96.3	77.5	59.5	54.0
135°	127.0	124.4	114.1	99.9	82.2	66.6	62.0
140°	125.6	123.2	114.1	102.3	86.1	73.2	70.3
145°	122.8	121.6	114.6	103.4	89.6	79.2	77.1
150°	119.9	119.3	113.7	103.5	92.3	85.0	83.2
155°	116.3	116.3	110.3	102.8	94.6	90.3	88.8
160°	112.2	112.1	106.9	101.9	96.9	93.8	93.7
165°	107.2	106.8	103.8	100.5	98.5	97.0	97.3
170°	103.9	102.9	102.2	100.5	99.8	99.7	99.8
175°	101.6	101.2	100.4	100.2	100.5	100.4	100.5
180°	100.7	100.7	100.7	100.7	100.7	100.7	100.7

Photometric test report

Family Silica® 21	Order number: 51MX34DA47B EAN: 4058352605653	LP number 59283_21
Table of values for luminous intensities		Maximum luminous intensity
		sITeco

C-planes	105° 255°	120° 240°	135° 225°	150° 210°	165° 195°	180°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm						Luminous flux in lm/klm	
0°	364.7	364.7	364.7	364.7	364.7	364.7	2.2	2.2
5°	362.9	358.9	355.8	351.9	350.5	349.8	17.4	19.6
10°	356.4	346.7	334.3	322.3	312.5	309.9	34.3	53.9
15°	351.5	329.8	301.2	272.8	255.4	250.3	50.5	104.3
20°	332.5	299.0	251.5	205.7	180.6	172.0	63.8	168.1
25°	300.5	247.9	184.7	134.5	99.3	86.1	70.5	238.6
30°	246.1	187.5	119.2	65.0	36.4	29.2	70.5	309.2
35°	174.7	119.3	62.2	24.9	14.0	12.2	62.6	371.8
40°	109.6	67.1	27.5	12.3	9.3	8.7	51.8	423.6
45°	65.7	34.8	12.8	8.3	6.4	5.9	40.7	464.3
50°	38.9	17.2	7.5	5.5	3.9	3.3	30.8	495.1
55°	21.5	8.7	4.7	3.3	2.1	1.8	22.9	518.0
60°	8.2	4.3	2.8	2.0	1.5	1.3	16.4	534.4
65°	2.7	2.1	1.7	1.4	1.0	0.7	11.5	545.9
70°	1.1	1.1	0.9	0.8	0.6	0.3	7.8	553.7
75°	0.4	0.5	0.5	0.4	0.4	0.3	4.4	558.1
80°	0.2	0.3	0.3	0.3	0.2	0.2	1.4	559.5
85°	0.5	0.5	0.6	0.6	0.6	0.6	0.4	559.9
90°	1.0	3.1	5.1	5.2	4.9	5.1	2.0	562.0
95°	8.1	15.6	24.4	25.8	24.1	23.5	10.2	572.1
100°	14.5	25.6	38.0	43.6	43.3	41.9	17.2	589.3
105°	21.9	35.3	51.6	60.4	61.7	60.5	23.8	613.1
110°	29.6	45.2	63.5	76.5	81.3	81.5	29.9	643.0
115°	37.4	55.0	74.7	90.7	98.3	99.2	34.9	677.9
120°	45.0	63.8	83.7	102.6	112.6	114.6	38.2	716.1
125°	52.1	71.5	91.4	109.3	120.5	124.0	39.7	755.8
130°	59.5	77.1	96.8	112.7	124.3	127.2	39.3	795.1
135°	66.2	81.6	99.7	114.1	124.5	127.1	37.5	832.6
140°	72.6	85.5	102.0	114.8	123.0	124.4	35.0	867.6
145°	78.7	89.2	103.4	114.2	121.7	123.1	31.9	899.4
150°	84.6	92.4	103.1	112.6	119.8	120.2	28.1	927.5
155°	89.7	94.6	103.0	110.2	116.6	117.3	23.8	951.3
160°	94.2	96.3	102.1	107.0	111.6	112.0	19.2	970.5
165°	97.4	98.7	101.2	104.4	106.4	107.2	14.4	985.0
170°	99.8	100.1	101.3	102.3	102.9	103.0	9.6	994.6
175°	100.7	100.4	100.7	100.9	101.1	101.0	4.8	999.4
180°	100.7	100.7	100.7	100.7	100.7	100.7	0.6	1000.0

Photometric test report

Family Silica® 21	Order number: 51MX34DA47B EAN: 4058352605653	LP number 59283_21
-----------------------------	---------------------------------------------------------------	------------------------------


UGR-Table		Standard room									
Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions		View crosswise (C0)					View endwise (C90)				
x	y										
2H	2H	22.1	23.0	22.9	23.8	24.9	17.5	18.4	18.3	19.2	20.3
	3H	22.4	23.2	23.3	24.1	25.3	17.3	18.1	18.2	19.0	20.1
	4H	22.5	23.2	23.4	24.1	25.3	17.2	17.9	18.1	18.8	20.0
	6H	22.4	23.0	23.3	23.9	25.1	17.0	17.7	17.9	18.6	19.8
	8H	22.3	22.9	23.2	23.8	25.0	16.9	17.6	17.9	18.5	19.7
	12H	22.2	22.7	23.1	23.7	24.9	16.8	17.4	17.8	18.3	19.5
4H	2H	22.3	23.0	23.2	23.9	25.0	18.1	18.8	19.0	19.7	20.9
	3H	22.9	23.5	23.8	24.4	25.6	18.1	18.7	19.1	19.7	20.9
	4H	23.0	23.6	24.0	24.5	25.7	18.1	18.6	19.0	19.5	20.7
	6H	22.9	23.4	23.9	24.3	25.6	17.9	18.4	18.9	19.3	20.6
	8H	22.8	23.3	23.8	24.2	25.5	17.8	18.2	18.8	19.2	20.5
	12H	22.7	23.1	23.7	24.1	25.4	17.7	18.1	18.7	19.1	20.3
8H	4H	23.0	23.4	23.9	24.3	25.6	18.1	18.5	19.1	19.5	20.8
	6H	22.9	23.3	23.9	24.3	25.5	18.1	18.4	19.1	19.4	20.7
	8H	22.8	23.2	23.9	24.1	25.4	18.0	18.3	19.0	19.3	20.6
	12H	22.8	23.0	23.8	24.0	25.3	17.9	18.2	18.9	19.2	20.5
12H	4H	22.9	23.2	23.8	24.2	25.5	18.1	18.4	19.0	19.4	20.7
	6H	22.8	23.1	23.8	24.1	25.4	18.0	18.3	19.0	19.3	20.6
	8H	22.8	23.0	23.8	24.0	25.3	17.9	18.2	19.0	19.2	20.5

Luminance table		Max. for $\gamma \geq 65^\circ$											
		Photometric dimensions in mm: L = 1176 B = 49											
C-planes	0°	15° 345°	30° 330°	45° 315°	60° 300°	75° 285°	90° 270°	105° 255°	120° 240°	135° 225°	150° 210°	165° 195°	180°
γ	Luminance in cd/m ²												
45°	37847.1	39066.6	41924.1	40365.0	32848.9	22219.0	17240.8	12382.6	6567.9	2406.2	1567.6	1215.3	1109.8
50°	29067.9	30810.4	33888.8	33146.8	26408.9	16415.6	11845.9	8064.2	3571.3	1552.6	1140.8	806.4	677.6
55°	22763.6	24190.8	27955.8	27307.0	22040.1	12165.8	7803.0	5001.4	2028.8	1096.5	776.1	479.4	412.9
60°	17451.9	18977.7	22985.1	23414.0	18995.8	8209.6	3899.2	2185.5	1136.6	756.0	524.0	408.9	347.9
65°	15195.7	15999.0	18754.9	20544.0	14954.8	5133.1	1478.7	858.1	677.7	537.7	435.2	322.6	214.1
70°	12794.7	14194.0	16548.5	17025.4	10672.5	3279.9	694.4	413.8	416.2	369.4	305.5	220.6	135.2
75°	8452.8	10540.4	14977.7	10871.5	6786.5	2443.9	319.3	210.1	256.4	244.6	225.5	182.3	147.3
80°	2097.6	3013.3	6611.4	6464.8	4610.5	1421.4	202.6	191.1	225.6	231.8	220.3	191.1	174.2
85°	1477.2	1640.8	2520.1	2347.3	1120.9	731.0	721.8	756.9	822.7	880.8	912.9	896.1	902.2

Photometric test report

Family Silica® 21	Order number: 51MX34DA47B EAN: 4058352605653	LP number 59283_21
------------------------------------	---------------------------------------------------------------	-------------------------------------

Luminance values in cd/m² γ 65° γ 70° γ 75° γ 80° γ 85° **siteco**

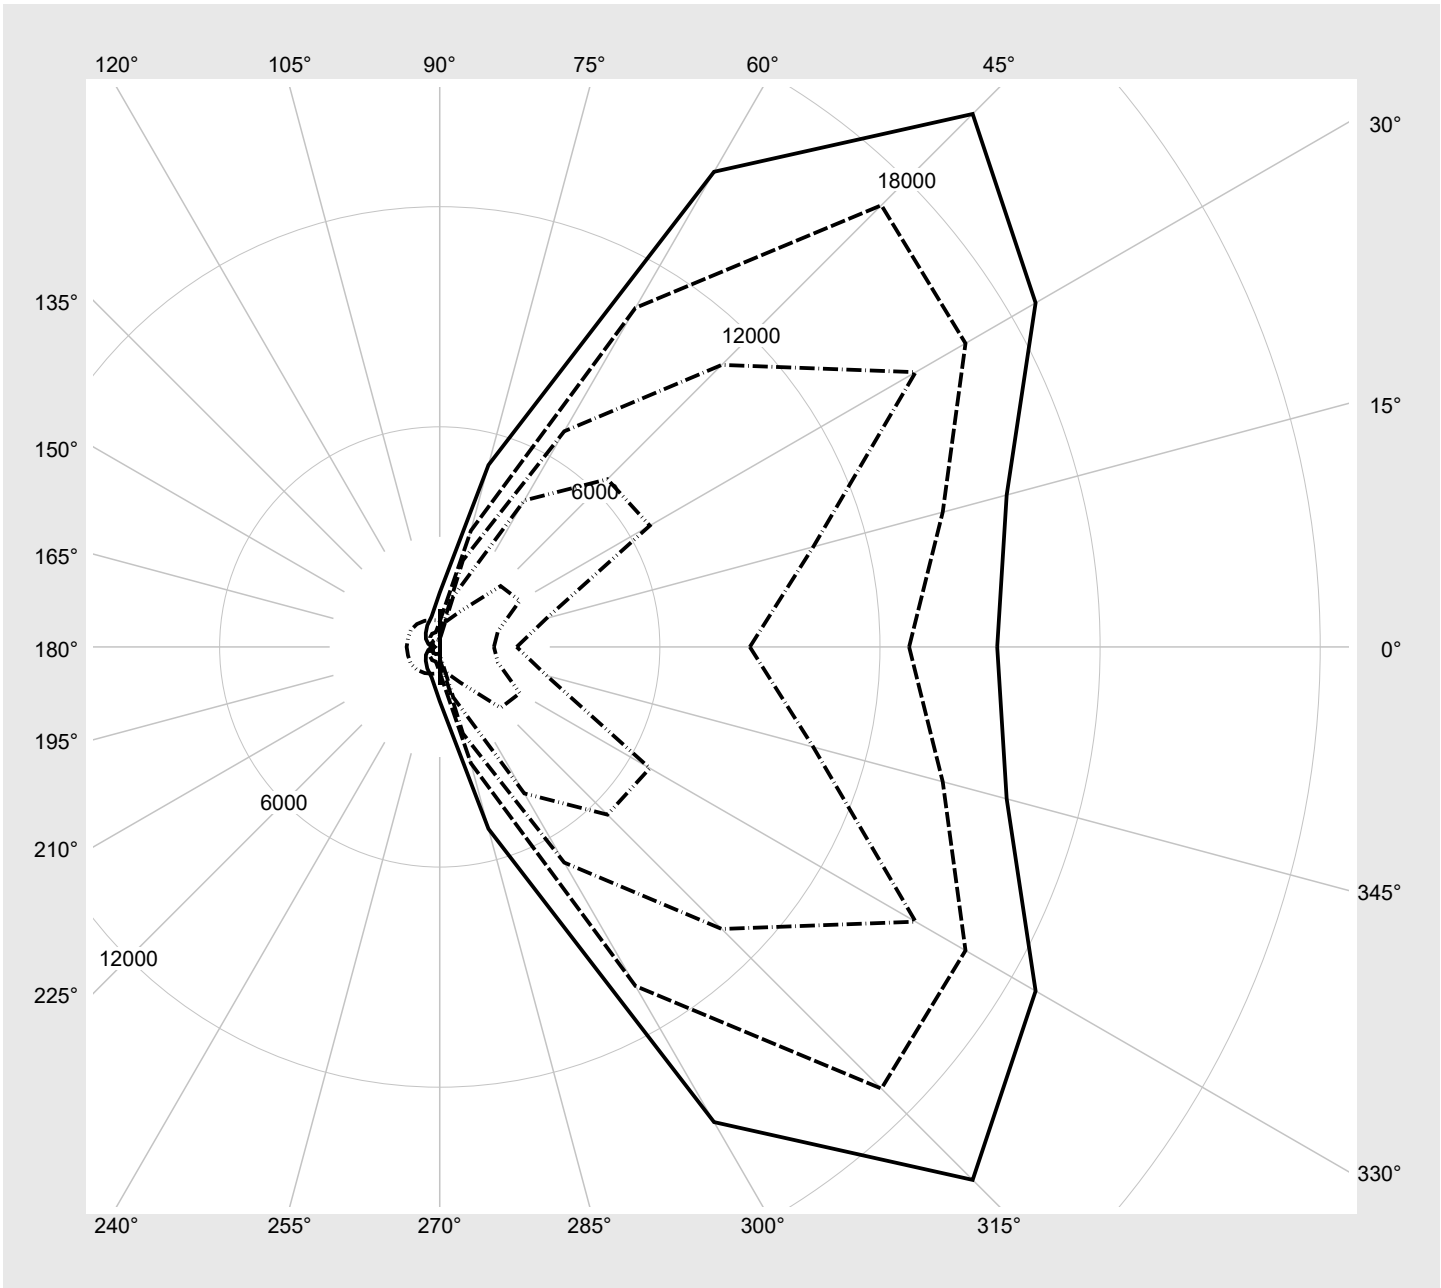

Photometric test report

Family Silica® 21	Order number: 51MX34DA47B EAN: 4058352605653	LP number 59283_21
-----------------------------	---------------------------------------------------------------	------------------------------

Dimming levels table	environmental temperature: 25°C	sITeco
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]
100	254	254	7680	56.7
95	240	252	7294	53.5
90	226	250	6903	50.2
85	213	248	6536	47.6
80	199	245	6135	44.6
75	186	243	5760	41.6
70	173	240	5381	38.5
65	160	237	4998	35.4
60	147	234	4611	32.4
55	134	231	4221	29.6
50	121	227	3825	26.9
45	109	223	3456	24.4
40	97	219	3085	22.0
35	84	213	2679	19.3
30	72	208	2301	16.7
25	60	201	1920	14.0
20	48	193	1536	11.5
15	36	182	1148	9.1
10	24	168	758	6.8
5	13	145	399	4.6
1	4	102	103	2.1