




Photometric test report

Family Licross® 11 Recessed	Order number: 51TL18DN485FD EAN: 4058352418307	LP number 58691_31
	Version cover frosted, wide distribution, high visual comfort Lamps LED 4000 K CRI ≥ 80 Controlgear ECG-DALI Setting AC-mode Rated values Net luminous flux = 8910 lm Power consumption = 55.4 W Luminous efficacy = 160.8 lm/W	serial documentation 26.08.2020 

Luminous intensity in cd/klm C180-0 C270-90 **Imax: 890 cd/klm**

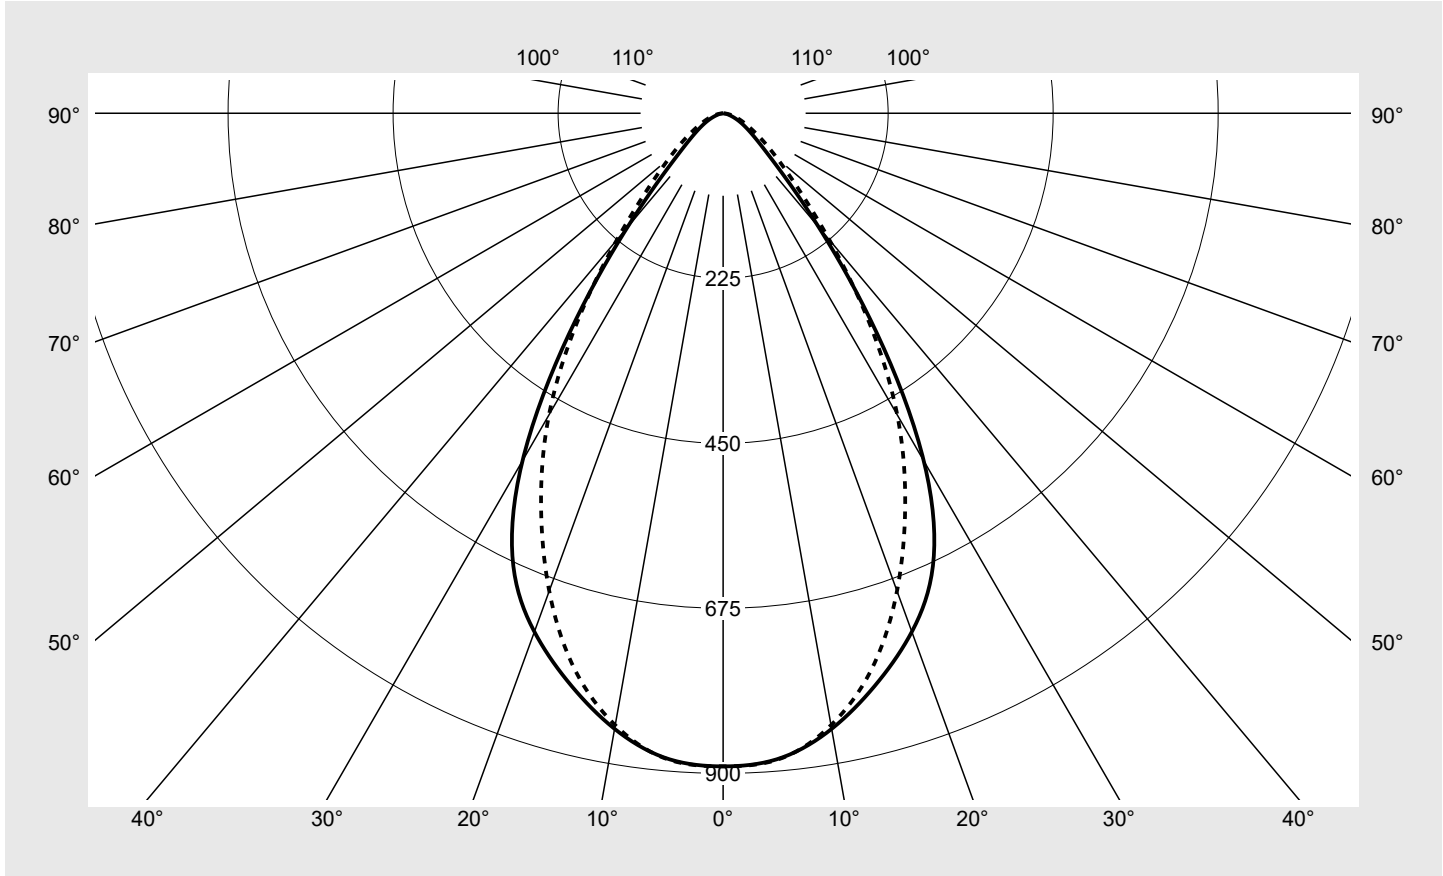

Classifications	
DIN 5040	A 6 0
CIE	N1=83 N2=96 N3=99 N4=100 N5=100

Luminaire light output ratios	
η_{LB}	100.0%
ϕ_u	100.0%
ϕ_o	0.0%

Measurement conditions
DIN EN 13032 and DIN 5032

Photometric test report

Family Licross® 11 Recessed	Order number: 51TL18DN485FD EAN: 4058352418307	LP number 58691_31
Table of values for luminous intensities		Maximum luminous intensity
		sITeco

C-planes γ	0° 180°	15°	30°	45°	60°	75°	90° 270°	Phi-zone	Total Phi-zone
		165° 195° 345°	150° 210° 330°	135° 225° 315°	120° 240° 300°	105° 255° 285°			
Luminous intensity in cd/klm							Luminous flux in lm/klm		
0°	890.5	890.5	890.5	890.5	890.5	890.5	890.5	5.3	5.3
5°	883.0	882.3	875.7	876.1	880.2	881.2	883.8	42.0	47.4
10°	852.3	852.7	846.0	846.4	847.1	846.1	847.2	80.7	128.1
15°	806.0	807.1	800.6	798.1	793.1	786.0	783.9	113.0	241.1
20°	752.4	753.8	745.8	735.1	719.0	700.4	693.3	136.8	377.8
25°	677.7	678.7	666.2	642.3	616.2	594.6	587.5	147.9	525.7
30°	547.1	547.0	530.5	500.0	481.5	475.9	474.8	139.1	664.9
35°	364.4	363.5	349.1	327.1	328.9	340.7	345.9	108.2	773.0
40°	203.2	202.2	193.4	185.6	201.9	218.9	225.4	71.4	844.5
45°	108.8	108.0	102.7	103.7	123.9	139.5	144.1	45.5	890.0
50°	66.7	66.1	62.8	66.6	83.9	94.8	97.2	31.9	921.9
55°	45.6	45.3	45.3	49.0	60.9	67.0	67.8	24.3	946.1
60°	31.9	31.8	34.1	38.0	45.2	47.1	47.1	18.6	964.8
65°	21.6	21.7	24.8	28.3	33.6	33.2	32.9	14.0	978.8
70°	13.4	13.7	16.2	19.9	24.5	23.3	22.8	9.9	988.7
75°	7.5	7.7	9.1	12.7	16.1	15.5	14.8	6.4	995.1
80°	4.0	4.1	4.6	6.4	8.9	8.9	8.1	3.5	998.6
85°	1.9	1.8	2.0	2.6	3.4	3.5	3.0	1.4	1000.0
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
180°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family Licross® 11 Recessed	Order number: 51TL18DN485FD EAN: 4058352418307	LP number 58691_31
---------------------------------------	---	------------------------------

UGR-Table	Standard room	siteco
------------------	----------------------	---------------

Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions	View crosswise (C0)					View endwise (C90)					
x	y										
2H	2H	18.6	19.9	18.9	20.2	20.5	19.5	20.8	19.8	21.1	21.4
	3H	18.7	19.9	19.1	20.2	20.6	20.0	21.1	20.3	21.5	21.8
	4H	18.8	19.8	19.2	20.2	20.6	20.2	21.2	20.6	21.6	21.9
	6H	18.8	19.7	19.2	20.1	20.5	20.3	21.2	20.7	21.6	22.0
	8H	18.9	19.7	19.3	20.1	20.5	20.4	21.2	20.8	21.6	22.0
	12H	18.8	19.6	19.3	20.0	20.4	20.4	21.2	20.9	21.6	22.0
4H	2H	18.7	19.8	19.1	20.1	20.5	19.6	20.6	20.0	21.0	21.4
	3H	19.0	19.9	19.4	20.3	20.7	20.2	21.1	20.7	21.5	21.9
	4H	19.1	19.8	19.5	20.3	20.7	20.5	21.3	21.0	21.7	22.2
	6H	19.1	19.8	19.5	20.2	20.7	20.7	21.4	21.2	21.8	22.3
	8H	19.1	19.7	19.6	20.1	20.6	20.8	21.4	21.3	21.8	22.3
	12H	19.1	19.6	19.6	20.1	20.6	20.9	21.4	21.4	21.8	22.3
8H	4H	19.2	19.8	19.6	20.2	20.7	20.5	21.1	21.0	21.6	22.1
	6H	19.2	19.7	19.7	20.2	20.7	20.8	21.3	21.3	21.8	22.3
	8H	19.2	19.6	19.7	20.1	20.7	20.9	21.4	21.4	21.8	22.4
	12H	19.2	19.6	19.8	20.1	20.6	21.0	21.4	21.5	21.9	22.4
12H	4H	19.2	19.7	19.7	20.2	20.7	20.5	21.0	21.0	21.5	22.0
	6H	19.3	19.6	19.8	20.1	20.7	20.8	21.2	21.3	21.7	22.2
	8H	19.3	19.6	19.8	20.1	20.6	20.9	21.3	21.5	21.8	22.3


Luminance table	Max. for $\gamma \geq 65^\circ$	Photometric dimensions in mm:	L = 1500
			B = 58

C-planes	γ	Luminance in cd/m ²							
		0° 180°	15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°	90° 270°	
45°		15761.5	15646.7	14868.0	15012.7	17948.8	20199.8	20876.5	
50°		10634.5	10531.6	9999.7	10615.4	13373.0	15103.9	15494.4	
55°		8139.7	8089.9	8094.3	8742.8	10866.0	11959.7	12104.5	
60°		6540.1	6507.8	6994.7	7790.2	9250.8	9646.2	9637.1	
65°		5238.7	5260.1	6011.3	6866.2	8137.3	8034.7	7964.2	
70°		4002.9	4108.6	4859.9	5954.3	7332.9	6989.8	6821.8	
75°		2966.9	3051.6	3605.2	5008.3	6377.8	6146.7	5857.1	
80°		2359.7	2398.0	2722.4	3782.8	5269.7	5226.0	4803.1	
85°		2189.1	2168.0	2344.3	3099.8	4008.2	4139.8	3514.6	

Photometric test report

Family Licross® 11 Recessed	Order number: 51TL18DN485FD EAN: 4058352418307	LP number 58691_31
--	---	-------------------------------------

Luminance values in cd/m² γ 65° γ 70° γ 75° γ 80° γ 85° **siteco**

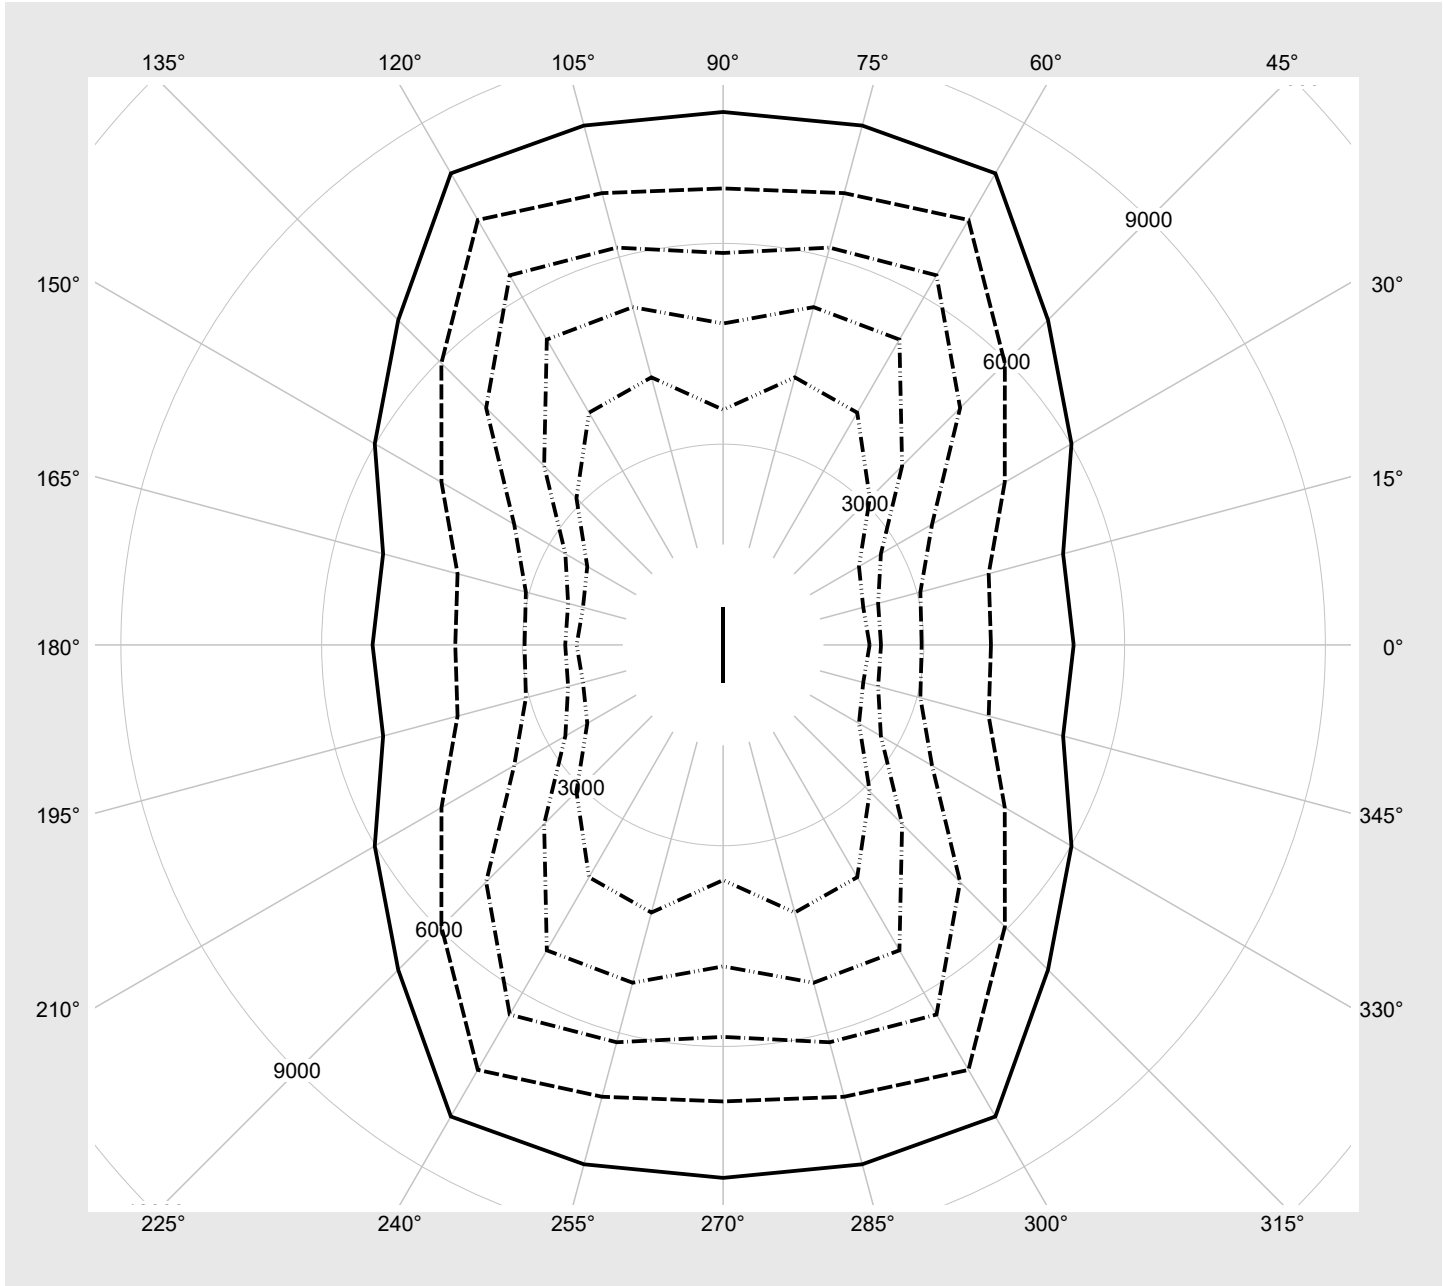

Photometric test report

Family Licross® 11 Recessed	Order number: 51TL18DN485FD EAN: 4058352418307	LP number 58691_31
---------------------------------------	---	------------------------------

Dimming levels table	environmental temperature: 25°C	sITeco
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]
100	254	254	8910	55.4
95	241	252	8475	52.5
90	227	250	8027	49.3
85	213	248	7579	46.3
80	200	245	7140	43.6
75	186	243	6669	40.5
70	173	240	6231	37.7
65	160	237	5792	35.0
60	147	234	5355	32.2
55	134	231	4892	29.4
50	122	227	4465	26.9
45	109	223	4026	24.4
40	97	219	3575	21.9
35	84	213	3113	19.2
30	72	208	2686	16.7
25	60	201	2234	14.2
20	48	193	1782	11.7
15	35	181	1319	9.2
10	24	168	904	7.1
5	13	145	464	4.9