


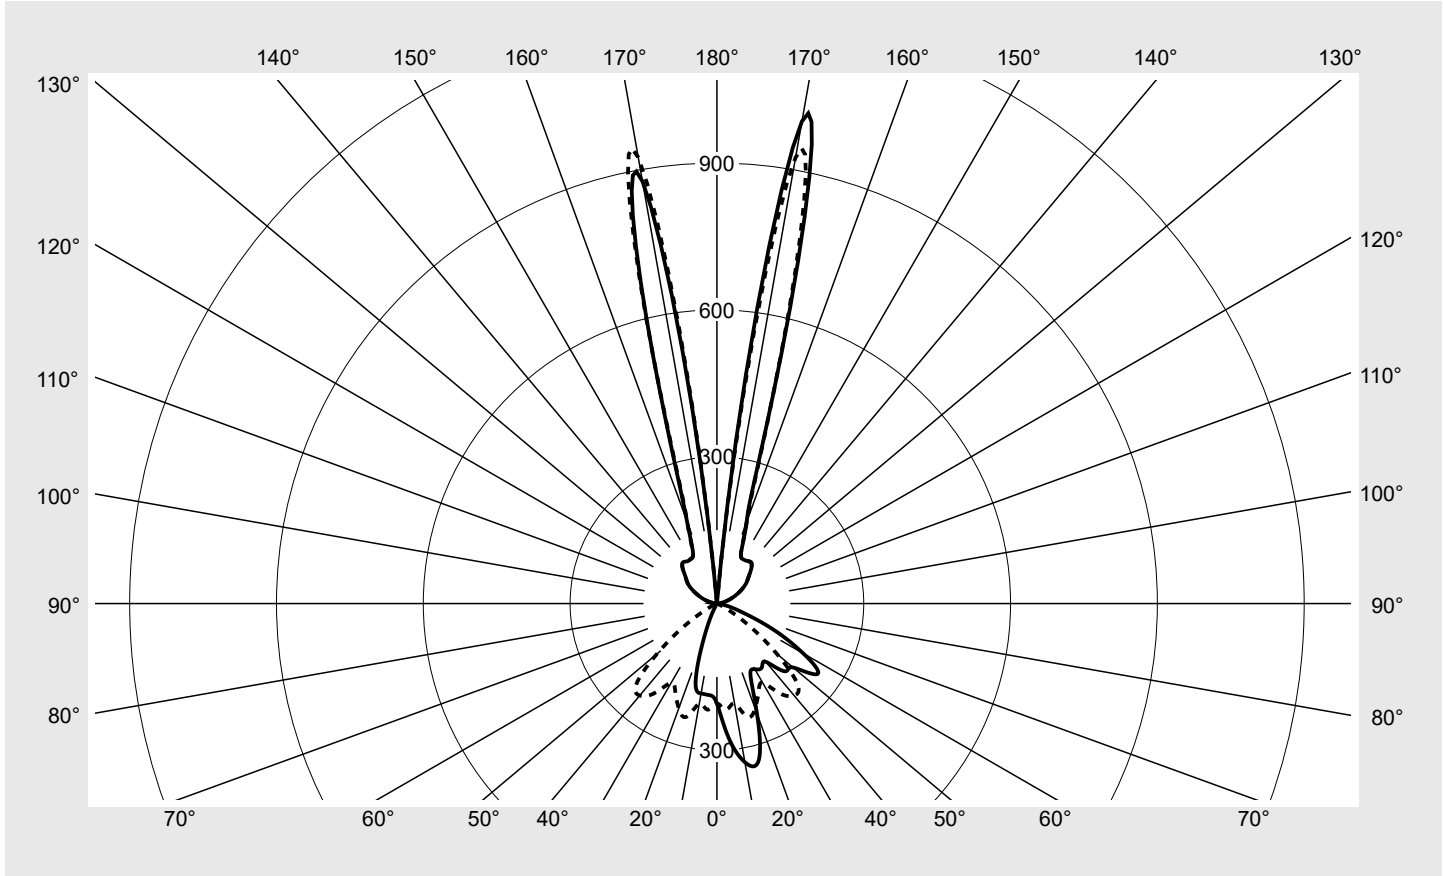
# Photometric test report

<b>Family</b> <b>Mirrortec® LED</b>	<b>Order number: 5NW14093QC + 5XA7682G2H2AC</b> <b>EAN: 4039806568489 + 4058352223710</b>	<b>LP number</b> <b>58034_10</b>
	<b>Version</b> SMR100A 1200x1200, 3 pcs. single wire suspension, FL20 midi power RS5 <b>Lamps</b> LED 4000 K   CRI ≥ 70 <b>Controlgear</b> ECG-DALI <b>Setting</b> individual position: distance floodlight mirror = 3,5m / reflector tilt = 5° <b>Rated values</b> Net luminous flux = 33940 lm Power consumption = 305.7 W Luminous efficacy = 111 lm/W	<b>serial documentation</b> <b>16.12.2020</b>




siteco

**Luminous intensity in cd/klm** C180-0 C270-90 **Imax: 1001 cd/klm**



Classifications	
DIN 5040	C 4 4
CIE	N1=47 N2=83 N3=98 N4=53 N5=100

Luminaire light output ratios	
$\eta_{LB}$	100.0%
$\phi_u$	53.4%
$\phi_o$	46.6%

**Measurement conditions**  
DIN EN 13032 and DIN 5032

## Photometric test report

Family <b>Mirrortec® LED</b>	Order number: <b>5NW14093QC + 5XA7682G2H2AC</b> EAN: <b>4039806568489 + 4058352223710</b>	LP number <b>58034_10</b>
Table of values for luminous intensities		Maximum luminous intensity
<b>siteco</b>		

C-planes	0°	15° 345°	30° 330°	45° 315°	60° 300°	75° 285°	90° 270°
$\gamma$	Luminous intensity in cd/klm						
0°	204.1	204.1	204.1	204.1	204.1	204.1	204.1
5°	275.7	268.7	264.5	259.9	232.3	221.8	217.7
10°	329.2	326.0	303.2	286.3	259.5	223.8	207.4
15°	330.9	319.7	297.7	275.7	246.9	236.7	239.4
20°	239.2	230.8	233.5	212.0	200.2	206.0	228.0
25°	162.3	175.1	171.0	182.5	178.3	180.1	200.8
30°	155.0	152.0	158.1	150.6	174.7	160.7	186.7
35°	159.7	156.1	163.8	168.8	182.3	197.4	223.9
40°	155.2	158.5	178.8	185.5	201.8	229.8	245.3
45°	195.7	194.8	205.4	226.1	235.1	224.3	232.8
50°	203.1	225.8	252.0	272.1	233.2	187.4	159.8
55°	250.9	249.2	284.8	297.0	192.8	121.2	86.0
60°	203.6	227.4	278.0	282.1	135.4	63.8	33.0
65°	130.7	154.4	242.5	198.2	77.4	22.5	7.5
70°	63.5	88.8	156.6	138.2	36.8	2.5	0.0
75°	31.4	41.9	89.1	76.6	13.2	0.0	0.0
80°	9.5	16.2	43.8	37.2	2.6	0.0	0.0
85°	3.3	5.5	17.7	19.2	0.4	0.0	0.0
90°	0.2	1.0	6.0	5.6	0.2	0.2	0.2
95°	2.8	2.8	3.5	2.9	2.8	2.8	2.8
100°	10.2	10.2	10.1	10.1	10.2	10.1	10.2
105°	20.6	20.7	20.6	20.7	20.6	20.6	20.8
110°	32.1	32.1	32.4	32.1	32.1	32.2	32.1
115°	45.3	44.9	45.3	45.2	45.1	45.1	45.1
120°	59.2	59.5	59.9	59.7	59.7	59.1	59.9
125°	73.2	72.6	72.4	73.3	73.1	72.2	72.8
130°	84.3	85.2	85.1	84.9	84.8	84.8	84.2
135°	98.7	98.3	97.8	97.6	97.6	97.6	98.4
140°	109.4	108.5	108.3	108.3	108.1	108.1	108.4
145°	106.6	105.9	105.9	106.5	104.4	106.1	106.1
150°	105.0	106.3	106.2	105.3	105.5	105.2	105.2
155°	117.6	116.8	116.8	118.1	117.4	117.2	117.3
160°	177.7	177.8	179.0	177.8	178.0	177.1	178.0
165°	449.2	450.2	450.5	428.6	452.1	450.3	448.7
170°	1000.6	840.1	387.0	73.7	348.6	778.2	925.6
175°	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180°	0.0	0.0	0.0	0.0	0.0	0.0	0.0

## Photometric test report

Family <b>Mirrortec® LED</b>	Order number: <b>5NW14093QC + 5XA7682G2H2AC</b> EAN: <b>4039806568489 + 4058352223710</b>	LP number <b>58034_10</b>
Table of values for luminous intensities		Maximum luminous intensity
		<b>sITeco</b>

C-planes	105° 255°	120° 240°	135° 225°	150° 210°	165° 195°	180°	Phi-zone	Total Phi-zone
$\gamma$	Luminous intensity in cd/klm						Luminous flux in lm/klm	
0°	204.1	204.1	204.1	204.1	204.1	204.1	1.2	1.2
5°	204.0	202.9	201.6	199.8	197.2	187.7	10.8	12.0
10°	204.3	206.2	205.3	202.7	195.2	186.5	22.8	34.8
15°	229.1	220.3	211.8	197.9	174.5	168.6	34.3	69.1
20°	242.4	236.8	190.3	133.9	97.6	85.0	37.1	106.2
25°	226.0	195.9	122.9	62.0	35.9	29.1	35.3	141.4
30°	214.7	145.1	64.6	16.4	3.5	0.6	34.4	175.8
35°	208.7	97.0	18.9	0.4	0.0	0.0	39.2	215.0
40°	194.5	61.7	7.6	0.6	0.0	0.0	45.3	260.3
45°	168.6	29.0	3.9	1.4	0.4	0.1	52.3	312.6
50°	108.8	8.3	0.0	0.5	0.0	0.0	54.2	366.8
55°	56.4	0.6	0.0	0.0	0.3	0.0	52.9	419.7
60°	17.4	0.0	0.0	0.0	0.3	0.0	45.1	464.8
65°	4.3	0.0	0.0	0.0	0.3	0.0	32.0	496.7
70°	0.1	0.0	0.0	0.2	0.4	0.0	19.5	516.3
75°	0.0	0.0	0.0	0.0	0.0	0.0	10.4	526.7
80°	0.0	0.0	0.0	0.0	0.0	0.0	4.7	531.4
85°	0.0	0.0	0.0	0.2	0.0	0.0	2.0	533.5
90°	0.2	0.2	0.2	0.2	0.2	0.2	0.7	534.1
95°	2.8	2.8	2.8	2.8	2.8	2.8	1.6	535.7
100°	10.0	10.2	10.2	10.2	10.2	10.2	5.5	541.2
105°	20.6	20.6	20.6	20.7	20.6	20.5	10.9	552.1
110°	32.4	32.2	32.2	32.2	32.1	32.5	16.6	568.7
115°	45.4	44.9	44.9	45.0	45.2	45.1	22.4	591.1
120°	59.6	59.6	59.5	59.6	59.8	59.9	28.3	619.4
125°	73.1	73.0	73.5	72.4	72.9	73.4	32.7	652.1
130°	85.3	84.9	83.9	85.1	84.6	83.2	35.6	687.7
135°	98.4	98.2	98.1	97.9	98.3	97.9	38.0	725.7
140°	107.8	107.9	107.8	108.4	108.4	109.0	38.1	763.8
145°	106.1	105.3	106.0	106.0	106.9	105.5	33.3	797.1
150°	105.5	106.1	104.9	105.8	106.2	106.1	29.0	826.1
155°	117.7	116.8	118.1	117.0	117.0	115.9	27.2	853.3
160°	177.5	178.5	178.3	178.8	178.9	178.6	33.4	886.7
165°	452.8	452.1	396.3	446.7	445.8	453.8	63.0	949.6
170°	734.3	296.4	44.7	278.2	702.5	875.9	50.3	1000.0
175°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
180°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

## Photometric test report

<b>Family</b> Mirrortec® LED	<b>Order number: 5NW14093QC + 5XA7682G2H2AC</b> <b>EAN: 4039806568489 + 4058352223710</b>	<b>LP number</b> 58034_10
<b>UGR-Table</b>		<b>Standard room</b>

**sitEco**

Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions	View crosswise (C0)					View endwise (C90)					
x	y										
2H	2H	20.5	21.5	21.4	22.4	23.6	14.7	15.7	15.6	16.6	17.7
	3H	22.6	23.6	23.3	24.4	25.3	15.8	16.8	16.5	17.5	18.5
	4H	21.4	22.2	22.3	23.1	24.3	14.4	15.2	15.3	16.1	17.3
	6H	21.9	22.6	22.7	23.5	24.7	14.8	15.6	15.7	16.5	17.6
	8H	21.2	21.9	22.2	22.8	24.1	14.2	14.8	15.1	15.8	17.1
	12H	21.7	22.4	22.6	23.3	24.5	14.6	15.3	15.6	16.2	17.4
4H	2H	21.4	22.2	22.4	23.2	24.4	16.7	17.5	17.7	18.5	19.7
	3H	22.7	23.3	23.6	24.3	25.6	16.7	17.4	17.7	18.3	19.6
	4H	22.9	23.5	23.8	24.4	25.7	16.6	17.2	17.6	18.2	19.4
	6H	23.4	23.9	24.3	24.9	26.1	17.0	17.6	18.0	18.5	19.7
	8H	22.8	23.2	23.8	24.2	25.5	16.4	16.9	17.4	17.9	19.2
	12H	23.3	23.7	24.2	24.7	25.9	16.9	17.3	17.8	18.3	19.5
8H	4H	23.0	23.4	23.9	24.4	25.7	17.3	17.7	18.3	18.7	20.0
	6H	23.1	23.5	24.1	24.5	25.8	17.2	17.6	18.2	18.6	19.9
	8H	23.1	23.4	24.1	24.5	25.8	17.1	17.5	18.2	18.5	19.8
	12H	23.6	23.9	24.6	24.9	26.2	17.6	17.9	18.6	18.9	20.2
12H	4H	23.4	23.9	24.4	24.8	26.1	17.9	18.3	18.8	19.3	20.5
	6H	23.6	24.0	24.6	25.0	26.2	17.9	18.2	18.8	19.2	20.4
	8H	23.7	24.0	24.7	25.0	26.2	17.8	18.1	18.8	19.1	20.4

<b>Luminance table</b>	Max. for $\gamma \geq 65^\circ$												
	Photometric dimensions in mm:										L = 1200 B = 1200		
C-planes	0°	15° 345°	30° 330°	45° 315°	60° 300°	75° 285°	90° 270°	105° 255°	120° 240°	135° 225°	150° 210°	165° 195°	180°
$\gamma$	Luminance in cd/m <sup>2</sup>												
45°	6524.4	6494.0	6844.8	7535.0	7835.8	7474.8	7760.4	5619.1	968.1	131.4	47.9	14.0	2.2
50°	7448.1	8279.3	9239.8	9977.8	8552.5	6870.4	5860.5	3988.4	303.3	1.0	18.4	0.0	0.0
55°	10311.8	10238.3	11702.9	12202.4	7921.4	4980.3	3533.4	2315.7	26.3	0.0	0.0	10.3	0.0
60°	9597.4	10719.9	13103.0	13299.5	6381.4	3005.6	1554.2	820.9	1.3	0.0	1.1	14.9	0.0
65°	7289.1	8613.6	13524.6	11054.2	4313.9	1252.7	418.2	237.5	0.0	0.0	0.0	14.0	0.0
70°	4375.6	6117.8	10792.2	9526.3	2536.5	174.0	0.0	7.4	0.0	2.3	11.2	28.6	0.0
75°	2855.3	3816.3	8111.7	6975.1	1199.8	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
80°	1286.1	2201.8	5951.1	5050.3	347.2	0.0	0.0	0.0	5.0	0.0	0.0	0.0	0.0
85°	898.1	1490.9	4785.5	5178.7	113.9	0.0	0.0	0.0	0.0	0.0	63.8	0.0	0.0

**Photometric test report**

<b>Family</b> <b>Mirrortec® LED</b>	<b>Order number: 5NW14093QC + 5XA7682G2H2AC</b> <b>EAN: 4039806568489 + 4058352223710</b>	<b>LP number</b> <b>58034_10</b>
--	--	-------------------------------------

**Luminance values in cd/m<sup>2</sup>**      γ 65°    γ 70°    γ 75°    γ 80°    γ 85°      **siteco**

