

Photometric test report

Family
LANTERN CLASSIC LED

Order number: 5XA5245NF14H + 5XA54000XS
EAN: 4058352834671 + 4050737730073

LP number
59286_22



Version post-top- or mounting to wall arm, spreader element, structured

Optic asymmetric, extremely wide distribution (P1.0a)

Cover cover transparent, PMMA

Lamps LED 2700 K | CRI ≥ 70

Controlgear ECG SITECO iQ

Rated values Net luminous flux = 1280 lm
Power consumption = 11.8 W
Luminous efficacy = 108.5 lm/W

serial
documentation
04.11.2022

siteco

Luminous intensity in cd/klm


C180-0

C195-15

C200-20

C270-90

Imax: 652 cd/klm

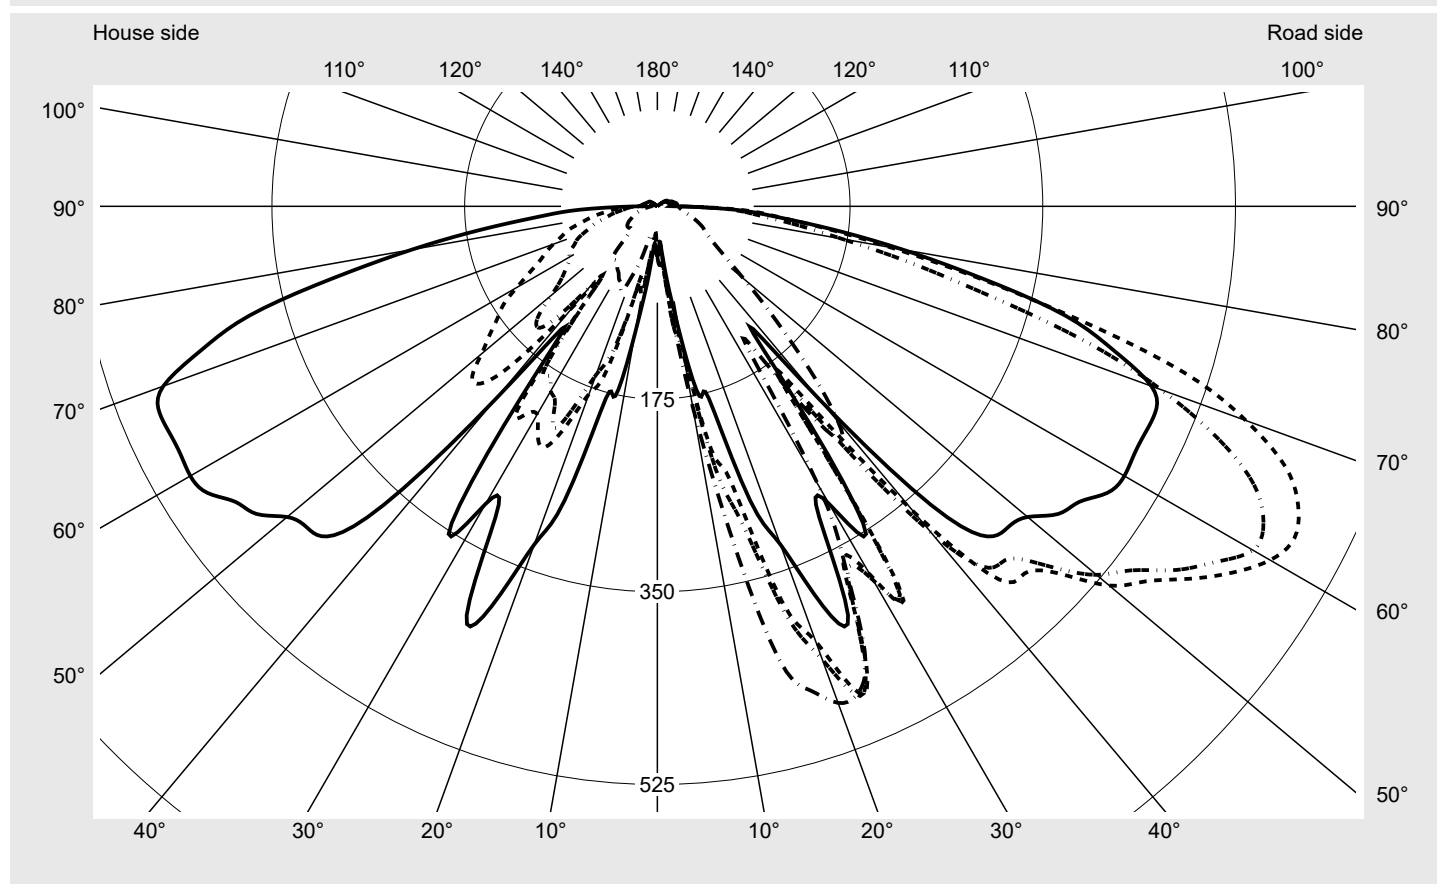

Luminaire output ratios

Eta	100.0%
Eta 0° - 90°	95.9%
Eta 90° - 180°	4.1%

Luminous intensity class acc. to EN13201-2


Class:	---
Imax 70°	617.0
Imax 80°	254.1
Imax 90°	21.9
Imax >90°	18.4
Imax >95°	17.8

Measurement conditions

DIN EN 13032 and DIN 5032

Photometric test report

Family LANTERN CLASSIC LED	Order number: 5XA5245NF14H + 5XA54000XS EAN: 4058352834671 + 4050737730073	LP number 59286_22
Envelope curve in cd/klm	KMK 62.5° KMK 60° KMK 57.5° KMK 55°	sit eco

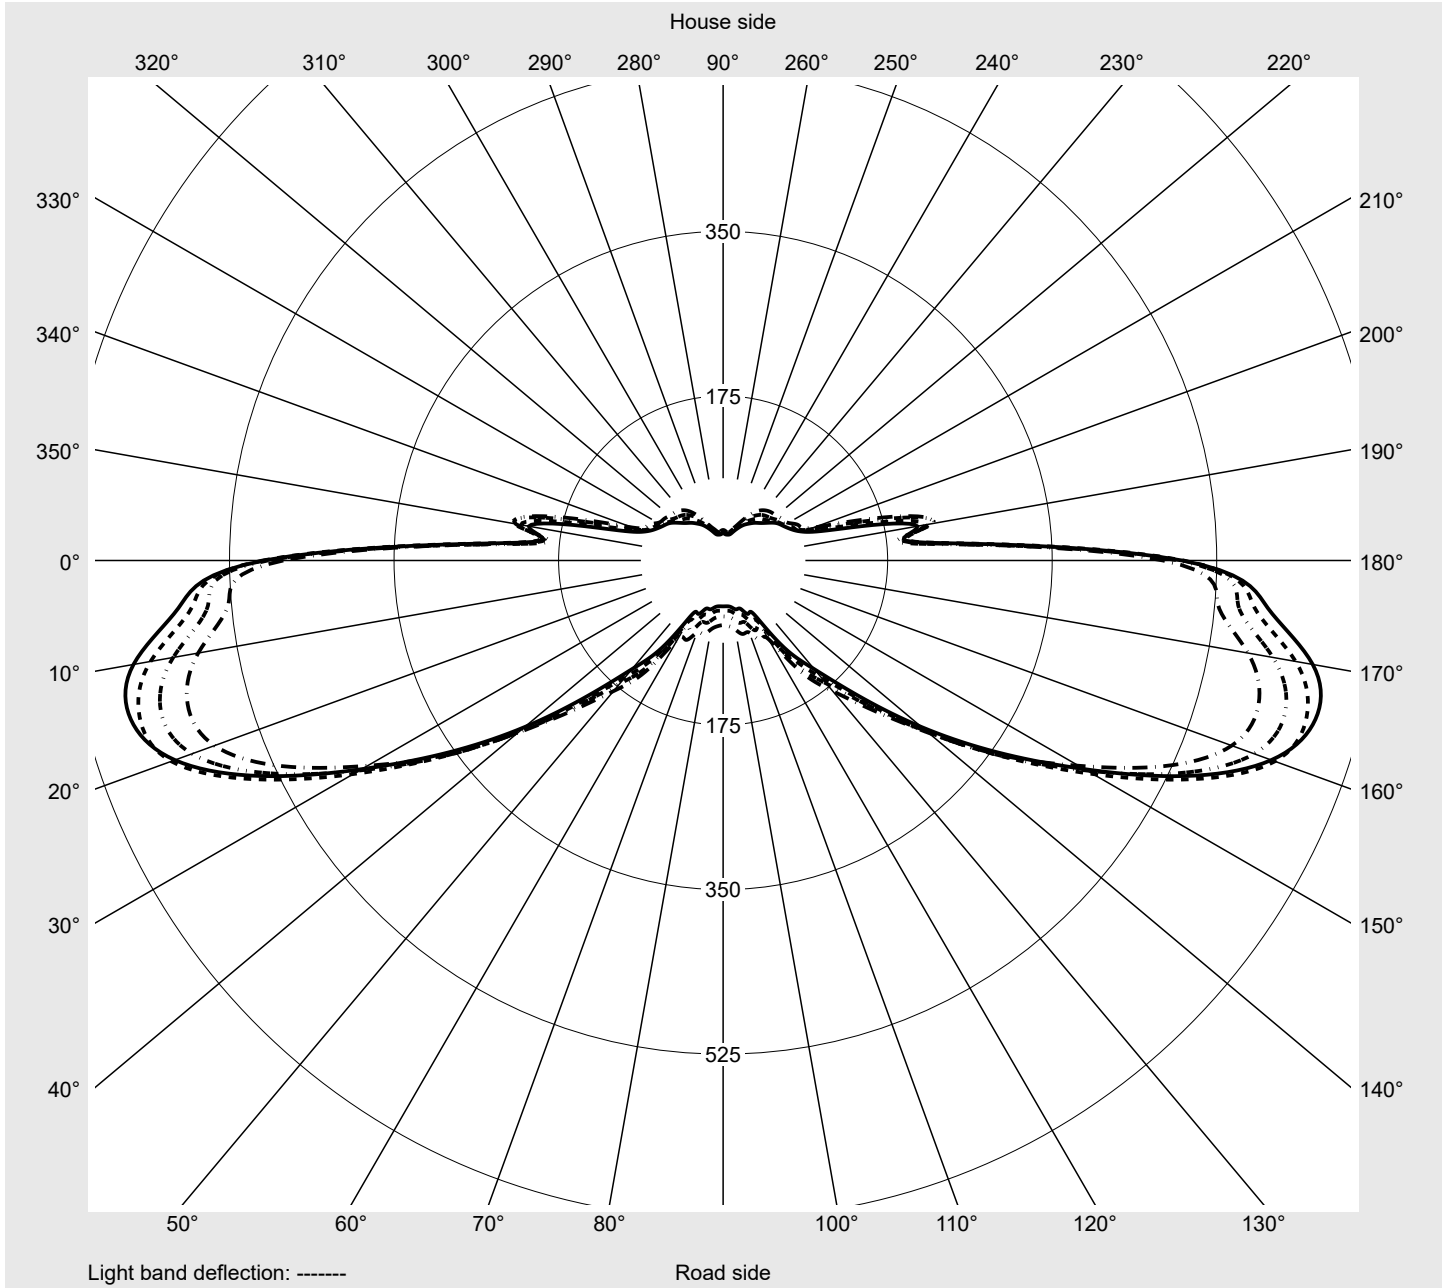

Photometric test report

Family LANTERN CLASSIC LED	Order number: 5XA5245NF14H + 5XA54000XS EAN: 4058352834671 + 4050737730073	LP number 59286_22
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
γ	Luminous intensity in cd/klm												
0,0°	45.2	45.2	45.2	45.2	45.2	45.2	45.2	45.2	45.2	45.2	45.2	45.2	45.2
2,5°	37.7	37.7	38.0	38.4	38.8	39.7	40.8	42.5	45.3	48.0	49.8	50.9	51.7
5,0°	36.7	36.8	37.0	37.3	38.1	40.0	42.3	44.4	47.3	49.2	50.3	51.0	50.6
7,5°	69.1	80.4	90.8	99.9	108.1	116.8	123.2	130.2	134.3	134.7	130.0	119.6	101.3
10,0°	117.6	123.7	124.4	128.7	136.5	145.5	153.0	161.9	172.2	183.0	190.4	203.1	215.5
12,5°	176.4	200.2	219.0	226.7	244.0	257.9	273.2	279.5	292.2	300.9	302.3	280.0	283.8
15,0°	180.5	207.1	231.4	260.0	298.3	320.6	322.9	331.1	333.5	371.7	383.2	384.1	359.6
17,5°	280.0	306.9	353.6	376.0	389.2	400.8	392.2	358.7	385.2	398.3	445.0	447.3	436.4
20,0°	326.8	368.6	388.8	420.3	437.9	451.2	454.7	443.3	441.8	446.4	485.3	469.2	455.7
22,5°	392.9	429.8	458.9	478.3	481.3	474.6	462.5	436.0	431.3	435.8	475.1	453.4	442.2
25,0°	409.8	430.1	442.4	442.9	438.8	432.7	414.9	386.3	374.5	380.1	413.5	392.3	383.3
27,5°	318.4	342.8	359.6	365.6	374.3	378.5	359.5	336.5	321.7	323.9	349.2	327.5	314.9
30,0°	312.1	346.8	373.7	386.2	392.1	392.7	374.3	344.7	322.4	315.6	323.6	285.1	257.8
32,5°	352.8	388.5	407.8	406.7	398.3	386.8	352.9	311.0	289.9	288.0	293.7	271.9	253.1
35,0°	243.2	228.2	216.4	205.9	207.5	216.9	215.8	209.9	219.1	237.0	249.0	249.7	242.8
37,5°	138.2	169.3	200.3	224.2	259.1	287.1	292.0	276.4	257.3	258.5	246.8	221.2	209.7
40,0°	228.4	282.2	330.3	362.5	387.4	388.3	364.6	329.4	295.3	280.8	258.4	221.1	199.7
42,5°	367.6	413.3	446.1	459.8	445.3	419.4	383.7	344.2	312.5	285.5	258.1	223.3	191.3
45,0°	424.0	462.2	476.0	471.5	452.4	427.4	395.5	353.7	315.9	287.8	254.4	216.5	177.3
47,5°	431.6	465.2	485.2	493.1	484.4	458.3	414.6	359.6	309.1	275.0	238.2	201.0	153.2
50,0°	438.9	486.3	519.4	535.8	520.7	482.8	428.9	357.5	295.5	255.1	214.3	181.4	132.2
52,5°	458.9	511.6	545.5	559.3	543.0	494.7	429.5	357.9	285.5	236.4	195.0	161.3	110.1
55,0°	467.8	528.1	566.9	589.7	575.7	517.5	436.6	361.1	285.1	225.1	181.3	144.5	96.6
57,5°	484.4	550.0	593.9	619.1	601.1	535.1	446.8	362.8	284.3	217.6	170.8	134.5	83.1
60,0°	489.7	567.0	618.4	642.6	624.5	550.4	454.3	363.6	283.0	212.1	162.1	123.7	76.5
62,5°	488.1	581.6	636.8	652.3	620.5	542.4	443.8	355.5	275.7	203.7	151.0	113.1	66.8
65,0°	488.4	591.7	644.8	642.0	597.8	517.1	422.8	337.0	263.8	193.9	140.2	102.2	61.5
67,5°	489.4	603.2	644.7	617.2	551.2	465.2	373.5	300.0	240.3	179.1	127.6	90.2	53.4
70,0°	477.5	584.5	617.0	568.9	487.0	395.8	316.1	252.7	207.9	160.0	113.0	78.7	47.4
72,5°	434.3	537.5	560.7	501.0	407.3	322.5	252.3	201.0	169.1	135.6	97.1	66.9	40.7
75,0°	383.7	456.2	459.9	393.9	310.0	243.3	190.4	153.3	129.6	109.0	81.1	57.1	36.1
77,5°	301.7	355.3	350.6	295.9	234.0	183.6	144.8	117.8	99.5	84.5	65.2	47.2	30.7
80,0°	226.2	254.1	251.0	215.4	170.3	133.9	108.6	89.0	73.9	63.6	51.7	39.5	27.1
82,5°	160.3	178.4	176.7	155.1	126.4	101.2	84.0	68.8	56.4	48.6	40.5	32.5	23.9
85,0°	107.9	120.8	119.8	109.9	91.7	73.7	61.9	52.7	43.9	37.9	32.9	27.6	21.4
87,5°	70.4	81.0	81.9	77.0	65.7	54.7	47.4	40.9	34.9	30.7	27.2	24.1	19.7
90,0°	17.6	19.2	20.6	21.9	21.9	21.3	20.6	20.0	19.3	18.8	18.2	17.6	16.1
92,5°	13.9	15.3	16.3	17.1	17.4	17.5	17.5	17.1	17.0	16.7	16.5	16.3	15.7
95,0°	13.5	14.8	15.6	16.3	16.7	16.9	17.0	16.7	16.5	16.4	16.2	16.1	15.7
97,5°	13.1	14.3	15.0	15.5	16.1	16.4	16.5	16.3	16.1	15.9	15.8	15.7	15.4
100,0°	12.5	13.4	14.1	14.7	15.1	15.5	15.7	15.5	15.3	15.2	15.2	15.2	14.9
102,5°	11.6	12.4	13.2	13.8	14.2	14.5	14.8	14.7	14.5	14.3	14.3	14.4	14.3
105,0°	11.0	11.7	12.4	12.9	13.4	13.8	14.0	14.0	13.8	13.8	13.8	13.8	13.8
107,5°	10.2	10.9	11.6	12.1	12.7	13.1	13.2	13.1	13.1	13.1	13.2	13.3	13.3
110,0°	9.8	10.4	11.1	11.6	12.1	12.5	12.8	12.6	12.5	12.4	12.5	12.6	12.7
112,5°	9.4	10.0	10.6	11.2	11.6	12.0	12.3	12.1	11.9	11.8	11.9	12.1	12.3

Photometric test report

Family LANTERN CLASSIC LED	Order number: 5XA5245NF14H + 5XA54000XS EAN: 4058352834671 + 4050737730073	LP number 59286_22
Table of values for luminous intensities		Maximum luminous intensity
		sit eco

C- planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
γ	Luminous intensity in cd/klm												
0,0°	45.2	45.2	45.2	45.2	45.2	45.2	45.2	45.2	45.2	45.2	45.2	45.2	45.2
2,5°	52.3	52.7	53.2	53.5	53.5	53.5	37.1	36.7	36.3	35.8	35.2	34.8	34.2
5,0°	50.5	51.1	51.2	52.8	54.0	54.2	36.6	36.4	36.4	36.5	35.9	34.5	33.3
7,5°	92.5	94.8	101.6	95.9	95.4	93.8	58.4	50.7	45.4	40.3	36.7	34.1	32.8
10,0°	197.3	170.2	178.2	188.7	187.8	184.5	111.2	103.2	80.6	75.8	74.9	65.3	52.2
12,5°	274.8	258.2	256.3	290.6	302.6	299.4	123.9	102.8	70.5	62.3	57.3	57.3	70.9
15,0°	349.6	295.1	295.4	373.7	418.1	424.8	145.2	110.1	102.5	99.1	111.4	115.5	119.1
17,5°	438.8	364.9	349.1	422.1	460.5	460.8	210.7	127.9	162.2	143.2	136.2	124.1	108.4
20,0°	457.0	378.0	362.2	440.3	479.8	479.9	237.1	141.7	181.3	163.0	148.6	130.7	113.7
22,5°	444.4	372.2	359.4	437.0	476.9	477.7	330.0	158.1	215.0	196.4	162.3	137.5	120.3
25,0°	396.8	342.9	334.2	406.9	443.4	445.6	315.2	169.9	241.3	222.4	180.9	145.8	125.3
27,5°	333.0	291.9	284.1	342.4	368.5	370.4	246.1	123.0	235.0	201.3	166.8	135.7	122.0
30,0°	251.4	224.6	220.6	260.4	285.7	291.8	221.5	103.7	218.4	193.5	160.7	132.9	118.6
32,5°	224.0	182.5	172.4	177.8	161.0	151.7	251.9	110.6	224.8	182.5	146.1	118.5	107.2
35,0°	206.1	149.1	155.8	187.6	187.9	185.0	205.3	111.4	211.6	175.1	135.4	96.5	78.4
37,5°	187.7	138.3	178.6	241.1	260.0	264.0	105.0	77.7	91.5	90.6	75.1	61.2	53.0
40,0°	190.3	163.9	202.4	247.0	254.7	255.4	154.6	99.0	116.6	94.6	62.7	61.2	66.6
42,5°	183.2	155.3	192.6	215.2	212.5	212.3	240.5	140.2	194.4	141.3	85.4	85.5	86.8
45,0°	165.1	146.5	168.5	175.0	169.0	166.9	261.6	174.9	227.7	154.6	97.5	98.3	94.4
47,5°	146.1	126.1	143.6	140.9	133.6	130.9	247.8	200.2	228.0	145.8	98.9	98.7	94.0
50,0°	124.3	109.3	117.4	111.3	104.7	102.4	225.7	213.2	208.5	125.7	93.6	91.2	87.8
52,5°	107.6	93.6	96.9	89.7	84.2	82.2	217.4	223.9	192.0	110.8	90.8	84.0	81.2
55,0°	93.2	81.6	80.9	74.5	70.2	68.8	211.9	223.9	177.2	102.4	88.6	80.0	76.9
57,5°	81.9	70.5	68.7	63.5	60.3	59.5	205.1	225.9	165.5	95.8	86.1	77.6	73.5
60,0°	71.4	62.1	60.0	55.6	53.6	53.3	219.0	218.1	147.4	91.9	82.6	75.6	71.1
62,5°	62.7	54.9	53.8	50.5	48.9	48.8	217.4	209.7	131.3	89.7	79.2	73.7	69.3
65,0°	54.7	49.1	48.2	46.2	45.7	45.8	221.0	193.8	118.2	83.4	71.8	69.3	65.7
67,5°	48.2	44.1	43.2	41.7	41.4	41.7	219.9	180.9	109.6	78.8	66.5	63.5	59.1
70,0°	41.6	39.0	38.6	37.6	37.4	37.5	215.6	164.8	100.5	71.2	61.2	58.7	54.4
72,5°	36.2	34.3	33.7	33.0	33.0	33.2	198.6	152.8	91.2	63.6	53.8	51.9	48.0
75,0°	31.7	30.5	30.0	29.3	29.1	29.3	174.4	138.6	84.0	57.2	48.8	46.5	42.9
77,5°	27.3	26.8	26.3	25.8	25.8	26.0	143.9	119.8	72.5	48.1	41.6	39.7	37.2
80,0°	24.1	24.0	23.6	23.4	23.5	23.6	106.5	102.7	62.9	42.5	37.7	35.1	33.8
82,5°	21.9	22.0	21.8	21.7	21.8	21.9	82.1	84.1	52.7	35.6	31.6	30.1	27.8
85,0°	20.5	20.7	20.6	20.6	20.6	20.7	63.6	62.3	42.1	29.8	26.4	24.8	22.7
87,5°	19.6	19.9	19.8	19.8	19.9	19.9	48.0	47.3	33.4	24.7	22.1	21.0	19.2
90,0°	16.9	17.5	17.8	18.2	18.4	18.6	15.0	14.2	13.1	12.3	11.7	11.1	10.7
92,5°	16.3	17.0	17.5	17.8	18.1	18.4	13.0	12.7	12.2	11.7	11.3	10.9	10.3
95,0°	16.3	16.6	17.2	17.6	17.9	18.2	12.7	12.5	12.0	11.5	11.2	11.0	10.4
97,5°	16.0	16.4	16.6	17.2	17.6	17.8	12.4	12.1	11.7	11.2	11.0	10.8	10.4
100,0°	15.4	15.8	16.0	16.3	16.9	17.2	11.8	11.4	11.0	10.6	10.5	10.4	10.0
102,5°	14.7	15.1	15.4	15.6	16.0	16.1	11.0	10.5	10.1	9.9	9.7	9.6	9.2
105,0°	14.2	14.5	14.8	14.9	15.2	14.9	10.4	9.9	9.6	9.3	9.1	9.0	8.7
107,5°	13.5	13.9	14.1	14.3	14.5	14.0	9.7	9.2	8.9	8.5	8.4	8.3	8.0
110,0°	13.0	13.2	13.5	13.8	13.9	13.1	9.3	8.8	8.3	8.1	7.9	7.8	7.5
112,5°	12.5	12.8	13.1	13.3	12.3	7.7	8.9	8.4	8.0	7.7	7.5	7.6	7.2

office	industry	traffic	retail	public	sports
--------	----------	---------	--------	--------	--------

Photometric test report

Family LANTERN CLASSIC LED	Order number: 5XA5245NF14H + 5XA54000XS EAN: 4058352834671 + 4050737730073	LP number 59286_22
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm											Luminous flux in lm/klm	
0,0°	45.2	45.2	45.2	45.2	45.2	45.2	45.2	45.2	45.2	45.2	45.2	0.1	0.1
2,5°	33.7	33.1	32.7	32.2	31.6	31.0	30.1	29.0	27.5	26.3	25.8	0.5	0.5
5,0°	32.6	32.2	32.8	32.2	31.4	30.6	30.0	29.2	28.6	28.0	28.0	0.9	1.5
7,5°	32.8	32.1	31.0	30.1	30.4	30.2	29.9	29.4	28.8	28.6	28.6	2.6	4.0
10,0°	38.1	32.6	31.4	30.7	29.8	29.4	29.1	28.3	27.5	26.8	26.4	5.2	9.3
12,5°	79.7	75.1	67.7	57.7	47.1	36.5	31.4	28.9	27.6	26.6	26.1	9.7	19.0
15,0°	90.5	78.0	73.4	74.9	71.5	59.0	51.3	39.1	38.2	36.7	34.6	14.5	33.5
17,5°	102.7	92.7	82.5	73.4	62.7	59.5	61.4	54.0	47.1	54.6	54.0	20.5	54.0
20,0°	107.3	93.4	83.2	79.6	75.2	71.3	72.1	60.8	55.1	64.6	67.8	25.7	79.7
22,5°	109.1	95.8	81.4	79.1	79.5	76.6	75.1	71.2	64.7	77.2	83.0	30.2	109.9
25,0°	106.4	90.4	79.2	78.2	82.1	84.7	84.6	74.8	67.3	74.1	77.9	31.4	141.3
27,5°	102.7	89.5	79.4	79.7	83.3	83.2	81.6	73.8	63.4	69.1	75.1	29.4	170.6
30,0°	102.8	86.8	79.2	81.2	84.7	83.3	79.2	71.5	57.8	65.5	70.3	29.7	200.3
32,5°	99.2	98.0	85.7	78.8	76.8	75.7	72.3	67.6	55.5	62.8	67.5	30.0	230.3
35,0°	78.7	84.1	83.2	78.8	77.7	75.1	70.8	65.5	55.0	59.3	63.6	24.9	255.2
37,5°	47.0	51.5	62.1	73.7	76.8	73.4	69.9	63.5	55.4	56.9	61.8	25.0	280.2
40,0°	51.1	38.7	34.5	47.4	62.0	65.2	64.6	60.1	54.4	56.8	62.8	31.0	311.2
42,5°	75.5	60.7	43.6	36.4	37.2	44.8	52.7	53.3	49.6	50.9	56.4	36.6	347.9
45,0°	88.1	79.3	63.5	48.0	39.8	36.9	36.7	37.1	38.0	38.6	41.2	39.1	386.9
47,5°	90.7	84.9	76.7	61.7	50.9	41.6	34.7	31.4	30.0	32.2	34.1	40.4	427.3
50,0°	86.6	83.3	78.6	68.2	55.0	44.4	37.8	34.0	29.5	29.6	31.2	41.3	468.6
52,5°	80.4	78.9	75.9	69.0	56.4	45.7	37.6	32.4	29.5	30.3	32.2	42.0	510.6
55,0°	74.1	72.4	69.6	64.3	55.5	46.0	38.5	34.0	30.7	31.3	32.7	43.1	553.7
57,5°	69.1	66.2	63.3	58.0	51.6	44.4	37.4	32.8	29.7	31.2	32.5	44.2	597.9
60,0°	65.7	61.7	58.2	52.9	47.1	40.9	35.2	31.1	28.5	30.1	30.8	45.3	643.2
62,5°	62.4	56.4	52.3	47.9	43.6	38.4	33.1	29.0	27.9	27.9	28.9	45.5	688.6
65,0°	58.6	51.7	47.0	42.8	39.5	35.5	30.7	27.1	26.5	25.8	26.1	44.8	733.4
67,5°	53.5	47.7	42.5	38.5	35.8	32.4	28.2	24.6	25.4	23.6	24.1	43.0	776.5
70,0°	48.5	42.4	37.7	34.2	32.2	29.2	25.3	22.8	23.3	21.7	21.8	39.9	816.4
72,5°	42.8	37.8	33.7	30.5	28.5	25.9	22.1	20.4	20.9	19.4	19.6	35.3	851.7
75,0°	37.5	32.9	29.4	26.3	24.9	22.8	19.4	18.9	18.6	17.2	17.2	29.6	881.2
77,5°	33.2	29.0	26.0	23.4	21.9	19.8	16.4	16.6	16.0	14.9	14.8	23.7	904.9
80,0°	29.4	25.3	22.4	20.3	18.6	16.7	13.8	14.2	13.4	12.5	12.1	18.4	923.3
82,5°	24.4	21.3	19.5	17.8	16.2	14.3	11.6	12.1	11.2	10.2	9.9	14.2	937.5
85,0°	20.5	18.1	16.3	14.8	13.5	12.0	9.7	10.0	9.1	8.5	8.1	10.8	948.3
87,5°	17.2	15.2	13.5	12.6	11.1	9.9	8.3	8.4	7.7	7.1	6.7	8.3	956.6
90,0°	10.2	9.6	9.1	8.6	7.9	7.0	6.4	6.3	6.0	5.6	5.3	3.9	960.5
92,5°	9.7	9.1	8.4	7.8	7.3	6.5	6.1	6.1	5.9	5.6	5.6	3.6	964.1
95,0°	9.8	9.2	8.5	8.2	7.6	6.9	6.3	6.4	6.1	6.0	5.9	3.5	967.6
97,5°	9.7	9.0	8.6	8.2	7.7	7.0	6.6	6.2	6.2	6.1	6.0	3.4	971.0
100,0°	9.3	8.9	8.5	8.1	7.6	6.9	6.6	6.3	6.0	6.1	6.0	3.3	974.3
102,5°	8.7	8.3	7.9	7.5	7.0	6.6	6.1	6.0	5.6	5.5	5.6	3.0	977.3
105,0°	8.3	7.8	7.4	7.0	6.6	6.1	5.6	5.5	5.2	4.8	4.9	2.8	980.2
107,5°	7.5	7.2	6.8	6.4	6.0	5.5	5.1	4.9	4.5	4.2	4.3	2.6	982.8
110,0°	7.1	6.7	6.3	5.9	5.5	4.9	4.5	4.4	4.1	3.9	3.5	2.4	985.2
112,5°	6.8	6.3	5.9	5.6	5.2	4.8	4.4	4.1	4.0	3.3	2.4	2.3	987.5

Photometric test report

Family LANTERN CLASSIC LED	Order number: 5XA5245NF14H + 5XA54000XS EAN: 4058352834671 + 4050737730073	LP number 59286_22
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C- planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
γ	Luminous intensity in cd/klm												
115,0°	9.2	9.7	10.3	10.7	11.2	11.5	11.8	11.6	11.4	11.4	11.5	11.7	11.9
117,5°	8.7	9.3	9.8	10.3	10.7	11.1	11.3	11.1	10.9	10.9	11.1	11.3	11.5
120,0°	8.5	9.0	9.5	9.9	10.2	10.6	10.7	10.5	10.4	10.4	10.7	10.9	11.1
122,5°	8.0	8.6	9.1	9.4	9.7	10.1	10.3	10.0	9.9	10.0	10.3	10.4	10.6
125,0°	6.4	6.8	7.1	7.4	7.6	7.9	8.0	7.8	7.8	7.8	8.0	8.1	8.3
127,5°	4.5	4.7	4.9	5.0	5.1	5.3	5.3	5.3	5.2	5.2	5.2	5.3	5.4
130,0°	3.4	3.5	3.6	3.6	3.6	3.6	3.5	3.5	3.5	3.5	3.5	3.6	3.6
132,5°	2.9	3.1	3.1	3.1	3.1	3.1	3.1	3.0	3.0	3.0	3.0	3.0	3.0
135,0°	2.5	2.6	2.6	2.6	2.5	2.5	2.5	2.5	2.4	2.4	2.4	2.5	2.5
137,5°	2.0	2.1	2.1	2.1	2.1	2.1	2.0	2.0	2.0	1.9	1.9	1.9	1.9
140,0°	1.6	1.6	1.6	1.6	1.6	1.6	1.5	1.5	1.5	1.4	1.4	1.3	1.3
142,5°	1.1	1.1	1.1	1.1	1.1	1.0	1.0	1.0	0.9	0.9	0.9	0.9	0.9
145,0°	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.8	0.8	0.8	0.7	0.6	0.6
147,5°	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.8	0.8	0.8	0.8	0.8	0.7
150,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
152,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
155,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
157,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
160,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
162,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
165,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
167,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
170,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
172,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
175,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
177,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family LANTERN CLASSIC LED	Order number: 5XA5245NF14H + 5XA54000XS EAN: 4058352834671 + 4050737730073	LP number 59286_22
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C- planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
γ	Luminous intensity in cd/klm												
115,0°	12.1	12.4	12.6	12.8	10.5	4.6	8.7	8.1	7.7	7.4	7.3	7.3	7.0
117,5°	11.7	11.9	12.1	12.3	9.2	4.3	8.3	7.8	7.3	7.0	6.9	7.0	6.7
120,0°	11.2	11.4	11.6	11.7	7.8	3.4	8.0	7.5	7.1	6.7	6.7	6.8	6.4
122,5°	10.8	11.0	11.1	11.2	6.9	3.0	7.6	7.2	6.8	6.4	6.2	6.4	6.1
125,0°	8.5	8.7	8.8	8.7	5.4	2.7	6.0	5.6	5.3	5.1	4.9	5.0	4.8
127,5°	5.5	5.6	5.6	5.6	3.5	1.9	4.2	4.0	3.8	3.7	3.6	3.5	3.5
130,0°	3.7	3.7	3.7	3.4	2.3	1.5	3.2	3.1	3.0	3.0	2.8	2.7	2.8
132,5°	3.1	3.1	3.1	2.7	1.9	1.3	2.8	2.7	2.6	2.6	2.5	2.5	2.5
135,0°	2.5	2.5	2.5	2.1	1.6	1.2	2.4	2.4	2.3	2.2	2.1	2.1	2.1
137,5°	1.9	1.9	1.9	1.6	1.1	1.0	1.9	1.9	1.8	1.8	1.8	1.8	1.8
140,0°	1.3	1.3	1.3	1.1	0.9	0.8	1.5	1.4	1.4	1.4	1.4	1.4	1.4
142,5°	0.9	0.9	0.8	0.8	0.6	0.6	1.0	1.0	1.1	1.1	1.1	1.1	1.1
145,0°	0.6	0.6	0.6	0.6	0.6	0.6	0.9	0.9	0.9	0.9	0.9	1.0	1.0
147,5°	0.7	0.8	0.8	0.8	0.8	0.8	0.8	0.8	0.9	0.9	0.9	0.9	0.9
150,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
152,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
155,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
157,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
160,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
162,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
165,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
167,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
170,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
172,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
175,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
177,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family LANTERN CLASSIC LED	Order number: 5XA5245NF14H + 5XA54000XS EAN: 4058352834671 + 4050737730073	LP number 59286_22
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm											Luminous flux in lm/klm	
115,0°	6.6	6.1	5.8	5.4	5.1	4.7	4.3	4.0	3.8	3.1	1.9	2.1	989.6
117,5°	6.2	5.9	5.5	5.2	4.8	4.5	4.1	3.8	3.5	2.7	1.9	2.0	991.6
120,0°	6.1	5.7	5.4	5.1	4.8	4.4	4.1	3.8	3.4	2.4	1.8	1.9	993.5
122,5°	5.8	5.4	5.1	4.8	4.6	4.2	3.9	3.6	3.2	2.3	1.7	1.7	995.2
125,0°	4.5	4.2	4.0	3.8	3.6	3.3	3.1	2.9	2.5	1.9	1.6	1.3	996.6
127,5°	3.3	3.2	3.1	2.8	2.7	2.6	2.5	2.3	2.0	1.6	1.4	0.9	997.4
130,0°	2.7	2.6	2.6	2.5	2.4	2.3	2.1	2.0	1.7	1.5	1.4	0.6	998.1
132,5°	2.4	2.4	2.3	2.3	2.2	2.1	2.0	1.9	1.6	1.5	1.3	0.5	998.6
135,0°	2.1	2.1	2.0	2.0	1.9	1.8	1.8	1.7	1.5	1.3	1.2	0.4	999.0
137,5°	1.8	1.7	1.7	1.7	1.6	1.5	1.5	1.4	1.3	1.2	1.1	0.3	999.3
140,0°	1.4	1.4	1.3	1.3	1.3	1.2	1.2	1.2	1.1	1.0	1.0	0.2	999.6
142,5°	1.1	1.1	1.1	1.1	1.1	1.0	1.0	1.0	1.0	1.0	1.0	0.2	999.7
145,0°	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	0.1	999.9
147,5°	0.9	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	0.1	1000.0
150,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
152,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
155,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
157,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
160,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
162,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
165,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
167,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
170,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
172,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
175,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
177,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family LANTERN CLASSIC LED	Order number: 5XA5245NF14H + 5XA54000XS EAN: 4058352834671 + 4050737730073	LP number 59286_22
Dimming levels table		environmental temperature: 25°C



Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W] start of lifetime	Power consumption [W] end of lifetime	Power consumption [W] average
100	254	254	1280	11.8	12.1	12.0
95	241	252	1214	11.1	11.4	11.2
90	229	250	1154	10.6	10.8	10.7
85	216	248	1089	9.9	10.2	10.0
80	203	246	1023	9.3	9.6	9.4
75	190	243	957	8.7	9.0	8.8
70	178	241	897	8.2	8.4	8.3
65	165	238	831	7.6	7.7	7.6
60	152	235	766	7.0	7.2	7.1
55	140	232	706	6.5	6.6	6.6
50	127	229	640	6.0	6.1	6.0
45	114	225	574	5.4	5.6	5.5
40	102	221	514	5.0	5.1	5.0
35	89	216	449	4.5	4.6	4.6
30	76	210	383	4.0	4.0	4.0
26	65	204	328	3.6	3.7	3.6