

Photometric test report

Family
Floodlight 20 midi LED

Order number: 5XA7682D1B2AC
EAN: 4058352222461

LP number
58579_2



Version bracket for wall fastening
Optic symmetric distribution RS17
Cover toughened safety glass
Lamps 1 x LED 3000K / CRI ≥ 80
 (unbekannt LED 3000K / CRI = 80)
Controlgear ECG-DALI
Rated values Net luminous flux = 15350 lm
 Power consumption = 142.0 W
 Luminous efficacy = 108.1 lm/W


serial
documentation
25.08.2021

siteco

Luminous intensity in cd/klm

C180-0

I_{max}: 2095 cd/klm

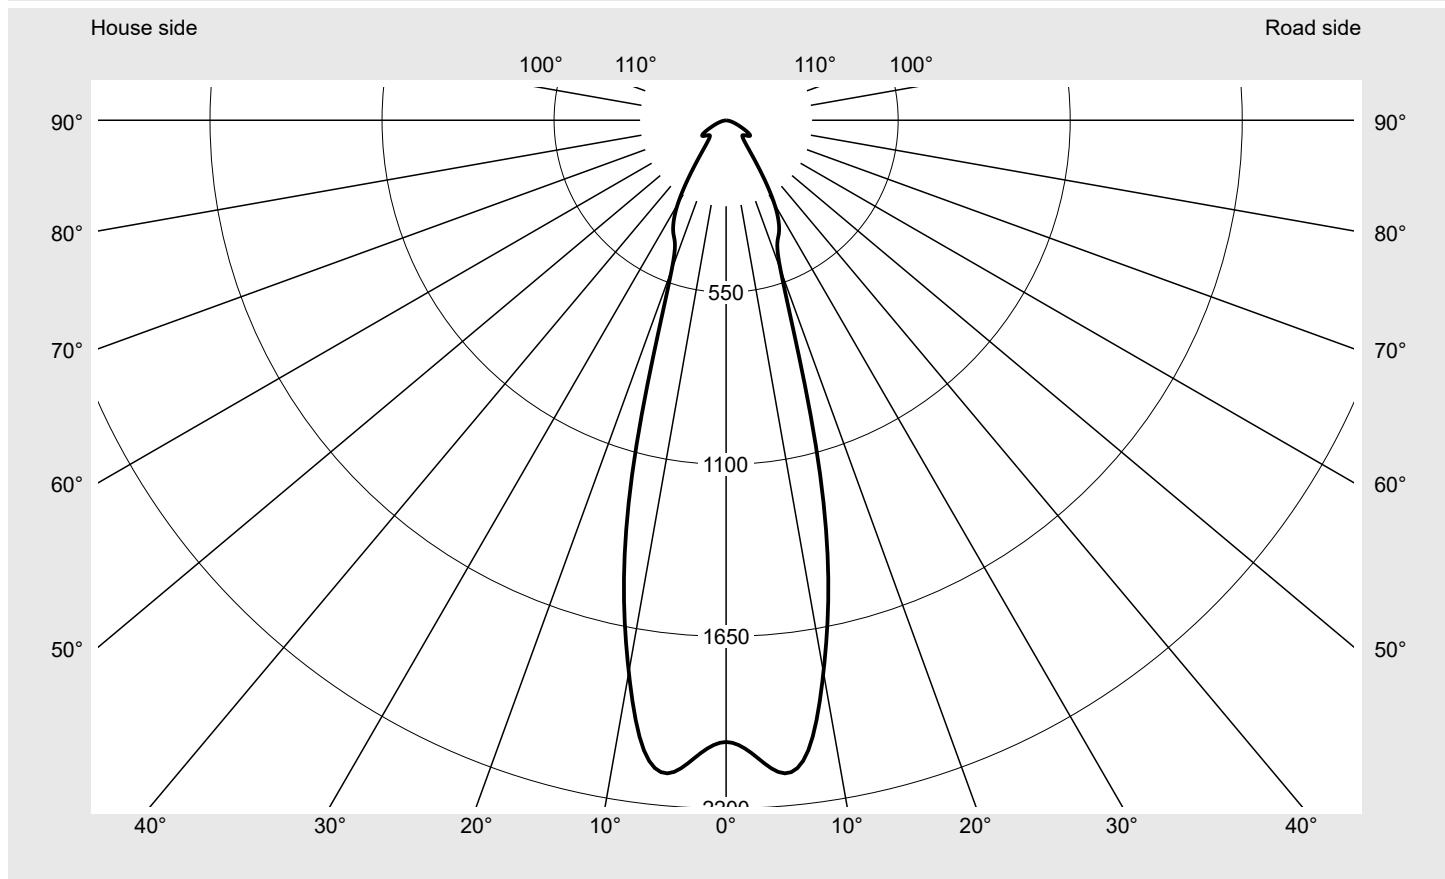

Luminaire output ratios

Eta	100.0%
Eta 0° - 90°	100.0%
Eta 90° - 180°	0.0%

Luminous intensity class acc. to EN13201-2

Class:	G6
I _{max} 70°	33.2
I _{max} 80°	8.4
I _{max} 90°	0.0
I _{max} >90°	0.0
I _{max} >95°	0.0

Measurement conditions


DIN EN 13032 and DIN 5032

Photometric test report

Family Floodlight 20 midi LED	Order number: 5XA7682D1B2AC EAN: 4058352222461	LP number 58579_2
---	---	-----------------------------



Envelope curve in cd/klm **KMK 5°** **KMK 2.5°** **KMK 0°**

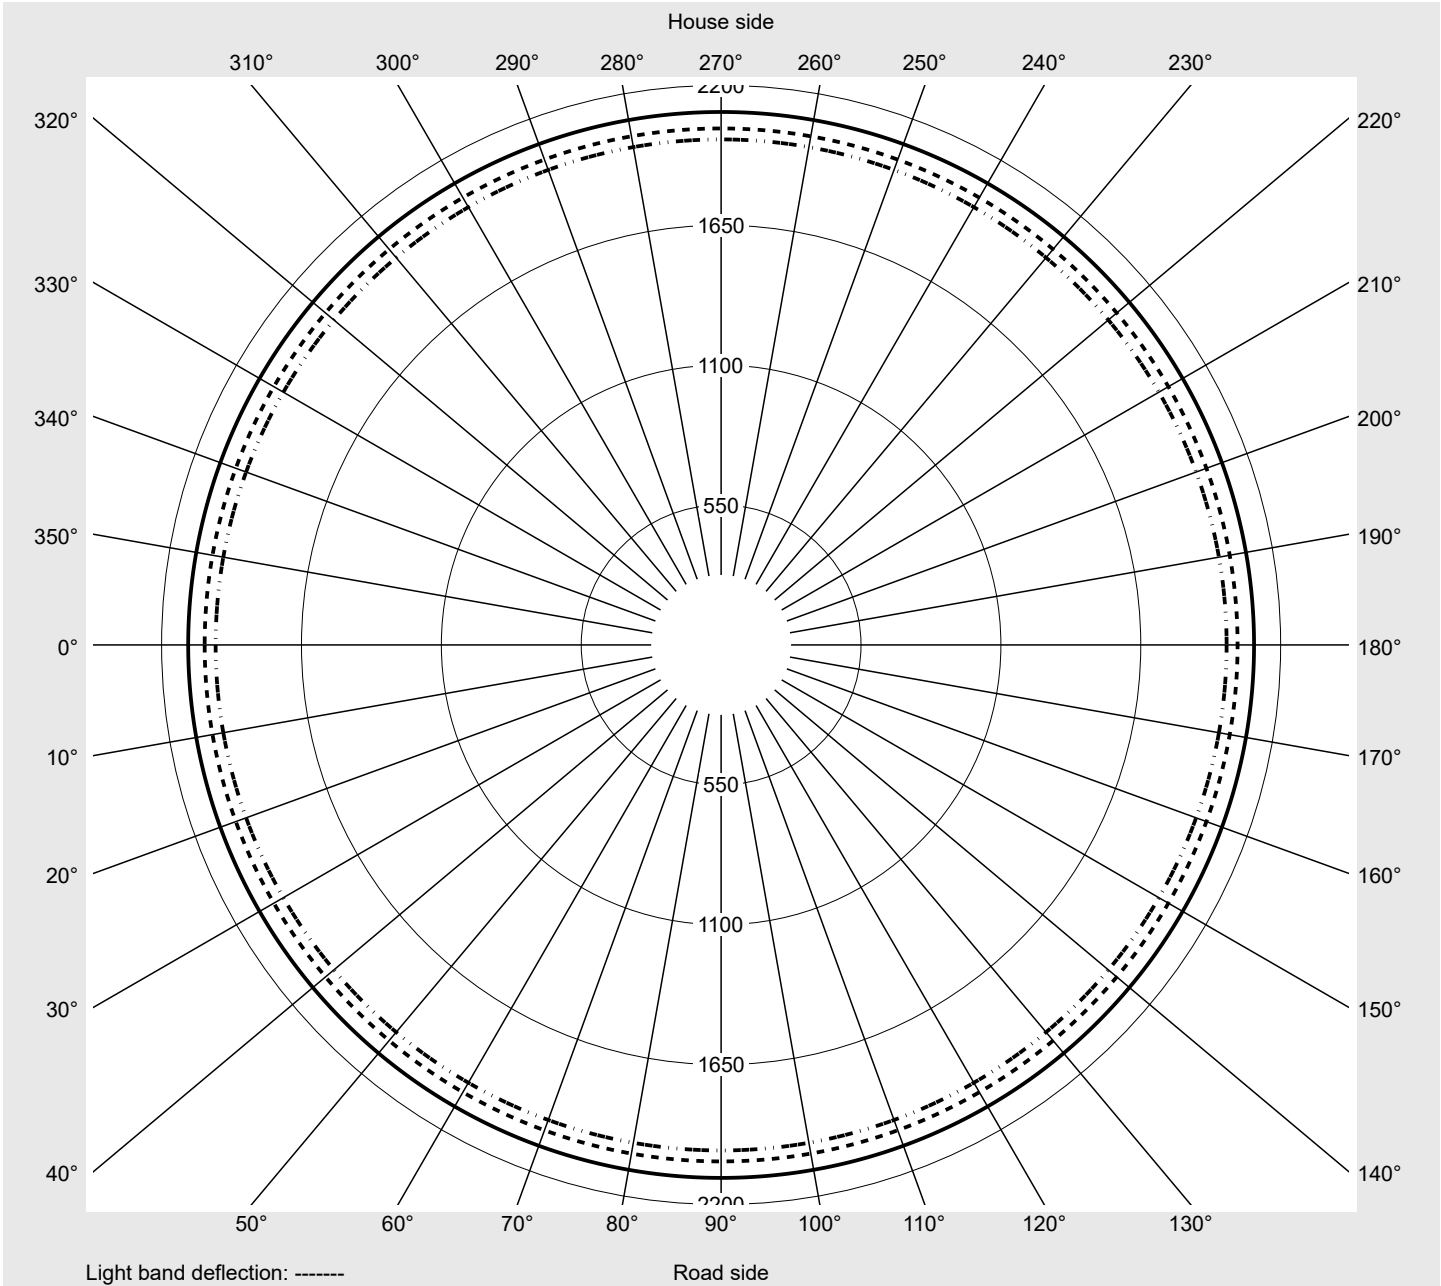

Photometric test report

Family Floodlight 20 midi LED	Order number: 5XA7682D1B2AC EAN: 4058352222461	LP number 58579_2
---	---	-----------------------------



Table of values for luminous intensities	Maximum luminous intensity
---	-----------------------------------

C-planes	0°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm	Luminous flux in lm/klm	
0,0°	1987.6	3.0	3.0
2,5°	2030.7	24.3	27.3
5,0°	2095.5	50.1	77.3
7,5°	2026.9	72.5	149.8
10,0°	1791.8	85.3	235.1
12,5°	1509.5	89.6	324.7
15,0°	1149.0	81.5	406.2
17,5°	740.6	61.1	467.3
20,0°	508.4	47.7	514.9
22,5°	427.7	44.9	559.8
25,0°	399.1	46.2	606.1
27,5°	363.0	45.9	652.0
30,0°	308.9	42.3	694.3
32,5°	237.9	35.0	729.4
35,0°	171.0	26.9	756.3
37,5°	124.2	20.7	777.0
40,0°	96.7	17.0	794.0
42,5°	81.3	15.1	809.1
45,0°	73.6	14.3	823.4
47,5°	71.2	14.4	837.8
50,0°	74.3	15.6	853.4
52,5°	79.9	17.4	870.8
55,0°	87.8	19.7	890.5
57,5°	90.8	21.0	911.5
60,0°	83.4	19.8	931.3
62,5°	69.1	16.8	948.1
65,0°	54.1	13.4	961.5
67,5°	42.5	10.8	972.3
70,0°	33.2	8.6	980.9
72,5°	25.3	6.6	987.5
75,0°	18.4	4.9	992.4
77,5°	12.8	3.4	995.8
80,0°	8.4	2.3	998.1
82,5°	4.7	1.3	999.3
85,0°	1.9	0.5	999.8
87,5°	0.4	0.1	1000.0
90,0°	0.0	0.0	1000.0
100,0°	0.0	0.0	1000.0
110,0°	0.0	0.0	1000.0
120,0°	0.0	0.0	1000.0
130,0°	0.0	0.0	1000.0
140,0°	0.0	0.0	1000.0
150,0°	0.0	0.0	1000.0
160,0°	0.0	0.0	1000.0
170,0°	0.0	0.0	1000.0
180,0°	0.0	0.0	1000.0

Photometric test report

Family Floodlight 20 midi LED	Order number: 5XA7682D1B2AC EAN: 4058352222461	LP number 58579_2
---	---	-----------------------------

Dimming levels table	environmental temperature: 25°C	sITeco
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]
100	254	254	15350	142.0
95	241	252	14583	134.1
90	226	250	13815	126.2
85	211	247	13048	118.6
80	197	245	12280	111.1
75	185	242	11513	103.6
70	171	239	10745	96.3
65	157	236	9978	89.2
60	144	233	9210	82.2
55	130	230	8443	75.4
50	118	226	7675	68.6
45	106	222	6908	61.9
40	94	217	6140	55.3
35	81	212	5373	48.9
30	69	206	4605	42.6
25	57	199	3838	36.4
20	45	191	3070	30.3
15	34	181	2302	24.2