

Photometric test report

Family
Floodlight 20 midi LED

Order number: 5XA7682D2D4AC
EAN: 4058352222775

LP number
58577_7



Version mast flange adapter
Optic asymmetric distribution PL52
Cover toughened safety glass
Lamps 1 x LED 4000K / CRI ≥ 70
 (unbekannt LED 4000K / CRI = 70)
Controlgear ECG-DALI
Rated values Net luminous flux = 17990 lm
 Power consumption = 142.0 W
 Luminous efficacy = 126.7 lm/W

serial
documentation
25.08.2021

siteco

Luminous intensity in cd/klm


C180-0

C215-35

C220-40

C270-90

Imax: 827 cd/klm

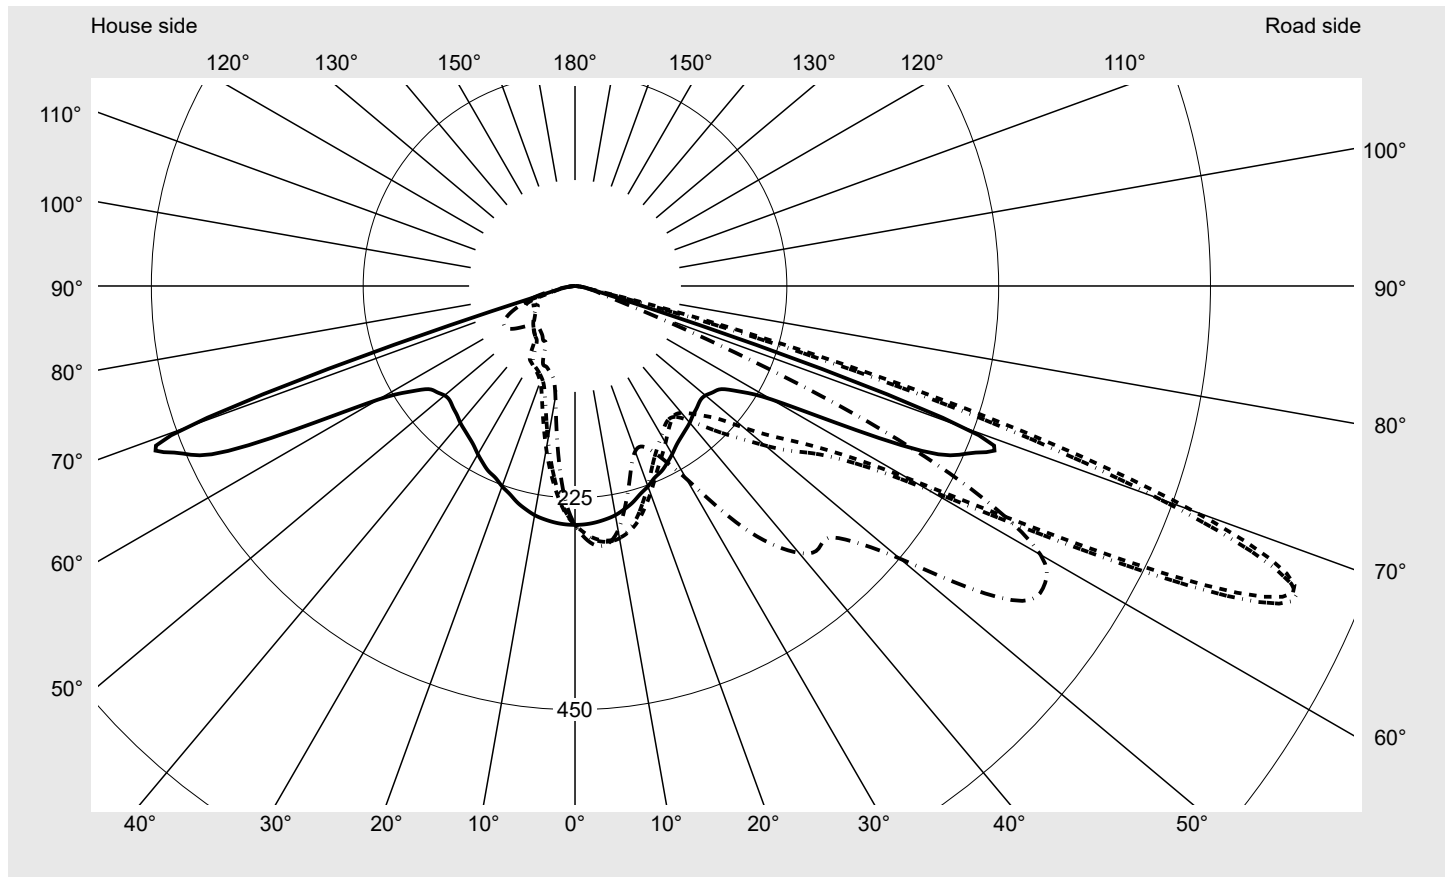

Luminaire output ratios

Eta	100.0%
Eta 0° - 90°	100.0%
Eta 90° - 180°	0.0%

Luminous intensity class acc. to EN13201-2

Class:	G3
Imax 70°	767.0
Imax 80°	23.0
Imax 90°	0.0
Imax >90°	0.0
Imax >95°	0.0

Measurement conditions


DIN EN 13032 and DIN 5032

Photometric test report

Family Floodlight 20 midi LED	Order number: 5XA7682D2D4AC EAN: 4058352222775	LP number 58577_7
--	---	------------------------------------



Envelope curve in cd/klm **KMK 67.5°** **KMK 65°** **KMK 62.5°** **KMK 60°**

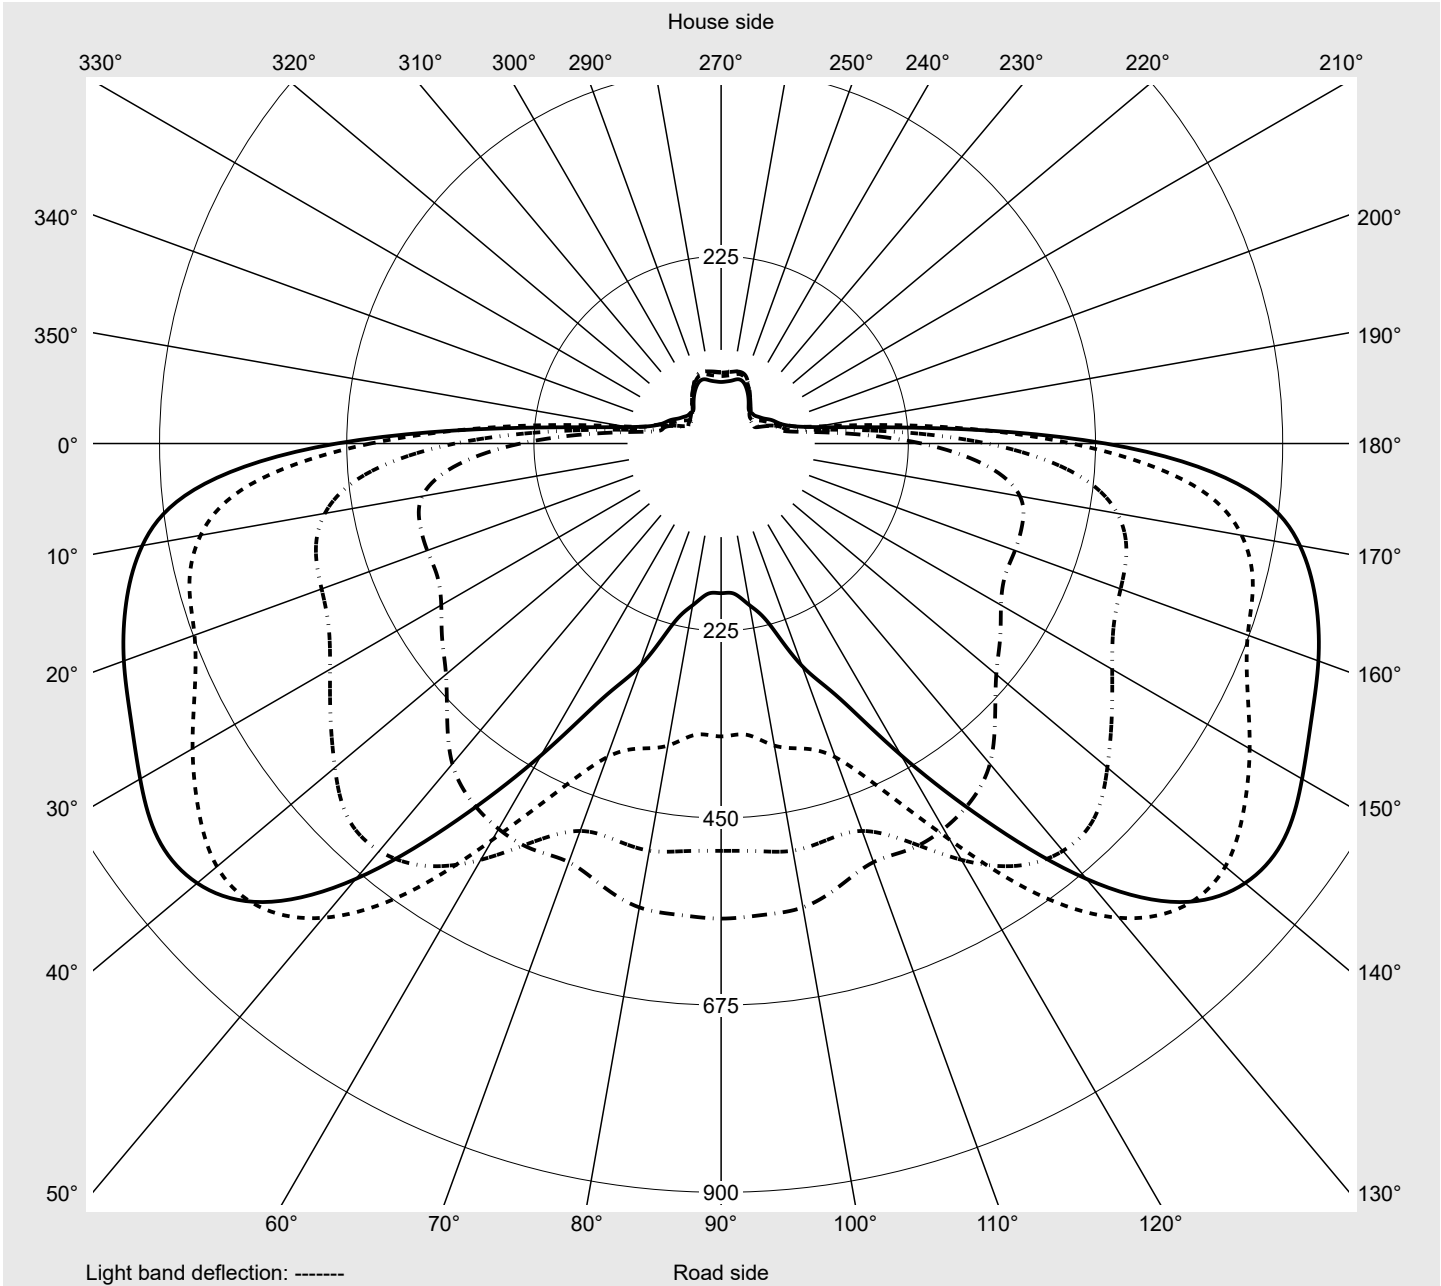

Photometric test report

Family Floodlight 20 midi LED	Order number: 5XA7682D2D4AC EAN: 4058352222775	LP number 58577_7
Table of values for luminous intensities		Maximum luminous intensity
		sitEco

C-planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
γ	Luminous intensity in cd/klm												
0,0°	253.8	253.8	253.8	253.8	253.8	253.8	253.8	253.8	253.8	253.8	253.8	253.8	253.8
2,5°	253.4	254.9	256.4	258.0	259.5	261.1	262.4	263.4	264.5	265.4	266.3	266.9	267.4
5,0°	252.0	255.2	258.3	261.1	263.7	266.3	268.4	270.1	271.6	272.8	273.7	274.6	275.2
7,5°	249.9	254.7	259.0	262.7	265.9	268.8	271.0	272.7	273.9	274.6	275.1	275.5	275.5
10,0°	247.1	253.2	258.3	262.6	266.1	268.7	270.7	271.8	272.0	271.6	270.6	269.4	267.8
12,5°	242.8	250.3	256.3	260.8	264.0	266.2	267.2	266.9	265.2	262.4	259.1	255.6	252.1
15,0°	237.8	246.4	253.0	257.5	260.3	261.5	261.0	258.6	254.4	249.3	243.9	238.7	233.5
17,5°	231.4	241.9	248.9	253.2	255.1	254.7	251.9	246.8	240.3	233.3	226.3	219.9	214.0
20,0°	226.5	237.3	244.7	248.7	249.4	247.0	241.7	234.4	226.2	217.9	210.2	203.6	198.3
22,5°	220.6	233.3	240.9	244.1	243.3	238.5	230.9	221.6	211.9	203.1	195.7	190.4	186.7
25,0°	217.2	230.8	238.8	241.4	238.8	231.5	221.3	210.4	200.2	191.7	186.1	183.2	182.9
27,5°	211.9	228.0	237.0	239.2	235.0	225.4	213.2	201.1	191.1	184.3	181.2	182.4	186.4
30,0°	206.3	222.9	232.5	234.4	229.0	218.0	204.9	192.3	183.6	179.2	180.9	187.1	195.9
32,5°	200.5	218.7	228.7	229.0	221.2	208.7	195.3	183.8	176.9	177.0	184.1	197.2	213.7
35,0°	196.2	216.1	227.0	225.9	216.5	202.5	188.2	177.1	173.1	178.5	193.9	217.2	243.3
37,5°	192.8	214.5	225.3	223.2	212.3	197.3	182.7	173.2	175.3	188.7	214.0	245.7	277.7
40,0°	189.6	213.1	223.4	221.9	210.0	194.2	180.3	175.9	185.7	207.5	240.4	277.4	310.3
42,5°	185.7	211.7	222.8	221.5	208.9	192.7	181.7	184.0	201.8	231.7	270.0	304.6	334.6
45,0°	183.0	210.3	223.6	222.1	209.1	193.9	187.2	195.2	220.8	254.0	286.5	314.9	338.2
47,5°	180.3	212.5	227.7	225.4	212.0	199.0	194.8	210.1	240.6	271.7	299.3	321.7	340.0
50,0°	180.9	217.4	236.4	236.0	222.7	210.3	212.6	234.2	263.6	291.2	311.5	327.9	344.0
52,5°	185.1	227.1	248.8	248.6	237.5	229.9	238.2	261.0	287.4	309.3	325.3	338.1	360.6
55,0°	191.0	242.1	268.8	270.6	261.4	258.5	268.5	289.3	310.3	327.0	343.8	368.9	407.8
57,5°	209.2	271.8	303.8	307.5	302.1	301.4	312.0	330.2	348.5	367.0	400.1	440.6	473.6
60,0°	241.1	322.9	364.8	374.8	375.9	376.5	388.5	409.3	431.7	465.7	502.6	524.1	534.9
62,5°	320.0	429.7	483.6	504.3	511.0	520.5	542.8	573.2	606.0	635.1	639.1	619.6	577.8
65,0°	421.5	568.6	635.3	661.7	673.6	698.0	733.6	767.0	791.1	786.5	744.2	660.3	550.1
67,5°	462.2	635.6	706.4	740.4	764.0	783.0	806.3	826.7	822.1	779.5	683.1	552.0	432.7
70,0°	439.4	623.7	722.7	767.0	750.7	724.1	713.8	699.9	659.8	581.1	469.0	370.0	297.7
72,5°	145.9	232.6	294.5	375.4	459.3	476.0	466.3	444.0	388.2	309.7	247.5	213.0	182.8
75,0°	37.2	40.5	45.0	53.0	97.4	158.1	175.4	167.3	114.0	78.9	104.0	105.0	101.6
77,5°	20.7	22.2	22.7	23.3	27.5	36.2	40.8	28.4	24.8	24.4	34.4	39.0	40.2
80,0°	12.0	11.3	11.0	11.2	12.5	15.0	15.0	13.6	13.3	14.0	15.0	15.3	17.0
82,5°	6.5	6.1	6.1	6.4	6.7	7.4	8.2	7.9	8.1	8.3	8.4	8.3	9.7
85,0°	2.9	2.6	2.6	2.7	2.9	3.3	3.5	3.6	3.7	3.7	3.7	3.5	3.4
87,5°	1.1	1.0	1.0	0.9	0.9	0.8	0.8	0.8	0.8	0.8	0.8	0.8	0.8
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
100,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
110,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
120,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
130,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
140,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
150,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
160,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
170,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Floodlight 20 midi LED	Order number: 5XA7682D2D4AC EAN: 4058352222775	LP number 58577_7
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
γ	Luminous intensity in cd/klm												
0,0°	253.8	253.8	253.8	253.8	253.8	253.8	253.8	253.8	253.8	253.8	253.8	253.8	253.8
2,5°	267.8	268.1	268.4	268.7	269.0	269.1	251.7	249.8	248.0	246.2	244.3	242.6	240.9
5,0°	275.6	275.9	276.3	276.7	277.0	277.2	248.2	244.0	239.6	235.0	230.4	225.8	221.2
7,5°	275.3	275.0	274.9	275.0	275.2	275.3	244.1	237.5	230.3	222.6	214.9	207.0	199.0
10,0°	266.2	264.6	263.6	263.3	263.3	263.4	239.2	230.0	219.9	209.1	197.8	186.7	175.8
12,5°	248.8	245.9	244.1	243.2	242.9	242.8	233.0	221.3	208.1	194.3	180.0	166.3	153.4
15,0°	229.0	225.2	222.6	221.2	220.6	220.5	225.8	211.4	195.4	178.7	162.2	147.1	133.8
17,5°	208.9	204.9	202.1	200.5	199.8	199.6	218.1	201.1	182.2	163.2	145.3	130.0	118.1
20,0°	194.2	190.6	188.5	187.4	186.9	186.9	210.5	191.0	169.3	148.6	130.5	116.8	108.2
22,5°	184.6	183.4	183.1	183.6	184.2	184.5	203.2	181.1	157.2	135.5	118.4	107.6	102.4
25,0°	183.9	185.6	187.8	190.6	192.6	193.2	196.4	171.4	145.9	124.0	108.9	101.9	98.7
27,5°	191.2	195.9	201.2	207.0	210.4	211.0	189.8	162.2	135.0	114.2	102.5	98.0	95.9
30,0°	205.1	213.5	222.6	232.7	237.7	236.4	180.8	151.5	124.3	105.4	97.8	94.9	93.3
32,5°	230.0	245.0	259.2	272.2	276.6	274.1	173.5	141.9	114.7	99.0	94.1	92.1	89.3
35,0°	266.1	285.6	303.5	314.0	314.9	314.8	166.4	132.6	105.7	94.0	90.6	87.5	77.7
37,5°	302.9	322.5	336.8	344.3	344.8	346.7	159.8	124.3	99.1	90.5	86.2	78.6	69.8
40,0°	334.1	349.7	360.6	366.5	368.0	370.1	152.8	115.7	93.0	86.9	78.0	69.3	66.7
42,5°	355.7	366.5	373.9	378.8	379.7	380.7	146.0	108.2	88.4	83.7	69.4	64.4	64.2
45,0°	355.2	361.7	368.1	374.9	377.3	378.9	139.2	100.1	84.1	80.3	63.5	61.4	61.9
47,5°	355.8	364.3	376.0	391.6	399.1	402.5	134.3	94.7	80.7	77.3	60.3	58.8	59.5
50,0°	364.3	384.7	407.6	433.1	445.9	450.5	128.9	89.3	77.4	74.2	56.6	56.3	56.6
52,5°	395.5	433.8	469.8	502.4	520.5	526.0	127.0	85.5	75.0	71.2	53.7	53.7	53.9
55,0°	451.6	493.4	531.1	562.3	577.5	583.0	126.6	82.7	72.8	68.1	50.9	50.9	51.5
57,5°	505.1	534.7	563.2	583.5	589.7	591.1	130.5	81.8	71.5	64.9	48.4	48.1	48.7
60,0°	537.9	535.5	550.7	566.1	568.8	571.0	143.7	83.2	71.6	61.8	46.4	45.4	46.3
62,5°	527.1	495.6	493.1	496.9	491.8	489.6	180.3	94.3	75.5	63.3	49.3	45.8	44.7
65,0°	459.5	401.3	379.6	368.7	351.4	352.1	243.0	118.3	84.1	70.3	61.3	55.1	48.7
67,5°	338.8	284.5	225.0	197.5	181.3	179.9	221.0	113.9	83.3	72.8	66.8	59.9	55.6
70,0°	242.2	200.8	99.2	72.0	66.9	70.0	138.6	70.9	68.1	65.0	60.1	57.1	54.6
72,5°	153.6	125.3	46.7	33.4	33.1	33.4	51.7	32.6	30.8	31.9	33.7	38.5	41.9
75,0°	88.5	70.5	31.8	25.1	24.4	24.4	24.5	22.0	22.0	21.9	22.6	24.1	25.8
77,5°	35.9	33.1	21.4	17.3	16.4	16.6	16.0	15.4	16.0	16.0	16.6	17.6	18.8
80,0°	18.9	16.9	12.5	11.1	10.6	10.6	11.8	10.4	10.4	10.7	11.3	11.9	12.5
82,5°	11.3	9.5	6.6	5.8	5.4	5.4	6.5	5.9	6.2	6.6	7.1	7.3	7.5
85,0°	3.2	2.9	2.4	2.2	2.1	2.0	2.7	2.7	3.0	3.3	3.4	3.6	3.6
87,5°	0.8	0.8	0.8	0.8	0.9	0.9	1.1	1.2	1.2	1.2	1.3	1.3	1.3
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
100,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
110,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
120,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
130,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
140,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
150,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
160,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
170,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Floodlight 20 midi LED	Order number: 5XA7682D2D4AC EAN: 4058352222775	LP number 58577_7
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm											Luminous flux in lm/klm	
0,0°	253.8	253.8	253.8	253.8	253.8	253.8	253.8	253.8	253.8	253.8	253.8	0.4	0.4
2,5°	239.2	237.4	235.7	234.3	233.0	231.9	230.8	229.9	229.2	228.9	228.8	3.0	3.4
5,0°	216.6	212.2	208.0	204.2	200.8	198.0	195.3	193.3	191.8	191.1	190.8	5.8	9.2
7,5°	191.3	184.0	177.3	171.3	166.0	161.5	157.7	154.8	152.7	151.6	151.2	8.2	17.4
10,0°	165.6	156.3	148.0	140.8	134.8	129.9	126.0	123.1	121.2	120.1	119.8	10.3	27.7
12,5°	141.7	131.9	123.8	117.4	112.5	109.1	106.7	105.1	104.1	103.5	103.2	12.0	39.7
15,0°	123.0	114.7	109.2	105.6	103.1	101.2	99.7	98.5	97.8	97.3	97.2	13.5	53.2
17,5°	110.2	105.7	102.7	100.5	98.6	97.1	95.7	94.7	94.1	93.6	93.4	14.7	67.9
20,0°	103.7	101.0	99.1	97.4	95.9	94.4	93.1	92.2	91.5	91.1	90.8	15.9	83.8
22,5°	99.7	97.8	96.4	95.1	93.8	92.5	91.1	89.6	89.2	89.1	89.1	17.1	100.9
25,0°	96.8	95.4	94.0	93.1	91.4	85.6	79.7	77.9	77.3	76.9	76.6	18.2	119.1
27,5°	94.3	91.9	89.6	84.7	75.7	71.6	70.1	69.0	68.2	67.7	67.4	19.5	138.6
30,0°	88.9	83.4	79.2	72.9	71.1	70.3	69.5	68.7	67.9	67.3	67.0	21.0	159.6
32,5°	78.1	73.8	71.5	70.7	70.3	69.5	68.1	66.7	65.4	64.4	64.0	22.9	182.5
35,0°	70.8	70.1	69.9	69.6	68.3	66.7	65.1	63.9	62.8	62.1	61.7	25.1	207.6
37,5°	68.6	68.4	68.2	66.9	65.5	64.6	63.7	62.7	61.7	60.7	60.2	27.5	235.1
40,0°	66.6	66.6	65.6	64.6	64.0	63.2	62.6	61.9	60.8	59.7	59.0	30.0	265.1
42,5°	64.7	64.2	63.9	63.6	63.2	62.6	62.3	62.0	61.2	59.9	59.0	32.3	297.4
45,0°	62.3	62.5	62.8	62.7	63.0	63.3	63.4	63.0	62.3	61.0	59.9	34.0	331.4
47,5°	60.2	61.2	61.9	62.5	63.8	64.1	64.6	64.7	64.3	63.1	62.2	36.2	367.6
50,0°	57.7	59.3	61.1	62.1	64.0	65.2	66.6	67.6	67.6	66.6	66.0	39.4	407.0
52,5°	55.2	57.1	59.3	61.1	63.9	67.1	70.6	73.2	73.6	72.9	72.2	44.1	451.1
55,0°	52.8	54.9	57.6	60.6	64.8	70.4	76.4	80.6	80.3	79.6	79.1	49.5	500.6
57,5°	50.5	52.7	56.2	60.6	66.5	74.0	82.1	86.7	86.3	85.6	84.1	55.7	556.3
60,0°	48.1	50.9	55.3	61.1	68.7	77.7	86.5	89.1	88.1	86.8	85.9	63.4	619.7
62,5°	46.1	49.1	54.2	61.1	69.2	77.8	85.6	89.4	87.8	86.1	85.2	74.4	694.1
65,0°	46.4	48.2	53.2	60.1	68.5	76.8	83.7	86.3	83.9	82.0	81.1	84.5	778.5
67,5°	52.5	52.0	52.1	57.7	65.3	72.5	78.4	80.0	76.9	74.9	74.0	82.2	860.7
70,0°	54.5	58.5	57.0	53.9	59.7	65.6	69.8	70.5	67.6	65.1	64.4	69.4	930.2
72,5°	52.2	57.1	55.0	50.9	51.3	55.5	58.3	58.3	55.1	53.4	54.1	39.8	969.9
75,0°	28.6	36.9	40.3	39.0	41.6	44.9	46.8	46.1	43.2	41.5	42.5	15.6	985.6
77,5°	20.4	22.6	25.3	28.0	30.9	33.4	34.8	33.4	31.1	29.8	29.9	7.0	992.5
80,0°	13.6	15.1	17.0	19.0	21.0	22.4	23.0	21.8	20.4	19.5	19.3	4.0	996.5
82,5°	8.0	8.7	9.6	10.5	11.0	11.5	11.5	11.1	10.4	10.1	10.0	2.2	998.8
85,0°	3.6	3.8	4.1	4.4	4.7	5.0	5.2	5.0	4.7	4.6	4.5	1.0	999.7
87,5°	1.3	1.3	1.4	1.4	1.4	1.4	1.4	1.3	1.3	1.3	1.3	0.3	1000.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
100,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
110,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
120,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
130,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
140,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
150,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
160,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
170,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family Floodlight 20 midi LED	Order number: 5XA7682D2D4AC EAN: 4058352222775	LP number 58577_7
---	---	-----------------------------

Dimming levels table	environmental temperature: 25°C	sITeco
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]
100	254	254	17990	142.0
95	241	252	17091	134.1
90	226	250	16191	126.2
85	211	247	15292	118.6
80	197	245	14392	111.1
75	185	242	13493	103.6
70	171	239	12593	96.3
65	157	236	11694	89.2
60	144	233	10794	82.2
55	130	230	9895	75.4
50	118	226	8995	68.6
45	106	222	8096	61.9
40	94	217	7196	55.3
35	81	212	6297	48.9
30	69	206	5397	42.6
25	57	199	4498	36.4
20	45	191	3598	30.3
15	34	181	2698	24.2