




Photometric test report

Family Floodlight FL21 micro	Order number: 5XA7762A1A1A EAN: 4058352631058	LP number 59324_8
	Version mounting bracket Optic asymmetric distribution PL43 Cover toughened safety glass Lamps LED 2200 K CRI ≥ 70 Controlgear ECG SITECO iQ Rated values Net luminous flux = 2520 lm Power consumption = 23.1 W Luminous efficacy = 109.1 lm/W	serial documentation 05.07.2022





Luminous intensity in cd/klm C180-0 C220-40 C225-45 C270-90 **Imax: 1028 cd/klm**

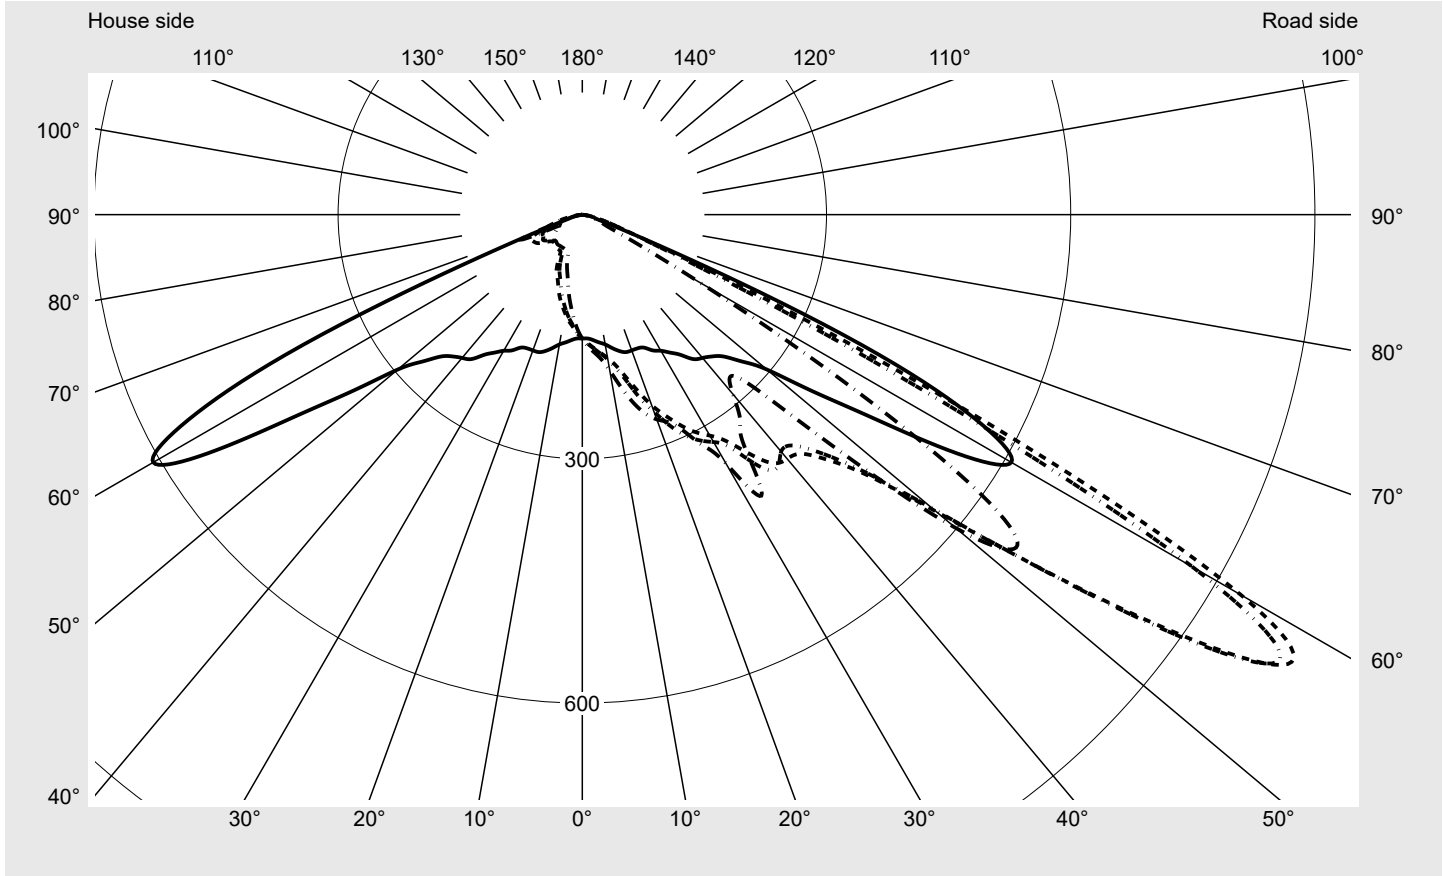


Luminaire output ratios	
Eta	100.0%
Eta 0° - 90°	100.0%
Eta 90° - 180°	0.0%
Measurement conditions	
DIN EN 13032 and DIN 5032	

Luminous intensity class acc. to EN13201-2	
Class:	G6
Imax 70°	56.8
Imax 80°	12.2
Imax 90°	0.0
Imax >90°	0.0
Imax >95°	0.0

Photometric test report

Family Floodlight FL21 micro	Order number: 5XA7762A1A1A EAN: 4058352631058	LP number 59324_8
---	--	------------------------------------

Envelope curve in cd/klm **KMK 57.5°** **KMK 55°** **KMK 52.5°** **KMK 50°** **siteco**

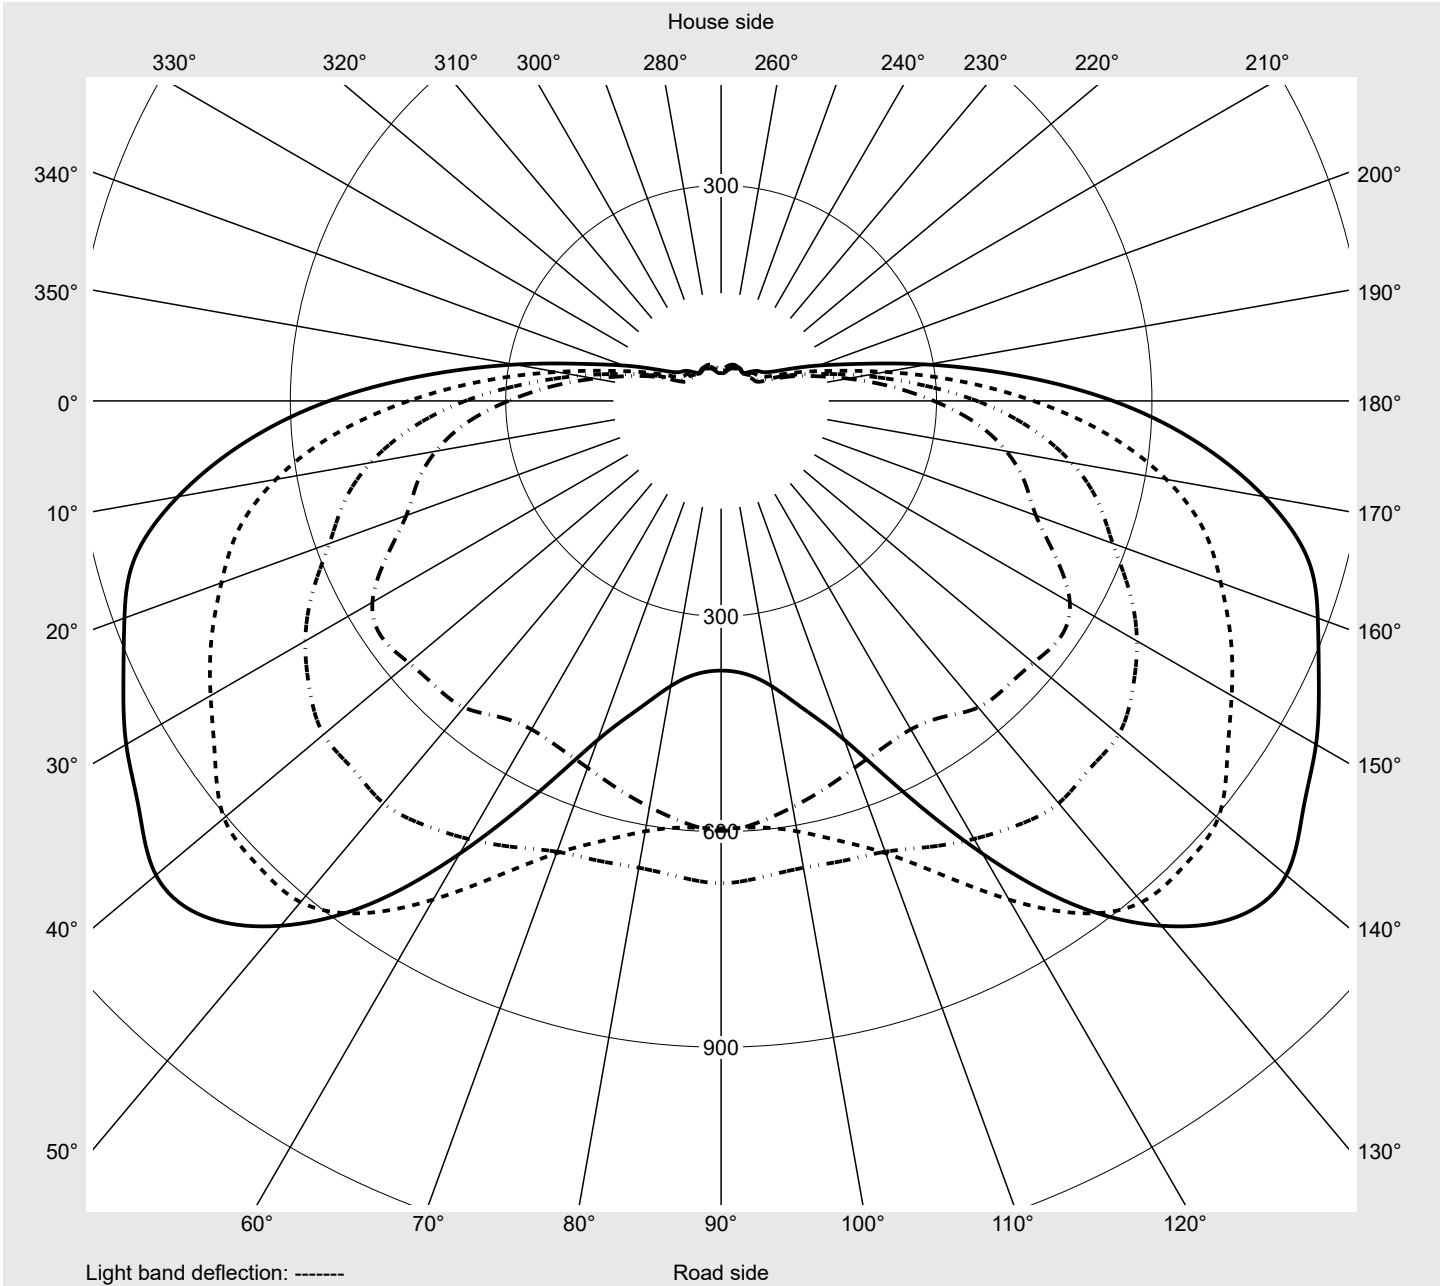

Photometric test report

Family Floodlight FL21 micro	Order number: 5XA7762A1A1A EAN: 4058352631058	LP number 59324_8
Table of values for luminous intensities		Maximum luminous intensity
siteco		

C-planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
γ	Luminous intensity in cd/klm												
0,0°	152.2	152.2	152.2	152.2	152.2	152.2	152.2	152.2	152.2	152.2	152.2	152.2	152.2
2,5°	152.3	153.0	153.7	154.6	155.3	156.3	157.0	157.8	158.3	158.8	159.4	159.9	160.3
5,0°	154.8	156.4	157.9	159.2	160.4	161.7	162.8	163.8	164.6	165.3	166.1	166.8	167.4
7,5°	158.3	160.7	162.8	164.5	166.0	167.4	168.9	170.2	171.2	172.2	173.1	174.2	175.2
10,0°	161.9	165.2	167.7	169.8	171.5	173.3	175.1	177.1	178.9	180.6	182.3	184.6	186.8
12,5°	167.7	171.2	174.2	176.3	178.7	180.7	183.5	186.4	189.6	193.9	198.1	201.5	204.5
15,0°	173.2	177.5	180.9	183.3	185.9	189.5	193.7	199.5	206.4	212.2	217.8	222.1	224.9
17,5°	177.1	182.4	186.7	190.2	193.7	198.9	206.9	217.3	227.3	236.6	241.4	244.7	246.6
20,0°	177.5	184.8	190.4	195.2	200.4	207.6	220.3	234.4	249.1	257.8	264.4	266.4	264.0
22,5°	177.7	187.1	194.4	200.5	207.2	218.0	233.3	252.2	267.4	280.2	286.9	283.9	276.1
25,0°	180.4	191.8	199.9	206.4	213.8	226.3	244.2	265.8	285.4	299.0	301.2	296.2	287.2
27,5°	188.1	200.6	209.2	215.8	223.8	236.9	257.5	280.9	301.2	312.6	313.9	308.8	301.6
30,0°	193.1	209.1	219.9	227.7	236.0	250.6	271.7	293.7	313.5	322.6	325.6	325.1	320.8
32,5°	201.0	221.2	235.2	244.9	255.0	271.6	292.4	314.0	330.1	339.4	345.2	350.9	361.4
35,0°	210.2	237.3	255.5	267.6	281.5	300.6	322.7	345.2	359.0	376.4	398.4	422.1	433.1
37,5°	223.6	254.8	273.0	282.1	291.2	307.6	340.0	368.9	384.9	392.6	407.4	414.1	406.9
40,0°	229.7	265.6	288.3	302.2	314.2	335.8	372.7	393.1	391.6	380.1	387.7	395.5	385.4
42,5°	236.2	272.1	298.8	316.0	330.4	357.6	397.9	410.2	398.4	384.8	386.4	388.5	373.9
45,0°	246.7	287.3	317.1	337.4	354.7	391.9	438.4	444.4	425.8	413.9	406.8	395.1	374.0
47,5°	267.4	312.7	349.1	374.8	397.0	442.8	491.3	494.2	472.5	464.7	453.0	428.7	407.6
50,0°	296.0	356.6	403.4	438.0	466.6	514.2	560.8	575.9	567.6	562.4	557.2	537.5	528.3
52,5°	356.2	432.5	495.8	543.5	580.6	627.5	668.7	699.7	722.8	725.3	731.5	721.0	704.4
55,0°	435.0	541.1	629.6	696.2	740.6	783.2	821.0	860.8	903.7	913.7	911.3	871.0	801.9
57,5°	545.9	666.4	768.1	845.4	884.3	918.5	956.8	989.9	1027.5	1016.2	954.2	856.5	728.1
60,0°	608.6	730.6	824.8	896.5	919.4	933.1	940.4	948.8	934.3	866.0	760.2	619.5	467.5
62,5°	545.3	656.2	724.2	765.9	757.5	731.9	698.8	668.4	601.9	505.0	395.9	301.2	215.6
65,0°	378.6	423.0	450.1	456.4	434.8	398.6	363.7	333.3	275.5	216.2	163.7	135.3	103.7
67,5°	139.6	158.6	161.6	157.4	150.7	139.6	130.7	125.0	108.3	94.3	80.9	68.1	55.2
70,0°	44.6	46.3	46.2	46.5	48.0	49.2	51.5	53.6	54.7	54.9	52.8	50.0	45.0
72,5°	20.8	21.6	21.3	21.5	23.1	24.5	26.2	29.2	32.7	36.1	38.4	36.7	32.9
75,0°	16.0	17.1	16.2	15.9	16.8	17.3	18.6	21.0	22.6	23.0	23.4	23.7	22.3
77,5°	12.8	13.1	11.7	11.2	11.5	11.8	12.5	13.3	13.8	13.4	13.3	13.8	13.9
80,0°	8.4	7.4	6.6	6.2	6.5	7.0	7.1	7.4	7.6	7.6	7.5	7.5	7.4
82,5°	3.3	3.1	2.8	2.9	3.0	3.1	3.3	3.4	3.5	3.5	3.4	3.2	3.4
85,0°	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.2	1.2	1.1	1.1
87,5°	0.9	0.9	0.9	0.8	0.8	0.8	0.8	0.7	0.7	0.7	0.7	0.6	0.6
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Floodlight FL21 micro	Order number: 5XA7762A1A1A EAN: 4058352631058	LP number 59324_8
Table of values for luminous intensities		Maximum luminous intensity



C-planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
γ	Luminous intensity in cd/klm												
0,0°	152.2	152.2	152.2	152.2	152.2	152.2	152.2	152.2	152.2	152.2	152.2	152.2	152.2
2,5°	160.6	160.8	161.1	161.4	161.7	161.8	151.4	150.4	149.6	148.7	148.0	147.2	146.5
5,0°	167.7	168.2	168.9	169.5	169.9	170.1	153.1	151.1	148.8	146.6	144.5	142.3	140.0
7,5°	175.8	176.4	177.3	178.3	179.1	179.3	155.5	152.3	148.8	145.0	141.2	137.8	134.3
10,0°	188.5	190.1	191.4	193.0	194.2	194.6	158.3	153.9	148.5	143.2	137.9	132.8	127.6
12,5°	207.2	209.5	211.6	213.6	215.4	215.9	162.8	156.8	149.6	142.6	135.1	127.8	120.8
15,0°	227.5	230.2	232.6	234.9	237.1	237.9	167.0	159.0	150.4	141.3	132.0	122.9	114.2
17,5°	247.3	247.7	249.2	251.5	254.6	255.8	168.8	159.6	148.3	137.5	126.9	116.7	106.5
20,0°	260.1	257.7	258.4	260.9	265.1	267.7	167.5	155.5	143.0	130.9	119.3	108.2	97.1
22,5°	269.1	264.8	264.9	267.5	272.7	276.0	164.8	151.0	136.6	123.6	111.4	99.7	89.3
25,0°	279.2	274.8	275.5	279.8	287.5	292.4	165.4	158.3	132.9	118.3	104.6	92.9	83.6
27,5°	294.3	291.5	294.7	303.4	313.8	318.9	170.3	150.8	132.1	115.3	100.6	89.2	78.3
30,0°	316.4	316.4	323.0	335.2	348.1	353.2	172.7	152.5	132.6	113.6	98.3	85.8	67.3
32,5°	366.6	368.8	377.4	392.0	404.2	409.3	175.9	152.6	132.3	113.5	97.8	79.5	57.2
35,0°	418.3	389.2	363.8	354.3	349.9	346.8	181.1	155.2	133.0	113.5	95.0	67.7	54.0
37,5°	383.2	357.6	344.1	337.1	323.5	318.7	188.0	158.6	133.0	112.1	86.7	58.6	52.8
40,0°	358.5	327.8	311.7	296.1	289.1	288.0	190.3	157.7	130.6	108.0	72.1	56.0	51.9
42,5°	339.3	306.9	286.3	272.3	269.4	269.6	192.1	157.2	129.4	104.8	67.7	56.1	51.9
45,0°	340.2	312.0	299.3	295.5	300.3	305.2	198.5	158.5	127.1	100.4	65.4	56.0	51.8
47,5°	391.0	388.0	392.3	406.5	423.4	433.8	212.7	165.8	123.3	98.4	65.5	55.5	52.2
50,0°	533.1	543.7	558.7	574.4	589.4	598.8	235.6	179.0	133.3	98.3	65.3	55.1	53.4
52,5°	685.4	668.2	662.8	660.2	665.4	671.8	273.1	201.6	145.0	105.7	72.9	58.3	56.2
55,0°	728.4	670.4	634.1	608.6	596.4	595.5	328.0	232.1	161.8	117.4	84.6	67.1	61.8
57,5°	601.1	502.5	444.1	403.1	381.6	375.6	411.7	291.6	199.2	144.0	105.7	81.2	70.2
60,0°	350.7	269.8	222.6	190.8	173.2	166.1	469.5	341.1	239.3	169.8	121.1	89.6	74.0
62,5°	160.1	123.8	98.7	80.3	69.1	64.9	435.8	324.6	239.9	176.3	122.8	91.3	73.9
65,0°	80.8	64.0	45.1	36.5	32.8	32.8	290.9	224.9	173.3	132.3	102.5	77.3	69.5
67,5°	48.3	42.3	33.9	30.0	27.2	26.2	104.6	83.1	83.7	71.8	60.3	54.1	59.0
70,0°	38.8	32.2	27.1	23.2	20.6	19.6	32.8	27.7	30.9	33.7	32.9	34.2	44.2
72,5°	28.8	24.2	20.4	17.9	16.2	14.9	20.5	19.6	19.5	20.5	20.3	22.1	31.4
75,0°	20.5	17.6	14.5	12.5	12.1	11.1	15.4	14.4	14.2	14.7	14.1	15.7	23.2
77,5°	13.5	11.8	9.9	9.0	8.9	8.4	12.4	10.2	9.7	9.9	9.6	10.8	16.0
80,0°	7.3	6.5	5.5	5.0	4.5	4.3	7.2	5.7	5.4	5.9	5.6	6.3	9.6
82,5°	3.1	2.7	2.5	2.3	2.1	2.1	3.0	2.8	2.5	2.7	2.8	2.8	4.0
85,0°	1.0	1.0	1.0	0.9	0.9	0.9	1.3	1.3	1.3	1.2	1.2	1.2	1.1
87,5°	0.6	0.6	0.5	0.5	0.5	0.5	0.9	0.9	1.0	1.0	1.0	0.9	0.9
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Floodlight FL21 micro	Order number: 5XA7762A1A1A EAN: 4058352631058	LP number 59324_8
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm											Luminous flux in lm/klm	
0,0°	152.2	152.2	152.2	152.2	152.2	152.2	152.2	152.2	152.2	152.2	152.2	0.2	0.2
2,5°	145.7	144.9	144.1	143.4	142.8	142.3	141.8	141.3	140.8	140.6	140.5	1.8	2.0
5,0°	137.7	135.7	133.8	132.1	130.6	129.3	128.2	127.2	126.5	126.0	125.9	3.6	5.6
7,5°	130.8	127.4	124.1	121.2	118.5	116.2	114.2	112.7	111.7	111.1	111.0	5.4	11.0
10,0°	122.6	118.0	113.7	109.8	106.3	103.4	101.0	99.0	97.6	96.8	96.6	7.2	18.2
12,5°	114.3	108.4	103.1	98.2	93.9	90.3	87.3	84.9	83.3	82.4	82.1	9.2	27.4
15,0°	106.0	98.6	92.1	86.5	81.9	78.5	75.8	73.8	72.6	71.9	71.7	11.3	38.6
17,5°	96.8	88.4	81.9	77.1	73.2	69.9	67.1	64.8	63.1	62.3	62.0	13.4	52.1
20,0°	87.6	80.4	74.5	68.2	61.9	57.2	54.2	52.5	51.6	51.3	51.2	15.5	67.5
22,5°	81.1	73.1	63.5	55.5	51.8	50.5	49.8	49.4	49.1	49.0	49.0	17.5	85.1
25,0°	74.8	63.3	54.3	51.2	50.2	49.5	49.0	48.6	48.2	48.0	48.0	19.8	104.9
27,5°	64.0	53.7	51.1	50.3	49.7	49.1	48.5	48.1	47.6	47.4	47.4	22.4	127.3
30,0°	53.7	51.2	50.3	50.0	49.6	49.0	48.5	48.0	47.5	47.1	47.1	25.4	152.7
32,5°	51.9	50.5	50.1	50.0	49.6	49.2	48.7	48.2	47.6	47.1	47.1	29.5	182.2
35,0°	51.5	50.3	49.9	49.7	49.6	49.3	49.1	48.6	48.0	47.2	47.1	33.1	215.2
37,5°	50.8	49.9	49.5	49.5	49.4	49.3	49.4	49.1	48.5	47.5	47.4	35.0	250.3
40,0°	49.8	49.2	48.8	49.0	49.2	49.6	50.0	49.9	49.0	47.8	47.5	36.5	286.7
42,5°	49.3	48.3	48.1	48.5	49.4	50.0	50.6	49.9	48.7	47.1	46.6	38.2	325.0
45,0°	48.8	47.6	47.5	48.4	49.5	49.9	50.2	50.1	48.6	46.6	45.9	42.0	367.0
47,5°	49.1	47.5	47.5	48.5	49.2	50.4	51.2	51.7	49.7	46.9	46.3	49.8	416.7
50,0°	51.0	48.7	48.4	48.6	50.2	52.5	53.3	52.1	49.0	46.1	45.3	63.0	479.8
52,5°	54.8	51.7	49.3	49.5	51.9	52.9	53.0	50.8	47.0	44.2	43.3	79.3	559.1
55,0°	59.7	55.4	50.8	50.4	52.4	52.1	51.1	48.6	44.2	41.5	40.5	93.7	652.8
57,5°	65.1	57.4	50.9	49.9	51.7	49.6	48.1	45.9	41.8	38.9	38.8	99.5	752.3
60,0°	67.5	55.2	49.8	48.4	48.8	47.2	44.9	43.5	39.8	37.2	37.4	90.6	843.0
62,5°	69.4	54.7	48.1	45.0	45.1	44.3	43.1	42.3	39.8	37.0	36.9	68.1	911.1
65,0°	68.9	53.6	45.3	41.5	42.3	42.6	41.8	41.0	38.0	35.5	35.9	41.0	952.1
67,5°	61.5	48.1	40.4	38.0	39.8	41.1	40.2	38.2	34.3	38.8	79.9	19.3	971.4
70,0°	49.3	40.7	35.6	34.2	36.8	38.4	36.3	32.5	27.8	26.1	56.8	10.1	981.6
72,5°	38.9	34.9	31.3	30.1	32.4	33.8	30.8	25.4	20.2	20.4	27.1	6.9	988.4
75,0°	30.5	29.4	26.0	26.3	28.5	26.6	20.9	14.4	12.0	13.0	14.0	5.0	993.5
77,5°	22.1	22.1	17.8	15.8	18.7	18.8	15.1	9.0	7.9	7.5	7.5	3.4	996.9
80,0°	12.2	11.5	9.8	9.5	8.6	5.6	5.0	4.0	3.4	3.4	3.3	1.8	998.7
82,5°	4.8	4.0	3.6	3.1	2.4	1.7	1.6	1.3	1.1	1.0	1.0	0.8	999.5
85,0°	1.1	1.0	1.0	0.9	0.9	0.8	0.8	0.8	0.7	0.7	0.7	0.3	999.8
87,5°	0.9	0.9	0.8	0.8	0.8	0.7	0.7	0.7	0.7	0.7	0.6	0.2	1000.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family Floodlight FL21 micro	Order number: 5XA7762A1A1A EAN: 4058352631058	LP number 59324_8
--	--	-----------------------------

Dimming levels table	environmental temperature: 25°C	siteco
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]	Power consumption [W]	Power consumption [W]
				start of lifetime	end of lifetime	average
100	254	254	2520	23.1	23.8	23.5
95	241	252	2391	21.7	22.4	22.0
90	229	250	2272	20.4	21.1	20.8
85	216	248	2143	19.1	19.7	19.4
80	203	246	2014	17.8	18.3	18.0
75	190	243	1885	16.6	17.1	16.8
70	178	241	1766	15.4	15.9	15.6
65	165	238	1637	14.3	14.7	14.5
60	152	235	1508	13.1	13.5	13.3
55	140	232	1389	12.1	12.4	12.2
50	127	229	1260	10.9	11.3	11.1
45	114	225	1131	9.9	10.2	10.0
40	102	221	1012	8.9	9.2	9.0
35	89	216	883	7.9	8.1	8.0
30	76	210	754	6.9	7.1	7.0
25	63	203	625	5.9	6.1	6.0
20	51	195	506	5.1	5.2	5.2
15	39	185	387	4.2	4.3	4.2