
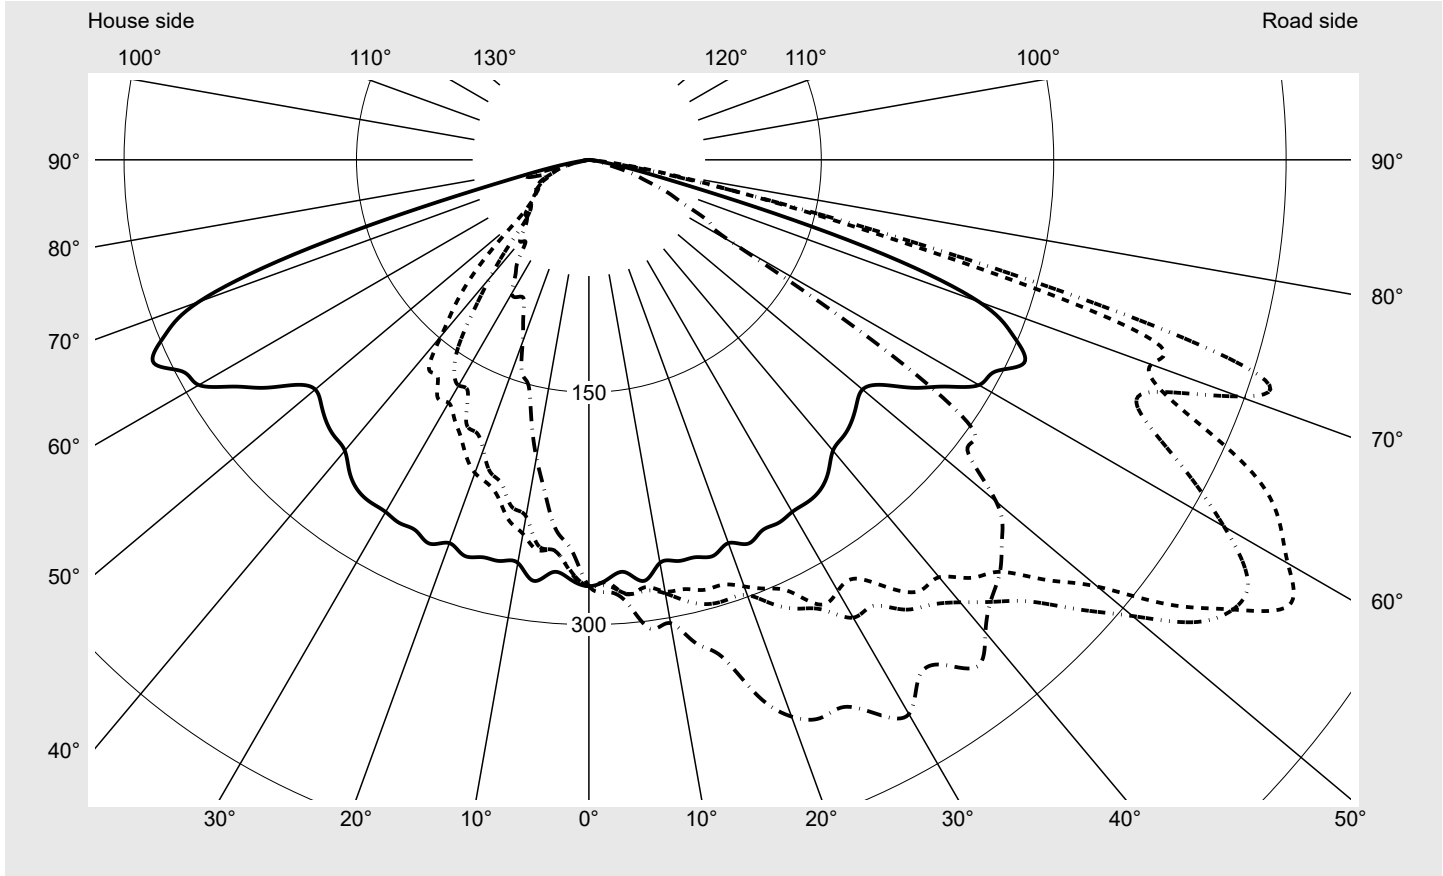


Photometric test report

Family Streetlight 21 mini LED	Order number: 5XE2E33S08JB EAN: 4058352725474	LP number 59079_62
	Version post-top or side-entry mounting, Smart Interface up Optic asymmetric, wide distribution (STW1.0a G) Cover toughened safety glass Lamps LED 3000 K CRI ≥ 70 Controlgear EVG-Smart Interface Rated values Net luminous flux = 12830 lm Power consumption = 87.3 W Luminous efficacy = 147 lm/W	serial documentation 23.08.2022



Luminous intensity in cd/klm C180-0 C200-20 C205-25 C270-90 **Imax: 535 cd/klm**



Luminaire output ratios

Eta	100.0%
Eta 0° - 90°	100.0%
Eta 90° - 180°	0.0%

Luminous intensity class acc. to EN13201-2

Class:	G4
Imax 70°	486.3
Imax 80°	49.2
Imax 90°	0.0
Imax >90°	0.0
Imax >95°	0.0


Measurement conditions

DIN EN 13032 and DIN 5032

Photometric test report

Family Streetlight 21 mini LED	Order number: 5XE2E33S08JB EAN: 4058352725474	LP number 59079_62
--	--	------------------------------

Envelope curve in cd/klm **KMK 57.5°** **KMK 55°** **KMK 52.5°** **KMK 50°** **siteco**

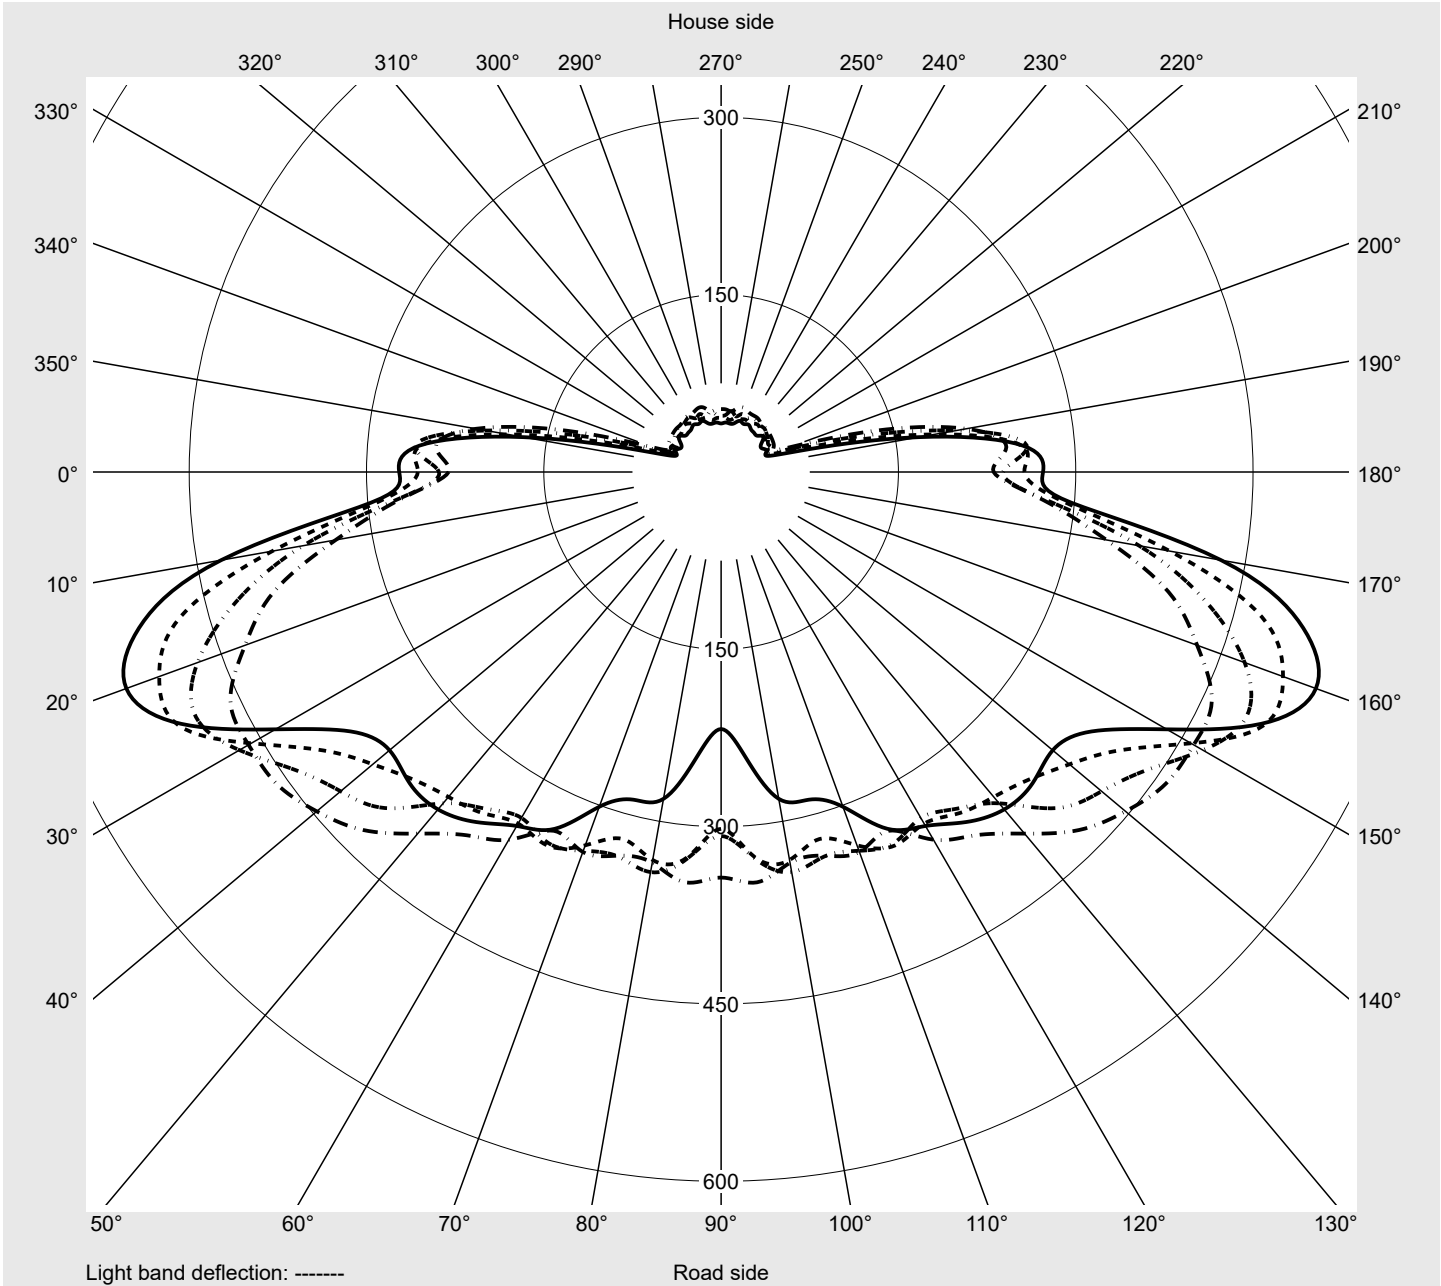

Photometric test report

Family Streetlight 21 mini LED	Order number: 5XE2E33S08JB EAN: 4058352725474	LP number 59079_62
Table of values for luminous intensities		Maximum luminous intensity
siteco		

C-planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
γ	Luminous intensity in cd/klm												
0,0°	275.2	275.2	275.2	275.2	275.2	275.2	275.2	275.2	275.2	275.2	275.2	275.2	275.2
2,5°	271.1	272.6	274.2	272.4	273.1	275.0	271.7	272.5	277.2	276.0	276.0	276.0	273.8
5,0°	267.1	272.9	275.2	280.1	281.5	281.2	280.8	282.7	283.1	284.1	282.6	285.7	289.7
7,5°	274.1	279.0	277.5	278.4	278.2	280.5	282.2	280.1	280.7	279.4	280.1	282.2	287.0
10,0°	264.1	267.7	274.1	281.5	282.9	284.1	284.6	289.0	288.4	289.8	289.4	296.1	298.5
12,5°	265.2	273.1	281.9	286.0	283.8	291.7	297.8	297.4	299.9	302.2	305.4	304.8	305.6
15,0°	265.5	268.6	273.1	278.4	287.3	296.8	296.7	300.7	302.2	302.6	306.1	317.4	327.7
17,5°	267.8	273.0	278.7	286.4	287.5	297.6	312.8	307.7	310.5	319.9	331.7	332.0	337.4
20,0°	263.2	276.0	283.2	285.6	293.0	298.9	314.1	316.9	322.0	337.8	350.9	349.4	357.5
22,5°	268.2	277.3	286.1	293.7	299.5	310.4	324.4	326.9	342.4	343.6	356.1	369.0	375.1
25,0°	264.1	279.2	290.5	304.6	307.6	319.6	332.9	339.3	354.0	370.6	376.6	388.5	394.7
27,5°	264.4	278.9	292.5	301.1	323.7	327.4	350.6	352.7	365.4	382.4	390.1	396.0	398.1
30,0°	262.4	282.1	299.4	304.0	321.3	341.2	351.9	364.5	376.7	390.8	402.8	403.1	399.6
32,5°	262.1	278.2	296.7	315.0	320.5	341.4	361.3	372.4	390.8	396.6	408.5	414.4	410.7
35,0°	260.2	274.8	293.4	320.6	337.1	354.3	370.4	374.9	395.6	416.3	417.7	425.9	434.6
37,5°	253.9	269.5	301.7	327.7	350.7	362.0	373.6	396.8	412.7	434.7	432.1	435.0	433.6
40,0°	245.1	278.1	306.0	330.0	351.7	372.8	391.4	402.6	422.5	443.3	435.7	438.1	439.9
42,5°	242.6	268.1	310.3	337.6	365.9	386.9	401.8	431.6	446.3	442.4	453.9	429.3	424.6
45,0°	239.5	273.8	302.3	342.4	376.0	403.2	431.8	441.1	452.0	463.2	443.3	420.5	405.7
47,5°	234.2	273.4	316.7	354.5	401.5	429.6	443.6	448.8	453.7	445.8	421.4	404.1	379.3
50,0°	230.6	273.9	331.1	391.8	428.6	458.0	461.6	459.4	446.6	428.3	399.3	375.2	359.2
52,5°	238.6	277.2	359.1	425.0	471.4	490.3	470.6	439.6	420.2	402.0	365.9	347.7	337.9
55,0°	256.6	291.5	385.6	473.5	505.9	506.7	459.0	410.7	384.7	368.1	358.8	352.1	343.4
57,5°	272.4	297.3	429.5	509.8	535.5	504.1	435.4	382.6	366.2	372.5	372.6	361.5	345.8
60,0°	290.7	312.9	440.7	516.1	520.9	473.3	391.3	379.2	399.9	420.5	391.2	362.4	336.3
62,5°	295.8	319.6	438.3	511.2	501.8	433.9	373.9	424.8	468.3	466.9	396.4	312.7	244.7
65,0°	310.0	306.1	414.0	482.8	468.6	395.4	406.6	503.6	507.9	477.9	351.8	231.9	136.1
67,5°	296.3	284.8	343.3	418.8	408.3	391.9	456.6	515.0	519.3	406.7	244.9	142.9	85.5
70,0°	267.9	221.9	267.0	347.6	386.2	446.6	482.2	486.3	474.1	299.8	141.0	105.2	59.3
72,5°	188.3	130.0	180.7	283.4	375.3	444.0	418.1	427.9	352.8	173.7	109.3	73.5	42.6
75,0°	79.5	49.5	103.3	171.0	226.3	273.0	234.3	258.1	188.4	90.8	79.5	53.3	28.4
77,5°	32.8	26.1	45.5	68.8	109.2	112.3	72.0	72.0	64.4	51.6	54.2	38.7	20.2
80,0°	12.7	11.2	13.8	29.0	49.2	38.8	18.1	12.1	17.2	27.4	33.2	21.4	13.7
82,5°	3.2	2.9	2.9	5.3	16.4	9.5	4.8	5.8	4.2	4.2	8.1	8.7	8.6
85,0°	1.0	0.7	1.0	1.2	1.0	1.3	1.2	1.3	1.3	1.2	1.1	1.3	1.4
87,5°	0.2	0.3	0.3	0.2	0.3	0.2	0.2	0.1	0.1	0.2	0.3	0.1	0.1
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 21 mini LED	Order number: 5XE2E33S08JB EAN: 4058352725474	LP number 59079_62
Table of values for luminous intensities		Maximum luminous intensity

siteco

C-planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
γ	Luminous intensity in cd/klm												
0,0°	275.2	275.2	275.2	275.2	275.2	275.2	275.2	275.2	275.2	275.2	275.2	275.2	275.2
2,5°	275.4	276.4	275.8	278.7	278.6	279.2	271.9	270.2	267.9	266.6	265.7	265.4	263.3
5,0°	286.6	286.7	285.9	286.3	284.1	287.4	264.7	262.8	256.2	253.3	253.1	251.8	249.4
7,5°	296.6	297.2	303.1	302.6	302.8	305.2	270.5	262.1	259.5	254.0	251.0	248.1	242.3
10,0°	301.8	296.6	299.1	304.9	306.9	303.6	259.4	258.2	251.7	245.1	233.7	230.0	225.1
12,5°	309.7	314.4	316.9	312.5	316.6	319.6	255.9	247.6	242.0	238.3	229.5	217.0	207.4
15,0°	330.0	333.2	335.6	336.4	331.8	332.1	257.5	245.9	237.1	225.7	216.8	209.9	200.7
17,5°	340.4	350.7	346.9	351.7	356.5	362.7	255.8	243.9	231.9	218.7	211.5	199.8	188.0
20,0°	362.8	363.2	373.1	382.4	380.6	382.4	252.3	241.2	228.1	215.1	199.2	189.6	172.4
22,5°	387.9	383.3	388.4	391.7	392.5	390.0	253.3	235.4	220.1	206.9	190.3	176.2	163.6
25,0°	395.3	398.5	402.1	400.7	402.0	389.6	250.3	227.6	210.8	196.3	187.2	166.5	152.4
27,5°	401.7	407.5	403.6	409.3	400.9	403.3	260.7	230.3	210.7	188.2	169.1	157.2	146.2
30,0°	413.5	413.1	416.0	405.9	412.5	413.1	252.2	228.6	208.9	181.1	168.2	150.9	126.5
32,5°	416.5	415.7	415.4	407.1	400.4	396.3	250.2	222.7	203.8	181.8	161.7	133.9	105.2
35,0°	424.4	420.6	411.8	403.2	413.5	397.8	239.8	214.2	199.1	170.3	146.6	110.2	83.9
37,5°	425.9	417.6	417.5	409.3	406.8	412.1	226.9	213.4	196.8	169.6	121.4	85.3	67.5
40,0°	424.1	425.5	404.9	403.6	392.5	398.2	225.0	212.7	194.7	148.3	99.2	71.0	64.3
42,5°	423.2	393.4	395.9	380.3	376.0	384.5	217.5	213.5	183.3	128.6	79.8	58.6	62.0
45,0°	389.6	380.7	368.6	371.4	374.3	375.4	224.9	214.4	166.7	108.0	62.0	58.1	54.8
47,5°	370.2	345.8	351.5	356.1	365.4	361.7	224.3	217.2	151.3	82.7	53.5	53.3	57.7
50,0°	334.9	342.1	336.0	335.7	348.4	343.1	242.2	210.6	134.8	60.0	49.0	50.8	51.6
52,5°	346.2	341.0	336.8	343.7	328.2	308.0	259.4	202.0	112.3	49.3	46.8	46.3	48.4
55,0°	348.5	336.1	321.4	333.3	327.1	301.8	255.3	183.3	89.9	43.5	43.5	43.4	45.5
57,5°	333.1	301.4	287.0	280.8	243.0	217.5	256.1	169.8	70.2	40.4	42.6	39.9	41.4
60,0°	279.1	240.3	177.8	140.7	115.6	108.0	237.5	150.4	54.0	37.7	41.5	39.6	41.3
62,5°	178.1	124.1	98.0	100.8	85.8	88.1	239.1	140.0	43.7	36.8	36.2	37.1	37.9
65,0°	99.1	83.2	78.4	82.9	69.1	68.0	241.7	135.3	46.2	32.9	35.4	35.4	34.2
67,5°	67.6	65.4	58.0	59.1	52.8	55.0	240.2	129.6	40.5	27.7	30.8	32.7	30.2
70,0°	54.9	49.1	44.3	41.8	38.6	38.8	219.4	108.6	29.5	25.1	24.9	26.1	25.9
72,5°	37.5	35.8	30.6	29.5	27.8	29.1	182.7	84.2	24.7	21.6	21.1	20.7	20.3
75,0°	27.1	24.4	19.7	18.6	15.6	14.7	95.9	46.9	22.2	15.0	16.2	15.3	14.5
77,5°	16.0	13.2	12.0	10.3	11.8	9.8	39.9	12.4	10.7	9.4	9.8	10.7	10.3
80,0°	9.9	6.2	5.3	5.1	4.8	4.8	13.7	6.5	4.8	4.8	4.6	5.9	6.2
82,5°	3.9	2.2	1.7	1.8	1.9	1.6	2.3	2.3	2.4	2.4	2.2	2.5	3.4
85,0°	0.8	0.3	0.5	0.4	0.5	0.7	1.0	0.7	0.8	0.7	0.7	0.8	0.6
87,5°	0.1	0.2	0.2	0.1	0.1	0.1	0.1	0.1	0.2	0.1	0.1	0.1	0.1
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 21 mini LED	Order number: 5XE2E33S08JB EAN: 4058352725474	LP number 59079_62
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm											Luminous flux in lm/klm	
0,0°	275.2	275.2	275.2	275.2	275.2	275.2	275.2	275.2	275.2	275.2	275.2	0.4	0.4
2,5°	260.8	259.8	256.9	253.8	251.0	252.2	251.9	249.9	250.5	250.2	252.4	3.2	3.6
5,0°	248.3	248.0	247.6	244.7	243.8	240.8	239.7	238.1	240.3	238.3	240.2	6.3	10.0
7,5°	237.6	230.9	229.2	228.6	224.8	222.0	219.4	218.6	215.7	216.7	216.9	9.4	19.3
10,0°	221.3	214.6	208.2	202.9	198.7	198.8	199.0	198.0	198.2	198.1	195.2	12.2	31.5
12,5°	203.7	196.8	192.2	183.7	183.6	182.0	181.0	176.7	174.1	172.2	171.5	15.0	46.5
15,0°	186.5	178.0	176.2	169.6	166.7	160.1	155.8	154.1	151.7	150.9	150.6	17.7	64.2
17,5°	176.1	167.1	157.8	153.5	148.4	147.6	144.8	144.9	145.1	146.7	143.8	20.7	84.8
20,0°	164.3	155.9	149.9	146.2	140.9	137.2	131.6	130.4	128.3	126.9	124.9	23.6	108.5
22,5°	154.2	146.7	140.2	130.7	122.7	116.4	112.1	109.0	111.6	108.2	110.7	26.4	134.9
25,0°	142.1	130.1	120.6	106.7	103.3	95.5	98.8	96.4	97.5	97.4	99.3	29.1	164.0
27,5°	123.7	109.6	92.1	90.5	86.8	87.4	88.0	94.3	96.2	99.4	99.8	31.7	195.7
30,0°	104.3	88.4	83.4	81.7	84.9	91.2	91.8	95.1	93.2	95.8	99.4	34.4	230.1
32,5°	81.6	73.6	73.0	73.4	77.3	81.3	81.6	84.1	86.0	82.6	88.3	36.5	266.6
35,0°	69.6	66.2	65.4	69.0	64.3	66.1	67.8	70.2	73.5	73.0	80.2	38.6	305.2
37,5°	70.3	69.8	68.3	63.8	63.8	59.8	62.3	66.0	64.0	64.6	67.3	41.0	346.2
40,0°	65.5	66.3	67.3	63.3	62.7	67.0	69.6	69.2	66.5	65.0	68.9	43.2	389.4
42,5°	64.0	62.1	68.3	59.5	72.1	75.8	71.4	68.4	64.4	63.6	62.6	45.0	434.4
45,0°	58.5	58.8	65.2	59.8	62.5	64.7	64.0	60.4	60.0	57.6	57.0	46.3	480.6
47,5°	53.8	57.1	57.5	58.4	56.9	59.5	56.5	57.2	57.7	57.2	54.4	47.2	527.9
50,0°	52.4	52.7	52.9	54.9	55.1	55.6	57.4	56.4	52.2	52.9	53.2	48.3	576.2
52,5°	50.2	51.8	51.5	52.5	53.4	50.3	52.2	48.7	52.1	48.7	47.6	49.5	625.7
55,0°	47.0	47.2	50.2	49.9	48.0	48.9	47.8	47.7	44.7	45.8	45.7	50.6	676.3
57,5°	46.6	43.4	43.3	44.0	46.3	44.9	46.0	42.7	41.6	42.0	41.1	50.5	726.8
60,0°	39.7	40.8	39.5	40.4	40.2	41.0	40.9	42.6	41.2	41.2	39.3	48.0	774.8
62,5°	36.9	38.6	35.2	36.9	36.9	36.9	37.6	37.2	37.3	37.5	36.1	45.8	820.6
65,0°	33.7	36.6	36.0	30.8	34.2	31.7	33.6	34.0	34.8	34.2	33.8	43.9	864.4
67,5°	30.7	30.9	31.1	30.5	30.9	30.4	30.0	32.6	33.0	32.5	32.0	40.1	904.6
70,0°	24.9	27.9	27.6	27.1	28.7	24.9	27.3	28.1	30.3	29.7	29.0	35.7	940.2
72,5°	20.6	22.8	23.9	24.1	24.1	24.0	23.7	24.0	28.1	31.5	34.3	29.2	969.4
75,0°	16.2	18.4	21.1	21.3	20.4	20.7	19.2	19.2	26.6	34.8	38.2	17.7	987.1
77,5°	10.5	11.5	15.4	16.1	16.5	15.0	14.2	12.3	12.7	7.0	5.2	8.0	995.1
80,0°	7.0	7.3	9.5	11.3	13.1	11.1	7.6	9.0	5.4	1.0	1.0	3.5	998.6
82,5°	3.1	4.6	5.5	6.4	6.3	4.6	4.5	3.8	1.9	0.6	0.3	1.2	999.7
85,0°	0.9	0.9	0.9	1.0	0.9	0.8	0.7	0.7	0.2	0.1	0.0	0.2	1000.0
87,5°	0.1	0.1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family Streetlight 21 mini LED	Order number: 5XE2E33S08JB EAN: 4058352725474	LP number 59079_62
--	--	------------------------------

Dimming levels table	environmental temperature: 25°C	siteco
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W] start of lifetime	Power consumption [W] end of lifetime	Power consumption [W] average
100	254	254	12830	87.3	90.3	88.8
95	239	252	12205	82.1	84.9	83.5
90	224	249	11564	76.9	79.4	78.2
85	209	247	10908	71.7	74.1	72.9
80	195	244	10275	66.8	69.1	67.9
75	181	242	9626	62.1	64.1	63.1
70	167	239	8970	57.3	59.2	58.2
65	154	236	8351	53.0	54.7	53.8
60	141	232	7718	48.6	50.2	49.4
55	128	229	7075	44.3	45.7	45.0
50	115	225	6416	40.0	41.3	40.6
45	103	221	5796	36.1	37.2	36.7
40	90	216	5114	31.8	32.7	32.2
35	78	211	4474	27.9	28.7	28.3
30	66	205	3823	24.0	24.7	24.4
25	55	198	3219	20.4	21.0	20.7
20	43	189	2550	16.5	17.0	16.8
15	32	178	1929	13.0	13.3	13.2
15	31	177	1872	12.7	13.0	12.8

Dimming levels table	environmental temperature: 5°C
-----------------------------	--------------------------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W] start of lifetime	Power consumption [W] end of lifetime	Power consumption [W] average
100	254	254	13250	88.3	91.4	89.8
95	239	252	12584	83.1	85.9	84.5
90	224	249	11904	77.8	80.4	79.1
85	210	247	11257	72.9	75.4	74.2
80	196	245	10594	68.1	70.3	69.2
75	182	242	9916	63.3	65.3	64.3
70	169	239	9282	58.8	60.7	59.8
65	155	236	8587	54.1	55.8	55.0
60	142	233	7931	49.7	51.2	50.4
55	129	229	7267	45.2	46.7	46.0
50	117	226	6640	41.3	42.5	41.9
45	104	221	5952	37.0	38.1	37.6
40	92	217	5307	32.9	33.9	33.4
35	80	212	4654	28.9	29.8	29.4
30	68	206	3990	25.0	25.8	25.4
25	56	199	3319	21.0	21.6	21.3
20	44	190	2640	17.1	17.6	17.4
15	33	179	2010	13.5	13.9	13.7
14	31	177	1895	12.9	13.2	13.0

Photometric test report

Family Streetlight 21 mini LED	Order number: 5XE2E33S08JB EAN: 4058352725474	LP number 59079_62
--	--	------------------------------

Dimming levels table	environmental temperature: 15°C	siteco
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]	Power consumption [W]	Power consumption [W]
				start of lifetime	end of lifetime	average
100	254	254	13060	87.8	90.8	89.3
95	239	252	12413	82.6	85.3	83.9
90	224	249	11751	77.3	79.9	78.6
85	210	247	11120	72.5	74.9	73.7
80	195	244	10425	67.3	69.6	68.4
75	182	242	9808	62.9	64.9	63.9
70	168	239	9137	58.1	60.0	59.0
65	155	236	8505	53.7	55.4	54.6
60	142	233	7859	49.3	50.8	50.0
55	129	229	7206	44.9	46.4	45.6
50	116	225	6535	40.6	41.9	41.2
45	103	221	5855	36.3	37.5	36.9
40	91	216	5216	32.3	33.4	32.8
35	79	211	4569	28.4	29.2	28.8
30	67	205	3912	24.5	25.2	24.8
25	55	198	3245	20.5	21.1	20.8
20	44	190	2626	16.9	17.4	17.2
15	32	178	1942	13.1	13.4	13.2
14	31	177	1885	12.8	13.1	13.0

Photometric test report

Family Streetlight 21 mini LED	Order number: 5XE2E33S08JB EAN: 4058352725474	LP number 59079_62
--	--	-------------------------------------

Luminousfluxs table	siteco
----------------------------	---------------

Temperature °C	Luminous flux lm	Power consumption W
25.0	12830.0	87.3
5.0	13250.0	88.3
15.0	13060.0	87.8