




# Photometric test report

<b>Family</b> <b>Streetlight 21 mini easy LED</b>	<b>Order number: 5XE6B47N08HB</b> <b>EAN: 4058352897362</b>	<b>LP number</b> <b>59065_1147</b>
	<b>Version</b>	post-top or side-entry mounting, NEMA 7 pin (DALI)
	<b>Optic</b>	asymmetric, wide distribution (ST0.5a)
	<b>Cover</b>	toughened safety glass
	<b>Lamps</b>	LED 4000 K   CRI ≥ 70
	<b>Controlgear</b>	ECG-DALI Plus
<b>Rated values</b>	Net luminous flux = 9430 lm Power consumption = 66.0 W Luminous efficacy = 142.9 lm/W	<b>serial documentation</b> <b>16.06.2023</b>
		

**Luminous intensity in cd/klm**
C180-0
C205-25
C207.5-27.5
C270-90
**Imax: 661 cd/klm**

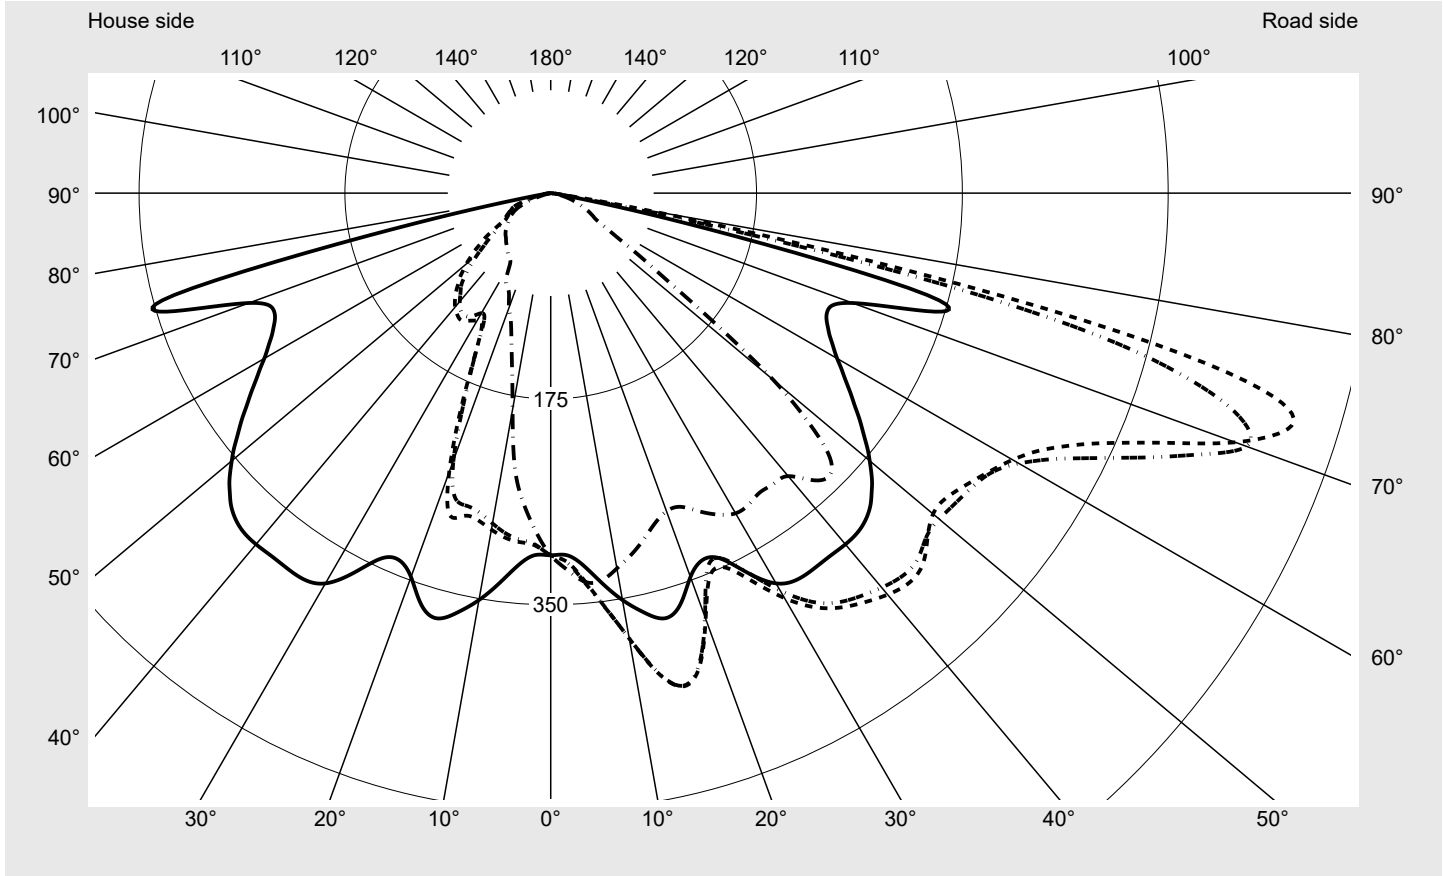

Luminaire output ratios	
Eta	100.0%
Eta 0° - 90°	100.0%
Eta 90° - 180°	0.0%


Luminous intensity class acc. to EN13201-2	
Class:	G3
Imax 70°	629.6
Imax 80°	99.6
Imax 90°	0.0
Imax >90°	0.0
Imax >95°	0.0

**Measurement conditions**  
 DIN EN 13032 and DIN 5032

**Photometric test report**

<b>Family</b> Streetlight 21 mini easy LED	<b>Order number: 5XE6B47N08HB</b> <b>EAN: 4058352897362</b>	<b>LP number</b> 59065_1147
---	--	--------------------------------

**Envelope curve in cd/klm**      **KMK 73°**    **KMK 72°**    **KMK 71°**    **KMK 70°**      **siteco**

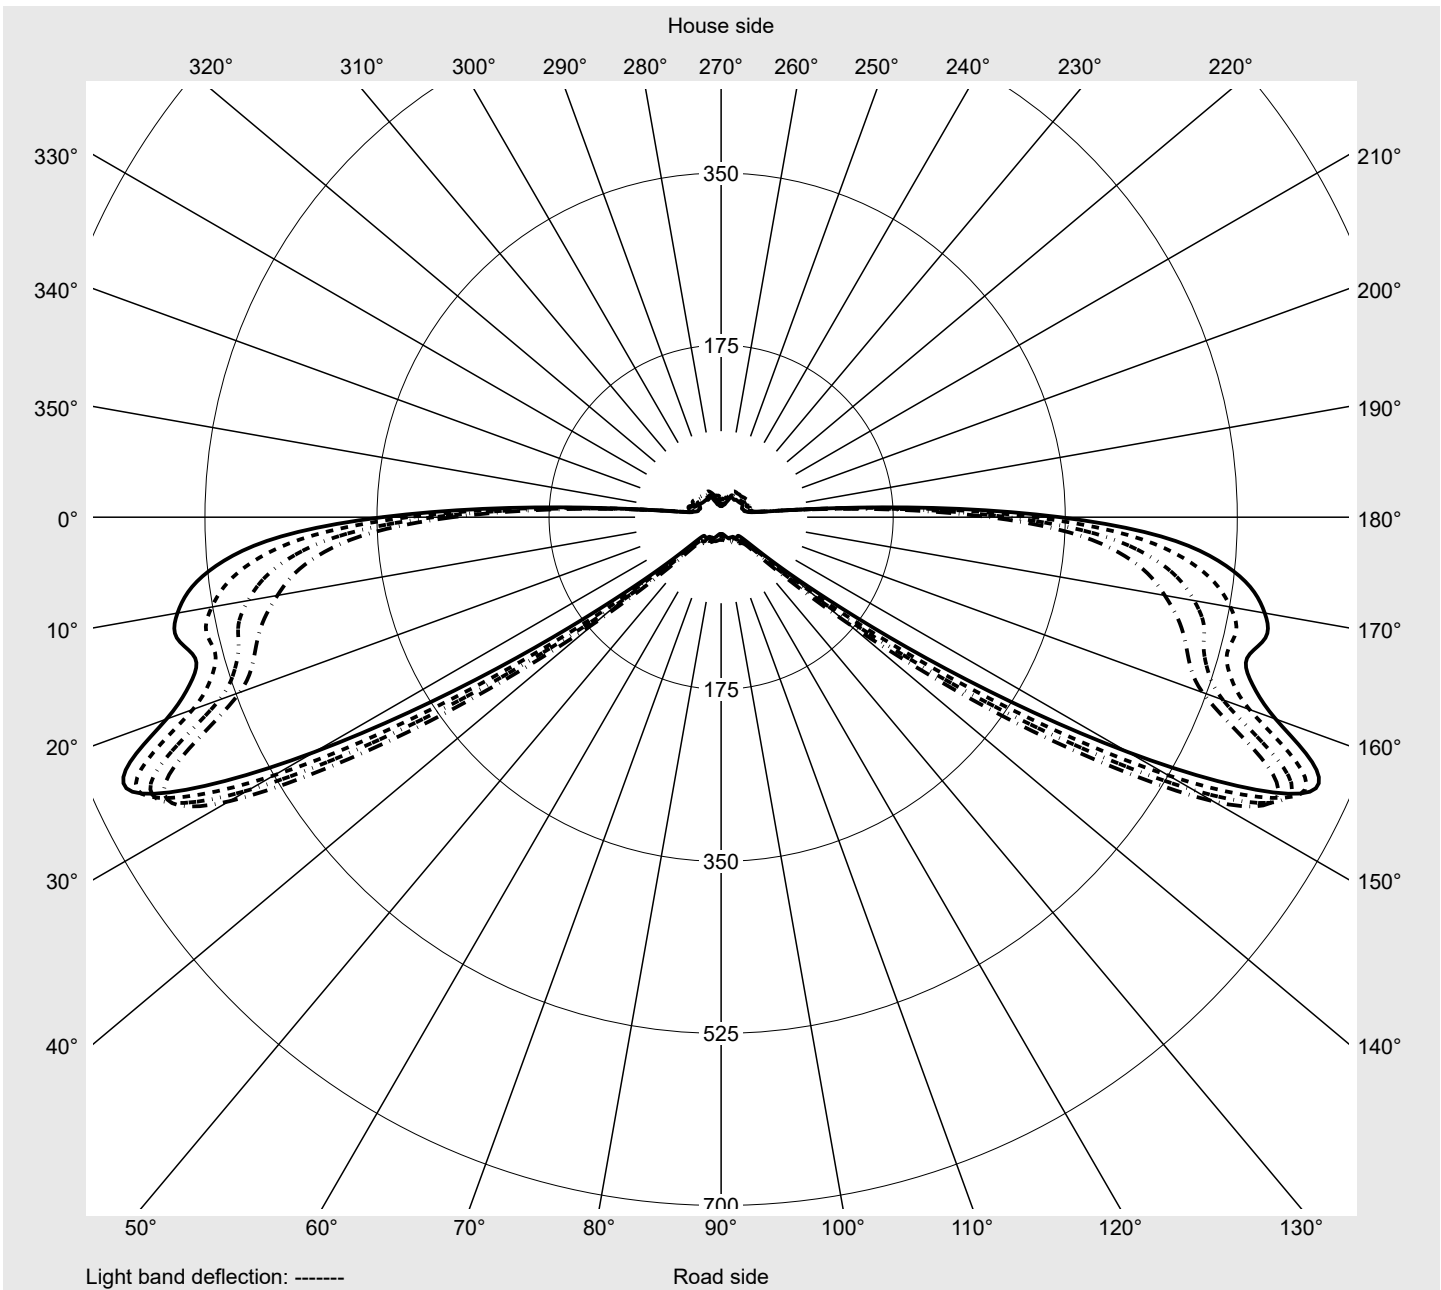

## Photometric test report

<b>Family</b> <b>Streetlight 21 mini easy LED</b>	<b>Order number: 5XE6B47N08HB</b> <b>EAN: 4058352897362</b>	<b>LP number</b> <b>59065_1147</b>
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>
<b>siteco</b>		

C-planes	0,0° 180,0°	2,5° 177,5°	5,0° 175,0°	7,5° 172,5°	10,0° 170,0°	12,5° 167,5°	15,0° 165,0°	17,5° 162,5°	20,0° 160,0°	22,5° 157,5°	25,0° 155,0°	27,5° 152,5°	30,0° 150,0°	32,5° 147,5°	35,0° 145,0°
γ	Luminous intensity in cd/klm														
0,0°	307.9	307.9	307.9	307.9	307.9	307.9	307.9	307.9	307.9	307.9	307.9	307.9	307.9	307.9	307.9
2,5°	308.1	308.8	309.3	310.1	310.8	311.3	311.8	312.4	312.9	313.4	313.7	314.3	314.7	315.1	316.0
5,0°	317.7	319.6	321.6	323.5	325.2	326.6	327.6	328.5	329.3	330.1	331.0	332.4	333.0	333.5	333.7
7,5°	334.5	338.4	342.1	345.1	347.7	349.5	351.2	352.4	353.7	354.6	355.3	355.6	355.6	355.3	354.8
10,0°	351.3	358.1	364.1	369.2	373.3	376.6	379.4	381.6	383.3	384.1	384.6	384.4	383.1	381.3	378.6
12,5°	365.0	374.7	383.1	390.4	396.3	402.2	406.9	411.9	413.7	416.2	416.9	416.3	414.2	410.6	405.9
15,0°	374.3	385.3	394.7	402.2	409.1	415.6	422.0	428.1	430.4	433.1	434.2	433.6	431.6	428.4	425.3
17,5°	366.6	377.4	386.3	393.5	400.0	406.2	412.2	417.2	419.8	421.5	421.3	419.8	417.1	413.9	411.0
20,0°	347.4	357.9	364.2	370.8	374.9	380.5	383.7	388.9	389.3	389.1	385.2	383.5	378.6	376.6	370.5
22,5°	337.6	345.7	350.7	355.3	358.9	362.7	365.0	367.5	364.6	359.8	353.3	347.3	340.8	334.2	327.2
25,0°	343.1	350.8	356.8	361.5	366.2	369.4	371.4	370.6	365.9	359.1	351.2	342.5	333.5	323.5	313.5
27,5°	364.4	373.1	379.9	385.6	390.9	395.0	395.9	392.9	387.3	380.2	372.3	364.0	355.5	347.0	337.5
30,0°	383.2	393.7	402.4	410.0	416.8	421.5	422.0	418.2	412.2	405.2	397.5	390.2	383.3	376.7	368.4
32,5°	389.7	403.3	414.6	425.2	434.7	440.7	441.1	437.1	431.2	424.4	417.4	411.8	406.8	402.3	396.2
35,0°	389.9	408.1	422.8	436.2	448.1	454.9	455.0	450.8	444.2	436.7	430.0	424.8	420.3	416.5	413.7
37,5°	389.4	413.4	432.2	449.5	463.9	471.1	469.9	463.8	455.5	446.4	438.5	432.1	426.8	423.8	424.8
40,0°	389.8	420.3	443.7	464.5	480.6	487.4	485.0	477.2	466.8	455.4	445.6	437.8	432.1	430.1	433.0
42,5°	388.6	425.8	453.7	477.2	494.3	500.9	497.4	487.3	474.9	461.5	450.1	442.0	437.8	438.7	442.0
45,0°	382.6	425.9	457.7	483.1	500.5	506.7	502.1	490.3	475.2	459.4	447.1	440.8	440.7	447.7	460.0
46,0°	378.5	424.2	457.4	483.2	500.5	506.5	501.5	489.1	472.7	455.5	442.7	437.9	441.5	453.3	469.4
47,0°	373.1	421.4	456.4	482.8	499.9	505.7	500.5	487.1	469.1	450.4	437.3	434.5	443.8	462.6	479.9
48,0°	367.7	418.5	455.1	481.8	498.7	504.2	498.6	484.5	465.0	444.9	431.9	432.0	447.1	470.0	486.0
49,0°	361.1	414.7	453.0	480.3	496.8	502.0	496.1	481.3	460.4	439.5	427.5	431.0	450.3	474.7	489.4
50,0°	354.0	410.0	450.3	478.1	494.6	499.5	493.4	477.9	455.7	434.5	424.4	431.2	452.1	475.8	489.4
51,0°	346.9	405.0	447.1	475.4	491.9	496.9	490.7	474.6	451.6	431.0	423.2	431.9	452.4	474.4	486.6
52,0°	338.9	399.3	443.0	472.0	488.9	494.4	488.3	471.8	448.7	429.4	423.9	432.9	450.9	469.4	480.7
53,0°	331.3	393.6	439.0	468.6	485.7	491.8	486.1	469.5	447.1	429.9	425.9	434.0	449.2	464.7	475.3
54,0°	323.8	387.7	434.4	464.5	481.9	488.6	483.7	467.9	447.1	432.0	428.6	435.2	447.5	460.6	472.2
55,0°	315.7	381.2	429.2	459.8	477.6	485.1	481.1	466.9	448.4	435.2	431.9	436.8	446.5	458.6	472.3
56,0°	308.5	375.6	424.4	455.3	473.4	481.6	479.1	466.8	450.7	439.1	435.5	438.7	447.2	459.9	475.6
57,0°	301.2	369.6	419.0	450.0	468.5	477.8	477.1	467.3	453.6	443.4	439.3	441.4	449.8	464.8	481.3
58,0°	294.2	363.8	413.9	445.0	463.8	474.3	475.7	468.1	456.6	447.8	443.5	445.5	455.3	472.8	489.0
59,0°	287.8	358.6	409.3	440.2	459.3	471.2	474.9	469.1	459.4	451.9	448.2	451.4	463.7	482.6	496.5
60,0°	281.2	352.9	404.1	434.7	454.0	467.9	474.1	470.1	462.0	455.9	453.5	459.6	476.1	496.8	505.2
61,0°	275.7	348.2	399.8	430.1	449.8	465.3	473.5	471.2	464.6	460.2	459.9	469.9	489.9	509.8	510.1
62,0°	270.9	343.8	395.4	425.6	445.9	463.0	473.1	472.3	467.5	465.0	467.7	481.9	504.6	522.3	512.5
63,0°	266.1	339.3	390.7	421.0	442.6	461.3	472.8	473.6	471.0	471.0	477.7	496.8	522.5	533.2	507.7
64,0°	262.4	336.0	386.9	417.2	439.9	460.0	472.6	475.0	475.0	478.4	490.0	513.9	539.4	539.5	498.2
65,0°	259.0	332.9	383.5	414.0	437.6	459.0	472.4	476.3	479.3	487.3	504.4	532.5	553.7	539.0	483.0
66,0°	256.6	330.6	380.9	411.6	436.4	458.8	472.5	477.9	484.3	498.3	522.3	552.6	564.1	531.2	460.2
67,0°	255.8	329.5	378.9	409.8	435.4	457.7	472.8	480.0	490.4	511.5	543.0	572.8	569.4	519.5	439.1
68,0°	256.9	330.8	380.0	411.0	436.2	457.8	474.1	483.3	497.7	526.9	566.8	593.5	572.4	504.8	412.3
69,0°	262.1	338.0	387.8	418.7	442.0	461.6	478.2	489.1	507.1	545.2	593.9	614.9	578.0	493.5	388.3
70,0°	273.1	354.5	405.0	437.4	458.2	475.8	488.7	500.0	521.1	567.1	619.4	629.6	577.9	474.0	361.2
71,0°	292.3	380.4	434.2	467.9	488.6	502.8	508.0	519.1	543.1	594.3	640.0	629.2	555.4	441.6	324.0
72,0°	318.8	414.0	471.3	505.8	526.0	536.5	532.9	543.9	571.9	624.9	655.4	616.0	525.2	404.9	284.4

## Photometric test report

<b>Family</b> Streetlight 21 mini easy LED	<b>Order number: 5XE6B47N08HB</b> <b>EAN: 4058352897362</b>	<b>LP number</b> 59065_1147
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>
		<b>siteco</b>

C-planes	37,5° 142,5°	40,0° 140,0°	42,5° 137,5°	45,0° 135,0°	47,5° 132,5°	50,0° 130,0°	52,5° 127,5°	55,0° 125,0°	57,5° 122,5°	60,0° 120,0°	62,5° 117,5°	65,0° 115,0°	67,5° 112,5°	70,0° 110,0°	72,5° 107,5°
γ	Luminous intensity in cd/klm														
0,0°	307.9	307.9	307.9	307.9	307.9	307.9	307.9	307.9	307.9	307.9	307.9	307.9	307.9	307.9	307.9
2,5°	316.4	316.7	317.0	317.2	317.9	318.4	318.7	318.5	318.5	318.4	318.7	319.2	319.3	319.4	319.5
5,0°	334.2	333.8	334.5	334.3	334.7	334.4	334.7	334.6	334.1	333.8	333.7	333.1	333.2	332.9	333.0
7,5°	354.1	353.4	352.6	351.5	350.2	349.0	347.8	346.0	344.7	343.2	341.8	340.5	339.2	338.1	337.0
10,0°	376.0	372.5	369.3	365.0	361.2	357.0	352.8	349.2	345.8	342.6	339.7	337.3	335.1	333.0	331.2
12,5°	400.3	393.0	385.1	377.4	369.8	362.7	356.8	351.0	345.7	340.9	336.8	333.2	330.1	327.3	324.8
15,0°	422.3	415.9	407.6	397.9	387.0	376.0	363.8	354.9	346.8	339.9	334.1	328.9	324.4	320.5	317.1
17,5°	407.4	403.1	399.0	393.8	387.9	380.5	368.8	359.1	348.8	339.0	330.7	323.9	318.1	313.0	308.6
20,0°	370.3	364.8	363.7	360.0	358.5	356.2	353.8	350.7	345.5	337.7	328.6	319.8	312.7	307.0	302.0
22,5°	324.7	323.4	323.0	322.5	321.8	321.3	322.5	324.0	325.5	325.9	323.2	317.2	310.3	304.4	299.7
25,0°	305.4	299.2	294.2	291.7	291.4	293.2	296.0	298.2	301.8	306.7	311.3	312.8	311.0	307.2	303.7
27,5°	326.8	314.7	302.3	291.6	283.8	281.8	281.0	282.7	286.5	292.4	300.1	307.7	312.2	312.5	310.8
30,0°	358.5	347.3	334.9	320.1	303.0	290.1	280.6	277.6	279.6	284.8	292.6	302.7	312.5	317.9	318.4
32,5°	390.1	383.0	373.1	358.2	338.8	317.9	298.9	286.6	282.2	285.6	293.9	304.9	316.5	325.1	327.2
35,0°	412.8	410.5	403.1	389.5	370.8	350.0	328.9	311.1	300.6	300.7	308.4	318.5	328.0	335.2	336.5
37,5°	427.9	427.9	422.2	411.3	397.0	383.4	368.5	354.5	342.9	336.3	335.0	337.3	340.2	343.0	343.2
40,0°	436.3	435.4	431.9	430.4	432.0	428.5	419.2	404.4	384.6	363.9	348.8	341.9	339.9	340.5	341.6
42,5°	444.8	449.7	458.7	466.4	467.2	458.0	443.8	422.6	395.1	366.9	344.4	333.2	333.2	338.3	344.5
45,0°	471.7	478.6	481.0	478.9	471.1	456.3	436.7	412.4	386.5	362.1	342.3	332.2	333.6	340.1	345.4
46,0°	481.0	485.1	483.6	476.8	465.0	448.9	429.3	406.9	383.5	360.9	341.8	330.6	329.9	335.0	339.0
47,0°	488.2	488.4	481.5	469.7	455.5	440.6	422.2	401.8	380.0	358.3	338.8	325.5	322.2	325.4	327.7
48,0°	491.2	487.6	477.3	463.5	448.9	433.2	415.5	395.8	374.3	352.4	331.6	315.9	309.3	310.1	309.7
49,0°	491.2	484.0	471.7	457.6	443.2	426.9	408.4	387.8	365.0	342.1	319.7	302.0	292.3	290.6	287.7
50,0°	489.0	479.4	467.2	453.6	437.9	419.4	398.5	375.6	350.3	326.0	302.0	283.0	270.0	266.4	260.2
51,0°	485.7	476.5	465.0	451.1	433.6	410.2	385.4	358.9	331.0	304.9	280.3	259.6	244.7	238.2	231.8
52,0°	482.0	475.5	463.8	447.0	425.1	397.5	367.6	337.4	307.2	280.3	255.6	234.8	218.9	211.2	203.0
53,0°	479.7	476.0	463.1	442.4	415.1	380.2	344.6	311.1	279.6	252.5	228.2	207.9	191.7	182.3	171.4
54,0°	479.7	477.0	462.4	437.7	404.0	360.0	320.0	284.8	253.0	226.4	202.9	183.2	167.5	156.5	144.4
55,0°	482.0	478.2	458.5	424.8	380.3	334.6	292.3	256.3	224.8	199.1	176.9	158.5	143.4	132.2	120.7
56,0°	485.2	478.1	452.2	409.3	358.0	306.7	262.7	226.2	194.9	170.2	149.7	133.5	120.7	111.0	100.4
57,0°	488.5	475.9	439.7	388.7	331.1	279.3	234.3	198.3	167.4	144.5	126.3	113.0	100.6	89.9	79.7
58,0°	490.7	468.6	421.3	362.1	301.7	250.7	205.4	170.2	140.2	120.1	103.6	91.9	79.0	71.2	63.9
59,0°	491.3	459.3	402.7	339.0	277.5	222.8	178.0	143.6	116.0	97.5	83.3	73.4	65.0	59.6	55.0
60,0°	487.7	441.4	375.6	308.4	246.1	194.9	151.0	118.8	94.3	79.1	69.2	62.4	56.3	52.0	48.7
61,0°	479.5	421.8	350.5	281.6	219.5	167.3	125.1	96.3	76.4	65.2	58.8	54.5	50.1	46.7	44.1
62,0°	468.6	402.1	327.6	257.9	195.2	142.7	104.1	79.5	63.7	55.8	52.5	50.0	46.6	43.5	41.4
63,0°	448.5	374.0	296.7	225.8	163.9	119.3	86.3	65.8	53.8	49.6	48.7	47.1	44.1	41.2	39.2
64,0°	429.0	349.4	271.4	199.8	140.1	98.8	71.3	54.6	46.9	45.4	45.5	44.1	41.5	38.9	37.1
65,0°	402.8	321.3	240.0	172.2	116.0	81.9	59.2	47.3	42.7	42.3	42.5	41.0	38.8	36.7	35.0
66,0°	374.2	289.5	209.3	142.9	95.4	67.0	49.8	42.3	39.4	39.3	39.5	38.2	36.0	34.5	32.9
67,0°	348.9	262.5	182.0	120.9	79.2	54.9	43.5	39.0	36.7	36.5	36.6	35.3	33.4	31.9	30.7
68,0°	315.2	226.5	148.9	95.5	60.6	45.7	39.2	36.5	34.4	34.0	33.9	32.9	31.3	30.0	28.8
69,0°	286.1	195.6	124.1	76.6	49.3	39.1	35.9	34.3	32.0	31.4	31.7	30.8	29.0	27.9	26.9
70,0°	252.1	165.7	100.4	61.6	41.0	35.0	33.3	32.4	29.9	29.3	29.7	28.9	27.5	26.7	25.6
71,0°	217.4	134.7	78.5	47.2	34.4	31.5	30.7	30.2	27.6	27.1	27.2	26.7	26.0	25.8	24.9
72,0°	185.4	111.2	61.4	37.3	29.8	28.3	28.1	27.9	25.7	24.9	25.0	24.6	24.6	24.6	23.7

## Photometric test report

<b>Family</b> Streetlight 21 mini easy LED	<b>Order number: 5XE6B47N08HB</b> <b>EAN: 4058352897362</b>	<b>LP number</b> 59065_1147
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>
		<b>siteco</b>

C-planes	75,0° 105,0°	77,5° 102,5°	80,0° 100,0°	82,5° 97,5°	85,0° 95,0°	87,5° 92,5°	90,0°	182,5° 357,5°	185,0° 355,0°	187,5° 352,5°	190,0° 350,0°	192,5° 347,5°	195,0° 345,0°	197,5° 342,5°	200,0° 340,0°
γ	Luminous intensity in cd/klm														
0,0°	307.9	307.9	307.9	307.9	307.9	307.9	307.9	307.9	307.9	307.9	307.9	307.9	307.9	307.9	307.9
2,5°	319.6	320.3	320.4	320.5	320.5	320.5	320.6	307.4	306.6	305.7	304.9	304.1	303.3	302.5	301.7
5,0°	332.8	332.3	332.4	332.0	331.9	331.9	331.6	315.8	314.0	312.2	310.1	308.0	305.9	303.8	301.9
7,5°	335.8	334.8	333.9	333.1	332.6	332.3	332.2	330.4	326.4	322.7	319.0	315.0	311.1	307.1	303.3
10,0°	329.4	327.9	326.6	325.5	324.6	324.0	324.0	344.4	337.6	331.0	325.0	318.7	312.8	307.1	301.5
12,5°	322.6	320.6	318.8	317.3	316.2	315.1	315.2	355.2	345.5	336.4	327.9	320.0	312.5	305.2	298.1
15,0°	314.3	311.8	309.6	307.8	306.3	305.1	304.9	362.8	351.5	341.2	332.3	324.8	316.4	308.1	300.0
17,5°	305.0	302.1	299.6	297.6	296.0	294.8	294.4	354.5	342.5	332.0	323.3	317.1	310.9	305.2	300.2
20,0°	297.9	294.7	292.3	290.3	288.9	288.1	287.9	335.9	322.0	310.8	299.8	290.8	282.7	277.5	271.8
22,5°	296.0	293.1	291.0	289.7	289.0	288.8	288.7	326.1	311.7	297.9	284.1	271.1	259.0	247.9	233.0
25,0°	301.4	299.9	298.7	298.2	298.3	298.6	298.5	331.2	315.9	298.6	280.3	260.1	239.3	214.6	187.6
27,5°	309.2	308.4	307.6	307.3	307.4	307.9	308.1	352.2	335.4	315.0	292.1	266.2	235.2	197.2	161.6
30,0°	316.8	315.7	314.8	314.1	313.7	314.0	314.4	369.6	351.6	329.1	302.6	270.7	231.0	186.0	152.9
32,5°	324.4	321.1	318.5	316.5	314.9	313.8	313.7	373.3	352.9	327.9	297.7	258.9	212.1	170.0	147.0
35,0°	331.2	324.6	319.6	316.2	313.4	311.3	310.4	368.2	343.5	314.5	279.1	233.0	183.4	152.3	139.8
37,5°	337.4	328.9	322.2	317.9	314.9	312.6	311.5	360.8	330.0	296.2	252.7	199.6	157.7	138.7	135.4
40,0°	338.4	330.6	323.8	319.3	316.4	314.6	314.1	353.5	315.8	275.9	222.7	168.6	137.6	131.2	131.7
42,5°	346.2	341.7	336.4	334.0	332.2	332.0	331.2	344.6	299.7	250.6	190.5	143.5	126.1	125.5	126.0
45,0°	346.9	342.5	338.3	336.3	336.6	336.8	336.9	331.8	280.5	222.3	160.9	124.3	117.0	118.3	120.2
46,0°	339.6	335.3	331.8	330.6	331.5	331.7	332.1	325.1	271.5	210.7	150.4	118.6	112.9	114.5	117.0
47,0°	327.4	323.1	320.0	318.5	319.7	320.3	321.0	317.3	261.5	198.6	140.4	113.4	110.0	112.1	114.3
48,0°	307.8	302.7	300.0	298.5	300.0	300.0	301.7	309.5	251.7	187.5	132.0	108.8	106.5	109.3	110.9
49,0°	284.6	279.0	276.1	273.5	275.2	274.7	277.1	300.8	240.9	176.0	124.1	104.0	102.1	106.3	107.7
50,0°	257.2	248.9	247.1	241.0	245.0	241.1	247.2	291.3	229.9	164.9	116.7	99.4	98.7	103.4	104.4
51,0°	226.1	216.8	210.7	203.9	204.2	201.1	204.1	282.2	219.2	154.6	110.0	95.2	94.9	99.8	100.4
52,0°	193.4	178.9	171.2	163.6	163.7	160.8	162.9	272.2	207.9	144.5	103.2	91.0	93.1	96.9	96.8
53,0°	157.3	142.6	134.9	129.0	128.7	127.0	127.7	263.1	197.8	135.9	96.6	85.8	92.5	96.3	93.9
54,0°	130.0	116.6	110.4	106.6	106.7	105.2	105.6	254.0	187.8	127.7	89.8	77.9	80.9	90.3	91.2
55,0°	108.7	98.6	93.6	90.3	89.8	87.9	88.4	244.5	177.7	119.9	83.7	70.6	70.0	78.2	84.8
56,0°	89.1	79.9	76.0	73.7	73.4	71.8	72.5	235.9	169.1	113.3	79.2	66.5	65.4	69.3	74.6
57,0°	72.1	66.7	64.0	62.7	62.6	61.2	61.9	227.6	160.9	107.2	75.1	63.5	62.8	65.3	67.5
58,0°	60.4	56.6	55.5	54.6	55.0	53.2	54.3	219.6	153.6	101.8	71.4	60.9	60.8	63.2	64.6
59,0°	52.4	50.1	49.2	48.8	48.9	47.7	48.1	212.3	147.1	97.1	68.2	58.8	58.8	61.2	61.8
60,0°	47.0	45.2	44.5	44.8	44.8	44.1	44.0	205.1	140.7	92.5	65.1	56.9	57.3	59.5	59.6
61,0°	42.9	41.8	41.6	42.3	42.2	41.9	41.9	199.1	135.3	88.4	62.4	55.3	56.1	58.0	57.6
62,0°	40.5	39.5	39.5	40.3	40.4	40.0	40.0	193.8	130.0	83.9	59.4	53.5	54.7	56.4	55.3
63,0°	38.4	37.5	37.5	38.5	38.4	38.2	38.0	187.8	122.6	77.5	55.7	51.3	53.3	54.9	53.4
64,0°	36.3	35.5	35.7	36.4	36.5	36.1	36.1	181.9	113.9	70.4	51.9	48.9	51.1	52.7	51.1
65,0°	34.3	33.6	33.9	34.5	35.1	34.1	33.8	175.7	105.1	64.0	48.3	46.1	48.2	50.1	48.5
66,0°	32.4	31.8	32.3	32.9	33.2	31.9	31.8	171.5	98.8	59.6	45.2	43.6	46.1	47.8	46.3
67,0°	30.3	30.3	30.8	31.0	30.7	29.6	29.7	169.3	95.0	56.0	42.3	41.1	43.1	44.2	42.4
68,0°	28.5	28.7	29.1	29.0	28.2	27.5	27.6	168.9	92.3	52.6	39.2	38.3	40.7	42.0	39.7
69,0°	26.8	26.9	26.8	26.3	25.7	25.3	25.3	171.0	91.1	49.7	36.5	35.5	37.7	38.4	36.7
70,0°	25.3	25.0	24.5	23.8	23.4	23.1	23.2	176.6	91.3	46.9	33.6	32.5	34.1	34.8	33.4
71,0°	24.0	23.1	22.3	21.5	21.3	20.8	21.2	187.1	93.6	44.6	30.8	29.5	30.4	31.1	29.9
72,0°	22.6	21.5	20.5	19.7	19.2	18.9	19.6	202.6	97.4	43.4	29.6	27.0	26.6	27.3	26.5

## Photometric test report

<b>Family</b> Streetlight 21 mini easy LED	<b>Order number: 5XE6B47N08HB</b> <b>EAN: 4058352897362</b>	<b>LP number</b> 59065_1147
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>



C-planes	202,5° 337,5°	205,0° 335,0°	207,5° 332,5°	210,0° 330,0°	212,5° 327,5°	215,0° 325,0°	217,5° 322,5°	220,0° 320,0°	222,5° 317,5°	225,0° 315,0°	227,5° 312,5°	230,0° 310,0°	232,5° 307,5°	235,0° 305,0°	237,5° 302,5°
γ	Luminous intensity in cd/klm														
0,0°	307.9	307.9	307.9	307.9	307.9	307.9	307.9	307.9	307.9	307.9	307.9	307.9	307.9	307.9	307.9
2,5°	300.8	300.0	299.2	298.5	297.9	297.2	296.6	295.6	295.1	294.7	293.9	293.0	292.2	291.8	291.4
5,0°	299.9	297.9	295.8	293.9	292.0	290.0	288.1	286.3	285.1	283.1	281.6	279.9	278.1	276.7	275.1
7,5°	299.3	295.5	291.9	288.2	284.6	281.2	277.8	274.5	271.1	268.5	265.5	262.6	259.7	257.0	254.2
10,0°	295.8	290.5	285.1	279.9	274.8	269.7	264.6	259.6	254.3	250.9	245.7	240.6	235.0	228.9	224.1
12,5°	291.1	284.9	278.4	271.7	264.4	256.9	248.5	239.9	230.8	221.7	212.5	203.3	196.6	189.1	183.5
15,0°	292.0	284.1	275.3	264.8	252.6	239.9	227.6	215.3	204.7	194.9	185.8	179.6	174.4	169.4	164.7
17,5°	294.8	286.5	271.0	256.3	241.4	227.2	214.9	204.5	195.6	187.5	180.0	172.4	165.0	157.9	151.1
20,0°	265.4	252.3	241.8	231.6	225.4	220.0	214.3	206.8	197.1	186.1	175.0	164.1	154.5	146.3	139.3
22,5°	216.2	200.7	193.5	192.2	193.9	195.8	196.1	193.8	188.2	179.8	170.0	159.5	149.6	141.1	134.0
25,0°	165.2	153.2	152.2	156.0	159.5	162.5	164.3	165.4	165.1	163.0	158.6	152.3	144.9	136.3	127.5
27,5°	137.8	126.7	123.1	123.9	126.3	131.0	136.3	140.1	141.1	140.2	138.4	135.9	131.3	124.8	117.9
30,0°	135.2	125.1	117.8	113.7	111.8	112.0	113.5	115.5	117.7	119.5	119.7	119.0	115.4	109.3	103.7
32,5°	135.3	128.6	124.1	119.1	114.6	109.5	105.2	102.3	101.4	101.5	101.2	98.6	96.3	94.2	91.4
35,0°	135.5	132.2	127.1	121.5	115.0	108.7	102.7	96.5	90.3	85.3	82.4	80.7	79.5	77.8	76.5
37,5°	134.1	130.4	125.7	118.9	112.1	105.3	96.7	86.7	78.5	73.7	71.1	68.9	68.4	69.0	69.6
40,0°	130.1	126.5	120.3	113.5	106.7	96.5	84.8	76.1	70.8	67.4	65.0	63.4	62.6	62.7	63.7
42,5°	125.1	120.2	113.4	106.5	95.6	83.2	74.7	69.7	66.3	63.3	60.9	59.2	58.7	59.0	59.8
45,0°	118.4	112.1	106.0	95.2	82.0	72.8	67.7	64.4	61.8	59.8	58.1	57.0	56.4	56.3	56.7
46,0°	114.6	108.5	101.3	89.3	77.1	69.3	65.0	62.2	60.2	58.6	57.3	56.4	55.7	55.4	55.7
47,0°	111.3	105.7	97.0	83.9	72.7	66.2	62.5	60.2	58.7	57.5	56.6	55.8	55.2	54.8	54.8
48,0°	107.4	101.8	92.1	78.9	69.0	63.5	60.4	58.6	57.5	56.6	55.8	55.2	54.6	54.2	54.1
49,0°	103.6	97.5	86.4	73.8	65.4	60.9	58.5	57.2	56.4	55.7	55.1	54.5	53.9	53.5	53.4
50,0°	100.6	93.7	81.6	69.5	62.3	58.6	56.9	56.0	55.4	54.8	54.3	53.9	53.3	52.9	52.7
51,0°	97.0	89.0	76.0	65.2	59.5	56.7	55.5	54.8	54.3	53.9	53.5	53.1	52.6	52.2	52.1
52,0°	93.4	84.5	71.3	61.6	57.1	55.1	54.2	53.7	53.3	53.0	52.7	52.3	51.9	51.5	51.4
53,0°	89.7	80.2	67.1	58.7	55.3	53.8	53.0	52.6	52.3	52.1	51.8	51.6	51.2	50.8	50.7
54,0°	85.9	74.6	62.3	55.9	53.6	52.4	51.8	51.5	51.3	51.1	50.8	50.6	50.3	50.1	49.9
55,0°	82.0	70.0	58.6	53.7	52.0	51.1	50.6	50.4	50.3	50.1	49.9	49.7	49.5	49.4	49.2
56,0°	75.1	65.9	56.0	52.0	50.6	49.8	49.3	49.2	49.1	49.1	48.9	48.9	48.8	48.7	48.3
57,0°	66.5	59.5	53.1	50.4	49.2	48.5	48.1	48.0	47.9	47.9	47.9	47.9	47.8	47.8	47.5
58,0°	61.1	53.8	50.2	48.9	47.8	47.2	46.9	46.7	46.6	46.6	46.9	46.9	46.8	46.8	46.7
59,0°	56.8	48.9	46.3	46.6	46.5	46.1	45.7	45.5	45.4	45.6	45.8	45.7	45.7	45.7	45.6
60,0°	54.0	46.5	43.7	44.1	45.1	44.9	44.5	44.2	44.2	44.4	44.6	44.7	44.6	44.7	44.6
61,0°	51.6	44.9	42.4	42.5	43.8	43.7	43.4	43.1	43.1	43.3	43.4	43.5	43.4	43.6	43.5
62,0°	49.0	43.3	41.2	41.4	42.6	42.5	42.2	41.9	41.8	42.0	42.1	42.1	42.1	42.2	42.2
63,0°	46.9	41.9	40.4	40.8	41.5	41.3	41.0	40.8	40.6	40.7	40.8	40.8	40.8	41.0	41.0
64,0°	44.9	40.6	39.6	40.4	40.5	40.1	39.9	39.7	39.4	39.4	39.3	39.5	39.4	39.6	39.5
65,0°	42.5	39.2	38.8	39.7	39.4	38.9	38.6	38.5	38.1	38.0	37.9	38.1	38.0	38.0	38.1
66,0°	40.7	38.1	37.7	38.7	38.3	37.7	37.4	37.2	36.8	36.5	36.4	36.6	36.4	36.5	36.7
67,0°	38.0	36.5	36.4	37.4	37.0	36.4	36.1	35.8	35.3	35.0	34.8	34.8	34.6	34.6	34.8
68,0°	35.8	34.9	35.5	36.0	35.5	34.9	34.6	34.3	33.7	33.3	33.0	33.0	32.9	33.0	33.3
69,0°	33.4	33.3	34.5	34.8	34.0	33.3	33.0	32.7	32.1	31.6	31.2	31.2	31.1	31.2	31.5
70,0°	30.8	31.0	32.7	33.0	32.4	31.6	31.1	30.8	30.2	29.8	29.4	29.6	29.5	29.2	29.5
71,0°	28.2	28.5	30.3	31.0	30.4	29.5	29.0	28.6	28.1	27.8	27.5	27.8	27.4	27.1	27.0
72,0°	25.4	25.9	27.1	28.0	28.0	27.2	26.5	26.2	25.9	25.8	25.6	25.6	24.8	24.6	24.4

# Photometric test report

<b>Family</b> Streetlight 21 mini easy LED	<b>Order number: 5XE6B47N08HB</b> <b>EAN: 4058352897362</b>	<b>LP number</b> 59065_1147
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>
		<b>siteco</b>

C-planes	240,0° 300,0°	242,5° 297,5°	245,0° 295,0°	247,5° 292,5°	250,0° 290,0°	252,5° 287,5°	255,0° 285,0°	257,5° 282,5°	260,0° 280,0°	262,5° 277,5°	265,0° 275,0°	267,5° 272,5°	270,0°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm													Luminous flux in lm/klm	
0,0°	307.9	307.9	307.9	307.9	307.9	307.9	307.9	307.9	307.9	307.9	307.9	307.9	307.9	0.5	0.5
2,5°	290.8	290.1	289.6	289.3	289.0	288.5	288.4	288.3	287.9	287.7	287.4	287.7	288.1	3.7	4.1
5,0°	273.6	272.1	271.1	269.8	268.7	268.1	267.1	266.4	265.9	265.5	265.0	264.7	264.9	7.4	11.5
7,5°	251.6	249.3	246.8	244.8	242.7	240.9	239.3	237.8	236.7	235.9	235.1	234.5	234.5	11.1	22.6
10,0°	218.0	213.6	208.8	204.6	200.9	197.3	194.4	192.0	189.7	188.2	187.0	185.9	186.6	14.5	37.1
12,5°	178.2	173.7	169.8	166.3	163.3	160.7	158.3	156.5	154.8	153.6	152.7	151.8	152.0	17.8	54.9
15,0°	160.0	155.3	150.9	146.8	143.0	139.8	136.9	134.5	132.5	130.9	129.8	128.9	129.1	21.1	76.0
17,5°	144.9	139.3	134.3	129.9	126.2	123.0	120.3	118.0	116.2	114.9	114.0	113.4	113.1	23.8	99.8
20,0°	133.8	129.3	125.2	121.6	118.0	114.8	111.8	109.2	107.1	105.4	104.5	103.6	103.8	25.4	125.2
22,5°	127.8	122.2	116.9	112.2	107.9	104.1	100.9	98.2	96.1	94.5	93.5	92.8	92.7	26.5	151.7
25,0°	119.2	111.8	105.9	102.0	99.3	97.4	95.6	93.7	91.7	89.9	88.7	87.8	87.7	28.0	179.7
27,5°	110.9	104.4	98.6	94.1	90.8	88.5	86.9	85.7	84.7	83.6	82.8	82.1	82.0	30.5	210.3
30,0°	99.1	95.5	92.2	88.3	83.2	78.3	74.9	72.7	71.4	70.3	69.7	69.2	69.0	33.5	243.8
32,5°	87.0	82.3	78.2	75.1	72.7	70.9	69.5	68.4	67.5	66.7	66.3	65.8	65.8	36.6	280.4
35,0°	75.5	74.4	72.8	70.8	69.0	67.5	66.4	65.6	64.9	64.3	64.0	63.5	63.3	39.5	319.9
37,5°	69.5	69.0	68.6	67.9	66.9	65.9	64.9	63.9	63.0	62.2	61.5	60.9	60.6	42.5	362.5
40,0°	64.9	65.5	65.7	65.4	64.7	63.4	62.3	61.2	60.5	59.7	59.0	58.2	58.2	45.4	407.9
42,5°	60.9	61.9	62.3	62.1	61.7	61.0	60.3	59.7	58.9	58.1	57.1	56.4	56.2	48.1	456.0
45,0°	57.5	58.4	59.2	59.4	59.0	58.3	57.8	57.3	56.8	55.9	55.0	54.1	53.8	34.8	490.8
46,0°	56.4	57.3	57.9	57.9	57.7	57.4	57.3	56.9	56.2	55.4	54.4	53.5	53.2	20.1	510.9
47,0°	55.3	56.2	56.9	57.0	57.0	57.0	56.9	56.4	55.7	54.7	53.6	52.7	52.5	20.2	531.1
48,0°	54.4	55.1	55.9	56.3	56.5	56.5	56.3	55.9	55.3	54.1	53.0	52.0	51.8	20.1	551.2
49,0°	53.6	54.2	55.1	55.7	55.8	55.9	55.8	55.3	54.6	53.3	52.1	51.1	50.9	19.9	571.2
50,0°	52.9	53.5	54.4	55.1	55.4	55.4	55.3	54.7	53.9	52.6	51.3	50.2	49.9	19.6	590.8
51,0°	52.3	52.7	53.6	54.3	54.9	54.9	54.7	54.0	52.9	51.8	50.4	49.1	48.8	19.2	610.1
52,0°	51.6	52.1	52.8	53.8	54.4	54.3	54.0	53.1	52.1	50.8	49.2	48.0	47.6	18.7	628.8
53,0°	50.9	51.4	52.2	53.0	53.6	53.6	53.2	52.3	51.1	49.8	48.2	46.8	46.3	18.2	647.0
54,0°	49.9	50.4	51.4	52.1	52.6	52.7	52.4	51.4	50.0	48.6	47.1	45.7	45.1	17.8	664.8
55,0°	49.2	49.8	50.6	51.3	51.8	51.7	51.5	50.5	49.1	47.5	46.0	44.5	44.2	17.3	682.1
56,0°	48.3	48.8	49.6	50.4	50.9	50.8	50.3	49.3	48.1	46.3	45.0	43.4	43.0	16.8	698.9
57,0°	47.4	47.7	48.6	49.5	50.0	49.8	49.0	48.1	46.7	45.2	43.8	42.5	41.9	16.4	715.3
58,0°	46.5	46.5	47.3	48.3	49.1	48.7	47.9	46.8	45.4	44.0	42.8	41.5	41.0	16.0	731.4
59,0°	45.2	45.2	45.8	46.7	47.6	47.5	46.6	45.4	44.0	42.7	41.5	40.5	40.0	15.7	747.1
60,0°	44.3	43.9	44.3	45.3	46.2	46.1	45.4	44.4	42.8	41.3	40.3	39.5	39.4	15.4	762.5
61,0°	43.1	42.6	42.8	43.8	44.7	44.8	44.3	43.4	41.7	40.0	38.9	38.3	38.4	15.2	777.6
62,0°	41.8	41.3	41.3	42.0	42.9	43.0	42.6	41.8	40.1	38.2	37.3	36.7	36.8	15.0	792.6
63,0°	40.7	40.3	40.1	40.3	41.4	41.4	40.9	39.9	38.2	36.6	35.8	35.3	35.4	14.7	807.4
64,0°	39.5	39.1	38.9	38.9	39.5	39.1	38.8	37.6	36.3	34.7	34.2	33.8	34.1	14.5	821.9
65,0°	38.2	38.2	37.9	37.4	37.3	36.9	36.5	35.4	34.4	32.7	32.3	31.9	32.2	14.3	836.2
66,0°	37.1	37.2	37.0	35.8	35.1	34.2	33.7	33.0	32.3	31.0	30.3	29.9	30.4	14.1	850.3
67,0°	35.6	35.7	35.0	33.4	32.1	31.3	31.1	30.6	30.2	28.9	28.0	27.5	27.8	13.9	864.2
68,0°	34.0	33.8	32.8	31.4	30.1	28.9	28.7	28.0	27.6	26.1	25.7	25.3	25.3	13.7	877.8
69,0°	32.1	31.4	30.9	29.4	28.0	26.1	25.9	25.2	25.1	24.0	23.6	22.7	23.0	13.6	891.4
70,0°	29.5	29.5	28.8	27.2	25.5	23.5	22.8	22.7	22.0	22.2	21.4	20.4	20.5	13.6	905.0
71,0°	27.2	27.6	26.8	24.9	22.8	20.5	19.6	20.5	19.3	20.7	18.9	18.0	18.0	13.6	918.6
72,0°	25.0	24.9	24.4	21.7	20.0	17.7	16.6	17.6	17.3	17.0	15.7	15.0	15.2	13.7	932.3

## Photometric test report

<b>Family</b> Streetlight 21 mini easy LED	<b>Order number: 5XE6B47N08HB</b> <b>EAN: 4058352897362</b>	<b>LP number</b> 59065_1147
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>
		<b>siteco</b>

C-planes	0,0° 180,0°	2,5° 177,5°	5,0° 175,0°	7,5° 172,5°	10,0° 170,0°	12,5° 167,5°	15,0° 165,0°	17,5° 162,5°	20,0° 160,0°	22,5° 157,5°	25,0° 155,0°	27,5° 152,5°	30,0° 150,0°	32,5° 147,5°	35,0° 145,0°
γ	Luminous intensity in cd/klm														
73,0°	344.9	447.8	507.5	542.8	561.4	567.1	553.8	566.9	600.3	650.6	660.7	591.8	477.7	349.1	231.2
74,0°	352.2	458.6	518.1	551.3	570.9	574.4	557.7	575.6	615.5	657.3	646.7	555.6	425.9	295.7	179.8
75,0°	324.1	422.3	480.5	511.8	538.1	546.6	531.6	556.8	602.4	629.9	604.7	507.1	371.5	222.9	117.1
76,0°	241.2	309.5	358.5	381.0	417.1	439.4	460.2	496.0	545.8	557.7	526.9	433.9	295.2	139.9	62.5
77,0°	150.2	185.1	212.0	226.8	258.3	284.6	344.4	387.7	438.0	439.6	413.4	330.6	209.0	86.4	36.0
78,0°	84.0	97.0	114.3	117.0	139.8	156.0	222.4	262.1	304.9	299.8	280.3	205.9	112.3	39.9	21.4
79,0°	37.7	43.8	50.1	53.9	65.3	79.2	127.4	158.4	188.8	180.6	159.4	96.4	35.5	15.5	12.4
80,0°	17.0	18.5	20.7	22.2	26.3	31.9	62.5	81.1	99.6	98.2	78.1	38.2	14.5	10.2	9.7
81,0°	8.6	9.0	9.8	10.7	12.1	13.9	26.2	30.6	37.9	40.4	30.7	14.9	8.5	7.6	7.4
82,0°	5.8	6.0	6.4	7.0	7.6	7.8	11.4	11.1	12.4	14.5	10.7	7.1	6.0	5.9	5.6
83,0°	4.4	4.4	4.8	5.1	5.4	5.5	6.2	6.0	6.5	7.5	6.5	5.0	4.4	4.7	4.9
84,0°	3.1	3.1	3.3	3.3	3.6	3.5	3.9	3.8	4.1	4.4	4.3	3.6	3.1	3.2	3.3
85,0°	2.4	2.4	2.5	2.5	2.5	2.3	2.6	2.5	2.7	2.8	2.8	2.5	2.4	2.3	2.5
86,0°	2.0	1.8	2.0	1.8	1.8	1.8	1.9	1.8	1.9	1.8	1.9	1.7	1.6	1.5	1.6
87,0°	1.5	1.5	1.5	1.3	1.3	1.3	1.4	1.3	1.3	1.2	1.3	1.1	1.0	1.0	1.0
88,0°	1.3	1.3	1.2	1.0	1.1	1.1	1.0	1.0	1.0	0.9	0.9	0.8	0.7	0.8	0.8
89,0°	1.0	1.0	1.0	1.1	0.9	0.9	0.9	0.8	0.8	0.7	0.7	0.7	0.7	0.6	0.5
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0



## Photometric test report

<b>Family</b> <b>Streetlight 21 mini easy LED</b>	<b>Order number: 5XE6B47N08HB</b> <b>EAN: 4058352897362</b>	<b>LP number</b> <b>59065_1147</b>
		<b>siteco</b>

C-planes	37,5° 142,5°	40,0° 140,0°	42,5° 137,5°	45,0° 135,0°	47,5° 132,5°	50,0° 130,0°	52,5° 127,5°	55,0° 125,0°	57,5° 122,5°	60,0° 120,0°	62,5° 117,5°	65,0° 115,0°	67,5° 112,5°	70,0° 110,0°	72,5° 107,5°
γ	Luminous intensity in cd/klm														
<b>73,0°</b>	140.1	81.8	45.1	29.6	25.7	25.7	25.8	26.0	24.1	23.0	23.0	22.6	22.9	23.0	21.9
<b>74,0°</b>	96.0	52.5	31.7	24.5	22.9	23.3	23.6	24.0	22.8	21.6	21.4	21.0	21.1	20.8	20.1
<b>75,0°</b>	55.3	31.2	23.0	22.8	22.9	22.2	22.0	22.2	21.4	20.5	20.1	19.8	19.3	19.1	18.4
<b>76,0°</b>	30.4	20.5	18.7	21.3	23.3	22.2	21.7	20.9	19.6	18.9	18.2	17.9	17.3	17.2	16.5
<b>77,0°</b>	20.8	16.4	15.8	16.5	18.3	20.6	21.0	20.0	18.0	17.2	16.2	15.8	15.0	14.9	14.3
<b>78,0°</b>	15.1	13.2	12.9	13.7	14.4	16.9	18.0	18.2	16.9	15.8	14.6	13.9	12.7	12.6	11.8
<b>79,0°</b>	11.2	10.6	10.6	11.5	12.5	13.4	14.0	14.9	14.5	14.0	12.5	11.7	10.5	10.4	9.3
<b>80,0°</b>	8.9	8.4	8.6	9.5	10.0	10.8	10.8	11.1	11.2	11.5	10.8	9.9	8.5	8.2	7.3
<b>81,0°</b>	6.8	6.5	7.1	7.8	7.8	8.3	8.2	8.2	8.5	9.1	9.0	8.5	6.8	6.3	5.7
<b>82,0°</b>	5.5	5.0	5.3	5.9	6.2	6.2	6.2	6.3	6.5	7.2	7.4	6.8	5.3	4.7	4.3
<b>83,0°</b>	4.3	4.2	4.4	4.6	4.2	4.5	4.6	4.7	4.8	5.5	5.6	5.1	4.0	3.6	3.4
<b>84,0°</b>	3.3	3.1	3.4	3.3	2.9	3.1	3.0	3.3	3.5	3.8	4.0	3.7	2.9	2.7	2.5
<b>85,0°</b>	2.3	2.3	2.6	2.1	2.1	2.1	2.0	2.2	2.2	2.6	2.5	2.4	2.0	1.9	1.8
<b>86,0°</b>	1.4	1.8	1.6	1.6	1.2	1.4	1.4	1.5	1.3	1.5	1.4	1.5	1.4	1.4	1.2
<b>87,0°</b>	0.9	0.9	1.1	1.0	1.0	1.0	0.9	1.1	1.0	1.0	0.9	0.9	0.9	0.9	0.8
<b>88,0°</b>	0.9	0.9	0.5	0.7	0.6	0.7	0.7	0.8	0.7	0.7	0.7	0.7	0.6	0.6	0.6
<b>89,0°</b>	0.5	0.5	0.5	0.4	0.8	0.5	0.5	0.5	0.6	0.5	0.5	0.4	0.4	0.3	0.3
<b>90,0°</b>	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

### Photometric test report

<b>Family</b> <b>Streetlight 21 mini easy LED</b>	<b>Order number: 5XE6B47N08HB</b> <b>EAN: 4058352897362</b>	<b>LP number</b> <b>59065_1147</b>
--	--	---------------------------------------

**siteco**

C-planes	75,0° 105,0°	77,5° 102,5°	80,0° 100,0°	82,5° 97,5°	85,0° 95,0°	87,5° 92,5°	90,0°	182,5° 357,5°	185,0° 355,0°	187,5° 352,5°	190,0° 350,0°	192,5° 347,5°	195,0° 345,0°	197,5° 342,5°	200,0° 340,0°
γ	Luminous intensity in cd/klm														
<b>73,0°</b>	20.8	19.7	18.6	17.8	17.2	17.1	17.7	216.1	98.5	42.3	30.5	26.5	24.3	24.2	23.5
<b>74,0°</b>	19.3	18.2	17.0	16.1	15.5	15.3	15.6	214.2	91.6	39.1	30.0	26.7	24.1	22.1	21.4
<b>75,0°</b>	18.0	16.8	15.6	14.5	13.9	13.6	13.6	185.3	74.2	32.2	26.2	24.3	21.8	19.5	18.6
<b>76,0°</b>	16.5	15.2	14.0	12.9	12.2	11.7	11.7	124.9	46.9	23.2	21.4	20.5	18.5	17.2	16.3
<b>77,0°</b>	14.2	12.9	12.0	10.9	10.2	9.7	9.7	73.0	28.3	18.2	17.7	17.2	15.9	14.9	14.4
<b>78,0°</b>	11.9	10.7	10.0	9.2	8.6	7.9	8.1	38.9	19.9	17.5	15.1	14.4	13.1	12.4	12.3
<b>79,0°</b>	9.7	8.5	8.3	7.6	7.2	6.4	6.7	19.9	14.6	16.2	12.7	11.9	11.5	11.0	10.5
<b>80,0°</b>	7.5	6.9	6.4	6.0	5.6	5.1	5.1	11.3	10.3	11.9	9.8	9.5	9.3	8.9	8.6
<b>81,0°</b>	5.9	5.5	5.1	4.7	4.5	4.0	4.1	7.3	7.0	7.5	7.1	7.3	7.1	7.1	6.8
<b>82,0°</b>	4.5	4.1	3.9	3.8	3.6	3.2	3.2	5.4	5.4	5.4	5.5	5.7	5.7	5.6	5.5
<b>83,0°</b>	3.3	3.1	3.0	2.9	2.8	2.5	2.5	4.2	4.3	4.2	4.3	4.3	4.0	4.1	4.2
<b>84,0°</b>	2.4	2.3	2.2	2.2	2.1	2.0	2.1	3.1	3.3	3.2	3.3	3.2	3.3	3.1	3.0
<b>85,0°</b>	1.8	1.6	1.5	1.5	1.5	1.4	1.4	2.4	2.6	2.5	2.6	2.6	2.4	2.4	2.6
<b>86,0°</b>	1.2	1.0	1.0	1.0	1.0	0.9	0.9	1.9	2.0	1.9	2.0	1.9	1.8	1.9	1.8
<b>87,0°</b>	0.8	0.8	0.8	0.7	0.7	0.6	0.7	1.5	1.6	1.6	1.6	1.6	1.5	1.3	1.4
<b>88,0°</b>	0.6	0.6	0.5	0.3	0.5	0.3	0.5	1.3	1.3	1.3	1.3	1.3	1.4	1.3	1.1
<b>89,0°</b>	0.3	0.3	0.3	0.3	0.3	0.2	0.2	1.0	1.1	1.1	1.1	1.1	0.9	0.9	0.9
<b>90,0°</b>	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

## Photometric test report

<b>Family</b> <b>Streetlight 21 mini easy LED</b>	<b>Order number: 5XE6B47N08HB</b> <b>EAN: 4058352897362</b>	<b>LP number</b> <b>59065_1147</b>
		<b>siteco</b>

C-planes	202,5° 337,5°	205,0° 335,0°	207,5° 332,5°	210,0° 330,0°	212,5° 327,5°	215,0° 325,0°	217,5° 322,5°	220,0° 320,0°	222,5° 317,5°	225,0° 315,0°	227,5° 312,5°	230,0° 310,0°	232,5° 307,5°	235,0° 305,0°	237,5° 302,5°
γ	Luminous intensity in cd/klm														
73,0°	22.9	23.6	24.3	25.3	25.5	24.7	24.1	23.8	23.5	23.5	23.4	23.3	22.1	22.2	22.5
74,0°	20.7	21.3	22.0	22.9	23.0	22.4	21.7	21.3	20.9	20.9	20.7	20.3	20.2	20.5	20.9
75,0°	18.0	18.1	18.8	20.0	20.4	20.0	19.2	18.7	18.2	18.0	17.7	17.8	18.2	19.2	19.4
76,0°	15.9	15.9	16.3	17.2	17.6	17.5	16.6	16.2	15.5	15.1	15.0	15.5	15.7	16.3	16.9
77,0°	13.5	13.6	13.5	14.5	14.9	15.1	14.1	13.7	13.0	12.7	12.4	12.4	12.1	13.0	13.8
78,0°	12.0	11.5	11.5	11.9	12.3	12.7	11.7	11.3	10.6	10.3	10.0	9.7	9.7	10.2	10.5
79,0°	10.2	9.9	9.7	9.9	10.3	10.5	9.6	9.2	8.6	8.2	7.9	7.9	7.8	8.0	8.0
80,0°	8.3	8.3	7.9	7.9	8.4	8.4	7.8	7.5	6.9	6.5	6.2	5.9	5.7	5.9	6.0
81,0°	6.8	6.5	6.5	6.4	6.6	6.7	6.3	5.9	5.4	5.0	4.7	4.5	4.2	4.3	4.4
82,0°	5.4	5.3	5.0	5.2	5.4	5.3	5.0	4.7	4.2	3.8	3.5	3.3	3.0	3.1	3.1
83,0°	3.8	4.0	3.8	3.9	4.2	4.2	3.9	3.5	3.1	2.8	2.6	2.4	2.3	2.3	2.0
84,0°	3.1	2.9	2.9	2.9	3.1	3.1	2.9	2.5	2.2	2.0	1.9	1.8	1.6	1.6	1.5
85,0°	2.3	2.2	2.0	2.0	2.2	2.2	2.0	1.8	1.5	1.4	1.3	1.2	1.1	1.1	0.8
86,0°	1.6	1.6	1.6	1.6	1.5	1.5	1.4	1.3	1.1	1.1	1.0	0.8	0.8	0.7	0.7
87,0°	1.4	1.4	1.4	1.4	1.3	1.1	1.1	1.1	1.0	0.9	0.9	0.8	0.7	0.6	0.6
88,0°	1.1	1.1	1.0	1.1	1.1	1.0	0.9	0.9	0.9	0.8	0.8	0.8	0.6	0.6	0.6
89,0°	0.9	1.0	1.2	0.8	0.9	0.9	0.8	0.8	0.8	0.8	0.8	0.7	0.6	0.6	0.6
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

C-planes	240,0° 300,0°	242,5° 297,5°	245,0° 295,0°	247,5° 292,5°	250,0° 290,0°	252,5° 287,5°	255,0° 285,0°	257,5° 282,5°	260,0° 280,0°	262,5° 277,5°	265,0° 275,0°	267,5° 272,5°	270,0°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm													Luminous flux in lm/klm	
73,0°	22.9	22.8	21.9	18.7	16.7	14.7	13.4	13.8	14.1	11.9	11.6	11.3	11.7	13.7	945.9
74,0°	21.2	20.7	19.7	15.9	12.8	11.1	10.4	10.6	11.1	9.0	8.6	8.3	8.5	13.2	959.1
75,0°	19.7	18.6	17.3	13.8	10.6	9.1	8.7	8.2	8.7	7.3	7.1	6.5	6.7	12.1	971.3
76,0°	17.0	15.9	14.3	11.8	9.5	7.7	7.2	6.5	6.7	5.4	5.0	4.6	4.6	9.9	981.2
77,0°	14.2	12.9	11.3	8.6	7.1	6.0	5.9	4.8	4.4	3.7	3.2	2.8	3.0	7.2	988.4
78,0°	11.1	10.3	9.0	6.9	5.4	4.5	4.0	3.4	2.9	2.3	1.8	1.6	1.6	4.6	993.0
79,0°	8.5	8.0	7.4	5.5	4.2	3.6	3.1	2.4	2.1	1.5	1.2	0.9	0.9	2.7	995.7
80,0°	6.3	5.8	5.5	4.3	3.3	2.7	2.2	1.8	1.5	1.0	0.7	0.7	0.5	1.6	997.3
81,0°	4.4	4.3	4.1	3.0	2.4	2.0	1.6	1.5	1.0	0.7	0.6	0.5	0.5	0.9	998.2
82,0°	3.0	3.0	3.2	2.2	1.8	1.4	1.2	1.0	0.9	0.5	0.5	0.5	0.5	0.6	998.7
83,0°	1.9	2.0	1.9	1.4	1.2	0.9	0.9	0.8	0.7	0.5	0.5	0.2	0.2	0.4	999.1
84,0°	1.4	1.7	1.2	0.9	0.8	0.7	0.7	0.6	0.5	0.5	0.2	0.2	0.2	0.3	999.4
85,0°	1.0	1.0	1.0	0.7	0.5	0.5	0.5	0.5	0.2	0.2	0.2	0.2	0.2	0.2	999.6
86,0°	0.6	0.6	0.5	0.5	0.5	0.3	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.1	999.7
87,0°	0.5	0.5	0.5	0.5	0.5	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.1	999.8
88,0°	0.5	0.5	0.5	0.5	0.3	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.1	999.9
89,0°	0.6	0.5	0.5	0.5	0.5	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.1	1000.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

## Photometric test report

<b>Family</b> Streetlight 21 mini easy LED	<b>Order number: 5XE6B47N08HB</b> <b>EAN: 4058352897362</b>	<b>LP number</b> 59065_1147
<b>Dimming levels table</b>		<b>siteco</b>
environmental temperature: 25°C		

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]	Power consumption [W]	Power consumption [W]
				start of lifetime	end of lifetime	average
100	254	254	9430	66.0	68.9	67.4
95	238	252	8958	61.7	64.5	63.1
90	223	249	8497	57.8	60.3	59.0
85	208	247	8019	53.8	56.3	55.0
80	193	244	7534	50.0	52.2	51.1
75	179	241	7063	46.4	48.4	47.4
70	165	238	6584	42.9	44.6	43.8
65	152	235	6129	39.6	41.2	40.4
60	139	232	5666	36.2	37.8	37.0
55	126	228	5191	33.0	34.4	33.7
50	113	224	4707	29.8	31.0	30.4
45	101	220	4250	26.8	27.9	27.4
40	89	216	3785	23.9	24.8	24.4
35	77	210	3308	20.9	21.8	21.4
30	65	204	2823	18.0	18.7	18.4
25	54	197	2371	15.3	15.8	15.6
20	42	188	1869	12.4	12.8	12.6
15	31	177	1401	9.8	10.1	10.0
10	20	161	923	7.0	7.1	7.0
9	19	159	879	6.9	7.0	7.0

<b>Dimming levels table</b>	environmental temperature: 5°C
-----------------------------	--------------------------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]	Power consumption [W]	Power consumption [W]
				start of lifetime	end of lifetime	average
100	254	254	9680	66.8	69.7	68.2
95	238	252	9181	62.5	65.3	63.9
90	223	249	8699	58.6	61.1	59.8
85	209	247	8234	54.8	57.3	56.0
80	194	244	7728	50.9	53.2	52.0
75	181	242	7276	47.5	49.6	48.6
70	167	239	6783	43.9	45.8	44.8
65	153	235	6279	40.3	42.1	41.2
60	140	232	5803	37.0	38.6	37.8
55	127	229	5316	33.8	35.2	34.5
50	115	225	4859	30.7	32.0	31.4
45	102	221	4355	27.5	28.6	28.0
40	90	216	3879	24.4	25.4	24.9
35	78	211	3394	21.5	22.3	21.9
30	66	205	2901	18.5	19.2	18.8
25	54	197	2401	15.5	16.1	15.8
20	43	189	1934	12.8	13.3	13.0
15	32	178	1460	10.2	10.5	10.4
10	21	163	977	7.2	7.4	7.3
9	19	159	889	7.0	7.1	7.0

## Photometric test report

<b>Family</b> Streetlight 21 mini easy LED	<b>Order number: 5XE6B47N08HB</b> <b>EAN: 4058352897362</b>	<b>LP number</b> 59065_1147
---	--	--------------------------------

<b>Dimming levels table</b>	environmental temperature: 15°C	<b>siteco</b>
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W] start of lifetime	Power consumption [W] end of lifetime	Power consumption [W] average
100	254	254	9560	66.4	69.3	67.8
95	238	252	9074	62.1	64.9	63.5
90	223	249	8602	58.2	60.7	59.4
85	208	247	8113	54.2	56.6	55.4
80	194	244	7650	50.6	52.8	51.7
75	180	241	7171	46.9	49.1	48.0
70	166	238	6686	43.3	45.2	44.2
65	153	235	6224	40.0	41.8	40.9
60	139	232	5719	36.5	38.1	37.3
55	127	229	5274	33.5	34.9	34.2
50	114	225	4783	30.3	31.5	30.9
45	101	220	4284	27.0	28.1	27.6
40	89	216	3813	24.0	24.9	24.4
35	77	210	3331	21.1	21.9	21.5
30	66	205	2883	18.4	19.1	18.8
25	54	197	2387	15.4	15.9	15.6
20	43	189	1923	12.7	13.2	13.0
15	32	178	1452	10.1	10.4	10.2
10	21	163	972	7.1	7.3	7.2
9	19	159	884	6.9	7.0	7.0

**Photometric test report**

<b>Family</b> Streetlight 21 mini easy LED	<b>Order number: 5XE6B47N08HB</b> <b>EAN: 4058352897362</b>	<b>LP number</b> <b>59065_1147</b>
---	--	---------------------------------------

**Luminousfluxs table**



Temperature °C	Luminous flux lm	Power consumption W
25.0	9430.0	66.0
5.0	9680.0	66.8
15.0	9560.0	66.4