

Photometric test report

Family
Streetlight 21 mini easy LED

Order number: 5XE6B47N08JB
EAN: 4058352897379

LP number
59074_196



Version post-top or side-entry mounting, NEMA 7 pin (DALI)
Optic asymmetric, wide distribution (ST0.5a G)
Cover toughened safety glass
Lamps LED 4000 K | CRI ≥ 70
Controlgear ECG-DALI Plus
Rated values Net luminous flux = 13390 lm
 Power consumption = 87.3 W
 Luminous efficacy = 153.4 lm/W

serial
documentation
16.06.2023

siteco

Luminous intensity in cd/klm


C180-0

C210-30

C212,5-32,5

C270-90

Imax: 532 cd/klm

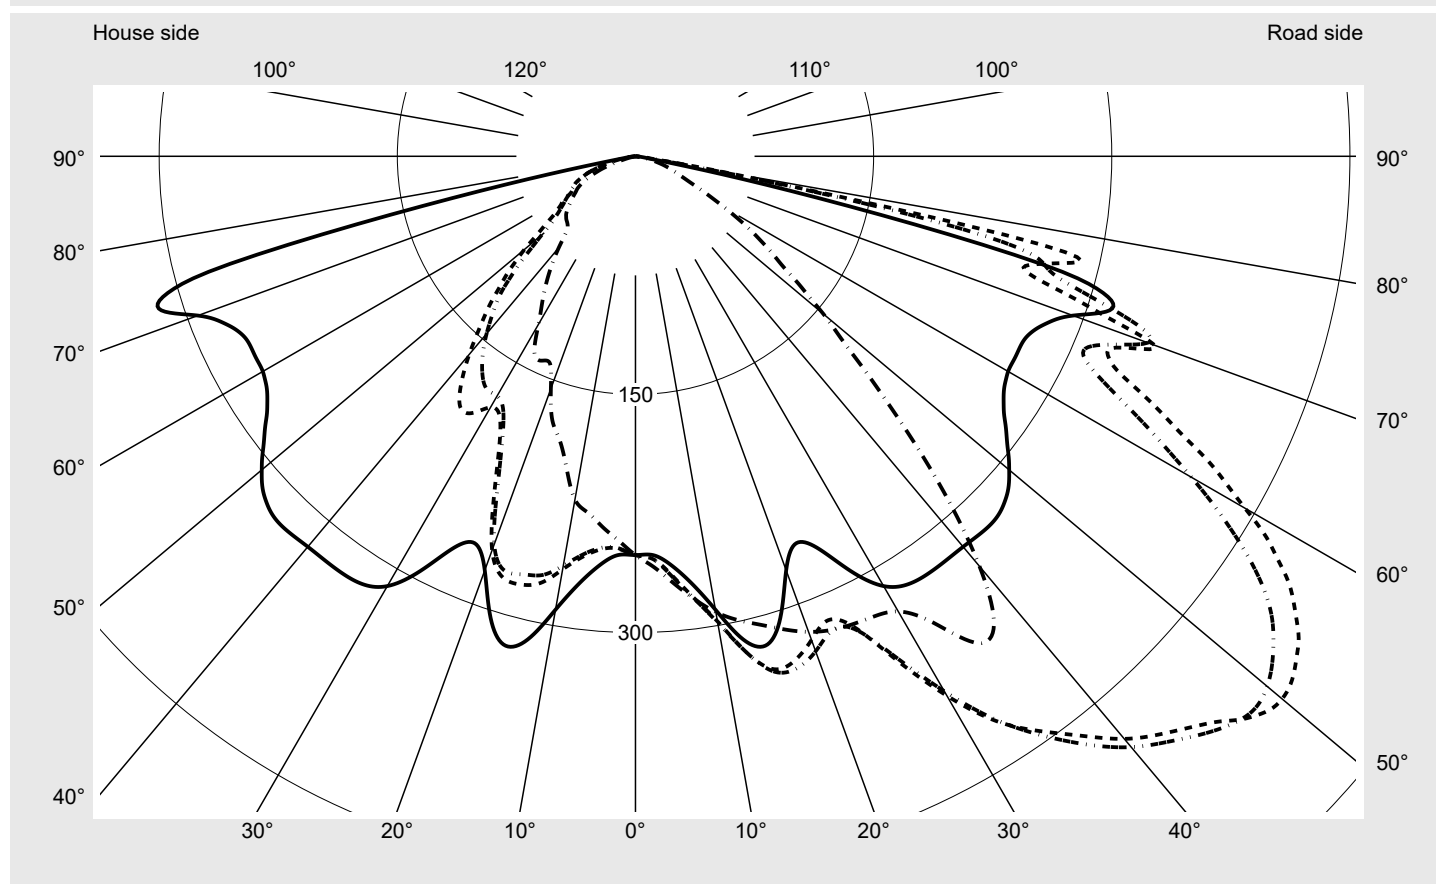

Luminaire output ratios

Eta	100.0%
Eta 0° - 90°	100.0%
Eta 90° - 180°	0.0%

Luminous intensity class acc. to EN13201-2


Class:	G4
Imax 70°	466.0
Imax 80°	84.5
Imax 90°	0.0
Imax >90°	0.0
Imax >95°	0.0

Measurement conditions

DIN EN 13032 and DIN 5032

Photometric test report

Family Streetlight 21 mini easy LED	Order number: 5XE6B47N08JB EAN: 4058352897379	LP number 59074_196
Envelope curve in cd/klm KMK 50° KMK 49° KMK 48° KMK 47°		sit eco

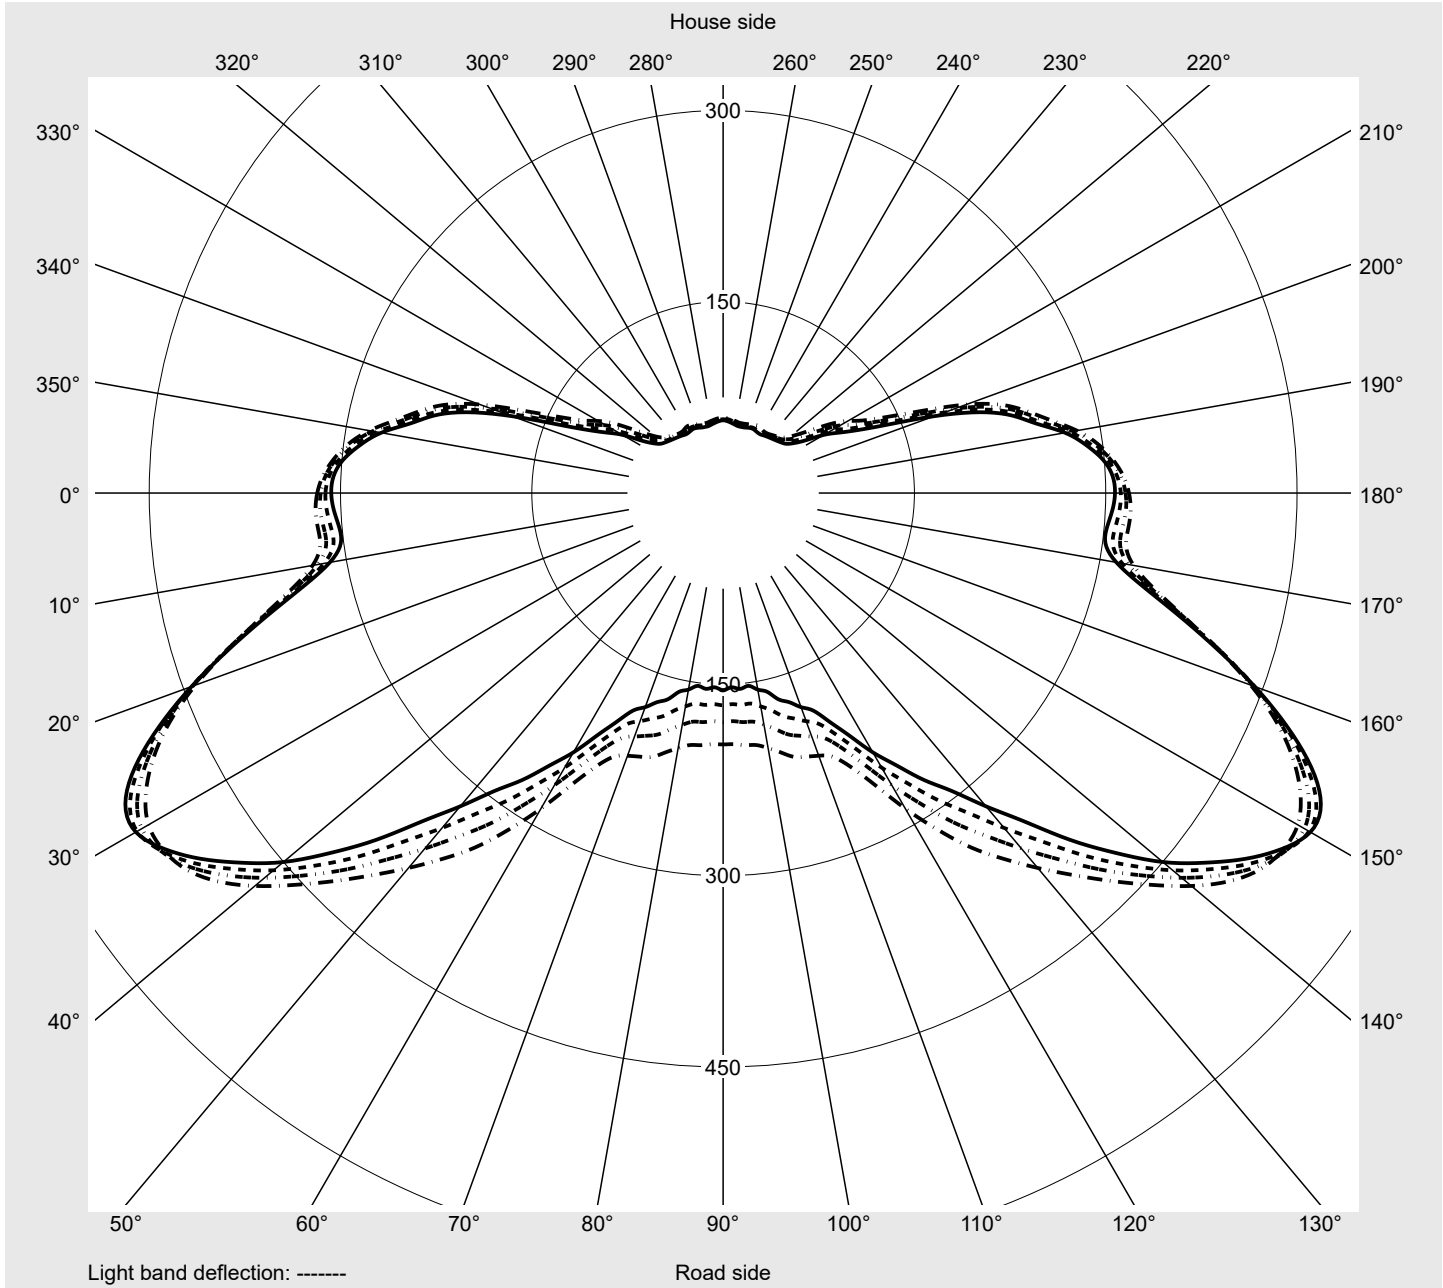

Photometric test report

Family Streetlight 21 mini easy LED	Order number: 5XE6B47N08JB EAN: 4058352897379	LP number 59074_196
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C- planes	0,0° 180,0°	2,5° 177,5°	5,0° 175,0°	7,5° 172,5°	10,0° 170,0°	12,5° 167,5°	15,0° 165,0°	17,5° 162,5°	20,0° 160,0°	22,5° 157,5°	25,0° 155,0°	27,5° 152,5°	30,0° 150,0°	32,5° 147,5°	35,0° 145,0°
γ	Luminous intensity in cd/klm														
0,0°	251.2	251.2	251.2	251.2	251.2	251.2	251.2	251.2	251.2	251.2	251.2	251.2	251.2	251.2	251.2
2,5°	251.4	251.6	251.8	252.0	252.2	252.5	252.7	252.9	253.1	253.4	253.5	253.8	254.0	254.1	254.3
5,0°	258.5	259.1	259.9	260.7	261.4	261.9	262.2	262.4	262.9	263.3	263.8	264.5	265.1	265.8	266.0
7,5°	271.3	272.4	273.6	274.3	275.1	275.2	275.8	276.2	277.2	277.8	278.9	279.5	280.4	280.6	281.2
10,0°	290.0	291.7	292.5	293.3	293.3	293.7	293.8	294.8	295.2	296.2	296.6	297.4	297.4	298.3	298.3
12,5°	311.3	313.3	313.5	314.3	313.7	314.5	314.5	316.0	316.4	317.8	318.0	319.1	319.2	319.3	319.7
15,0°	318.8	319.0	318.7	318.1	317.6	318.1	319.4	321.2	323.3	325.6	328.2	331.2	334.4	335.9	338.6
17,5°	304.0	303.9	303.0	302.2	302.2	303.6	305.8	308.9	312.5	317.0	321.9	327.5	333.1	338.1	342.9
20,0°	277.5	279.5	278.2	279.7	280.3	283.9	286.4	291.6	295.9	303.0	309.1	317.6	324.2	331.8	337.5
22,5°	264.0	267.6	270.2	273.0	276.7	280.1	284.1	288.4	294.0	299.7	305.5	311.0	316.4	323.3	328.1
25,0°	272.6	278.4	284.8	289.0	294.6	297.4	303.0	307.0	314.1	318.1	323.3	324.9	327.7	329.1	329.6
27,5°	295.0	303.0	310.2	315.7	320.4	324.5	330.3	337.3	345.3	352.0	357.0	359.1	358.7	356.0	352.1
30,0°	312.6	321.6	329.3	334.8	339.7	345.3	353.5	363.4	374.5	384.0	390.8	393.4	392.3	389.1	384.2
32,5°	319.6	328.7	336.2	341.5	346.5	353.7	364.6	378.0	392.2	404.9	414.2	419.5	421.4	420.1	417.0
35,0°	321.1	329.9	336.8	341.5	346.4	355.1	368.4	384.8	401.8	417.0	428.5	436.4	441.7	445.0	445.9
37,5°	321.0	329.2	335.1	339.0	344.3	354.7	370.4	388.9	408.1	425.7	439.8	450.7	459.9	467.0	470.9
40,0°	321.1	328.1	332.6	335.4	341.2	353.8	371.8	392.6	413.9	433.7	451.2	466.8	479.0	485.8	489.2
42,5°	322.0	327.4	330.2	331.7	338.2	353.2	373.9	397.4	421.9	445.7	466.4	482.2	493.0	499.6	503.4
45,0°	321.7	325.2	325.9	326.2	333.4	350.6	374.7	402.9	432.6	459.9	481.2	496.2	506.0	512.5	514.5
46,0°	320.4	323.0	322.9	323.1	330.8	348.8	374.6	404.9	436.7	465.0	486.8	502.2	512.4	517.0	515.5
47,0°	318.3	319.8	318.9	318.7	326.8	346.0	374.0	406.7	440.3	469.9	493.1	510.3	520.3	520.6	514.2
48,0°	315.5	316.1	314.3	314.0	322.6	343.2	373.1	407.5	442.4	473.6	498.8	517.8	526.3	522.6	510.9
49,0°	311.8	311.1	308.7	308.2	317.7	339.8	371.5	407.1	443.4	476.8	504.5	524.3	530.6	522.1	506.0
50,0°	307.3	305.5	302.3	302.4	313.1	336.8	369.4	405.8	443.5	478.7	508.9	528.4	531.7	519.4	500.0
51,0°	302.6	299.8	296.4	297.2	309.2	334.1	367.1	403.9	442.8	480.1	511.8	530.6	530.3	515.2	493.5
52,0°	297.4	293.5	290.1	292.2	305.7	331.6	365.0	402.3	442.5	481.8	514.3	530.3	526.6	509.6	486.2
53,0°	292.7	288.2	284.9	288.3	303.2	330.1	363.8	401.8	443.4	483.8	515.5	527.9	521.7	503.1	477.1
54,0°	288.2	283.2	280.2	285.0	301.4	329.2	363.5	402.6	445.7	486.4	515.8	524.7	516.4	495.7	465.9
55,0°	283.4	278.2	275.8	282.2	300.2	329.3	364.6	405.4	449.7	489.9	514.5	518.9	508.3	485.8	451.7
56,0°	279.7	274.5	272.9	280.7	300.1	330.3	366.8	409.4	454.6	493.0	512.5	512.6	499.7	473.3	435.0
57,0°	276.5	271.6	271.0	280.2	300.9	332.6	370.0	415.0	460.3	495.6	510.2	504.8	489.8	458.4	417.8
58,0°	274.0	269.6	269.9	280.6	302.6	335.7	375.0	421.7	467.1	497.5	505.6	496.5	476.1	441.5	399.8
59,0°	272.3	268.4	269.7	281.8	305.1	339.6	380.6	429.2	473.6	498.4	500.6	486.7	462.3	423.6	381.6
60,0°	271.0	267.7	270.0	283.5	308.5	345.4	389.0	439.3	480.2	497.4	492.4	473.1	443.3	404.4	363.7
61,0°	270.6	267.5	270.6	285.5	312.1	351.4	397.6	448.8	485.1	494.7	483.7	459.2	425.6	385.0	346.3
62,0°	270.6	267.6	271.4	287.9	316.3	358.2	407.0	458.0	489.0	491.0	474.6	445.2	408.3	366.8	330.9
63,0°	270.5	267.9	273.2	291.1	321.6	366.4	418.0	467.2	490.5	484.2	462.0	427.4	386.7	348.6	316.4
64,0°	270.4	268.7	275.7	295.6	327.7	374.6	428.6	473.9	489.8	477.0	449.7	410.9	368.6	331.5	304.6
65,0°	271.0	270.8	279.3	302.0	335.3	384.9	439.6	479.8	487.1	467.0	436.2	391.2	350.1	317.6	297.1
66,0°	272.9	273.8	284.7	309.3	344.5	395.6	449.6	482.9	481.7	457.1	420.5	374.1	332.4	308.9	295.5
67,0°	275.8	277.6	290.5	317.8	353.5	405.6	457.2	482.8	475.7	446.4	406.8	361.1	323.7	308.7	303.1
68,0°	280.0	283.6	299.2	329.0	364.2	415.9	463.1	478.8	466.2	433.5	393.9	353.0	322.9	317.1	320.0
69,0°	285.2	290.3	309.4	341.5	376.0	425.6	465.8	471.9	453.2	418.4	384.3	356.2	337.9	331.0	338.2
70,0°	293.3	300.8	322.8	358.3	390.0	435.5	466.0	461.7	438.8	394.0	359.3	335.9	348.2	343.3	350.0
71,0°	304.7	313.5	340.2	376.2	407.0	443.9	462.4	451.1	422.5	374.2	327.5	302.7	319.0	340.6	352.8
72,0°	314.0	325.0	356.5	392.8	420.5	448.6	456.5	440.5	406.8	354.4	302.6	275.3	291.8	320.9	339.0

Photometric test report

Family Streetlight 21 mini easy LED	Order number: 5XE6B47N08JB EAN: 4058352897379	LP number 59074_196
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C- planes	37,5° 142,5°	40,0° 140,0°	42,5° 137,5°	45,0° 135,0°	47,5° 132,5°	50,0° 130,0°	52,5° 127,5°	55,0° 125,0°	57,5° 122,5°	60,0° 120,0°	62,5° 117,5°	65,0° 115,0°	67,5° 112,5°	70,0° 110,0°	72,5° 107,5°
γ	Luminous intensity in cd/klm														
0,0°	251.2	251.2	251.2	251.2	251.2	251.2	251.2	251.2	251.2	251.2	251.2	251.2	251.2	251.2	251.2
2,5°	254.5	255.2	255.3	255.7	256.0	256.3	256.5	256.6	256.8	257.1	257.2	257.4	257.6	257.9	258.1
5,0°	266.8	266.8	267.7	267.7	268.1	268.3	268.3	269.0	268.7	269.2	269.1	269.1	269.6	269.3	269.8
7,5°	281.5	281.9	282.2	282.3	282.5	282.3	282.6	282.4	282.6	282.3	282.3	282.2	282.1	282.1	281.8
10,0°	299.0	299.0	299.4	299.2	299.3	299.1	298.9	298.6	297.9	297.4	296.6	296.2	295.4	295.0	294.2
12,5°	320.1	320.4	320.2	320.1	319.1	318.7	316.9	316.2	313.9	313.0	310.8	309.6	307.6	306.3	304.8
15,0°	340.5	342.3	342.5	342.7	341.0	339.6	336.2	333.6	329.9	327.1	324.0	321.5	318.9	316.6	314.3
17,5°	347.6	351.7	355.2	357.7	358.7	358.2	355.7	352.1	347.1	341.9	336.9	332.7	329.1	326.0	323.3
20,0°	344.0	349.0	354.3	358.3	362.0	364.4	365.8	365.4	362.8	358.1	352.0	345.7	340.3	336.0	332.6
22,5°	333.1	337.7	342.8	347.5	352.4	356.8	361.0	364.1	366.0	365.5	362.5	356.9	350.4	344.3	339.5
25,0°	329.4	330.1	331.6	334.3	338.1	342.8	348.1	353.2	358.0	362.0	364.1	363.2	359.0	352.4	345.9
27,5°	347.1	342.4	337.9	334.9	333.7	335.2	339.0	344.3	350.0	355.4	359.9	362.5	362.1	357.5	350.6
30,0°	377.6	370.2	362.4	355.6	350.3	346.8	345.3	346.0	348.8	352.7	356.7	360.3	362.3	360.7	355.3
32,5°	412.1	406.0	399.9	393.2	385.5	376.4	368.0	361.2	357.4	356.7	358.4	361.6	365.2	367.2	365.5
35,0°	445.2	443.0	439.0	431.9	422.2	410.4	397.9	385.7	375.9	369.9	368.9	371.8	377.7	383.7	387.2
37,5°	472.4	471.4	467.7	461.4	453.1	442.5	429.5	414.4	399.0	386.7	380.4	380.7	385.1	390.8	393.5
40,0°	490.9	490.6	487.8	482.0	472.7	459.3	442.4	423.2	402.3	384.3	371.8	367.6	367.3	369.0	367.2
42,5°	504.6	501.5	492.9	479.9	462.7	443.9	422.9	403.6	384.1	366.5	349.1	336.5	326.0	321.7	315.5
45,0°	509.3	495.9	476.2	454.4	432.2	412.0	393.9	376.2	354.9	330.8	303.3	280.0	264.2	258.0	254.7
46,0°	506.0	488.6	465.7	442.2	419.6	399.4	380.0	359.9	335.5	308.8	279.8	256.5	242.0	236.8	234.7
47,0°	500.0	479.3	454.7	430.1	406.2	383.7	361.6	339.3	312.9	285.7	258.2	237.0	223.7	219.2	216.7
48,0°	492.2	469.3	443.6	417.2	389.6	363.9	338.8	315.4	289.2	264.4	240.1	220.7	208.0	203.1	199.5
49,0°	484.2	460.2	432.1	402.5	370.7	342.8	316.4	294.0	270.2	248.6	226.6	208.7	195.9	190.4	185.4
50,0°	476.1	450.1	417.7	384.5	349.1	320.7	294.4	274.7	253.3	234.8	214.4	198.1	184.6	178.7	171.9
51,0°	467.8	437.8	401.4	364.5	328.5	299.9	276.0	257.4	239.3	222.4	204.3	188.2	175.0	167.5	160.2
52,0°	457.4	423.0	383.1	344.8	309.6	282.2	260.0	243.2	227.2	212.1	195.3	179.8	166.7	158.1	149.7
53,0°	443.8	405.3	363.8	325.7	291.9	265.9	245.7	230.6	216.0	202.5	187.0	172.3	159.0	149.4	140.7
54,0°	428.1	387.1	345.8	309.3	277.5	253.4	234.8	220.4	207.1	195.0	180.9	166.7	153.5	143.0	133.9
55,0°	410.0	368.3	328.4	294.2	265.3	243.1	225.4	211.9	199.8	188.7	175.6	161.9	148.8	138.0	128.2
56,0°	391.1	349.9	312.1	281.0	255.2	234.3	217.6	204.9	193.5	182.9	170.4	157.5	145.2	134.1	122.3
57,0°	373.4	333.9	298.4	271.2	247.6	228.4	212.3	199.8	188.0	177.6	165.5	153.2	138.6	125.2	112.7
58,0°	356.4	319.3	287.3	263.4	241.9	224.0	207.9	195.1	182.2	171.2	157.6	144.2	126.7	114.4	101.8
59,0°	340.7	306.5	278.8	257.3	238.1	220.4	204.2	190.2	175.6	161.9	146.1	131.3	116.0	104.2	93.4
60,0°	325.9	296.1	272.2	253.2	235.7	217.9	200.6	184.6	166.5	150.4	134.5	120.6	106.1	94.9	84.6
61,0°	312.5	287.5	267.4	250.8	234.2	215.9	196.6	177.2	155.5	138.2	122.5	108.9	95.1	84.8	75.4
62,0°	302.1	281.5	265.0	250.0	233.6	214.3	191.9	168.6	144.8	126.9	111.2	98.0	84.9	75.4	67.0
63,0°	293.6	277.8	264.6	250.2	233.1	211.9	185.6	158.6	133.4	115.1	99.6	86.9	74.9	66.3	59.0
64,0°	287.9	276.4	265.7	251.2	232.0	207.6	177.0	147.1	120.7	102.2	86.8	75.0	64.4	57.1	51.1
65,0°	286.2	278.1	268.2	252.3	229.3	200.7	166.8	135.7	108.3	90.0	74.9	64.5	55.2	49.5	44.7
66,0°	290.2	283.6	272.4	252.8	224.6	191.8	155.1	123.5	95.1	77.8	63.3	54.9	46.9	43.1	38.8
67,0°	303.0	294.6	277.9	251.9	218.0	181.4	143.6	110.6	82.9	66.0	54.1	46.7	40.6	37.4	34.6
68,0°	323.3	310.3	284.7	249.4	208.9	169.9	131.3	98.3	71.0	56.0	46.4	40.5	35.8	33.6	31.4
69,0°	341.6	325.4	290.9	245.8	198.9	157.2	118.2	85.5	59.7	47.2	40.0	35.7	32.1	30.5	28.7
70,0°	351.0	334.0	294.4	242.7	190.7	145.5	105.0	74.1	51.0	40.4	35.4	32.6	29.9	28.5	27.0
71,0°	353.1	334.3	293.7	239.1	183.2	133.0	91.3	63.9	43.1	35.1	31.9	30.2	28.2	27.2	25.7
72,0°	340.8	321.4	280.1	228.4	172.1	118.6	79.0	54.3	37.2	30.9	29.1	27.8	26.6	25.8	24.2

Photometric test report

Family Streetlight 21 mini easy LED	Order number: 5XE6B47N08JB EAN: 4058352897379	LP number 59074_196
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C- planes	75,0° 105,0°	77,5° 102,5°	80,0° 100,0°	82,5° 97,5°	85,0° 95,0°	87,5° 92,5°	90,0°	182,5° 357,5°	185,0° 355,0°	187,5° 352,5°	190,0° 350,0°	192,5° 347,5°	195,0° 345,0°	197,5° 342,5°	200,0° 340,0°
γ	Luminous intensity in cd/klm														
0,0°	251.2	251.2	251.2	251.2	251.2	251.2	251.2	251.2	251.2	251.2	251.2	251.2	251.2	251.2	251.2
2,5°	258.3	258.5	258.7	258.7	258.8	258.8	258.8	251.1	250.9	250.6	250.3	250.0	249.7	249.4	248.9
5,0°	269.8	269.6	270.1	269.6	269.8	270.0	269.5	258.0	257.4	256.9	256.1	255.3	254.3	253.5	252.5
7,5°	281.9	281.5	281.5	281.3	281.2	281.3	281.0	270.1	269.2	268.1	267.0	265.5	264.1	262.5	261.0
10,0°	293.6	292.9	292.4	292.1	291.8	291.7	291.5	288.5	286.7	285.2	283.2	281.4	278.9	276.7	274.1
12,5°	303.5	302.3	301.1	300.5	299.8	299.7	299.3	310.0	307.5	305.8	303.1	300.8	297.4	294.4	290.7
15,0°	312.2	310.3	308.6	307.3	306.3	305.8	305.5	318.1	317.0	315.8	314.3	312.5	309.9	306.7	302.7
17,5°	320.8	318.7	316.6	314.9	313.6	312.9	312.5	303.9	303.5	303.6	303.7	303.7	302.7	301.1	298.0
20,0°	329.5	326.9	324.3	322.1	320.3	319.2	318.7	277.4	274.6	275.3	273.9	276.0	274.8	276.0	271.7
22,5°	335.5	332.4	329.5	327.1	324.9	323.4	322.8	259.3	253.9	250.2	247.3	246.9	246.2	244.7	241.5
25,0°	340.5	336.3	332.8	329.9	327.4	325.7	325.0	263.5	254.7	246.2	239.8	235.5	230.5	225.4	223.6
27,5°	343.8	338.2	333.8	330.7	328.5	327.0	326.5	284.7	273.6	263.2	254.7	247.3	238.2	232.0	227.2
30,0°	348.2	341.9	337.0	334.0	332.2	331.4	331.0	301.9	290.7	280.5	272.3	262.9	254.7	248.5	238.0
32,5°	360.2	355.8	351.6	349.9	348.4	348.6	347.9	309.7	300.0	291.5	283.5	274.8	268.8	260.6	246.0
35,0°	385.1	381.9	377.7	375.5	374.1	374.5	374.1	312.0	303.8	297.0	288.8	281.7	275.4	263.4	249.1
37,5°	390.5	383.7	377.4	372.6	370.8	370.4	370.9	312.5	305.2	298.7	290.6	283.5	273.8	259.9	247.4
40,0°	362.2	352.4	345.4	339.0	337.3	335.9	337.1	313.2	306.3	298.9	290.6	281.8	268.4	254.3	243.0
42,5°	311.2	301.1	295.9	289.7	289.1	286.7	288.6	315.1	308.1	299.4	289.1	277.2	261.4	248.0	235.0
45,0°	252.5	246.7	242.1	237.9	236.9	235.4	235.5	316.0	308.4	298.9	285.9	270.6	254.2	239.7	220.5
46,0°	232.6	227.0	222.0	217.8	216.9	215.4	215.4	315.3	307.7	297.9	284.1	267.2	250.8	235.2	212.3
47,0°	214.1	208.2	203.1	199.3	198.5	197.1	197.1	313.9	306.4	296.1	281.7	263.4	247.1	229.7	202.8
48,0°	195.9	189.6	184.6	180.8	180.3	179.0	179.6	312.0	304.7	293.9	279.1	259.8	243.5	224.0	193.7
49,0°	181.0	174.4	169.8	166.5	166.7	165.7	166.4	309.1	302.3	291.0	276.0	255.8	239.3	217.5	184.7
50,0°	167.4	159.6	156.5	152.5	154.1	152.4	154.5	305.7	299.1	287.3	272.2	251.6	234.7	210.7	176.2
51,0°	153.5	146.0	142.0	139.4	140.5	140.4	140.9	301.9	295.3	283.0	268.0	247.0	229.5	203.9	168.4
52,0°	141.1	133.1	130.1	128.6	130.1	129.9	130.2	297.6	291.0	277.8	262.7	241.6	223.6	196.8	161.0
53,0°	130.9	122.6	119.8	118.1	119.2	118.6	118.5	293.3	286.5	272.0	255.9	235.2	217.1	190.0	154.2
54,0°	123.7	115.2	111.8	110.1	110.8	110.1	110.2	289.1	281.9	266.2	248.3	227.2	208.9	182.0	147.2
55,0°	118.0	109.8	105.9	103.8	104.2	103.2	103.2	284.5	277.0	260.5	241.3	219.3	199.2	172.0	139.0
56,0°	110.9	102.4	98.4	96.7	96.8	95.7	95.4	280.7	272.7	255.6	235.4	213.0	191.1	161.6	128.9
57,0°	102.6	95.2	91.9	90.2	90.1	88.6	88.5	277.2	268.6	250.5	229.7	206.7	183.9	152.1	118.2
58,0°	94.4	87.5	85.0	82.7	83.0	80.3	81.0	274.4	265.0	246.0	224.3	200.7	176.7	144.3	109.6
59,0°	86.1	79.9	77.1	75.6	75.1	72.8	73.0	272.3	261.9	241.7	219.4	195.0	169.8	136.9	102.7
60,0°	78.0	72.0	69.8	68.6	68.0	65.4	65.6	270.6	259.0	237.5	214.4	189.3	162.7	129.3	96.0
61,0°	69.3	63.9	62.0	61.1	60.2	57.8	58.0	269.8	257.2	234.3	210.2	184.0	156.4	122.6	89.9
62,0°	61.6	56.8	55.4	54.7	53.6	51.4	51.7	269.3	255.6	231.4	205.7	178.1	149.7	115.9	84.1
63,0°	54.4	50.5	49.5	48.9	47.5	45.9	45.9	268.5	253.0	227.3	198.8	168.6	139.9	107.9	78.4
64,0°	47.4	44.3	43.7	43.0	41.7	40.3	40.4	267.9	249.9	221.4	188.2	152.7	123.7	95.7	72.6
65,0°	41.9	39.5	39.2	38.4	37.5	36.1	36.2	268.2	247.1	214.7	175.8	132.6	102.0	78.9	64.7
66,0°	37.2	35.1	35.5	34.5	34.0	32.5	33.0	269.3	245.8	209.9	164.1	114.6	81.9	65.2	55.6
67,0°	33.3	32.3	32.4	31.8	30.8	29.9	30.0	271.6	246.3	206.5	154.8	100.7	68.8	55.9	48.4
68,0°	30.5	29.9	30.1	29.3	28.5	27.8	27.9	275.4	248.4	203.4	145.5	89.3	61.2	50.5	43.3
69,0°	28.2	27.7	27.6	26.7	26.1	25.6	25.7	281.3	252.5	201.3	137.0	80.0	57.0	47.2	40.0
70,0°	26.4	25.7	25.2	24.4	23.9	23.6	23.8	290.6	259.0	199.5	127.7	71.5	53.8	44.0	37.1
71,0°	24.8	23.6	23.0	22.1	21.8	21.3	21.7	302.4	269.3	198.6	117.5	65.4	51.1	41.1	34.1
72,0°	23.1	21.9	21.0	20.1	19.6	19.3	19.7	312.8	278.4	195.4	107.3	62.3	49.3	38.5	31.3

Photometric test report

Family Streetlight 21 mini easy LED	Order number: 5XE6B47N08JB EAN: 4058352897379	LP number 59074_196
Table of values for luminous intensities		Maximum luminous intensity

siteco

C- planes	202,5° 337,5°	205,0° 335,0°	207,5° 332,5°	210,0° 330,0°	212,5° 327,5°	215,0° 325,0°	217,5° 322,5°	220,0° 320,0°	222,5° 317,5°	225,0° 315,0°	227,5° 312,5°	230,0° 310,0°	232,5° 307,5°	235,0° 305,0°	237,5° 302,5°
γ	Luminous intensity in cd/klm														
0,0°	251.2	251.2	251.2	251.2	251.2	251.2	251.2	251.2	251.2	251.2	251.2	251.2	251.2	251.2	251.2
2,5°	248.5	248.2	247.7	247.4	247.1	246.6	246.4	246.0	245.7	245.4	245.0	244.8	244.4	244.0	243.8
5,0°	251.7	250.7	249.4	248.5	247.6	246.7	245.8	245.0	244.1	243.3	242.5	241.7	240.8	240.1	239.3
7,5°	259.4	257.8	255.9	254.4	253.0	251.4	249.9	248.4	246.9	245.4	244.0	242.7	241.2	239.8	238.3
10,0°	272.0	269.3	267.0	264.2	261.8	259.2	256.8	254.2	251.0	247.7	244.3	241.3	238.7	236.2	234.2
12,5°	287.1	283.0	278.9	275.2	270.1	264.7	259.6	255.2	251.4	248.2	245.3	242.3	239.3	235.6	232.1
15,0°	298.1	292.7	286.2	279.2	272.6	267.4	262.6	258.4	253.5	247.2	240.8	233.4	227.0	220.2	214.8
17,5°	293.5	287.2	281.6	278.1	273.7	268.4	260.8	251.8	242.2	232.8	224.7	217.7	212.0	206.8	202.2
20,0°	269.2	265.6	265.8	264.0	260.1	252.8	245.2	237.0	229.9	222.7	216.0	210.0	205.0	200.1	195.3
22,5°	241.7	241.5	239.4	233.2	227.5	222.8	219.9	218.0	216.8	215.4	212.1	206.4	199.4	191.8	184.4
25,0°	223.2	218.5	211.6	203.3	198.8	195.8	195.4	196.9	198.4	198.3	196.6	193.2	187.7	180.6	173.1
27,5°	218.3	205.8	194.7	185.1	180.4	178.4	176.8	174.2	171.6	170.3	170.7	172.4	174.2	174.9	173.6
30,0°	222.5	207.0	193.8	182.6	174.2	164.6	155.1	147.8	144.0	144.6	149.1	156.6	165.0	171.4	173.4
32,5°	230.4	216.3	203.8	191.8	174.0	153.9	137.0	126.3	123.6	127.5	134.9	143.0	149.6	155.6	159.2
35,0°	236.2	224.9	211.8	192.5	168.0	146.3	129.8	118.7	112.9	112.0	115.0	120.7	126.5	130.5	132.9
37,5°	236.8	224.4	204.4	180.2	158.1	141.0	127.9	116.9	106.9	98.7	94.7	95.3	98.8	104.0	109.2
40,0°	231.1	211.2	184.8	162.9	145.9	134.1	122.9	109.8	96.3	86.5	79.0	75.7	76.6	82.7	88.8
42,5°	215.3	187.2	161.8	144.2	132.4	122.2	109.1	95.8	84.2	75.0	68.5	65.6	65.5	68.3	72.9
45,0°	190.7	161.2	139.6	127.0	117.5	104.6	91.1	80.0	71.4	66.1	63.2	61.5	60.6	60.8	62.5
46,0°	179.4	150.8	131.3	119.4	109.1	95.3	83.1	73.6	67.2	63.9	61.8	60.4	59.3	59.1	59.9
47,0°	168.1	140.9	123.2	113.0	101.5	87.5	76.6	69.0	64.5	62.3	60.7	59.5	58.4	57.9	58.1
48,0°	157.9	132.2	115.8	106.2	92.5	80.2	70.6	65.5	62.4	60.9	59.5	58.5	57.6	57.0	56.7
49,0°	148.6	124.2	108.9	98.4	84.2	73.3	66.3	62.8	60.9	59.6	58.5	57.5	56.7	56.1	55.5
50,0°	140.6	117.0	102.6	91.3	77.2	68.4	63.4	61.0	59.6	58.4	57.5	56.7	56.0	55.2	54.5
51,0°	133.3	110.2	96.0	82.8	70.5	64.3	60.9	59.3	58.0	57.1	56.3	55.7	54.9	54.2	53.5
52,0°	126.2	103.5	89.3	75.8	65.9	61.4	59.1	57.7	56.7	55.9	55.3	54.8	54.0	53.3	52.6
53,0°	119.8	97.1	82.9	70.2	62.7	59.4	57.5	56.4	55.5	54.8	54.2	53.6	53.0	52.5	51.8
54,0°	113.2	90.5	76.3	64.7	59.8	57.2	55.7	54.8	54.1	53.5	53.0	52.3	51.9	51.5	50.9
55,0°	106.1	84.2	70.2	61.1	57.6	55.5	54.3	53.4	52.7	52.2	51.7	51.2	50.9	50.6	50.1
56,0°	97.9	78.3	65.0	58.3	55.4	53.9	52.6	52.2	51.4	51.0	50.4	50.2	49.9	49.7	49.2
57,0°	87.7	71.8	60.7	55.9	53.6	52.1	51.1	50.6	50.0	49.6	49.2	49.0	48.8	48.8	48.4
58,0°	78.4	64.1	56.6	54.4	52.0	50.7	49.7	49.1	48.6	48.5	48.0	47.9	47.7	47.8	47.5
59,0°	71.7	57.4	51.9	51.6	50.3	49.2	48.2	47.4	46.9	47.0	47.0	46.7	46.6	46.8	46.7
60,0°	66.6	53.1	48.1	48.0	48.7	47.8	46.9	46.1	45.5	45.6	45.7	45.7	45.6	45.8	45.7
61,0°	62.6	50.4	45.9	46.0	47.4	46.7	45.7	44.9	44.3	44.4	44.5	44.7	44.5	44.8	44.7
62,0°	59.1	47.9	44.4	45.1	46.0	45.3	44.3	43.7	43.1	43.0	43.1	43.3	43.3	43.7	43.5
63,0°	55.9	45.7	43.1	44.4	44.7	44.0	43.2	42.6	42.0	41.9	42.0	42.2	42.3	42.5	42.5
64,0°	53.1	43.8	41.7	43.6	43.2	42.7	41.9	41.5	40.9	40.8	40.8	41.1	41.2	41.3	41.2
65,0°	49.9	42.0	40.4	42.3	41.9	41.3	40.7	40.5	40.0	39.8	39.7	40.2	40.3	40.0	40.1
66,0°	46.0	40.1	39.2	41.2	40.5	40.1	39.6	39.3	38.6	38.4	38.5	38.9	39.0	38.9	38.9
67,0°	41.6	38.0	37.9	39.4	38.8	38.4	38.0	37.9	37.3	37.0	36.9	37.4	37.5	37.4	37.3
68,0°	37.9	35.8	36.5	37.5	37.0	36.8	36.6	36.5	36.0	35.6	35.5	36.1	36.4	36.1	35.8
69,0°	35.2	33.6	34.8	35.6	35.1	35.1	34.8	35.0	34.6	34.1	33.8	34.7	34.9	34.1	33.8
70,0°	32.7	31.4	32.6	33.3	33.2	33.0	32.9	33.1	32.8	32.3	32.0	32.9	32.6	31.7	31.9
71,0°	29.9	29.1	30.1	30.9	30.9	31.0	30.9	31.0	30.7	30.4	30.3	30.9	29.9	29.4	29.6
72,0°	27.3	26.7	27.3	28.0	27.9	28.1	27.9	28.0	28.0	28.0	27.9	28.2	27.0	26.8	26.9

Photometric test report

Family Streetlight 21 mini easy LED	Order number: 5XE6B47N08JB EAN: 4058352897379	LP number 59074_196
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	240,0° 300,0°	242,5° 297,5°	245,0° 295,0°	247,5° 292,5°	250,0° 290,0°	252,5° 287,5°	255,0° 285,0°	257,5° 282,5°	260,0° 280,0°	262,5° 277,5°	265,0° 275,0°	267,5° 272,5°	270,0°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm													Luminous flux in lm/klm	
0,0°	251.2	251.2	251.2	251.2	251.2	251.2	251.2	251.2	251.2	251.2	251.2	251.2	251.2	0.4	0.4
2,5°	243.4	243.3	243.0	242.8	242.8	242.5	242.5	242.4	242.1	242.4	242.1	242.1	242.3	3.0	3.4
5,0°	238.6	237.9	237.3	236.7	236.3	235.9	235.5	235.4	235.1	234.9	234.7	234.6	234.6	6.1	9.5
7,5°	236.8	235.3	233.8	232.5	231.2	230.3	229.3	228.5	227.9	227.3	227.0	226.7	226.7	9.4	18.9
10,0°	232.2	230.4	228.8	227.3	225.9	224.6	223.4	222.3	221.4	220.6	220.2	219.6	219.6	13.0	31.9
12,5°	227.8	224.2	220.1	216.8	213.4	210.6	208.1	205.7	204.1	202.3	201.7	200.6	200.8	16.8	48.6
15,0°	209.6	205.5	201.8	198.6	195.9	193.5	191.4	189.4	187.8	186.4	185.6	184.8	184.8	20.3	68.9
17,5°	198.1	194.4	191.2	188.2	185.6	183.4	181.3	179.2	177.5	175.9	175.0	174.2	174.2	23.4	92.3
20,0°	190.5	185.8	181.2	176.6	172.6	168.7	165.7	162.6	160.3	157.9	156.9	155.5	155.8	25.7	118.0
22,5°	177.4	170.9	165.2	160.0	155.7	151.9	149.1	146.6	144.7	142.8	141.8	141.0	141.0	27.6	145.6
25,0°	166.7	161.7	158.0	155.0	152.6	150.4	148.5	146.8	145.3	144.0	142.8	142.1	142.0	30.1	175.8
27,5°	170.6	166.5	162.1	157.8	153.9	150.5	147.4	144.7	142.6	140.7	139.1	138.1	137.9	33.4	209.2
30,0°	171.2	166.2	160.0	153.7	148.2	142.8	137.9	132.9	129.2	125.8	123.8	122.1	122.1	37.0	246.2
32,5°	159.3	154.0	146.2	137.1	130.5	124.6	120.6	116.8	114.3	111.8	110.6	109.2	109.4	40.6	286.8
35,0°	134.1	133.4	129.8	123.6	117.5	112.4	108.5	105.3	102.6	100.6	99.2	98.3	98.2	44.2	330.9
37,5°	113.3	115.3	114.5	110.5	105.4	100.4	96.7	93.4	91.0	89.0	87.8	86.8	86.8	47.1	378.0
40,0°	94.4	96.6	97.6	94.4	90.9	85.9	83.0	79.7	78.3	76.2	75.9	74.7	75.2	48.5	426.5
42,5°	77.4	79.8	79.8	77.7	74.6	71.2	68.7	66.9	65.9	65.0	64.6	64.4	64.5	48.6	475.1
45,0°	65.0	66.5	66.1	64.0	61.6	59.9	59.1	58.9	59.3	59.6	60.0	60.3	60.5	33.2	508.4
46,0°	61.4	62.3	61.8	60.0	58.7	58.0	57.7	57.7	58.2	58.7	59.2	59.6	59.8	18.9	527.3
47,0°	59.0	59.5	58.9	58.1	57.5	56.9	56.6	56.6	57.2	57.8	58.5	59.0	59.3	18.7	546.0
48,0°	57.2	57.3	57.3	56.9	56.4	55.7	55.6	55.6	56.3	56.9	57.7	58.2	58.7	18.5	564.5
49,0°	55.7	56.0	56.3	55.9	55.3	54.8	54.7	54.7	55.3	56.0	56.9	57.5	57.9	18.2	582.7
50,0°	54.5	55.0	55.5	55.2	54.6	53.9	53.7	53.7	54.4	55.1	55.9	56.6	57.0	18.0	600.7
51,0°	53.4	53.8	54.5	54.5	53.9	53.0	52.7	52.7	53.2	54.0	54.8	55.5	55.8	17.7	618.4
52,0°	52.5	52.7	53.3	53.8	53.3	52.4	51.8	51.6	52.0	52.7	53.4	54.1	54.4	17.5	635.9
53,0°	51.5	51.7	52.1	52.5	52.6	51.7	50.9	50.5	50.7	51.2	52.0	52.6	52.9	17.2	653.1
54,0°	50.5	50.5	51.0	51.0	51.1	50.8	50.1	49.5	49.4	49.8	50.5	51.0	51.3	17.0	670.1
55,0°	49.6	49.5	50.0	50.0	49.9	49.6	49.4	48.9	48.3	48.4	49.1	49.6	49.9	16.8	686.8
56,0°	48.8	48.5	48.9	48.9	48.6	48.1	48.3	47.8	47.3	47.0	47.8	48.1	48.5	16.5	703.4
57,0°	47.9	47.6	47.7	47.8	47.5	46.9	46.6	46.5	46.0	45.6	46.5	46.9	46.9	16.3	719.7
58,0°	47.0	46.5	46.5	46.6	46.6	45.9	45.3	44.9	44.5	44.3	45.2	45.7	45.5	16.1	735.8
59,0°	46.1	45.2	45.2	45.4	45.5	44.8	44.1	43.5	43.0	42.9	44.1	44.7	44.0	15.9	751.7
60,0°	45.1	44.1	44.1	44.2	44.3	43.8	43.2	42.4	41.8	42.0	43.7	43.9	42.9	15.6	767.3
61,0°	44.1	43.2	42.8	43.2	43.1	42.8	42.2	41.3	40.6	40.7	42.0	42.3	41.7	15.4	782.7
62,0°	43.0	42.2	41.7	41.8	42.0	41.5	41.1	40.3	39.3	39.0	39.9	40.2	40.1	15.2	797.9
63,0°	42.1	41.3	40.8	40.6	40.8	40.2	39.8	39.1	38.0	37.5	38.0	38.3	38.4	15.0	812.9
64,0°	41.1	40.4	39.9	39.5	39.6	38.7	38.3	37.4	36.7	35.6	36.2	36.2	36.7	14.7	827.5
65,0°	40.2	39.9	39.3	38.8	38.4	37.1	36.4	35.6	34.6	33.3	33.6	33.7	34.2	14.4	841.9
66,0°	39.5	39.2	38.9	38.4	36.8	34.7	34.0	33.0	32.0	31.0	31.1	31.2	31.9	14.1	856.1
67,0°	38.3	38.5	38.3	37.0	33.9	31.7	31.2	30.4	29.7	28.3	28.5	28.6	29.2	14.0	870.0
68,0°	36.5	37.3	37.8	34.5	31.1	28.9	28.7	27.6	27.1	25.5	25.8	25.7	26.3	13.9	883.9
69,0°	34.9	35.9	35.7	30.9	27.9	25.4	25.4	24.7	24.6	23.4	23.6	22.9	23.8	13.9	897.8
70,0°	33.0	34.2	32.2	27.4	24.6	22.9	22.4	22.2	22.3	21.5	21.0	20.3	20.8	13.8	911.6
71,0°	30.6	31.8	28.3	23.8	22.1	20.0	19.4	19.4	20.0	19.5	18.3	17.5	17.6	13.6	925.1
72,0°	28.0	27.2	24.1	20.1	18.6	17.2	16.4	16.3	17.3	16.1	15.3	14.7	15.0	13.2	938.3

Photometric test report

Family Streetlight 21 mini easy LED	Order number: 5XE6B47N08JB EAN: 4058352897379	LP number 59074_196
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C- planes	0,0° 180,0°	2,5° 177,5°	5,0° 175,0°	7,5° 172,5°	10,0° 170,0°	12,5° 167,5°	15,0° 165,0°	17,5° 162,5°	20,0° 160,0°	22,5° 157,5°	25,0° 155,0°	27,5° 152,5°	30,0° 150,0°	32,5° 147,5°	35,0° 145,0°
γ	Luminous intensity in cd/klm														
73,0°	314.2	327.1	363.0	397.4	422.7	442.9	443.9	424.6	388.6	334.2	283.3	254.4	265.4	296.9	310.4
74,0°	302.3	315.4	351.4	383.4	407.0	421.3	422.6	404.3	368.4	319.2	278.5	252.6	254.3	276.8	278.8
75,0°	271.9	282.4	317.5	348.3	373.3	382.5	388.8	372.7	343.4	304.4	279.4	261.8	262.3	267.5	251.6
76,0°	203.4	205.7	235.6	259.9	289.7	298.9	320.0	312.0	301.5	279.0	270.4	271.0	278.1	258.7	216.4
77,0°	127.7	125.1	141.5	158.4	183.6	190.1	209.0	211.9	225.2	227.5	246.7	272.1	287.2	232.7	167.6
78,0°	69.4	62.5	74.1	81.0	106.1	107.6	125.5	119.8	140.1	148.2	182.4	203.3	237.4	175.8	116.2
79,0°	29.2	27.1	30.4	36.2	50.1	55.6	64.6	67.3	83.0	101.9	127.0	132.3	111.3	97.4	67.9
80,0°	12.8	12.6	14.0	17.5	21.8	23.3	28.0	29.0	41.4	56.8	84.5	75.6	49.9	39.4	30.6
81,0°	7.7	8.0	8.9	10.4	11.7	11.5	12.4	12.0	15.1	20.5	28.7	25.3	16.6	15.8	13.4
82,0°	5.8	6.0	6.6	7.2	7.9	7.5	7.7	7.8	8.6	10.6	14.3	13.0	9.1	8.3	8.1
83,0°	4.4	4.5	4.9	5.1	5.5	5.4	5.4	5.6	5.8	6.4	8.8	9.1	7.0	5.9	5.9
84,0°	3.1	3.1	3.3	3.3	3.5	3.5	3.6	3.6	3.8	3.9	4.6	4.7	4.4	4.2	4.3
85,0°	2.4	2.3	2.3	2.3	2.4	2.3	2.5	2.5	2.6	2.6	2.8	2.8	2.9	2.8	3.0
86,0°	1.8	1.8	1.8	1.7	1.8	1.7	1.8	1.6	1.7	1.6	1.8	1.8	1.9	1.8	2.0
87,0°	1.4	1.4	1.4	1.3	1.3	1.3	1.2	1.2	1.2	1.2	1.2	1.1	1.1	1.2	1.2
88,0°	1.1	1.1	1.1	1.0	1.0	1.0	1.0	0.9	0.9	0.9	0.9	0.8	0.8	0.8	0.8
89,0°	1.0	1.0	1.0	0.9	0.9	0.9	0.9	0.8	0.8	0.7	0.8	0.7	0.7	0.7	0.6
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family
Streetlight 21 mini easy LED

Order number: 5XE6B47N08JB
EAN: 4058352897379

LP number
59074_196

siteco

C- planes	37,5° 142,5°	40,0° 140,0°	42,5° 137,5°	45,0° 135,0°	47,5° 132,5°	50,0° 130,0°	52,5° 127,5°	55,0° 125,0°	57,5° 122,5°	60,0° 120,0°	62,5° 117,5°	65,0° 115,0°	67,5° 112,5°	70,0° 110,0°	72,5° 107,5°
γ	Luminous intensity in cd/klm														
73,0°	308.3	289.8	248.1	201.6	148.8	101.1	66.6	46.0	32.7	28.1	26.8	25.7	25.0	24.3	22.6
74,0°	264.8	245.1	208.3	168.0	120.8	81.4	53.7	38.2	29.2	25.7	24.6	23.7	23.1	22.3	20.7
75,0°	221.4	197.5	168.0	137.9	96.7	64.3	42.4	32.1	26.6	23.9	22.7	22.1	21.1	20.4	18.8
76,0°	170.0	141.6	116.1	96.9	66.0	46.5	33.7	27.6	23.9	22.0	20.8	20.3	18.8	18.0	16.6
77,0°	115.1	88.3	66.5	54.7	37.9	29.4	24.9	23.6	21.5	19.9	18.7	18.0	16.1	15.0	13.9
78,0°	76.5	58.2	42.9	33.1	24.2	20.5	19.2	19.7	18.8	17.7	16.6	16.0	13.8	12.5	11.6
79,0°	51.1	41.7	30.0	23.4	18.1	15.9	14.7	15.6	15.2	15.4	14.3	13.4	11.4	10.3	9.3
80,0°	27.2	25.0	20.1	16.4	13.4	11.9	11.1	11.4	11.9	13.0	12.3	11.1	9.1	8.2	7.6
81,0°	11.7	12.0	11.9	11.4	9.8	9.0	8.5	8.7	9.5	10.7	10.3	9.2	7.2	6.5	6.0
82,0°	7.4	7.2	7.5	7.3	6.8	6.7	6.6	6.8	7.5	8.7	8.4	7.3	5.7	5.0	4.6
83,0°	5.7	5.7	5.8	5.1	4.8	4.9	4.8	5.2	5.6	6.5	6.1	5.3	4.3	3.8	3.5
84,0°	4.3	4.5	4.4	3.8	3.4	3.3	3.3	3.6	3.8	4.5	4.3	3.9	3.2	2.9	2.7
85,0°	3.1	3.3	3.2	2.8	2.4	2.3	2.2	2.2	2.3	2.8	2.6	2.5	2.1	2.1	1.9
86,0°	2.0	2.2	2.1	2.0	1.7	1.7	1.5	1.5	1.4	1.5	1.4	1.5	1.4	1.4	1.3
87,0°	1.2	1.4	1.3	1.3	1.1	1.1	1.0	1.0	0.9	1.0	0.9	1.0	0.9	0.9	0.9
88,0°	0.8	0.8	0.8	0.8	0.7	0.7	0.7	0.7	0.6	0.6	0.6	0.6	0.6	0.6	0.6
89,0°	0.6	0.6	0.6	0.6	0.6	0.5	0.5	0.5	0.5	0.5	0.4	0.4	0.5	0.4	0.4
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family
Streetlight 21 mini easy LED

Order number: 5XE6B47N08JB
EAN: 4058352897379

LP number
59074_196

siteco

C- planes	75,0° 105,0°	77,5° 102,5°	80,0° 100,0°	82,5° 97,5°	85,0° 95,0°	87,5° 92,5°	90,0°	182,5° 357,5°	185,0° 355,0°	187,5° 352,5°	190,0° 350,0°	192,5° 347,5°	195,0° 345,0°	197,5° 342,5°	200,0° 340,0°
γ	Luminous intensity in cd/klm														
73,0°	21.3	20.0	19.0	18.2	17.6	17.4	17.7	313.3	276.8	182.6	96.1	62.4	48.6	36.4	28.9
74,0°	19.7	18.1	17.0	16.2	15.6	15.3	15.5	298.9	258.9	160.8	84.5	62.2	47.9	34.5	26.9
75,0°	18.1	16.5	15.3	14.4	13.8	13.6	13.6	264.0	223.5	129.7	69.4	55.9	45.5	31.7	24.5
76,0°	16.3	14.7	13.7	12.7	12.1	11.7	11.8	192.6	158.3	84.1	46.3	41.8	38.2	28.2	21.4
77,0°	14.0	12.6	11.8	10.9	10.4	9.8	9.9	119.2	94.7	47.7	27.5	30.6	30.2	25.2	18.9
78,0°	12.0	10.8	10.1	9.4	8.8	8.3	8.4	60.8	51.0	28.7	23.6	31.7	31.7	27.0	18.5
79,0°	9.9	8.8	8.6	7.8	7.4	6.8	6.9	26.2	24.1	20.1	24.0	34.5	38.1	31.6	19.5
80,0°	7.8	7.1	6.8	6.2	5.7	5.4	5.4	11.7	11.9	13.1	17.9	27.0	35.6	31.7	18.8
81,0°	6.3	5.7	5.4	4.9	4.6	4.3	4.3	7.2	7.1	7.6	9.6	14.8	24.3	24.2	14.8
82,0°	4.8	4.3	4.1	3.9	3.7	3.5	3.5	5.5	5.5	5.5	6.1	7.9	14.2	14.8	9.6
83,0°	3.5	3.2	3.1	3.1	2.9	2.8	2.8	4.2	4.2	4.2	4.5	4.9	6.9	7.1	5.4
84,0°	2.6	2.5	2.3	2.3	2.3	2.2	2.2	3.1	3.2	3.2	3.3	3.4	3.6	3.5	3.2
85,0°	1.9	1.7	1.7	1.6	1.6	1.5	1.6	2.3	2.4	2.4	2.5	2.4	2.4	2.3	2.3
86,0°	1.3	1.2	1.1	1.1	1.1	1.1	1.1	1.8	1.9	1.8	1.9	1.8	1.9	1.7	1.8
87,0°	0.9	0.8	0.8	0.7	0.7	0.7	0.8	1.4	1.5	1.4	1.5	1.5	1.4	1.4	1.4
88,0°	0.5	0.5	0.5	0.5	0.5	0.5	0.5	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2
89,0°	0.4	0.4	0.4	0.3	0.3	0.3	0.4	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 21 mini easy LED	Order number: 5XE6B47N08JB EAN: 4058352897379	LP number 59074_196 siteco
--	--	--------------------------------------

C- planes	202,5° 337,5°	205,0° 335,0°	207,5° 332,5°	210,0° 330,0°	212,5° 327,5°	215,0° 325,0°	217,5° 322,5°	220,0° 320,0°	222,5° 317,5°	225,0° 315,0°	227,5° 312,5°	230,0° 310,0°	232,5° 307,5°	235,0° 305,0°	237,5° 302,5°
γ	Luminous intensity in cd/klm														
73,0°	24.9	24.3	24.5	25.3	25.5	25.7	25.5	25.6	25.6	25.7	25.5	25.3	24.2	24.2	24.3
74,0°	22.7	21.8	22.0	23.1	23.1	23.3	23.3	23.1	23.0	23.0	22.3	21.8	21.3	22.1	22.2
75,0°	20.1	19.3	19.5	20.0	20.1	20.7	20.5	20.1	19.5	19.2	18.5	18.6	18.7	19.6	20.1
76,0°	17.5	16.8	17.0	17.6	17.7	18.1	17.8	17.2	16.6	16.1	16.0	16.1	16.1	16.5	17.1
77,0°	15.2	14.8	14.8	15.1	14.9	15.8	14.9	14.7	13.6	13.6	13.1	13.4	12.7	13.5	13.5
78,0°	13.3	13.0	12.8	12.6	12.4	13.0	12.1	11.6	11.1	10.9	10.7	10.7	10.4	10.5	10.3
79,0°	12.2	11.5	11.0	10.5	10.6	10.6	9.8	9.6	9.0	8.8	8.6	8.6	8.3	8.5	8.1
80,0°	10.6	9.9	9.3	8.2	8.3	8.6	8.1	7.7	7.2	6.8	6.6	6.5	6.1	6.1	6.0
81,0°	8.5	8.0	7.5	6.6	6.6	6.8	6.6	6.2	5.6	5.3	5.0	4.8	4.6	4.6	4.5
82,0°	6.3	6.0	5.6	5.1	5.1	5.3	5.1	4.9	4.4	4.1	3.7	3.6	3.3	3.2	3.2
83,0°	4.4	4.3	4.0	3.8	3.7	3.8	3.8	3.5	3.1	2.9	2.7	2.6	2.4	2.4	2.2
84,0°	3.0	3.0	2.8	2.7	2.7	2.8	2.7	2.5	2.2	2.1	2.0	2.0	1.8	1.7	1.6
85,0°	2.2	2.2	2.0	2.0	1.8	1.9	1.7	1.8	1.5	1.5	1.3	1.3	1.2	1.1	0.9
86,0°	1.7	1.7	1.6	1.4	1.4	1.3	1.2	1.2	1.1	1.0	0.9	0.9	0.8	0.8	0.7
87,0°	1.4	1.3	1.3	1.2	1.2	1.1	1.1	1.0	0.9	0.9	0.8	0.7	0.7	0.7	0.6
88,0°	1.2	1.1	1.1	1.0	1.0	1.0	0.9	0.9	0.8	0.8	0.7	0.7	0.7	0.6	0.5
89,0°	1.0	1.0	1.0	0.9	0.9	0.9	0.8	0.8	0.8	0.7	0.7	0.7	0.6	0.6	0.5
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

C- planes	240,0° 300,0°	242,5° 297,5°	245,0° 295,0°	247,5° 292,5°	250,0° 290,0°	252,5° 287,5°	255,0° 285,0°	257,5° 282,5°	260,0° 280,0°	262,5° 277,5°	265,0° 275,0°	267,5° 272,5°	270,0°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm													Luminous flux in lm/klm	
73,0°	25.2	23.7	20.7	17.3	15.7	14.3	13.6	13.2	13.9	12.2	11.9	11.5	12.0	12.5	950.9
74,0°	22.7	20.6	17.8	14.9	13.0	11.5	11.0	10.5	10.8	9.4	9.0	8.5	8.6	11.7	962.5
75,0°	19.7	17.1	15.0	13.1	11.1	9.5	9.0	8.4	8.6	7.4	7.0	6.4	6.5	10.6	973.1
76,0°	16.2	14.3	12.8	11.1	9.6	8.0	7.3	6.7	6.5	5.6	5.1	4.7	4.8	8.7	981.9
77,0°	13.4	11.9	10.7	9.0	7.7	6.2	6.0	5.0	4.6	3.7	3.4	2.9	3.1	6.4	988.3
78,0°	10.5	9.9	8.8	7.2	5.7	4.7	4.3	3.6	3.1	2.4	2.0	1.7	1.7	4.4	992.7
79,0°	8.3	7.6	6.9	5.6	4.5	3.8	3.4	2.7	2.2	1.6	1.2	1.0	1.0	2.8	995.4
80,0°	6.2	5.6	5.3	4.3	3.5	2.9	2.4	1.9	1.6	1.1	0.8	0.7	0.7	1.7	997.1
81,0°	4.5	4.1	4.0	3.2	2.6	2.2	1.9	1.5	1.2	0.9	0.7	0.5	0.5	0.9	998.0
82,0°	3.2	3.0	3.0	2.4	2.0	1.6	1.4	1.1	0.9	0.6	0.5	0.5	0.5	0.6	998.6
83,0°	2.0	2.1	2.2	1.7	1.4	1.2	1.0	0.8	0.6	0.5	0.5	0.4	0.4	0.4	999.1
84,0°	1.5	1.6	1.5	1.1	1.0	0.8	0.7	0.6	0.5	0.4	0.4	0.3	0.3	0.3	999.4
85,0°	1.0	1.0	1.0	0.7	0.7	0.5	0.5	0.4	0.4	0.3	0.3	0.3	0.3	0.2	999.6
86,0°	0.6	0.6	0.5	0.5	0.4	0.4	0.3	0.3	0.3	0.3	0.3	0.3	0.3	0.1	999.7
87,0°	0.5	0.5	0.5	0.4	0.4	0.3	0.3	0.3	0.3	0.3	0.3	0.2	0.2	0.1	999.8
88,0°	0.5	0.5	0.4	0.4	0.4	0.3	0.3	0.3	0.3	0.3	0.3	0.2	0.2	0.1	999.9
89,0°	0.5	0.5	0.4	0.4	0.4	0.3	0.3	0.3	0.3	0.3	0.3	0.3	0.2	0.1	1000.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

office	industry	traffic	retail	public	sports
--------	----------	---------	--------	--------	--------

Photometric test report

Family Streetlight 21 mini easy LED	Order number: 5XE6B47N08JB EAN: 4058352897379	LP number 59074_196
Dimming levels table		environmental temperature: 25°C

sitEco

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W] start of lifetime	Power consumption [W] end of lifetime	Power consumption [W] average
100	254	254	13390	87.3	90.3	88.8
95	239	252	12736	82.1	84.9	83.5
90	224	249	12064	76.9	79.4	78.2
85	209	247	11377	71.7	74.1	72.9
80	195	244	10715	66.8	69.1	67.9
75	181	242	10037	62.1	64.1	63.1
70	167	239	9350	57.4	59.2	58.3
65	154	236	8702	53.0	54.7	53.8
60	141	232	8041	48.6	50.2	49.4
55	128	229	7370	44.3	45.7	45.0
50	115	225	6681	40.0	41.3	40.6
45	103	221	6035	36.1	37.2	36.7
40	91	216	5378	32.1	33.1	32.6
35	79	211	4711	28.2	29.0	28.6
30	67	205	4034	24.3	25.0	24.6
25	55	198	3347	20.4	21.0	20.7
20	43	189	2651	16.5	17.0	16.8
15	32	178	2005	13.0	13.3	13.2
10	21	163	1348	9.3	9.5	9.4
10	20	161	1288	8.9	9.2	9.0

Dimming levels table		environmental temperature: 5°C
----------------------	--	--------------------------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W] start of lifetime	Power consumption [W] end of lifetime	Power consumption [W] average
100	254	254	13810	88.4	91.4	89.9
95	239	252	13114	83.1	85.9	84.5
90	225	250	12453	78.1	80.8	79.4
85	210	247	11729	73.0	75.4	74.2
80	196	245	11037	68.1	70.4	69.2
75	183	242	10381	63.6	65.6	64.6
70	169	239	9667	58.8	60.7	59.8
65	156	236	8996	54.4	56.2	55.3
60	143	233	8312	50.0	51.6	50.8
55	130	229	7620	45.6	47.0	46.3
50	117	226	6912	41.3	42.6	42.0
45	104	221	6194	37.0	38.1	37.6
40	92	217	5522	32.9	33.9	33.4
35	80	212	4841	28.9	29.8	29.4
30	68	206	4151	25.0	25.8	25.4
25	56	199	3451	21.0	21.6	21.3
20	44	190	2745	17.1	17.6	17.4
15	33	179	2089	13.5	13.9	13.7
10	21	163	1363	9.4	9.6	9.5
9	20	161	1302	9.0	9.3	9.2

Photometric test report

Family Streetlight 21 mini easy LED	Order number: 5XE6B47N08JB EAN: 4058352897379	LP number 59074_196
Dimming levels table environmental temperature: 15°C		

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W] start of lifetime	Power consumption [W] end of lifetime	Power consumption [W] average
100	254	254	13620	87.8	90.8	89.3
95	239	252	12943	82.6	85.4	84.0
90	224	249	12252	77.3	79.9	78.6
85	210	247	11592	72.5	74.9	73.7
80	196	245	10915	67.7	69.9	68.8
75	182	242	10222	62.9	64.9	63.9
70	168	239	9520	58.1	60.0	59.0
65	155	236	8860	53.7	55.4	54.6
60	142	233	8186	49.3	50.9	50.1
55	129	229	7503	44.9	46.4	45.6
50	116	225	6804	40.6	41.9	41.2
45	104	221	6149	36.7	37.8	37.2
40	91	216	5428	32.3	33.4	32.8
35	79	211	4754	28.4	29.2	28.8
30	67	205	4068	24.5	25.2	24.8
25	56	199	3432	20.8	21.5	21.2
20	44	190	2731	17.0	17.5	17.2
15	32	178	2019	13.1	13.4	13.2
10	21	163	1357	9.3	9.5	9.4
10	20	161	1297	9.0	9.2	9.1

Photometric test report

Family Streetlight 21 mini easy LED	Order number: 5XE6B47N08JB EAN: 4058352897379	LP number 59074_196
Luminousfluxs table		siteco

Temperature °C	Luminous flux lm	Power consumption W
25.0	13390.0	87.3
5.0	13810.0	88.4
15.0	13620.0	87.8