

Photometric test report

Family
Streetlight 11 micro LED

Order number: 5XC1A61Y08DE
EAN: 4058352949580

LP number
58065_164



Version post-top or side-entry mounting, Smart Interface up/down
Optic direct, asymmetric wide distribution S120001
Cover transparent, PMMA
Lamps LED 2700 K | CRI ≥ 70
Controlgear ECG SITECO iQ - DALI2
Rated values Net luminous flux = 3320 lm
Power consumption = 25.4 W
Luminous efficacy = 130.7 lm/W

serial
documentation
27.07.2023

siteco

Luminous intensity in cd/klm


C180-0

C205-25

C210-30

C270-90

Imax: 699 cd/klm

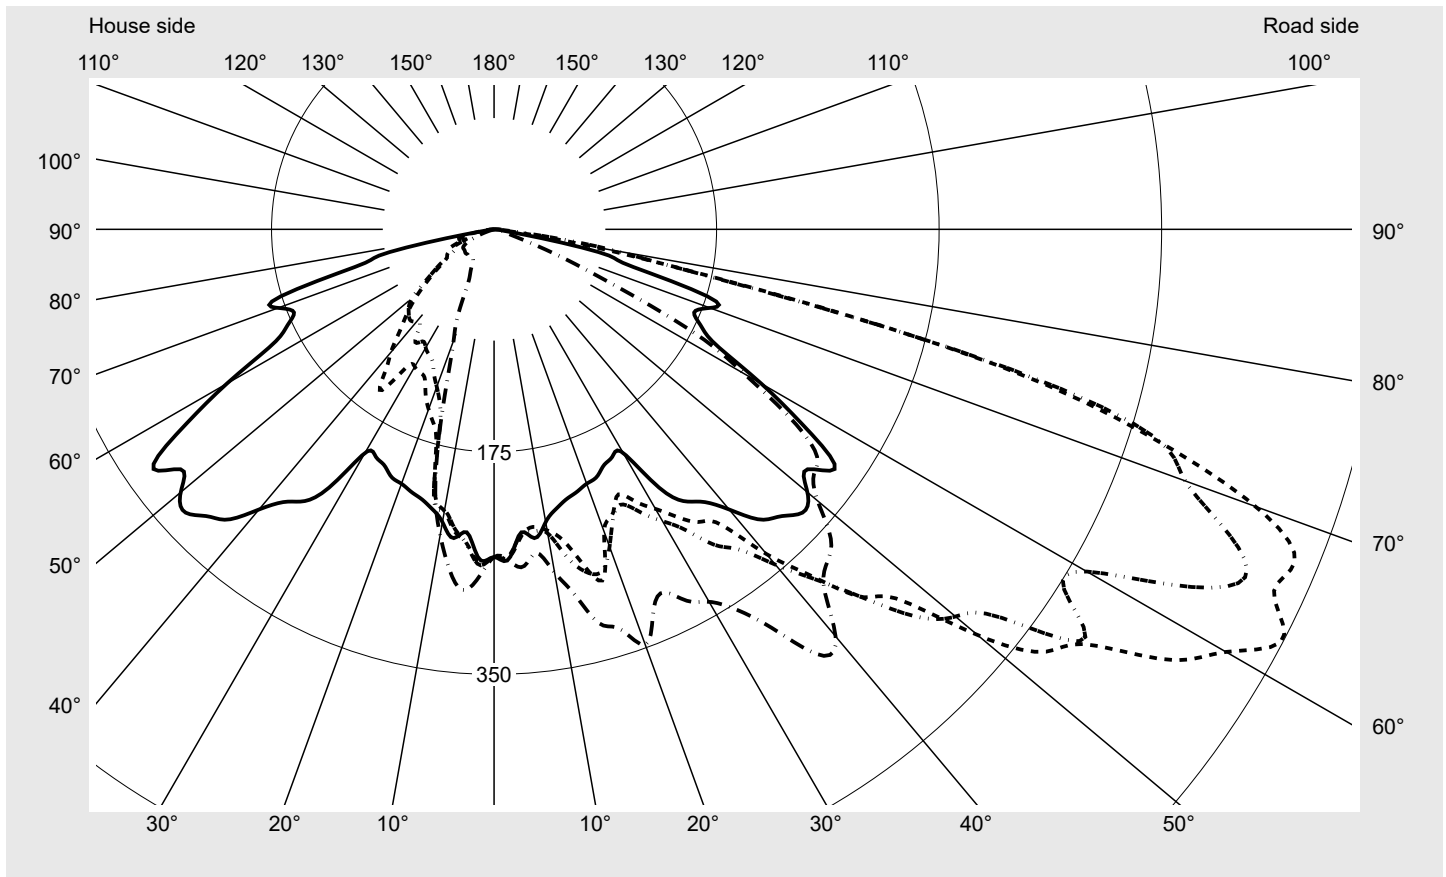

Luminaire output ratios

Eta	100.0%
Eta 0° - 90°	100.0%
Eta 90° - 180°	0.0%

Luminous intensity class acc. to EN13201-2

Class:	G3
Imax 70°	637.5
Imax 80°	98.2
Imax 90°	0.0
Imax >90°	0.0
Imax >95°	0.0


Measurement conditions

DIN EN 13032 and DIN 5032

Photometric test report

Family Streetlight 11 micro LED	Order number: 5XC1A61Y08DE EAN: 4058352949580	LP number 58065_164
---	--	-------------------------------

Envelope curve in cd/klm **KMK 62.5°** **KMK 60°** **KMK 57.5°** **KMK 55°** **siteco**

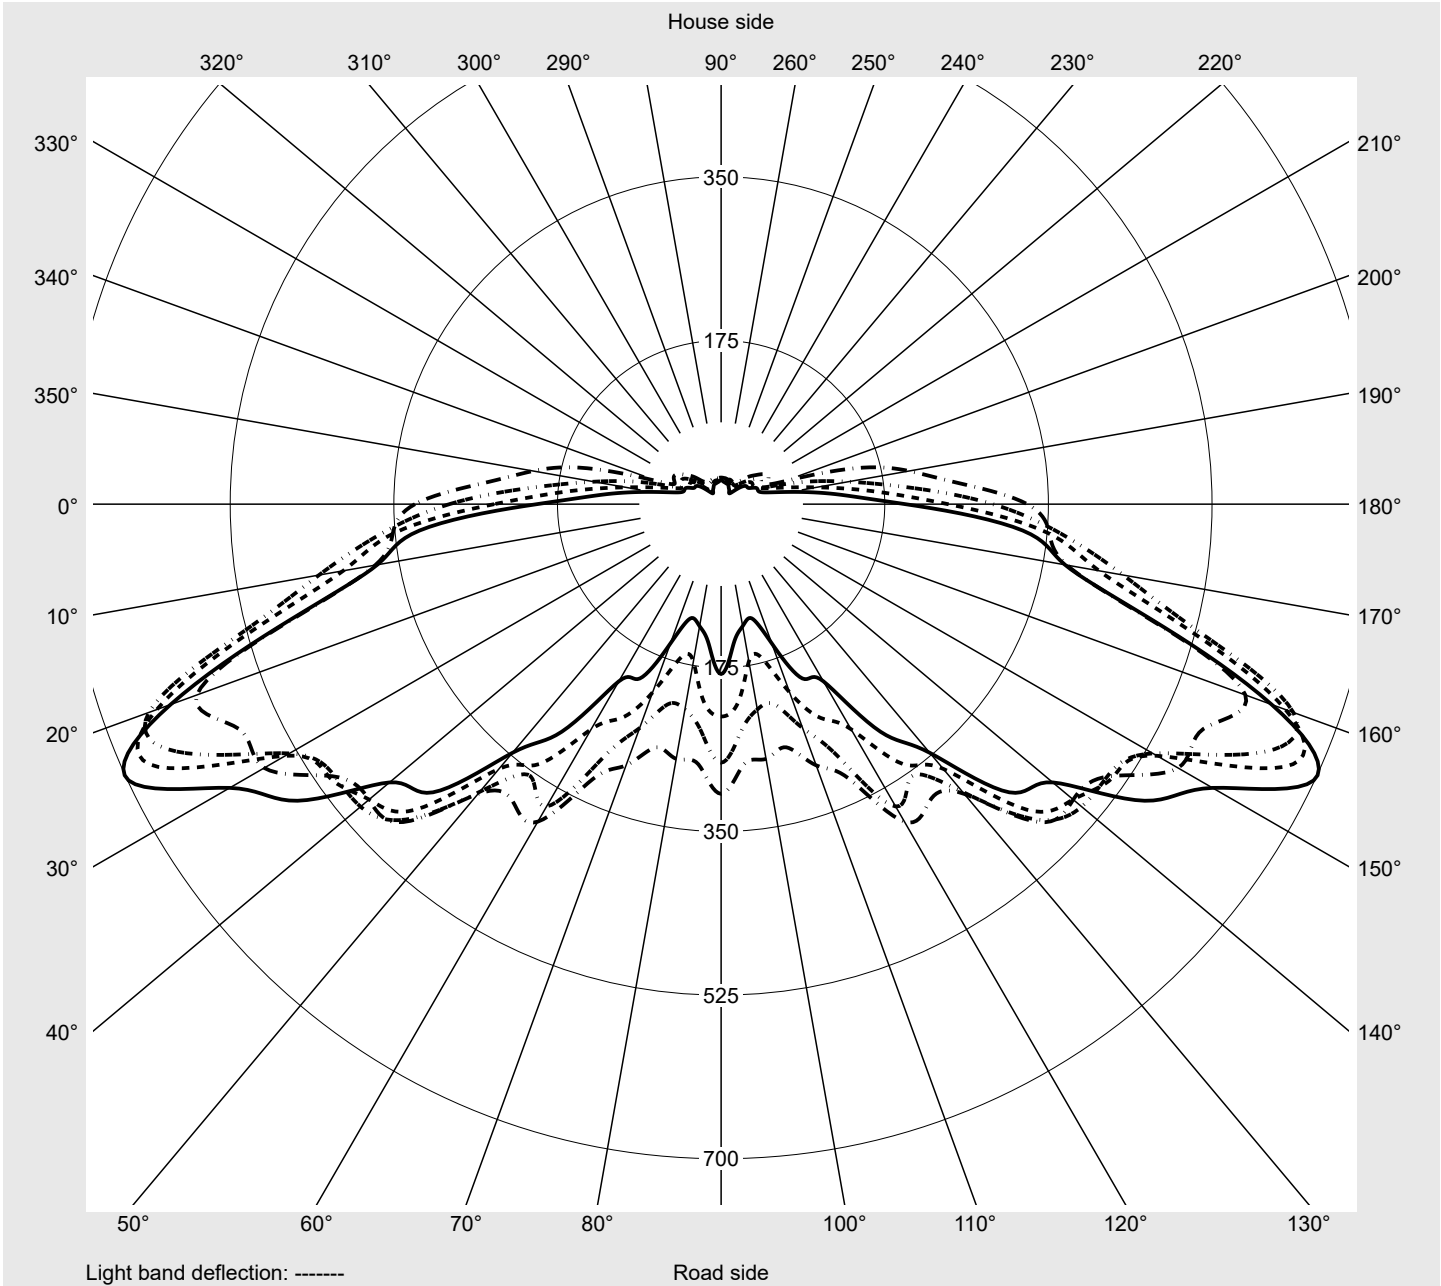

Photometric test report

Family Streetlight 11 micro LED	Order number: 5XC1A61Y08DE EAN: 4058352949580	LP number 58065_164
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
γ	Luminous intensity in cd/klm												
0,0°	257.7	257.7	257.7	257.7	257.7	257.7	257.7	257.7	257.7	257.7	257.7	257.7	257.7
2,5°	259.9	259.7	259.7	260.1	259.7	258.6	257.4	255.7	253.8	253.3	252.7	252.9	253.7
5,0°	239.6	238.9	237.5	239.1	243.2	242.7	240.8	244.6	250.6	256.3	263.1	271.3	271.3
7,5°	244.9	242.1	235.6	230.9	228.8	236.0	239.4	250.8	256.3	259.9	254.4	255.2	258.8
10,0°	233.7	243.2	241.5	238.9	240.0	240.4	242.7	243.0	250.6	255.7	265.4	267.5	278.3
12,5°	225.2	233.7	239.6	245.3	250.1	250.4	263.7	271.5	263.5	263.7	272.0	275.3	277.7
15,0°	219.7	229.0	247.6	256.3	265.0	273.9	278.9	272.2	267.7	271.1	272.8	264.7	275.6
17,5°	216.5	223.5	248.2	257.8	271.3	287.6	282.1	276.8	264.1	264.7	264.1	271.1	270.1
20,0°	212.9	224.3	235.6	241.9	249.3	252.9	265.6	273.9	277.0	265.4	250.6	254.8	274.5
22,5°	210.8	219.3	222.6	234.7	239.4	243.0	245.1	248.3	255.4	253.7	253.7	262.2	262.4
25,0°	204.6	216.7	224.8	227.7	230.5	230.3	238.7	255.2	263.5	262.2	277.0	272.4	278.5
27,5°	201.5	215.0	216.5	224.8	233.7	241.5	251.4	261.8	265.4	279.6	301.0	305.2	312.8
30,0°	203.0	214.8	220.7	231.7	244.7	253.8	265.0	270.1	283.8	299.2	324.7	337.6	348.1
32,5°	240.0	235.6	234.5	235.3	252.5	268.3	280.4	287.4	312.2	327.0	350.0	360.2	381.1
35,0°	261.0	262.6	256.5	255.9	264.3	281.0	303.1	310.9	322.3	347.3	367.4	382.6	402.5
37,5°	270.1	279.4	281.0	280.8	282.5	292.3	317.5	330.6	342.0	366.8	377.3	417.6	423.1
40,0°	287.6	289.7	295.7	308.3	316.2	333.5	344.3	342.9	362.1	396.0	398.7	425.6	460.3
42,5°	309.6	310.1	306.5	320.6	345.6	369.9	373.1	366.5	370.1	405.9	409.7	424.1	463.7
45,0°	319.1	326.6	339.9	375.4	394.1	408.9	409.3	397.9	403.0	408.5	412.3	421.8	444.0
47,5°	329.5	324.9	325.9	392.6	432.8	430.2	451.0	434.1	450.1	424.7	412.7	419.2	439.1
50,0°	321.7	337.0	337.0	403.0	489.7	496.5	473.8	484.8	475.1	452.0	430.2	413.1	420.5
52,5°	310.1	321.7	346.7	404.6	507.5	545.8	500.9	473.0	508.8	459.5	427.7	416.3	397.2
55,0°	327.4	352.3	375.6	473.9	596.6	568.9	564.2	507.3	491.6	480.8	404.6	388.3	392.0
57,5°	290.6	365.3	436.7	530.2	651.2	630.3	533.1	505.4	503.3	477.0	401.5	355.3	373.3
60,0°	242.7	350.2	410.5	516.6	642.3	664.7	538.2	510.5	491.4	462.0	369.5	339.3	277.9
62,5°	197.0	323.8	373.5	476.4	626.6	699.2	606.8	553.0	462.9	435.8	347.1	297.1	218.8
65,0°	179.5	280.2	343.1	404.0	556.8	676.6	650.6	531.2	454.6	415.7	339.3	267.7	193.9
67,5°	170.4	253.6	315.8	366.1	567.4	681.7	625.0	497.3	409.1	364.7	296.5	241.5	173.8
70,0°	180.7	254.0	305.9	356.9	500.0	637.5	578.2	458.2	366.5	303.9	243.8	186.5	151.1
72,5°	177.1	253.8	262.9	340.7	417.3	539.9	545.4	397.0	317.0	272.8	193.0	154.3	144.8
75,0°	110.7	201.4	253.0	322.9	326.5	401.9	408.9	286.5	228.6	201.1	142.4	135.5	132.5
77,5°	88.0	125.7	156.6	239.2	175.9	190.1	183.1	164.0	125.9	136.7	94.4	91.6	91.9
80,0°	24.5	28.1	39.4	78.7	68.8	80.0	96.1	98.2	94.9	89.3	52.1	31.7	29.0
82,5°	5.9	6.6	7.8	9.5	12.1	17.6	35.1	52.1	44.2	29.6	19.5	15.7	12.1
85,0°	4.2	4.4	4.7	5.5	6.8	8.0	8.7	9.7	9.9	9.1	8.5	7.6	7.2
87,5°	2.7	2.7	3.0	3.4	3.8	4.6	4.7	5.1	5.3	4.9	4.6	4.2	3.6
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
100,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
110,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
120,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
130,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
140,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
150,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
160,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
170,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 11 micro LED	Order number: 5XC1A61Y08DE EAN: 4058352949580	LP number 58065_164
Table of values for luminous intensities		Maximum luminous intensity

siteco

C-planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
γ	Luminous intensity in cd/klm												
0,0°	257.7	257.7	257.7	257.7	257.7	257.7	257.7	257.7	257.7	257.7	257.7	257.7	257.7
2,5°	255.2	257.3	259.0	260.5	261.0	260.5	260.5	260.9	261.4	262.0	262.8	264.3	266.5
5,0°	271.1	267.7	264.7	264.1	266.0	266.2	241.5	243.6	246.1	247.0	247.8	248.5	247.0
7,5°	257.6	258.8	261.4	260.7	257.3	256.7	241.5	238.9	239.6	239.6	239.4	237.4	234.1
10,0°	278.1	274.7	268.3	265.0	270.1	274.1	225.6	221.4	223.7	228.4	224.8	224.5	220.5
12,5°	274.9	275.1	275.6	285.7	289.5	294.6	219.9	216.9	213.3	209.1	214.4	218.6	219.3
15,0°	280.8	283.8	297.3	315.8	317.9	321.1	215.7	202.3	195.1	186.0	175.7	167.2	166.3
17,5°	291.2	299.0	298.2	315.1	329.9	329.5	198.7	186.4	181.8	175.4	159.2	142.2	130.1
20,0°	271.3	289.1	297.8	313.2	341.0	347.7	199.8	181.6	168.9	161.5	150.5	131.8	120.4
22,5°	270.5	277.2	305.4	312.6	324.4	326.8	190.3	175.9	161.0	150.7	140.7	123.4	105.2
25,0°	282.8	301.6	307.7	314.7	328.2	315.1	190.9	167.2	157.3	140.3	129.1	114.5	102.6
27,5°	315.3	328.0	341.6	331.0	327.8	329.5	184.8	171.2	157.0	141.2	126.8	110.9	93.1
30,0°	362.3	355.3	351.3	350.0	344.3	338.2	189.8	175.4	158.7	140.1	124.7	107.5	87.6
32,5°	375.7	361.3	361.5	370.6	364.6	354.5	230.1	220.3	179.5	151.7	129.1	104.5	85.1
35,0°	399.3	383.3	385.8	390.0	393.9	384.1	253.1	241.5	199.8	175.5	154.7	108.1	82.5
37,5°	425.0	417.1	400.2	406.6	416.9	422.4	261.4	243.2	194.1	165.9	140.3	96.1	84.7
40,0°	456.3	428.4	401.5	377.8	394.5	417.8	293.1	265.8	201.9	175.2	126.3	94.8	88.7
42,5°	467.3	416.5	391.7	370.2	369.9	384.5	299.0	255.9	192.0	172.1	110.9	97.3	86.6
45,0°	479.8	431.7	387.1	364.9	366.5	370.4	313.6	262.0	196.8	154.1	99.2	94.8	89.7
47,5°	461.1	403.4	368.2	367.0	372.9	359.1	308.1	244.2	191.3	127.6	88.3	91.0	93.1
50,0°	420.3	371.2	331.2	323.8	346.4	332.1	295.6	240.4	177.4	103.5	76.8	84.0	77.5
52,5°	382.0	343.3	299.5	312.4	316.4	317.0	279.1	224.8	162.7	87.2	65.0	70.1	65.2
55,0°	324.2	297.3	269.2	276.6	279.2	309.8	255.9	204.2	148.4	70.5	54.8	58.4	55.9
57,5°	299.3	254.8	221.8	222.9	244.0	276.4	202.8	138.2	92.1	55.0	45.9	49.3	47.6
60,0°	252.3	214.2	171.2	170.8	212.1	227.1	161.3	103.5	68.4	49.7	42.7	39.6	40.0
62,5°	205.7	158.5	126.4	132.5	150.5	181.6	122.8	75.3	48.5	42.1	41.1	34.5	33.2
65,0°	152.2	108.4	88.3	87.6	107.1	106.9	112.6	58.0	45.9	38.3	38.1	32.4	33.0
67,5°	140.1	83.2	53.8	49.7	68.6	59.5	108.4	56.3	45.1	35.3	36.8	32.4	24.5
70,0°	131.4	69.2	38.1	24.1	29.0	25.4	106.4	59.1	44.9	35.6	29.6	24.1	22.2
72,5°	108.6	36.0	24.5	13.6	12.5	12.1	92.3	63.5	49.3	45.9	30.9	26.5	22.6
75,0°	79.2	24.6	15.2	10.4	9.3	9.1	63.1	60.5	59.0	37.2	30.1	28.4	20.1
77,5°	30.7	16.9	10.8	8.2	7.2	7.6	72.4	53.5	51.6	29.2	26.9	24.3	17.6
80,0°	16.3	11.4	7.8	6.1	5.3	5.3	20.5	23.7	21.0	16.1	15.7	17.3	18.6
82,5°	10.0	7.4	5.5	4.2	3.6	3.4	5.5	5.5	5.7	6.1	6.8	7.4	7.6
85,0°	5.7	4.4	3.0	2.3	1.9	1.9	3.8	3.6	3.6	3.8	4.0	3.6	3.6
87,5°	2.8	2.1	1.3	0.9	0.8	0.8	2.3	2.3	2.3	2.3	2.1	2.1	2.1
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
100,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
110,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
120,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
130,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
140,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
150,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
160,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
170,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 11 micro LED	Order number: 5XC1A61Y08DE EAN: 4058352949580	LP number 58065_164
Table of values for luminous intensities		Maximum luminous intensity
		sITeCO

C-planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm											Luminous flux in lm/klm	
0,0°	257.7	257.7	257.7	257.7	257.7	257.7	257.7	257.7	257.7	257.7	257.7	0.4	0.4
2,5°	268.8	270.9	274.5	277.0	277.5	276.0	273.9	274.7	275.5	274.3	273.7	3.1	3.5
5,0°	245.5	250.1	256.1	261.6	261.4	267.5	270.9	279.4	284.7	286.3	284.7	6.1	9.7
7,5°	229.8	233.2	242.3	242.1	245.1	253.5	255.9	257.4	260.5	266.2	269.6	8.9	18.5
10,0°	208.0	203.6	214.6	211.6	221.4	226.4	236.4	243.4	247.2	244.4	244.2	11.5	30.0
12,5°	218.2	195.3	193.7	187.1	184.6	196.0	205.9	219.7	225.4	218.2	213.5	14.1	44.1
15,0°	166.3	170.8	173.1	167.4	162.8	165.5	171.9	177.6	181.0	175.5	166.4	16.1	60.1
17,5°	130.1	136.5	137.8	132.1	125.5	138.0	139.5	135.7	127.4	120.4	120.2	17.5	77.7
20,0°	114.5	118.5	123.8	109.8	99.2	92.5	86.4	86.1	92.5	95.5	92.9	18.6	96.3
22,5°	98.6	102.2	108.4	91.0	83.2	76.0	72.0	70.3	67.1	66.0	76.2	19.6	115.9
25,0°	87.4	91.2	91.0	81.9	76.8	71.9	69.4	60.9	53.1	51.6	51.9	21.4	137.2
27,5°	79.8	70.7	64.8	63.9	60.3	61.2	59.7	49.3	45.7	42.8	41.3	23.6	160.9
30,0°	77.3	69.6	63.7	58.4	53.7	49.7	44.9	43.8	40.4	37.9	36.4	26.5	187.4
32,5°	73.4	67.5	62.2	54.8	46.3	41.1	38.3	36.0	34.9	33.0	31.5	30.2	217.6
35,0°	75.1	67.7	62.2	50.4	43.0	37.5	33.4	31.8	30.1	29.4	28.8	34.3	251.9
37,5°	76.4	67.1	59.0	49.3	42.7	37.2	31.5	29.4	28.2	28.4	28.1	38.0	289.8
40,0°	77.2	68.6	56.7	49.5	40.2	32.4	30.3	29.0	28.6	28.1	28.1	41.7	331.6
42,5°	79.4	66.0	57.6	47.2	39.6	33.2	29.0	29.0	28.4	28.4	29.2	44.5	376.1
45,0°	83.4	69.8	52.1	43.4	37.9	33.7	29.4	28.2	28.4	28.4	28.8	48.1	424.2
47,5°	81.1	61.8	48.2	40.0	35.6	32.8	29.4	28.2	28.4	28.2	28.8	50.5	474.7
50,0°	63.9	54.0	44.9	36.0	33.4	30.7	30.1	28.4	28.1	28.4	29.2	52.2	526.8
52,5°	56.1	48.5	38.3	32.0	29.8	30.3	29.4	28.6	28.1	29.4	28.8	52.9	579.7
55,0°	48.3	41.3	32.8	29.0	27.1	27.1	27.9	27.3	27.9	28.2	28.4	54.3	634.0
57,5°	40.2	33.0	27.3	24.5	25.0	25.8	26.4	26.7	27.9	27.7	28.4	53.7	687.7
60,0°	35.6	25.6	20.3	19.7	20.7	22.6	24.3	25.8	26.0	26.7	28.1	50.9	738.6
62,5°	29.4	21.2	15.5	14.8	17.3	19.3	22.0	22.7	23.5	24.5	25.8	48.0	786.6
65,0°	22.9	17.3	13.6	12.7	14.2	16.9	19.7	19.9	21.2	22.6	22.0	44.5	831.0
67,5°	20.5	15.5	12.5	11.2	11.9	13.6	15.2	15.5	16.3	15.9	15.5	41.4	872.4
70,0°	19.0	14.2	11.6	10.4	9.9	10.4	10.4	11.0	11.2	10.2	9.9	37.7	910.1
72,5°	16.9	12.7	9.9	8.7	8.0	8.0	7.6	7.2	7.0	4.2	3.8	33.7	943.8
75,0°	14.4	11.6	8.7	7.0	6.4	5.7	5.3	4.6	3.4	0.9	0.8	26.9	970.8
77,5°	11.6	8.5	6.8	5.7	4.7	4.4	3.4	4.0	1.9	0.8	0.4	16.9	987.6
80,0°	13.1	7.2	4.9	4.2	3.4	2.8	2.7	2.8	1.3	0.4	0.4	7.8	995.4
82,5°	6.6	4.9	3.8	3.0	2.7	1.9	1.5	1.5	0.8	0.4	0.4	2.8	998.2
85,0°	3.2	2.7	1.9	1.7	1.5	1.1	0.9	0.8	0.4	0.4	0.4	1.2	999.4
87,5°	1.7	1.5	1.3	0.9	0.9	0.8	0.8	0.4	0.4	0.4	0.4	0.7	1000.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
100,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
110,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
120,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
130,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
140,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
150,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
160,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
170,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family Streetlight 11 micro LED	Order number: 5XC1A61Y08DE EAN: 4058352949580	LP number 58065_164
---	--	--------------------------------------

Dimming levels table	environmental temperature: 25°C	sITeco
-----------------------------	---------------------------------	---------------

Luminous flux [%]	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]start of lifetime	Power consumption [W]end of lifetime	Power consumption [W]average
100	254	254	3320	25.4	26.1	25.8
95	241	252	3150	23.9	24.6	24.2
90	229	250	2993	22.6	23.2	22.9
85	216	248	2823	21.2	21.7	21.4
80	203	246	2653	19.8	20.3	20.0
75	190	243	2483	18.4	18.8	18.6
70	178	241	2327	17.1	17.6	17.4
65	165	238	2157	15.8	16.2	16.0
60	152	235	1987	14.5	14.9	14.7
55	140	232	1830	13.3	13.7	13.5
50	127	229	1660	12.0	12.4	12.2
45	114	225	1490	10.8	11.0	10.9
40	102	221	1333	9.7	9.9	9.8
35	89	216	1163	8.5	8.7	8.6
30	76	210	993	7.3	7.5	7.4
25	63	203	823	6.1	6.2	6.2
20	51	195	667	5.0	5.1	5.0
15	38	184	497	3.9	4.0	4.0