


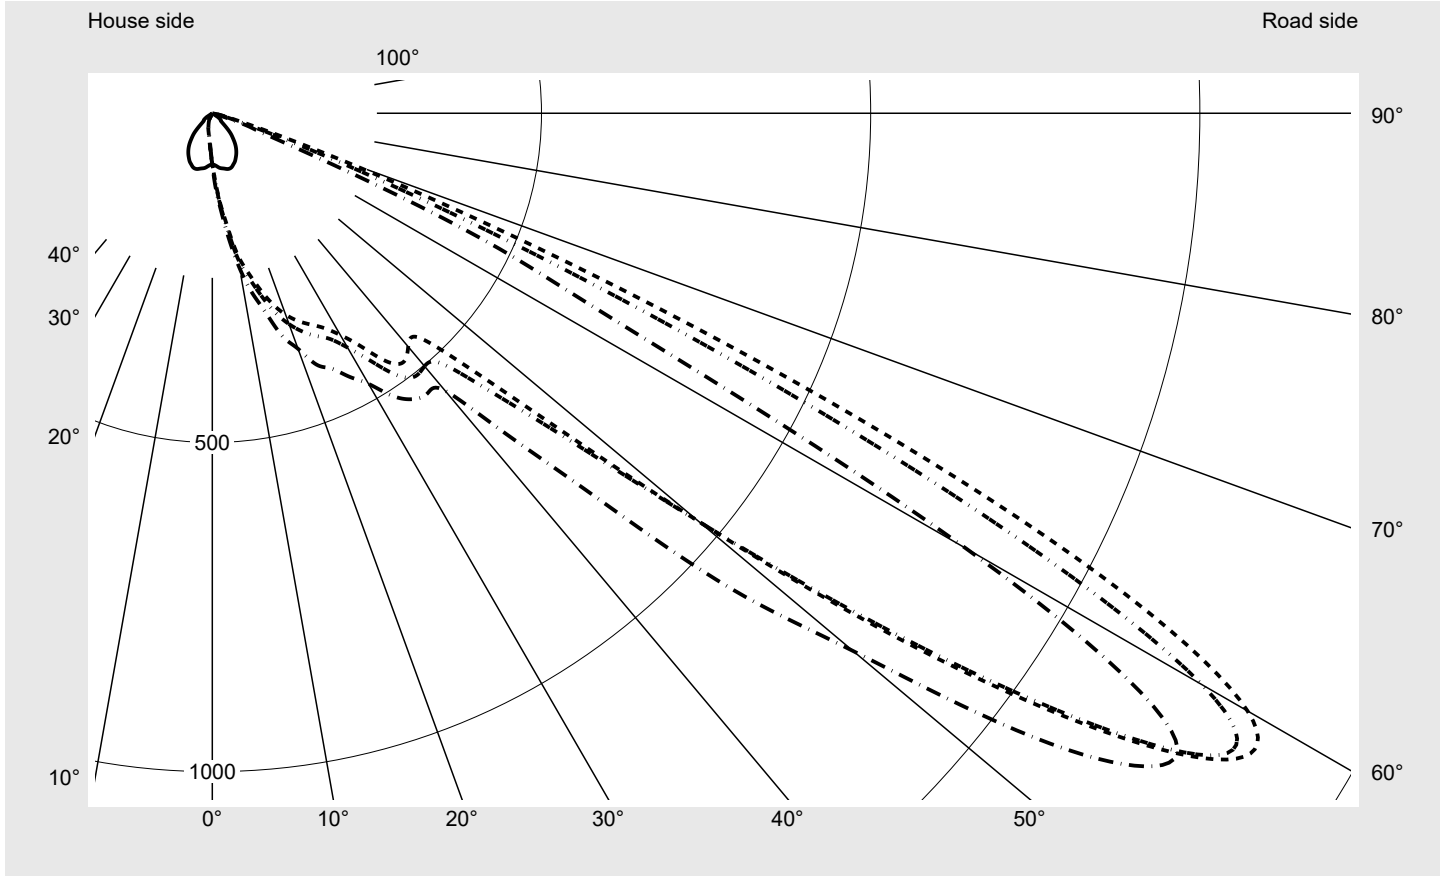
Photometric test report

Family Floodlight FL11	Order number: 5XA779126H01AA EAN: 4058352556962	LP number 59257_45
	Version standard bracket Optic asymmetric distribution PL33T with Back Light Control Cover toughened safety glass Lamps LED 4000 K CRI ≥ 70 Controlgear ECG-DALI Rated values Ta = 10 °C Net luminous flux = 124720 lm Power consumption = 1388.3 W Luminous efficacy = 89.8 lm/W	serial documentation 11.09.2023





Luminous intensity in cd/klm C180-0 C240-60 C245-65 C270-90 **Imax: 1827 cd/klm**



Luminaire output ratios

Eta	100.0%
Eta 0° - 90°	100.0%
Eta 90° - 180°	0.0%

Luminous intensity class acc. to EN13201-2

Class:	G6
Imax 70°	279.0
Imax 80°	8.4
Imax 90°	0.0
Imax >90°	0.0
Imax >95°	0.0


Measurement conditions

DIN EN 13032 and DIN 5032

Photometric test report

Family Floodlight FL11	Order number: 5XA779126H01AA EAN: 4058352556962	LP number 59257_45
----------------------------------	--	------------------------------

Envelope curve in cd/klm **KMK 57.5°** **KMK 55°** **KMK 52.5°** **KMK 50°** **siteco**

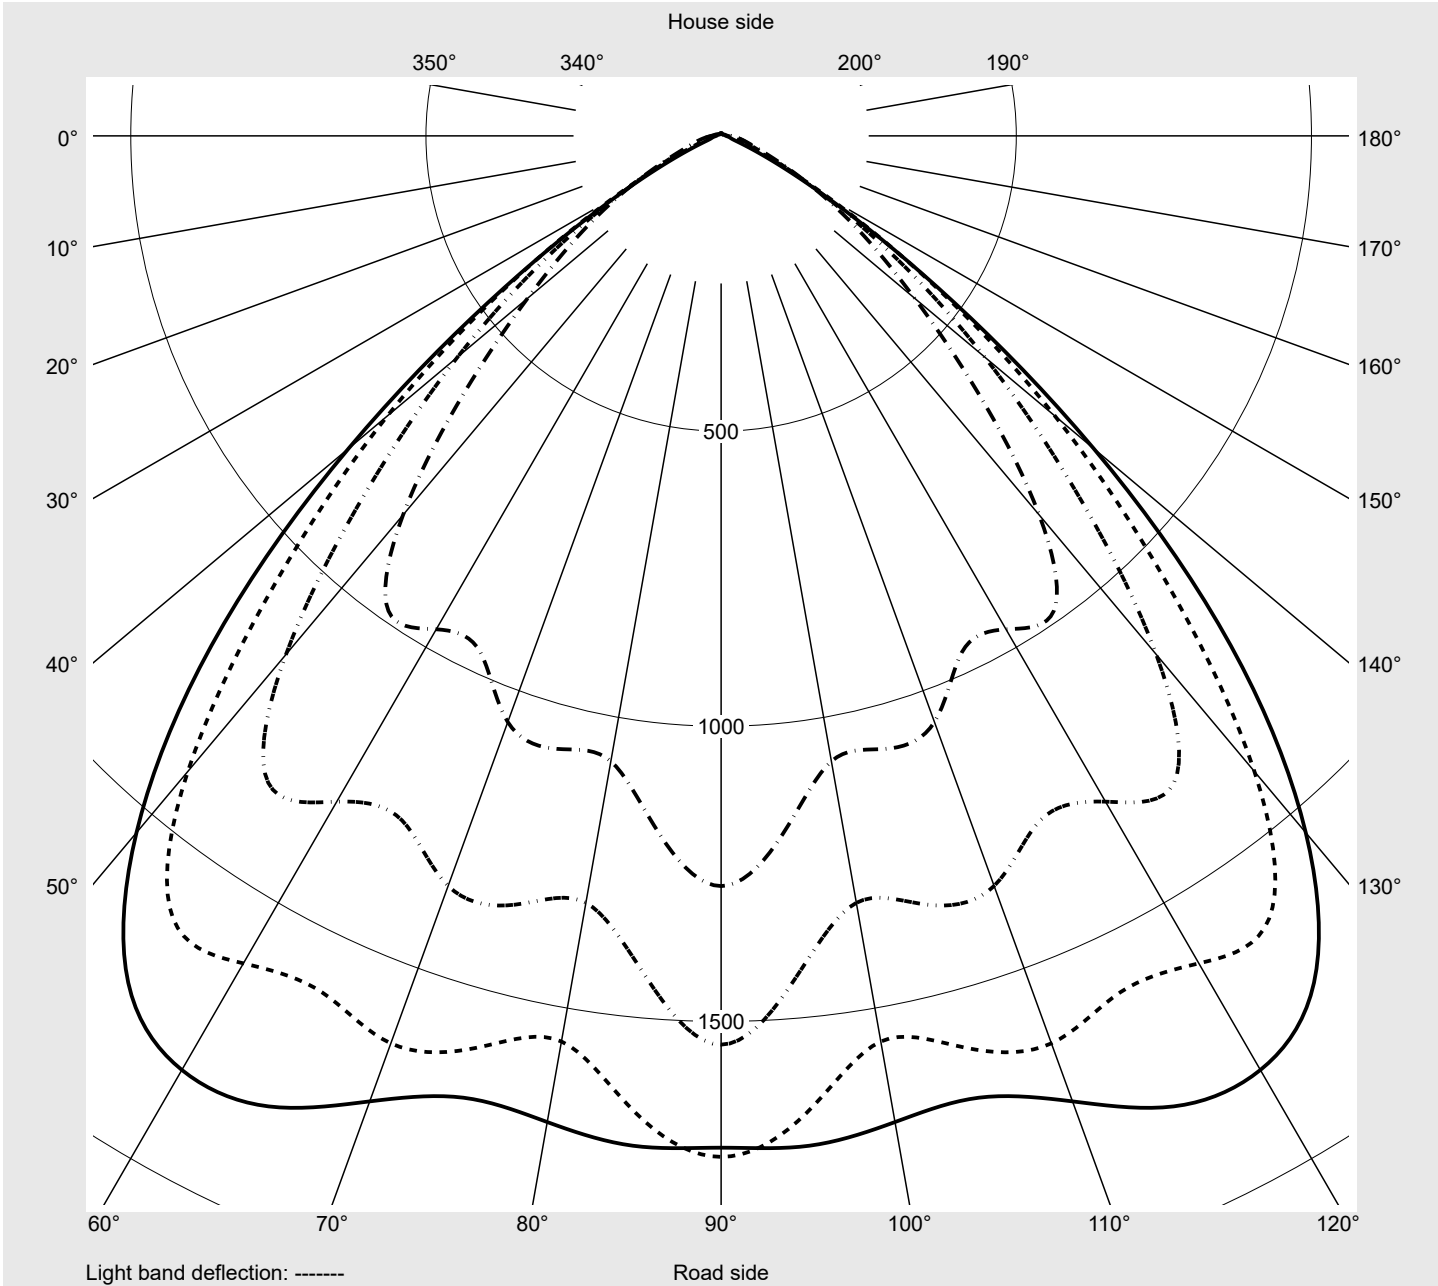

Photometric test report

Family Floodlight FL11	Order number: 5XA779126H01AA EAN: 4058352556962	LP number 59257_45
---	--	-------------------------------------

siteco

Table of values for luminous intensities		Maximum luminous intensity											
C-planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
γ	Luminous intensity in cd/klm												
0,0°	77.6	77.6	77.6	77.6	77.6	77.6	77.6	77.6	77.6	77.6	77.6	77.6	77.6
2,5°	78.7	80.9	83.2	85.5	87.9	90.2	92.5	94.7	96.8	98.7	100.3	101.7	103.0
5,0°	81.0	85.9	91.1	96.3	101.7	106.8	111.9	116.8	121.5	125.9	130.1	133.8	137.2
7,5°	83.6	90.4	97.6	104.4	111.3	118.8	126.6	134.7	143.3	151.5	159.2	166.0	172.2
10,0°	85.0	93.4	102.2	112.3	123.9	136.3	148.9	161.9	174.6	186.3	197.0	206.8	216.2
12,5°	86.2	97.0	109.7	124.0	139.3	153.7	167.4	181.9	196.5	209.8	222.6	234.9	246.2
15,0°	87.7	100.9	115.8	132.0	147.8	163.1	179.8	198.2	215.3	231.3	246.7	261.5	275.2
17,5°	88.0	102.5	118.7	135.8	153.7	172.9	193.3	214.9	234.3	252.0	269.1	287.2	303.4
20,0°	86.8	102.5	120.0	138.8	159.2	181.7	205.9	229.0	248.3	266.7	286.7	307.2	325.5
22,5°	83.9	100.7	120.4	141.0	164.1	189.7	215.0	237.4	256.5	277.2	300.0	322.1	341.6
25,0°	81.0	98.7	119.7	142.3	167.0	193.6	218.5	239.8	261.7	285.3	309.5	332.5	354.2
27,5°	76.9	95.7	117.1	139.7	166.5	194.0	219.3	243.3	269.3	294.6	319.1	343.8	367.8
30,0°	72.6	91.8	112.3	135.8	164.6	194.3	222.7	251.6	282.1	309.9	335.5	362.4	388.9
32,5°	67.8	86.4	106.5	131.5	162.4	194.6	227.9	264.7	300.0	331.7	362.1	391.8	419.5
35,0°	62.3	79.9	100.0	125.5	156.6	193.0	233.1	277.3	318.4	357.3	393.6	428.5	459.5
37,5°	55.6	72.4	91.9	115.7	146.8	186.9	232.5	279.5	321.6	359.8	398.6	438.8	476.6
40,0°	48.1	63.8	82.2	103.6	133.9	179.0	230.4	276.2	310.9	343.2	379.9	420.0	462.9
42,5°	40.4	54.7	72.1	93.1	124.1	172.2	230.8	276.5	306.8	338.3	375.1	415.2	461.2
45,0°	28.5	39.1	53.5	74.9	107.3	161.3	226.4	277.5	311.4	364.8	435.7	495.8	538.7
47,5°	18.6	24.9	34.6	51.9	82.5	136.2	207.9	274.8	342.6	448.9	583.6	675.7	696.9
50,0°	16.9	24.4	35.1	48.6	70.6	115.0	191.5	295.6	427.8	615.6	838.2	982.4	965.1
52,5°	15.3	22.9	34.0	45.1	62.8	106.6	198.7	364.0	582.7	847.4	1146.7	1337.5	1302.2
55,0°	11.5	16.8	24.5	31.4	47.2	96.7	214.4	437.6	738.2	1063.3	1405.4	1618.5	1618.5
57,5°	8.2	10.7	14.5	18.4	31.5	79.5	202.9	448.3	823.7	1220.9	1540.7	1751.0	1827.0
60,0°	6.7	7.8	9.8	12.7	21.9	56.1	149.1	361.7	748.8	1177.8	1460.2	1699.7	1815.7
62,5°	6.1	6.9	8.4	10.6	15.5	34.4	88.1	222.4	499.7	869.7	1119.1	1425.2	1522.3
65,0°	5.7	6.3	7.5	9.1	11.8	22.2	51.1	117.7	270.5	520.5	769.3	1042.5	1025.9
67,5°	5.1	5.5	6.5	7.7	9.6	17.0	33.4	62.1	125.3	263.0	464.6	610.3	538.4
70,0°	4.5	4.9	5.5	6.2	7.7	11.0	16.8	26.2	47.4	102.5	209.4	279.0	215.6
72,5°	3.7	4.1	4.4	5.1	6.1	7.4	9.3	13.1	20.5	37.7	74.6	99.7	70.8
75,0°	3.0	3.2	3.5	4.1	4.9	6.3	7.2	9.1	12.2	17.4	28.3	36.6	27.1
77,5°	2.1	2.4	2.5	2.9	3.4	4.5	4.8	5.8	7.3	9.0	12.2	15.7	12.4
80,0°	1.5	1.9	1.9	1.9	2.2	2.6	2.9	3.5	4.0	5.0	7.3	8.4	6.1
82,5°	1.1	1.4	1.4	1.4	1.4	1.6	1.7	1.9	2.3	2.8	3.8	4.0	3.3
85,0°	0.6	0.8	0.8	0.6	0.7	0.8	0.9	1.0	1.0	1.2	1.5	1.7	1.6
87,5°	0.2	0.3	0.2	0.3	0.3	0.4	0.5	0.5	0.6	0.7	0.8	0.8	0.9
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Floodlight FL11	Order number: 5XA779126H01AA EAN: 4058352556962	LP number 59257_45
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
γ	Luminous intensity in cd/klm												
0,0°	77.6	77.6	77.6	77.6	77.6	77.6	77.6	77.6	77.6	77.6	77.6	77.6	77.6
2,5°	104.1	105.1	105.9	106.5	107.0	112.3	76.6	74.7	72.8	71.0	69.1	67.4	65.8
5,0°	140.3	143.0	145.3	147.1	148.3	146.7	76.4	72.2	68.4	64.8	61.5	58.4	55.7
7,5°	177.7	182.2	185.7	188.5	190.4	191.5	77.2	71.2	65.4	60.2	55.6	51.7	48.3
10,0°	224.4	230.9	235.3	238.4	240.5	239.0	77.0	69.7	62.6	56.0	50.0	45.4	41.5
12,5°	255.6	262.6	268.6	273.4	277.0	279.4	76.3	67.5	59.2	51.9	45.6	40.6	36.7
15,0°	286.7	296.0	303.7	309.5	313.4	313.3	75.2	64.9	56.5	48.6	41.5	36.0	32.0
17,5°	317.0	327.9	336.9	343.9	349.0	355.4	74.5	61.9	51.7	44.0	36.8	31.6	27.7
20,0°	340.8	353.5	364.8	373.4	379.7	380.7	72.2	59.2	48.8	39.8	32.2	27.3	24.0
22,5°	359.1	374.1	386.5	397.4	406.1	413.1	69.7	56.9	44.7	35.3	27.8	23.4	20.0
25,0°	373.2	389.3	403.5	416.3	425.0	427.8	66.5	53.0	40.9	31.3	24.2	19.5	16.5
27,5°	386.3	403.2	421.5	435.9	444.5	451.3	61.6	48.1	36.6	27.1	20.4	16.2	13.6
30,0°	411.0	431.7	450.0	463.4	472.8	474.6	56.4	43.3	32.3	23.5	17.2	13.7	11.6
32,5°	444.8	466.8	485.4	495.9	502.4	508.8	51.3	38.6	28.3	20.0	14.9	12.0	10.4
35,0°	484.4	504.1	515.2	522.8	527.6	530.1	46.0	34.1	24.3	17.1	13.1	10.8	9.4
37,5°	504.3	520.2	527.4	530.7	535.1	536.6	40.8	29.9	20.5	14.7	11.6	10.0	8.5
40,0°	501.6	525.3	535.5	542.1	547.5	550.1	35.2	25.6	17.5	12.9	10.6	9.4	7.9
42,5°	515.5	563.6	583.8	597.2	621.6	660.8	29.8	21.3	15.1	11.4	9.6	8.5	7.4
45,0°	597.2	675.0	705.3	720.2	788.4	826.2	22.0	17.2	13.2	10.4	8.8	7.5	6.6
47,5°	732.9	825.1	861.2	872.8	964.4	1068.6	15.1	12.6	10.9	9.3	8.1	6.8	6.0
50,0°	965.1	1056.6	1075.0	1075.7	1188.4	1270.7	12.9	10.8	9.4	8.0	7.0	6.1	5.3
52,5°	1279.2	1352.0	1348.1	1319.2	1433.7	1539.3	11.4	9.5	8.2	7.0	5.9	5.3	4.7
55,0°	1600.4	1635.8	1599.0	1557.7	1661.2	1729.4	9.2	8.1	7.1	6.3	5.3	4.6	4.2
57,5°	1813.9	1740.4	1686.7	1696.2	1717.1	1713.9	7.0	6.3	5.9	5.5	4.7	4.2	3.8
60,0°	1735.8	1537.9	1506.4	1585.6	1431.2	1321.6	6.0	5.4	5.2	4.7	4.2	3.9	3.7
62,5°	1317.0	1096.2	1102.2	1162.6	929.0	734.3	5.4	4.9	4.7	4.2	3.8	3.7	3.6
65,0°	787.3	613.8	652.3	654.1	523.1	453.2	5.1	4.7	4.4	4.0	3.7	3.6	3.5
67,5°	368.9	284.2	292.2	239.9	192.2	140.2	4.7	4.2	3.9	3.7	3.5	3.4	3.3
70,0°	132.6	123.6	117.9	81.6	62.4	60.8	4.3	3.9	3.6	3.4	3.3	3.3	3.3
72,5°	44.5	48.6	40.3	24.6	18.7	16.9	3.4	3.1	3.0	3.0	3.0	3.1	3.1
75,0°	20.0	21.0	14.3	9.3	9.1	10.9	2.6	2.2	2.1	2.3	2.5	2.6	2.8
77,5°	11.0	11.0	7.5	5.5	5.6	6.0	1.7	1.5	1.5	1.7	2.0	2.1	2.2
80,0°	5.1	5.1	4.3	3.5	3.5	4.0	1.2	1.1	1.1	1.2	1.4	1.6	1.7
82,5°	2.9	3.0	2.7	2.3	2.3	2.5	0.7	0.7	0.8	0.9	1.1	1.2	1.4
85,0°	1.4	1.4	1.4	1.4	1.3	1.4	0.5	0.5	0.6	0.7	0.9	1.0	1.1
87,5°	0.9	1.0	1.0	1.0	1.0	0.9	0.3	0.4	0.5	0.6	0.7	0.8	0.9
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Floodlight FL11	Order number: 5XA779126H01AA EAN: 4058352556962	LP number 59257_45
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm											Luminous flux in lm/klm	
0,0°	77.6	77.6	77.6	77.6	77.6	77.6	77.6	77.6	77.6	77.6	77.6	0.1	0.1
2,5°	64.2	62.7	61.3	60.0	58.9	58.1	57.4	56.8	56.4	56.1	56.1	1.0	1.1
5,0°	53.1	50.8	48.8	47.1	45.7	44.5	43.6	42.9	42.5	42.1	42.0	2.1	3.2
7,5°	45.3	42.7	40.5	38.8	37.4	36.2	35.5	35.0	34.8	34.7	34.7	3.5	6.7
10,0°	38.5	36.1	34.1	32.6	31.2	30.3	29.8	29.7	29.8	29.8	29.9	5.3	11.9
12,5°	33.8	31.5	29.7	28.0	27.1	26.5	26.3	26.3	26.3	26.0	26.0	7.1	19.0
15,0°	29.3	27.2	25.3	24.1	23.4	23.1	22.9	22.8	22.8	22.8	22.6	9.1	28.2
17,5°	25.0	23.4	21.7	20.6	20.1	20.0	20.0	19.6	19.0	19.1	19.2	11.3	39.4
20,0°	21.4	19.5	18.3	17.7	17.5	17.5	17.1	16.4	16.3	16.2	16.2	13.4	52.9
22,5°	17.4	16.1	15.4	14.8	15.0	14.6	14.1	13.8	13.6	13.5	13.5	15.5	68.3
25,0°	14.5	13.4	12.5	12.4	12.2	11.8	11.5	11.2	11.0	10.9	10.9	17.4	85.7
27,5°	12.2	10.8	10.2	10.3	9.4	9.3	9.1	8.8	8.5	8.4	8.3	19.3	105.0
30,0°	10.4	9.1	9.0	8.2	7.9	7.6	7.4	7.2	6.9	6.7	6.7	21.6	126.6
32,5°	9.0	8.3	8.0	7.1	6.8	6.7	6.5	6.4	6.2	6.1	6.1	24.3	151.0
35,0°	8.2	7.9	6.9	6.6	6.3	6.1	6.0	5.9	5.8	5.8	5.8	27.2	178.2
37,5°	7.6	7.4	6.4	6.1	5.9	5.8	5.7	5.7	5.6	5.6	5.6	29.0	207.2
40,0°	7.1	6.4	6.0	5.6	5.5	5.4	5.4	5.3	5.3	5.3	5.2	30.1	237.2
42,5°	6.7	5.8	5.3	5.1	5.0	5.0	5.0	5.0	5.0	5.0	5.0	32.6	269.8
45,0°	6.0	5.3	4.8	4.7	4.7	4.7	4.7	4.8	4.8	4.7	4.7	38.5	308.3
47,5°	5.2	4.7	4.4	4.3	4.4	4.5	4.5	4.6	4.6	4.6	4.6	47.6	356.0
50,0°	4.6	4.1	4.0	4.1	4.1	4.2	4.4	4.4	4.5	4.5	4.5	62.6	418.5
52,5°	4.1	3.8	3.7	3.8	3.9	4.1	4.3	4.4	4.4	4.5	4.5	82.5	501.1
55,0°	3.8	3.5	3.6	3.7	3.9	4.1	4.3	4.5	4.5	4.6	4.6	101.9	602.9
57,5°	3.5	3.4	3.5	3.7	3.9	4.1	4.4	4.7	4.8	4.8	4.9	112.8	715.8
60,0°	3.4	3.2	3.4	3.6	3.8	4.1	4.5	4.8	5.0	5.1	5.1	105.9	821.7
62,5°	3.3	3.1	3.2	3.4	3.7	4.0	4.4	4.8	5.2	5.3	5.4	80.2	901.9
65,0°	3.2	3.2	3.3	3.5	3.8	4.1	4.5	4.8	5.1	5.3	5.3	51.0	952.9
67,5°	3.3	3.5	3.8	4.1	4.3	4.6	4.8	5.1	5.3	5.4	5.4	25.8	978.7
70,0°	3.4	3.8	4.3	4.6	4.9	5.1	5.2	5.4	5.6	5.6	5.7	11.2	989.9
72,5°	3.4	3.9	4.2	4.5	4.8	5.1	5.3	5.4	5.6	5.7	5.7	4.5	994.4
75,0°	3.1	3.7	4.0	4.3	4.6	4.9	5.1	5.3	5.4	5.5	5.6	2.3	996.6
77,5°	2.5	2.9	3.2	3.5	3.8	4.1	4.3	4.5	4.6	4.7	4.7	1.4	998.0
80,0°	1.9	2.2	2.5	2.7	3.0	3.2	3.4	3.6	3.7	3.8	3.9	0.9	998.8
82,5°	1.5	1.7	1.9	2.1	2.3	2.5	2.7	2.9	3.0	3.1	3.1	0.6	999.4
85,0°	1.2	1.4	1.5	1.7	1.8	2.0	2.2	2.3	2.4	2.5	2.5	0.4	999.8
87,5°	1.0	1.1	1.3	1.4	1.5	1.6	1.8	1.9	2.0	2.0	2.1	0.2	1000.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family Floodlight FL11	Order number: 5XA779126H01AA EAN: 4058352556962	LP number 59257_45
----------------------------------	--	------------------------------

siteco

Dimming levels table environmental temperature: 10°C

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]
100	----	----	----	----
100	253	254	124451	1382.7
95	233	251	118536	1269.8
90	215	248	112394	1168.2
85	198	245	105876	1072.7
80	183	242	99884	988.2
75	168	239	93398	904.2
70	155	236	87461	832.3
65	141	232	81020	755.2
60	128	229	74708	684.3
55	117	226	68751	624.4
50	104	221	62441	554.1
45	92	217	56233	490.0
40	81	212	50102	431.5
35	70	207	43833	373.1
30	59	201	37406	314.5
25	48	193	31372	256.8
20	38	184	24752	205.3
15	28	173	18614	154.3
10	19	159	12488	108.2
5	9	132	6309	58.0
1	2	77	1696	21.0

Dimming levels table environmental temperature: 25°C

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]
100	----	----	----	----
95	----	----	----	----
90	----	----	----	----
85	----	----	----	----
80	179	241	95485	958.2
80	178	241	95077	952.7
75	164	238	89414	874.8
70	151	235	83443	803.3
65	137	232	77304	727.1
60	124	228	71192	656.8
55	113	224	65237	597.5
50	100	220	59696	527.6
45	89	216	53521	469.2
40	78	211	47615	411.4
35	67	205	41499	352.9
30	57	199	35608	300.8
25	46	192	29497	243.8
20	37	184	23876	198.0
15	27	172	17807	147.5
10	18	157	11969	101.9
5	9	132	6253	57.3
1	2	77	1682	20.7

Photometric test report

Family Floodlight FL11	Order number: 5XA779126H01AA EAN: 4058352556962	LP number 59257_45
----------------------------------	--	-------------------------------------

Luminousfluxs table



Temperature °C	Luminous flux lm	Power consumption W
10.0	124720.0	1388.3
25.0	95700.0	961.2