




Photometric test report

Family Licross® 11 Protected	Order number: 51TP12DN4FXM EAN: 4058352918517	LP number 58523_236
	Version prismatic cover, frosted, wide distribution Lamps LED 4000 K CRI ≥ 80 Controlgear ECG-DALI Rated values Net luminous flux = 15270 lm Power consumption = 87.3 W Luminous efficacy = 174.9 lm/W	serial documentation 31.10.2024
		

Luminous intensity in cd/klm C180-0 C270-90 **Imax: 630 cd/klm**

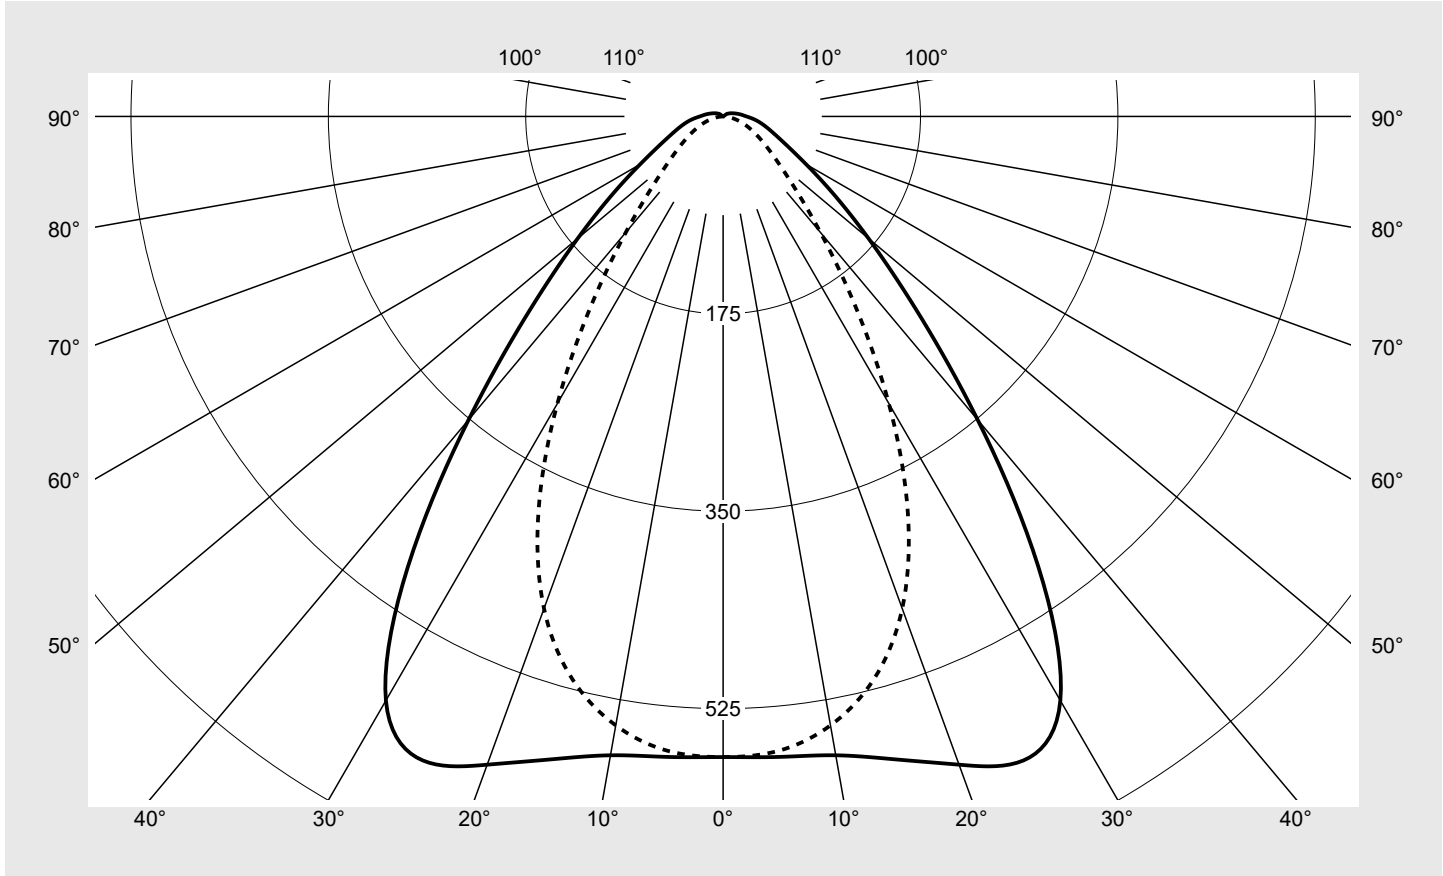

Classifications	
DIN 5040	A 5 1
CIE	N1=70 N2=91 N3=97 N4=98 N5=100

Luminaire light output ratios	
η_{LB}	100.0%
ϕ_u	98.3%
ϕ_o	1.7%

Measurement conditions
DIN EN 13032 and DIN 5032

Photometric test report

Family Licross® 11 Protected	Order number: 51TP12DN4FXM EAN: 4058352918517	LP number 58523_236
Table of values for luminous intensities		Maximum luminous intensity
		sITeco

C-planes	0° 180°	15°	30°	45°	60°	75°	90° 270°	Phi-zone	Total Phi-zone
		165° 195° 345°	150° 210° 330°	135° 225° 315°	120° 240° 300°	105° 255° 285°			
γ	Luminous intensity in cd/klm							Luminous flux in lm/klm	
0°	568.0	568.0	568.0	568.0	568.0	568.0	568.0	3.4	3.4
5°	570.0	568.0	563.9	564.4	565.6	564.2	564.6	27.0	30.4
10°	575.1	572.9	563.4	557.9	553.3	549.0	548.2	53.3	83.7
15°	590.1	586.0	566.8	548.5	532.2	519.9	516.5	78.2	161.9
20°	611.6	603.6	568.7	531.0	496.5	471.9	464.3	100.3	262.2
25°	630.0	617.6	564.2	499.9	441.6	401.0	387.5	117.1	379.3
30°	598.0	589.4	536.5	452.4	368.0	311.9	293.8	123.5	502.8
35°	487.1	490.1	463.2	383.1	284.6	222.1	203.0	114.7	617.4
40°	351.1	360.8	359.1	297.2	205.7	150.3	134.3	94.9	712.3
45°	241.7	250.7	257.1	211.9	140.4	100.6	89.9	72.8	785.1
50°	168.3	174.0	178.9	144.5	94.4	69.8	63.7	54.4	839.5
55°	118.9	121.8	123.3	97.4	64.6	50.4	47.5	40.5	880.0
60°	85.1	85.8	84.4	66.1	45.7	37.4	36.1	30.1	910.0
65°	63.8	62.6	58.2	45.7	33.4	28.1	27.2	22.6	932.7
70°	50.4	47.7	40.8	32.1	24.8	20.7	19.9	17.3	949.9
75°	41.3	37.6	29.5	22.7	17.9	14.5	13.5	13.2	963.2
80°	34.0	30.0	21.9	15.9	12.4	9.4	8.0	10.0	973.1
85°	27.2	23.7	16.4	11.2	8.0	5.3	3.6	7.3	980.4
90°	20.7	17.9	12.0	7.4	4.6	2.2	0.4	5.0	985.4
95°	16.6	14.7	10.2	6.3	3.6	1.3	0.3	4.0	989.4
100°	13.2	11.9	8.5	5.2	2.7	0.8	0.3	3.2	992.6
105°	10.4	9.5	6.9	4.1	1.9	0.4	0.3	2.5	995.1
110°	8.2	7.4	5.5	3.1	1.2	0.3	0.3	1.9	997.0
115°	6.5	5.8	4.2	2.2	0.7	0.4	0.4	1.4	998.4
120°	4.9	4.3	3.0	1.4	0.6	0.5	0.5	1.0	999.4
125°	3.5	3.0	2.0	0.9	0.6	0.5	0.5	0.7	1000.0
130°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
135°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
140°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
145°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
150°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
155°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
160°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
165°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
170°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
175°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
180°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family Licross® 11 Protected	Order number: 51TP12DN4FXM EAN: 4058352918517	LP number 58523_236
--	--	-------------------------------

UGR-Table	Standard room	siteco
------------------	----------------------	---------------

Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions	View crosswise (C0)					View endwise (C90)					
x	y										
2H	2H	23.4	24.9	23.8	25.2	25.5	19.3	20.7	19.6	21.0	21.4
	3H	24.0	25.3	24.4	25.7	26.0	19.7	21.0	20.1	21.3	21.7
	4H	24.4	25.6	24.8	25.9	26.3	19.9	21.1	20.3	21.5	21.8
	6H	24.8	25.9	25.2	26.2	26.6	20.0	21.2	20.4	21.5	21.9
	8H	25.1	26.0	25.5	26.4	26.8	20.1	21.2	20.5	21.6	22.0
	12H	25.3	26.2	25.8	26.6	27.0	20.2	21.2	20.6	21.5	22.0
4H	2H	23.5	24.7	23.9	25.1	25.4	20.0	21.1	20.3	21.5	21.9
	3H	24.2	25.2	24.6	25.6	26.0	20.5	21.5	20.9	21.9	22.3
	4H	24.7	25.6	25.1	26.0	26.4	20.8	21.7	21.2	22.1	22.5
	6H	25.2	26.0	25.7	26.4	26.9	21.0	21.8	21.4	22.2	22.7
	8H	25.6	26.3	26.0	26.7	27.2	21.1	21.8	21.5	22.2	22.7
	12H	25.9	26.5	26.4	27.0	27.5	21.1	21.8	21.6	22.2	22.7
8H	4H	24.7	25.4	25.1	25.9	26.3	21.1	21.8	21.6	22.2	22.7
	6H	25.3	25.9	25.8	26.4	26.9	21.4	22.0	21.9	22.5	23.0
	8H	25.7	26.3	26.2	26.7	27.3	21.5	22.1	22.0	22.5	23.1
	12H	26.2	26.7	26.8	27.2	27.7	21.7	22.1	22.2	22.6	23.1
12H	4H	24.7	25.3	25.2	25.8	26.3	21.2	21.8	21.7	22.2	22.7
	6H	25.3	25.9	25.8	26.3	26.9	21.6	22.0	22.1	22.5	23.0
	8H	25.8	26.2	26.3	26.7	27.3	21.7	22.1	22.2	22.6	23.2


Luminance table	Max. for $\gamma \geq 65^\circ$	Photometric dimensions in mm:	L = 1480	H(C0) = 13	H(C180) = 13
			B = 78	H(C90) = 0	H(C270) = 0

C-planes	γ	Luminance in cd/m ²							
		0° 180°	15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°	90° 270°	
45°		38756.6	40388.1	42034.7	35454.3	24242.2	18041.6	16823.7	
50°		28896.4	30046.4	31420.2	26073.6	17668.0	13652.1	13112.0	
55°		22144.4	22846.6	23583.8	19222.8	13310.7	10942.3	10959.8	
60°		17468.8	17758.3	17857.8	14527.2	10561.9	9201.5	9540.3	
65°		14707.8	14559.1	13917.4	11410.3	8867.9	8036.6	8505.6	
70°		13362.3	12786.3	11307.1	9378.7	7793.2	7156.4	7686.7	
75°		13003.1	12004.5	9800.2	8061.1	6996.8	6379.1	6901.6	
80°		13305.1	11952.2	9193.0	7278.0	6388.9	5751.2	6107.7	
85°		14191.7	12645.1	9391.0	7224.3	6209.2	5346.8	5495.6	

Photometric test report

Family Licross® 11 Protected	Order number: 51TP12DN4FXM EAN: 4058352918517	LP number 58523_236
--	--	--------------------------------------

Luminance values in cd/m² γ 65° γ 70° γ 75° γ 80° γ 85° **siteco**

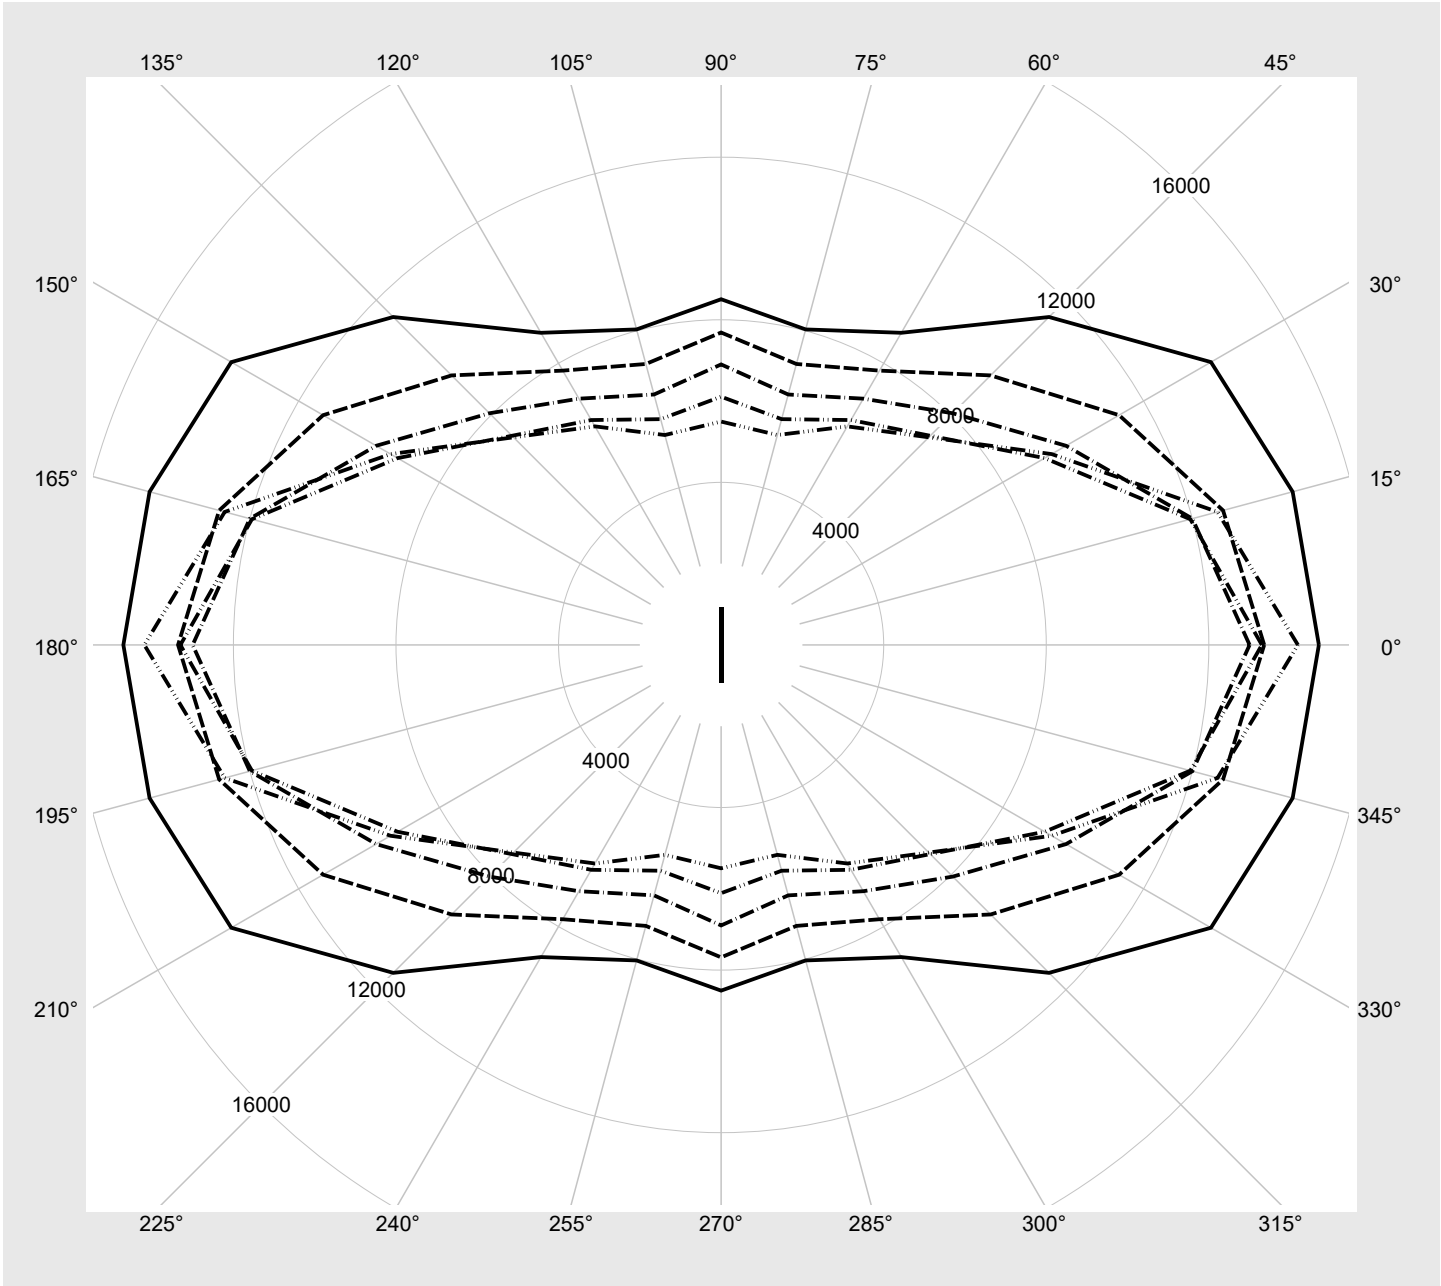

Photometric test report

Family Licross® 11 Protected	Order number: 51TP12DN4FXM EAN: 4058352918517	LP number 58523_236
--	--	--------------------------------------

Dimming levels table	environmental temperature: 25°C	sITeco
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]
100	254	254	15270	87.3
95	240	252	14500	82.4
90	226	250	13719	77.5
85	213	248	12985	72.9
80	200	245	12243	68.3
75	186	243	11437	63.6
70	173	240	10682	59.1
65	160	237	9923	54.7
60	147	234	9156	50.2
55	134	231	8380	45.9
50	122	227	7660	41.9
45	109	223	6875	37.7
40	96	218	6081	33.4
35	84	213	5341	29.4
30	72	208	4594	25.7
25	60	201	3841	21.8
20	48	193	3080	17.9
15	36	182	2314	14.0
10	24	168	1543	10.1
5	12	142	765	6.4
2	4	102	243	4.0