Photometric test report

Family
Highbay 11

Order number: 51HN11DB4RDA
EAN: 4069025230508

LP number
59711_160

serial documentation
14.02.2025

Version	primary light control with lens, PMMA, housing, white, narrow distribution
Lamps	LED 4000 K | CRI ≥ 80
Controlgear	ECG-DALI
Setting	AC-mode
Rated values	Net luminous flux = 42500 lm Power consumption = 213.7 W Luminous efficacy = 198.9 lm/W

siteco

Luminous intensity in cd/klm C180-0 C270-90 **Imax: 2679 cd/klm**

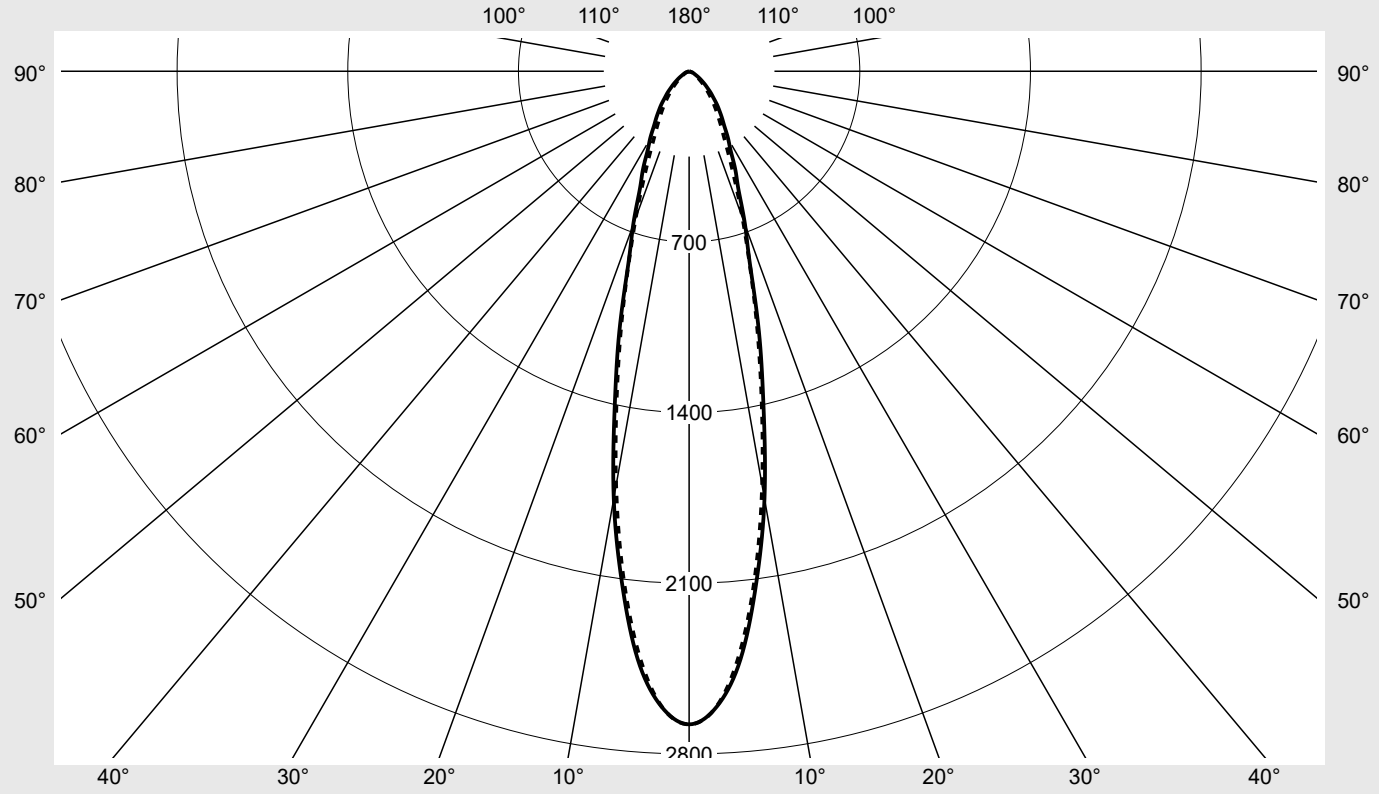

Classifications

DIN 5040	A 7 0
CIE	N1=85 N2=97 N3=100 N4=100 N5=100

Luminaire light output ratios

ηLB	100.0%
ϕ_u	100.0%
ϕ_o	0.0%

Measurement conditions

DIN EN 13032 and DIN 5032

Photometric test report

Family	Order number: 51HN11DB4RDA	LP number
Highbay 11	EAN: 4069025230508	59711_160

siteco

Table of values for luminous intensities

Maximum luminous intensity

C-planes	0° 180°	15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°	90° 270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm							Luminous flux in lm/klm	
0,0°	2678.6	2678.6	2678.6	2678.6	2678.6	2678.6	2678.6	4.0	4.0
2,5°	2608.0	2619.4	2619.4	2616.5	2617.6	2616.2	2606.1	31.3	35.3
5,0°	2420.1	2415.7	2414.1	2408.4	2406.6	2402.3	2391.7	57.6	92.8
7,5°	2113.4	2116.1	2112.3	2103.0	2097.6	2090.5	2079.6	75.2	168.1
10,0°	1780.1	1768.7	1762.7	1751.6	1743.6	1735.2	1724.7	83.4	251.5
12,5°	1410.1	1409.3	1404.7	1395.9	1388.1	1380.5	1373.1	82.8	334.3
15,0°	1106.5	1097.8	1095.0	1089.4	1083.1	1078.4	1073.9	77.3	411.5
17,5°	830.1	840.2	835.5	831.1	826.6	824.9	824.1	68.5	480.0
20,0°	671.1	661.9	651.8	643.2	639.9	639.4	641.0	60.8	540.8
22,5°	531.9	530.5	514.2	498.9	497.0	496.6	496.8	53.4	594.2
25,0°	450.6	441.3	420.6	401.3	399.0	395.8	392.4	47.9	642.1
27,5°	370.8	368.7	351.4	331.7	326.8	321.1	316.0	43.1	685.2
30,0°	320.4	312.1	300.8	284.1	278.0	270.2	264.7	39.7	724.9
32,5°	271.0	266.8	259.0	245.6	238.0	229.0	224.7	36.5	761.4
35,0°	235.8	228.9	222.7	210.5	201.6	193.0	191.7	33.3	794.7
37,5°	204.4	197.8	191.5	181.1	172.0	164.3	162.4	30.3	825.0
40,0°	176.7	170.7	163.1	154.3	146.1	138.3	135.6	27.3	852.2
42,5°	147.6	145.5	138.6	130.6	123.2	115.8	113.3	24.2	876.4
45,0°	126.0	121.8	116.3	109.0	102.0	95.3	93.2	21.1	897.6
47,5°	103.2	101.5	97.1	90.9	84.6	78.4	76.7	18.3	915.9
50,0°	85.9	82.9	79.4	74.6	69.1	63.7	61.9	15.5	931.4
52,5°	69.0	67.2	64.5	61.0	56.2	51.6	49.7	13.0	944.4
55,0°	55.6	54.1	52.2	49.5	45.7	41.7	40.0	10.9	955.3
57,5°	43.6	43.1	41.8	39.8	37.0	33.6	32.2	9.0	964.3
60,0°	33.2	33.3	33.9	32.4	30.5	27.5	26.1	7.4	971.7
62,5°	25.9	26.0	27.0	26.2	25.1	22.4	21.3	6.1	977.8
65,0°	21.6	21.2	21.7	21.3	20.9	18.8	17.7	5.1	982.9
67,5°	17.0	17.1	17.8	17.0	17.3	15.6	14.8	4.3	987.2
70,0°	13.5	13.4	14.4	13.6	14.1	13.0	12.4	3.5	990.7
72,5°	11.0	10.8	10.9	10.9	11.0	10.7	10.6	2.8	993.5
75,0°	9.0	8.4	8.4	8.3	8.6	9.0	8.9	2.3	995.8
77,5°	6.6	6.4	6.2	6.2	6.6	7.3	7.4	1.8	997.5
80,0°	4.4	4.2	4.1	4.2	4.7	5.7	5.8	1.3	998.8
82,5°	2.0	2.1	2.2	2.4	3.0	3.9	4.1	0.8	999.6
85,0°	0.8	0.8	0.8	1.0	1.5	2.2	2.4	0.4	999.9
87,5°	0.3	0.3	0.3	0.3	0.3	0.4	0.5	0.1	1000.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family	Order number: 51HN11DB4RDA	LP number
Highbay 11	EAN: 4069025230508	59711_160

siteco

UGR-Table

Standard room

Reflection factor of ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Reflection factor of walls		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reflection factor of floor		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		View crosswise (C0)					View endwise (C90)				
x	y										
2H	2H	20.1	21.3	20.5	21.6	21.9	18.9	20.1	19.3	20.4	20.7
	3H	20.3	21.4	20.7	21.7	22.1	19.2	20.2	19.6	20.6	20.9
	4H	20.4	21.4	20.8	21.7	22.1	19.3	20.3	19.7	20.6	21.0
	6H	20.5	21.3	20.9	21.7	22.1	19.5	20.3	19.9	20.7	21.1
	8H	20.5	21.2	21.0	21.6	22.0	19.6	20.3	20.0	20.7	21.1
	12H	20.5	21.1	20.9	21.5	22.0	19.6	20.3	20.0	20.7	21.1
4H	2H	20.2	21.1	20.6	21.5	21.8	19.1	20.0	19.5	20.4	20.8
	3H	20.5	21.3	20.9	21.7	22.1	19.5	20.3	19.9	20.7	21.1
	4H	20.6	21.3	21.0	21.7	22.1	19.7	20.4	20.1	20.8	21.2
	6H	20.7	21.3	21.1	21.7	22.2	19.9	20.5	20.4	20.9	21.4
	8H	20.7	21.2	21.1	21.6	22.1	20.0	20.5	20.5	20.9	21.4
	12H	20.7	21.1	21.1	21.5	22.0	20.0	20.5	20.5	20.9	21.4
8H	4H	20.6	21.1	21.1	21.6	22.0	19.7	20.2	20.2	20.7	21.2
	6H	20.7	21.1	21.2	21.6	22.1	20.0	20.4	20.5	20.9	21.4
	8H	20.6	21.0	21.2	21.5	22.0	20.1	20.4	20.6	20.9	21.4
	12H	20.6	20.9	21.1	21.4	22.0	20.1	20.4	20.7	20.9	21.5
12H	4H	20.6	21.0	21.1	21.5	22.0	19.7	20.1	20.2	20.6	21.1
	6H	20.6	21.0	21.2	21.5	22.0	19.9	20.3	20.5	20.8	21.3
	8H	20.6	20.9	21.2	21.4	22.0	20.0	20.3	20.6	20.8	21.4

Luminance table

Max. for $\gamma >= 65°$

Photometric dimensions in mm: L = 852, B = 264

C-planes	0° 180°	15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°	90° 270°
γ	Luminance in cd/m²						
45,0°	33665.9	32541.9	31076.0	29132.3	27256.4	25473.3	24903.1
50,0°	25238.2	24359.6	23327.8	21942.7	20297.5	18712.5	18182.8
55,0°	18313.0	17817.2	17199.8	16306.4	15050.4	13737.6	13185.5
60,0°	12564.8	12578.4	12812.3	12240.9	11513.1	10387.3	9868.8
65,0°	9646.9	9484.2	9699.2	9542.3	9340.7	8394.2	7934.5
70,0°	7474.1	7384.1	7932.6	7491.2	7774.1	7157.0	6839.9
75,0°	6552.1	6149.2	6163.0	6079.8	6272.5	6540.5	6528.8
80,0°	4780.1	4602.7	4452.6	4533.1	5065.2	6151.1	6276.3
85,0°	1769.0	1747.4	1827.6	2066.1	3171.7	4669.8	5292.0

Photometric test report

Family	Order number: 51HN11DB4RDA	LP number
Highbay 11	EAN: 4069025230508	59711_160

Luminance values in cd/m²

γ 65° γ 70° γ 75° γ 80° γ 85°

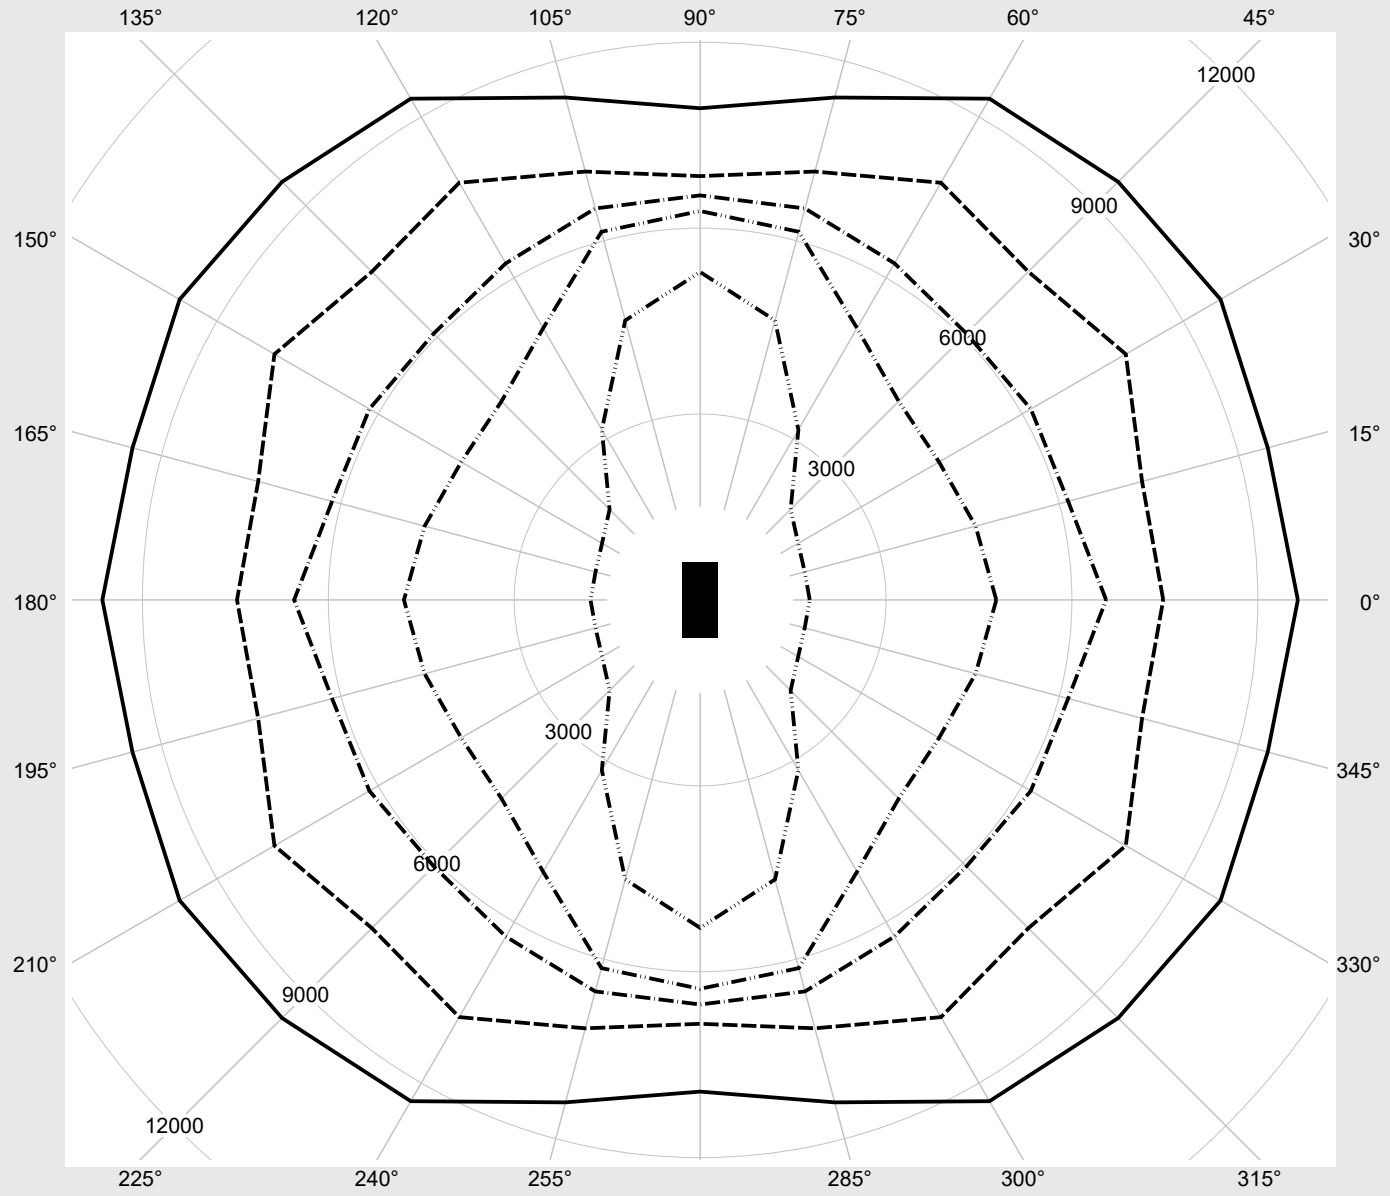

Photometric test report

Family	Order number: 51HN11DB4RDA	LP number
Highbay 11	EAN: 4069025230508	59711_160

siteco

Dimming levels table

environmental temperature: 25°C

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]
100	254	254	42500	213.7
95	240	252	40311	201.5
90	227	250	38258	190.0
85	214	248	36193	178.8
80	200	245	33955	166.7
75	187	243	31858	155.5
70	174	240	29749	144.4
65	161	237	27625	133.3
60	148	234	25488	122.5
55	135	231	23337	111.6
50	122	227	21171	100.8
45	110	223	19157	90.8
40	97	219	16955	80.1
35	85	214	14901	70.3
30	73	208	12834	60.7
25	60	201	10579	50.1
20	48	193	8469	40.5
15	36	182	6345	31.1
10	24	168	4202	21.7
5	12	142	2034	12.0
1	4	102	581	5.4