Photometric test report

Family
Highbay 11

Order number: 51HN12DB4QDA
EAN: 4069025230638

Version	primary light control with lens, PMMA, housing, white, wide distribution
Lamps	LED 4000 K | CRI ≥ 80
Controlgear	ECG-DALI
Setting	AC-mode
Rated values	Net luminous flux = 36000 lm Power consumption = 177.7 W Luminous efficacy = 202.6 lm/W

LP number
59710_156

serial documentation
14.02.2025

siteco

Luminous intensity in cd/klm

C180-0 C270-90

Imax: 772 cd/klm

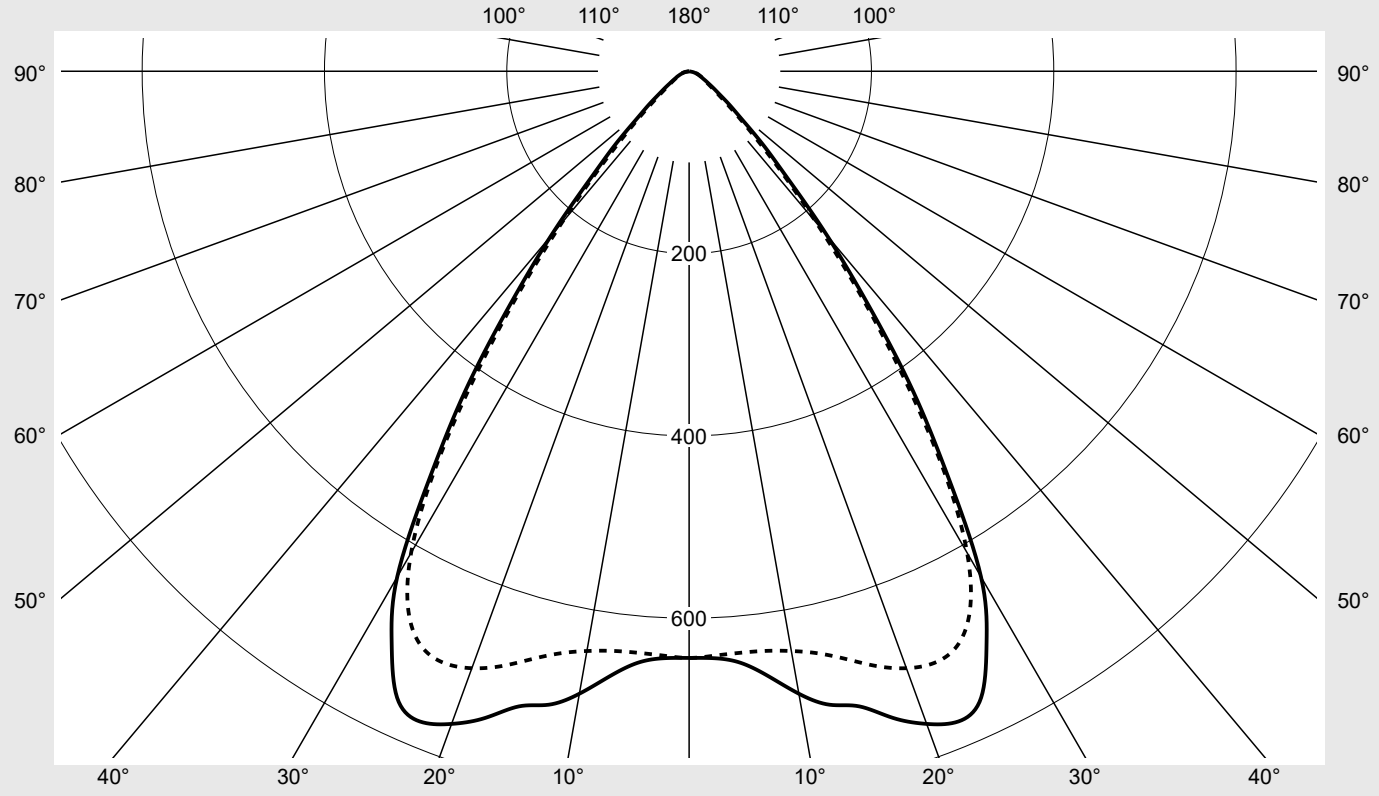

Classifications

DIN 5040	A 6 0
CIE	N1=88 N2=98 N3=100 N4=100 N5=100

Luminaire light output ratios

ηLB	100.0%
ϕ_u	100.0%
ϕ_o	0.0%

Measurement conditions

DIN EN 13032 and DIN 5032

Photometric test report

Family	Order number: 51HN12DB4QDA	LP number
Highbay 11	EAN: 4069025230638	59710_156

siteco

Table of values for luminous intensities

Maximum luminous intensity

C-planes	0° 180°	15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°	90° 270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm							Luminous flux in lm/klm	
0,0°	643.6	643.6	643.6	643.6	643.6	643.6	643.6	1.0	1.0
2,5°	644.5	645.1	645.0	644.3	644.2	643.7	641.7	7.7	8.7
5,0°	651.5	652.3	650.7	647.5	645.3	643.2	640.4	15.5	24.1
7,5°	669.6	669.1	664.2	657.2	651.2	645.8	641.3	23.5	47.6
10,0°	693.4	691.0	681.5	670.0	659.9	651.2	645.8	31.9	79.6
12,5°	711.8	709.4	700.3	685.9	671.9	660.7	654.0	40.7	120.2
15,0°	721.3	721.7	717.1	704.9	689.4	675.9	667.7	49.7	169.9
17,5°	743.8	740.8	737.9	726.5	708.9	693.0	684.2	59.4	229.3
20,0°	761.9	761.9	759.6	745.2	724.0	705.6	696.8	69.2	298.5
22,5°	772.0	771.2	770.0	754.7	731.1	710.8	702.6	78.2	376.7
25,0°	758.1	756.6	756.3	743.6	722.7	703.3	695.6	85.1	461.8
27,5°	706.7	709.5	709.5	700.0	685.7	672.3	667.0	87.8	549.7
30,0°	640.4	635.6	633.7	626.6	621.7	614.1	609.9	85.8	635.5
32,5°	530.6	537.6	535.6	526.2	530.2	524.1	520.8	78.1	713.6
35,0°	428.2	426.4	425.9	411.9	420.8	414.2	411.4	66.0	779.6
37,5°	322.5	323.4	327.0	311.0	319.4	310.8	308.2	53.0	832.6
40,0°	236.1	234.0	241.6	230.8	230.9	219.8	218.4	40.7	873.3
42,5°	162.3	165.3	172.9	171.1	161.7	151.3	150.8	30.2	903.5
45,0°	117.3	114.9	119.4	122.5	109.3	102.6	102.3	21.9	925.4
47,5°	80.5	81.4	82.8	85.5	75.2	71.4	70.8	15.9	941.3
50,0°	59.4	58.0	58.0	59.0	52.9	50.5	49.6	11.7	953.0
52,5°	43.3	42.8	42.8	43.0	39.3	37.2	36.6	8.9	961.8
55,0°	33.3	32.4	32.9	33.7	30.5	28.7	28.3	7.1	968.9
57,5°	25.9	25.4	25.9	26.8	24.5	22.9	22.9	5.8	974.7
60,0°	20.9	20.2	21.2	21.8	20.4	18.9	19.2	4.9	979.5
62,5°	16.9	16.2	17.4	18.0	17.2	15.9	16.4	4.1	983.6
65,0°	14.9	13.6	14.4	15.1	14.8	13.6	14.4	3.6	987.2
67,5°	12.3	11.4	12.5	12.4	13.0	11.7	12.6	3.1	990.3
70,0°	10.4	9.5	10.5	10.1	11.1	10.1	11.0	2.7	993.0
72,5°	8.2	7.7	7.9	8.2	8.7	8.6	9.5	2.2	995.2
75,0°	6.5	6.0	6.0	6.4	6.6	7.1	7.9	1.7	996.9
77,5°	4.5	4.3	4.4	4.7	5.1	5.6	6.3	1.3	998.2
80,0°	2.9	2.7	2.9	3.1	3.5	4.1	4.7	0.9	999.1
82,5°	1.3	1.4	1.6	1.8	2.2	2.7	3.3	0.5	999.7
85,0°	0.6	0.6	0.6	0.7	1.0	1.4	1.8	0.3	999.9
87,5°	0.3	0.3	0.3	0.3	0.3	0.4	0.5	0.1	1000.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family	Order number: 51HN12DB4QDA	LP number
Highbay 11	EAN: 4069025230638	59710_156

siteco

UGR-Table

Standard room

Reflection factor of ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Reflection factor of walls		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reflection factor of floor		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions x	y	View crosswise (C0)					View endwise (C90)				
2H	2H	20.6	21.8	20.9	22.2	22.5	20.3	21.5	20.6	21.9	22.2
	3H	20.6	21.7	20.9	22.0	22.4	20.3	21.4	20.7	21.7	22.1
	4H	20.6	21.6	21.0	21.9	22.3	20.3	21.3	20.7	21.7	22.1
	6H	20.5	21.5	20.9	21.8	22.2	20.3	21.3	20.7	21.6	22.0
	8H	20.6	21.4	21.0	21.8	22.2	20.4	21.2	20.8	21.6	22.0
	12H	20.6	21.3	21.0	21.7	22.1	20.4	21.1	20.8	21.5	22.0
4H	2H	20.4	21.5	20.8	21.8	22.2	20.2	21.2	20.6	21.6	21.9
	3H	20.5	21.3	20.9	21.7	22.1	20.2	21.1	20.7	21.5	21.9
	4H	20.5	21.2	20.9	21.7	22.1	20.3	21.0	20.7	21.5	21.9
	6H	20.5	21.1	20.9	21.5	22.0	20.3	21.0	20.8	21.4	21.9
	8H	20.4	21.0	20.9	21.5	22.0	20.3	20.9	20.8	21.4	21.8
	12H	20.5	20.9	20.9	21.4	21.9	20.4	20.8	20.9	21.3	21.8
8H	4H	20.4	21.0	20.9	21.5	21.9	20.2	20.8	20.7	21.2	21.7
	6H	20.4	20.9	20.9	21.3	21.9	20.3	20.7	20.8	21.2	21.7
	8H	20.4	20.8	20.9	21.3	21.8	20.3	20.7	20.8	21.2	21.7
	12H	20.4	20.7	20.9	21.2	21.7	20.3	20.6	20.8	21.1	21.7
12H	4H	20.4	20.9	20.9	21.4	21.9	20.2	20.7	20.7	21.2	21.7
	6H	20.4	20.8	20.9	21.3	21.8	20.3	20.6	20.8	21.1	21.7
	8H	20.4	20.7	20.9	21.2	21.7	20.3	20.6	20.8	21.1	21.7

Luminance table

Max. for $\gamma >= 65°$

Photometric dimensions in mm: L = 852, B = 264

C-planes	0° 180°	15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°	90° 270°
γ	Luminance in cd/m²						
45,0°	26556.1	26003.2	27029.9	27722.7	24732.4	23221.4	23153.0
50,0°	14796.1	14446.2	14431.0	14688.7	13180.8	12567.5	12351.9
55,0°	9298.5	9049.9	9179.0	9389.7	8517.7	8006.8	7910.5
60,0°	6687.9	6456.1	6783.6	6987.2	6541.9	6058.3	6135.4
65,0°	5643.2	5133.5	5471.7	5707.6	5589.1	5168.7	5460.7
70,0°	4850.4	4425.5	4895.3	4736.2	5195.7	4729.7	5165.3
75,0°	3997.3	3702.3	3692.4	3949.0	4103.0	4391.8	4895.8
80,0°	2698.7	2518.1	2664.6	2878.5	3249.0	3821.4	4355.9
85,0°	1078.0	1072.4	1107.3	1296.5	1917.2	2554.4	3309.2

Photometric test report

Family	Order number: 51HN12DB4QDA	LP number
Highbay 11	EAN: 4069025230638	59710_156

Luminance values in cd/m²

γ 65° γ 70° γ 75° γ 80° γ 85°

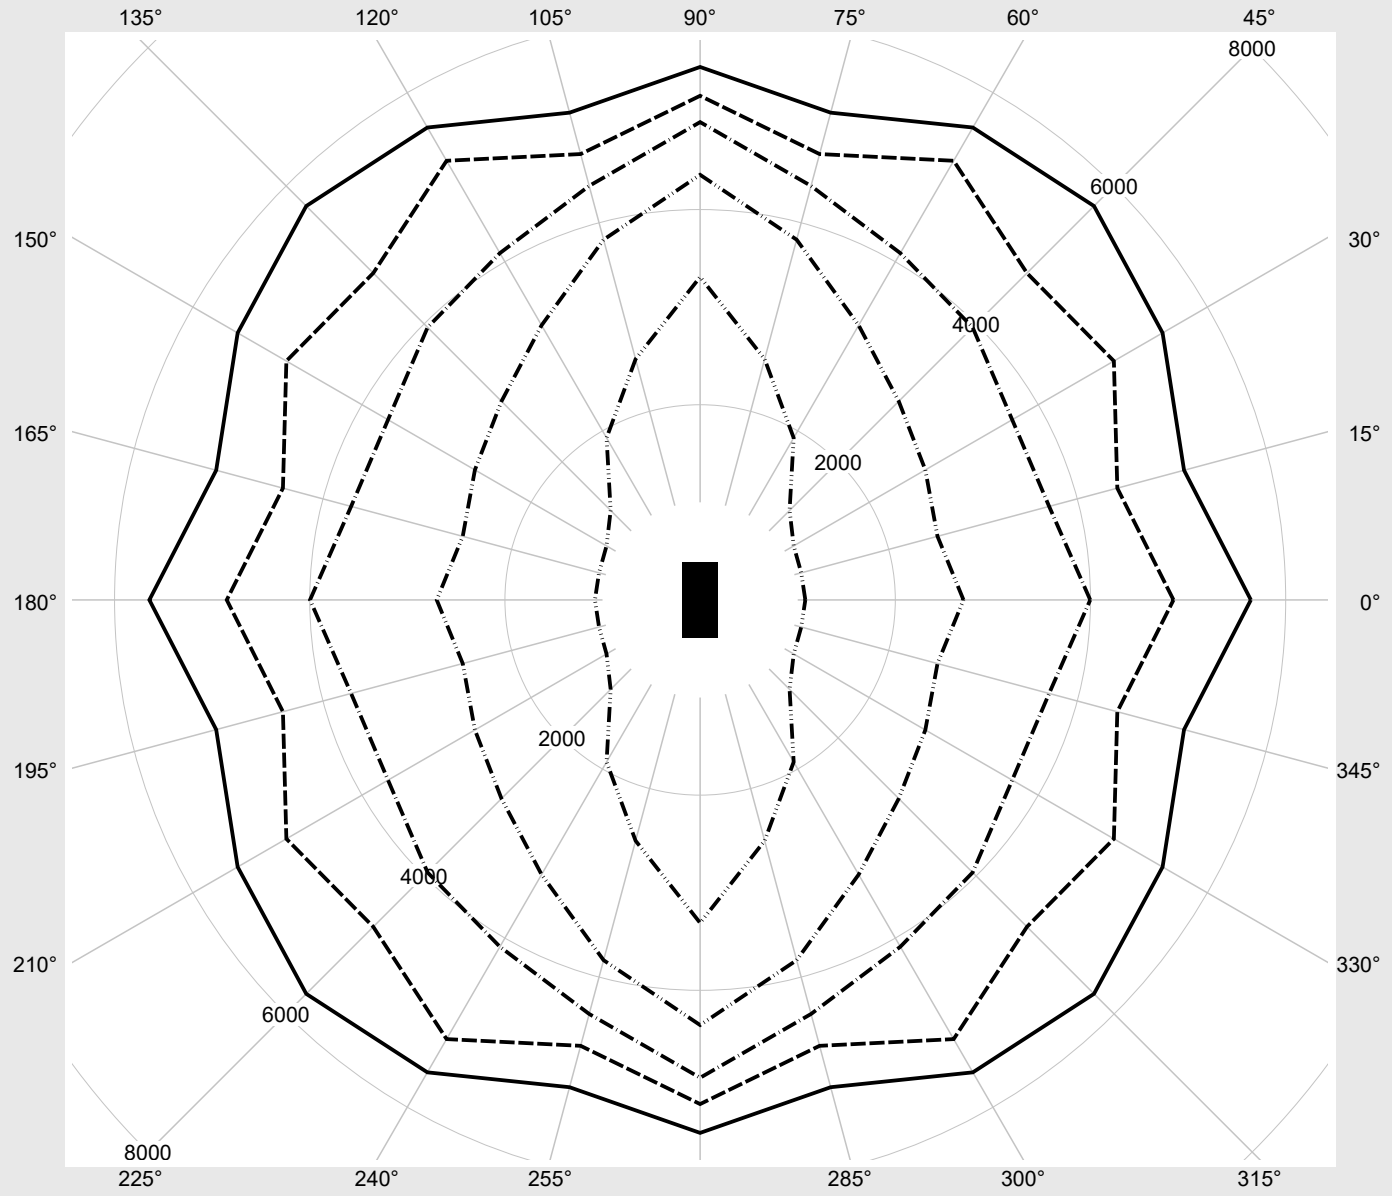

Photometric test report

Family	Order number: 51HN12DB4QDA	LP number
Highbay 11	EAN: 4069025230638	59710_156

siteco

Dimming levels table

environmental temperature: 25°C

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]
100	254	254	36000	177.7
95	241	252	34258	168.3
90	227	250	32370	158.2
85	214	248	30612	149.0
80	201	245	28833	139.6
75	188	243	27050	130.5
70	175	240	25256	121.2
65	162	238	23457	112.2
60	149	234	21641	103.1
55	136	231	19822	94.1
50	123	227	17982	85.1
45	111	224	16268	76.9
40	98	219	14402	68.0
35	86	214	12670	59.9
30	73	208	10780	51.0
25	61	202	9014	43.0
20	49	194	7241	35.1
15	37	183	5454	27.2
10	25	169	3653	19.3
5	13	145	1834	11.1
1	4	102	463	4.8