

Photometric test report

Family
Streetlight 31 mini toolless



Order number: 5XH613AT08JA
EAN: 4069025513663

Version

Optic

Cover

Lamps

Controlgear

Rated values

post-top or side-entry mounting, Smart Interface up/down

asymmetric distribution (PL32G)

toughened safety glass

LED 3000 K | CRI ≥ 70


ECG SITECO - Smart Interface

Net luminous flux = 12190 lm
Power consumption = 82.5 W
Luminous efficacy = 147.8 lm/W

LP number
59798_2101

serial
documentation
25.08.2025

siteco

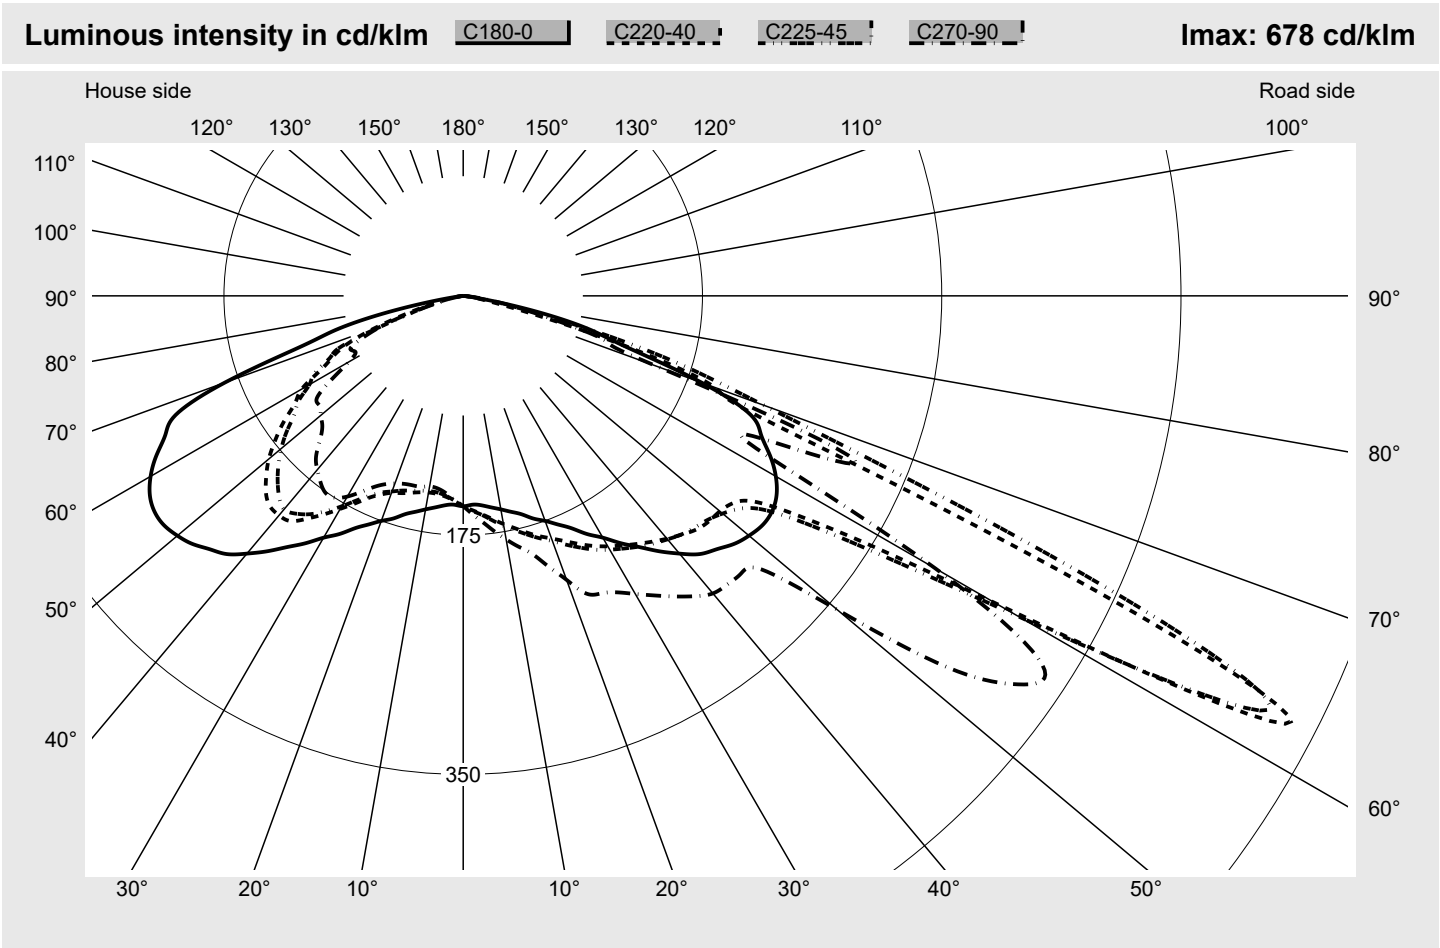


Luminaire output ratios		Luminous intensity class acc. to EN13201-2	
Eta	100.0%	Class:	G3
Eta 0° - 90°	100.0%	Imax 70°	623.9
Eta 90° - 180°	0.0%	Imax 80°	57.0
		Imax 90°	0.0
		Imax >90°	0.0
		Imax >95°	0.0
Measurement conditions			
DIN EN 13032 and DIN 5032			

Photometric test report

Family Streetlight 31 mini toolless	Order number: 5XH613AT08JA EAN: 4069025513663	LP number 59798_2101
Envelope curve in cd/klm		KMK 62.5° KMK 60° KMK 57.5° KMK 55°

siteco

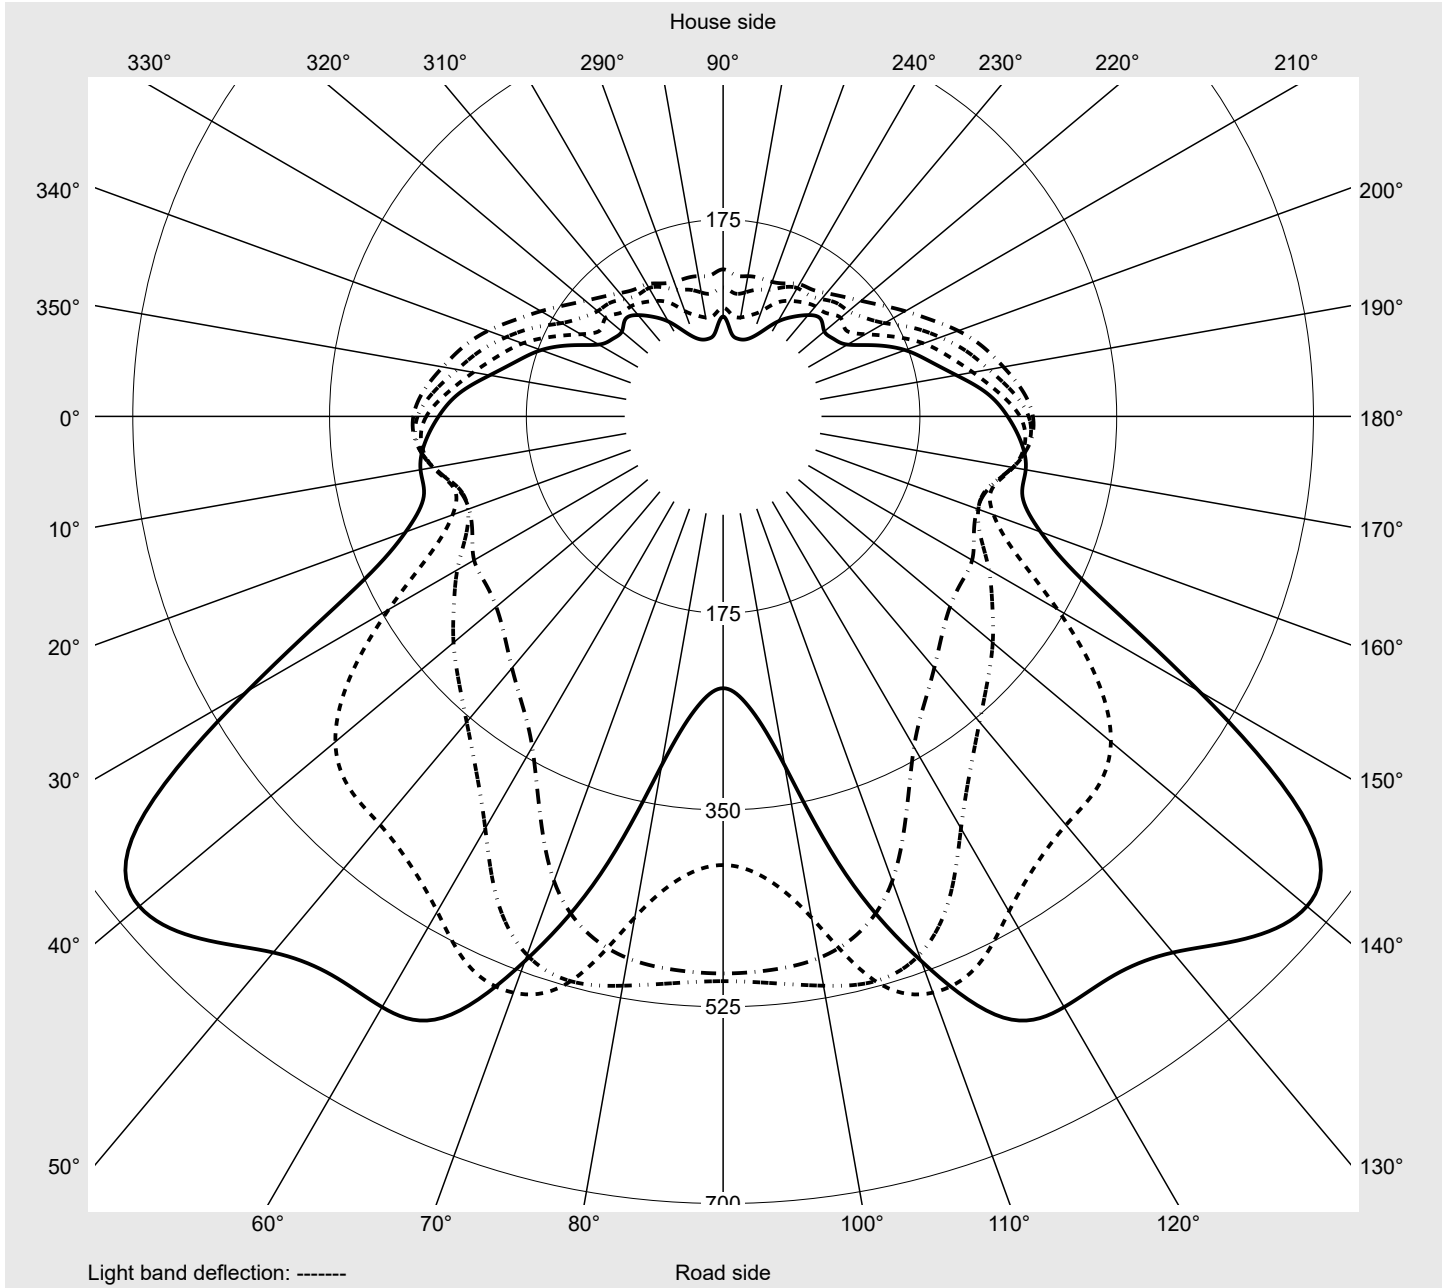

Photometric test report

Family Streetlight 31 mini toolless	Order number: 5XH613AT08JA EAN: 4069025513663	LP number 59798_2101
--	--	-------------------------

Table of values for luminous intensities	Maximum luminous intensity	siteco
--	----------------------------	--------

C- planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
γ	Luminous intensity in cd/klm												
0,0°	153.9	153.9	153.9	153.9	153.9	153.9	153.9	153.9	153.9	153.9	153.9	153.9	153.9
2,5°	152.9	153.3	153.8	154.4	154.9	155.4	156.0	156.5	157.0	157.5	157.9	158.3	158.7
5,0°	153.8	154.6	155.4	156.5	157.5	158.3	158.9	159.7	160.5	161.0	161.6	162.2	162.9
7,5°	156.0	157.1	158.0	159.2	160.3	161.4	162.4	163.6	164.7	165.8	166.8	167.8	168.6
10,0°	158.6	159.8	160.7	162.1	163.6	165.0	166.3	167.8	169.4	170.8	172.3	173.6	174.7
12,5°	161.8	162.9	164.3	166.1	167.9	169.6	171.0	172.5	174.0	175.6	177.3	178.9	180.3
15,0°	165.4	166.9	168.3	170.4	172.5	174.3	176.0	177.5	179.2	180.7	182.1	184.2	186.5
17,5°	170.8	172.0	173.2	175.2	177.0	179.0	180.8	182.5	184.2	185.9	187.6	189.5	193.3
20,0°	175.2	177.6	179.4	180.6	182.3	183.8	185.4	187.0	188.9	190.8	193.3	195.6	198.8
22,5°	181.0	183.3	185.4	187.4	188.4	189.3	190.5	192.0	194.2	197.0	200.2	203.5	206.3
25,0°	187.6	190.1	191.6	193.7	195.1	195.1	195.8	197.7	200.2	203.2	206.9	210.2	213.0
27,5°	196.4	198.0	199.0	200.0	201.5	201.5	201.7	203.7	206.2	209.3	212.5	215.7	218.7
30,0°	204.2	206.2	206.7	206.7	207.3	207.7	207.4	209.4	211.5	214.4	217.0	219.4	222.1
32,5°	214.5	215.1	214.9	213.5	212.7	212.7	212.5	214.6	216.5	219.1	221.3	223.8	226.6
35,0°	224.3	224.9	223.5	220.7	217.8	217.6	217.3	220.0	221.5	223.9	226.4	229.1	232.2
37,5°	235.5	234.4	231.5	226.7	222.7	222.0	221.6	224.9	226.7	228.3	230.7	233.9	237.1
40,0°	246.1	244.1	238.9	231.2	227.0	225.6	225.6	229.6	231.8	232.5	234.7	237.4	240.3
42,5°	256.1	251.5	243.7	234.8	230.4	228.4	229.6	234.7	236.8	236.6	237.3	239.0	242.2
45,0°	262.1	258.4	248.9	238.5	233.4	230.6	232.6	238.8	241.5	239.6	239.3	241.4	245.8
47,5°	268.6	264.5	253.2	241.5	235.7	233.5	235.8	240.9	243.9	242.5	242.8	246.1	252.5
50,0°	272.9	269.4	256.7	243.7	237.1	236.9	240.1	244.1	245.1	247.7	250.1	255.0	265.8
52,5°	275.7	272.4	259.2	245.1	239.2	241.2	245.9	248.1	248.9	255.6	263.8	274.7	290.4
55,0°	275.5	273.8	261.2	245.1	240.6	246.1	255.7	258.3	263.4	275.1	292.1	311.9	339.5
57,5°	271.7	273.1	261.7	244.1	241.5	252.6	273.0	292.3	313.0	332.6	354.8	383.3	423.1
60,0°	264.0	269.5	261.9	247.8	256.0	286.6	343.4	405.3	450.2	469.1	474.4	485.9	508.4
62,5°	253.0	266.1	273.3	275.7	300.5	360.4	488.8	635.9	677.8	656.9	622.4	606.6	606.6
65,0°	240.3	274.2	286.5	273.7	264.1	275.7	311.3	384.1	511.5	564.9	556.9	590.7	600.5
67,5°	227.7	249.1	236.1	196.9	168.4	167.8	182.1	207.7	249.4	360.6	503.8	535.0	349.3
70,0°	185.7	185.4	184.1	169.0	150.8	152.0	157.7	172.3	195.9	234.0	284.0	366.9	498.5
72,5°	126.9	155.2	171.0	150.9	111.5	93.7	90.0	103.8	134.0	166.6	192.6	201.1	236.6
75,0°	96.9	117.8	119.7	83.1	44.1	31.7	30.5	39.5	61.7	98.4	139.1	154.4	150.9
77,5°	60.5	54.0	41.1	25.1	13.3	11.4	11.3	14.3	24.0	44.4	79.4	107.8	98.4
80,0°	22.7	9.2	5.9	6.4	6.7	6.7	6.6	7.4	10.8	16.5	36.0	55.9	57.0
82,5°	4.1	2.8	3.0	3.2	3.4	3.5	3.5	3.8	4.8	7.4	13.0	24.0	27.7
85,0°	1.2	1.2	1.2	1.2	1.2	1.2	1.4	1.4	1.5	2.0	2.7	5.0	6.9
87,5°	0.7	0.7	0.7	0.7	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.7
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 31 mini toolless		Order number: 5XH613AT08JA EAN: 4069025513663										LP number 59798_2101	
Table of values for luminous intensities										Maximum luminous intensity		siteco	
C- planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
γ	Luminous intensity in cd/klm												
0,0°	153.9	153.9	153.9	153.9	153.9	153.9	153.9	153.9	153.9	153.9	153.9	153.9	153.9
2,5°	159.1	159.4	159.7	159.8	159.9	160.0	152.4	151.8	151.6	151.3	150.9	150.6	150.4
5,0°	163.7	164.5	165.1	165.6	166.1	166.3	152.8	151.7	150.9	150.3	149.5	148.7	148.0
7,5°	169.4	170.2	171.2	172.3	173.2	173.6	154.4	152.8	151.7	150.4	149.3	148.1	147.1
10,0°	175.5	176.3	177.2	178.7	180.2	180.9	156.5	154.6	153.1	151.7	150.1	148.7	147.4
12,5°	181.6	182.5	183.3	184.9	187.0	188.0	159.7	157.3	155.6	153.7	152.0	150.4	148.5
15,0°	188.7	190.7	191.4	192.4	194.5	195.4	163.4	160.8	158.9	156.9	154.7	152.7	150.9
17,5°	198.0	202.0	204.3	204.2	206.1	207.7	168.2	165.4	162.6	160.0	157.6	155.4	153.3
20,0°	206.1	212.8	217.8	217.6	218.8	221.0	172.1	169.3	166.3	163.1	160.2	157.5	155.2
22,5°	211.5	220.9	227.4	228.6	229.6	235.8	177.3	174.5	171.9	168.2	164.7	161.6	159.2
25,0°	216.0	224.8	231.2	232.8	233.2	240.0	184.4	180.8	178.1	174.8	170.8	167.5	165.0
27,5°	220.8	226.8	232.8	234.6	234.6	244.5	192.9	189.3	185.7	183.1	179.7	176.3	173.6
30,0°	224.8	229.3	236.4	238.7	238.5	251.8	201.8	198.4	194.5	190.6	188.8	185.4	182.4
32,5°	229.5	233.4	241.7	245.6	245.0	259.8	211.7	208.7	205.0	201.0	197.7	196.5	192.8
35,0°	234.9	238.7	246.3	252.1	252.4	268.4	222.9	220.0	216.2	212.5	208.5	205.4	204.0
37,5°	240.1	243.6	251.3	261.6	263.1	277.0	234.2	231.2	227.2	223.4	219.2	215.1	210.2
40,0°	243.8	247.9	256.6	273.9	278.8	284.1	245.3	242.2	237.9	233.5	228.7	223.0	216.7
42,5°	246.4	252.9	262.7	285.1	288.5	286.1	255.1	251.8	247.3	241.9	235.3	227.8	219.2
45,0°	251.6	260.7	270.1	282.6	289.1	287.3	261.5	259.0	254.5	247.6	239.1	229.2	216.9
47,5°	261.0	273.6	281.2	289.3	296.3	296.3	266.6	262.3	257.3	249.7	238.9	225.6	210.4
50,0°	279.0	298.4	311.8	330.3	349.0	357.1	270.0	263.8	255.6	246.5	233.4	217.1	200.4
52,5°	315.1	351.1	385.6	420.3	441.3	446.2	270.7	260.9	250.0	237.0	221.3	205.0	187.3
55,0°	386.3	439.7	473.6	489.2	494.1	495.4	267.0	253.2	239.2	222.5	203.6	187.1	172.2
57,5°	474.9	509.7	520.2	514.1	506.0	502.2	257.7	240.1	224.0	205.6	186.4	165.9	153.3
60,0°	537.7	545.3	519.2	452.5	411.2	399.0	245.7	225.6	207.2	189.8	167.7	146.1	133.5
62,5°	590.0	515.5	421.5	315.3	258.8	241.7	235.6	210.7	189.9	172.3	149.6	127.7	120.1
65,0°	483.5	302.1	187.1	194.0	243.5	258.9	209.5	187.8	172.2	155.2	131.6	112.6	104.5
67,5°	189.2	219.9	403.6	398.0	335.1	304.9	192.4	159.6	147.1	135.6	113.1	96.5	91.2
70,0°	623.9	488.5	293.6	190.4	158.1	150.3	173.4	146.1	127.2	114.7	96.8	80.7	75.9
72,5°	266.8	208.4	157.0	131.3	114.1	109.4	118.5	122.0	114.7	96.9	76.6	64.1	54.6
75,0°	143.3	125.1	104.9	89.5	77.5	73.1	62.5	68.5	86.0	79.6	61.7	45.1	32.8
77,5°	87.4	73.2	61.5	52.2	46.1	43.5	37.1	27.9	43.3	49.7	37.5	21.9	11.8
80,0°	48.8	40.2	34.1	29.5	25.5	23.9	17.2	9.9	14.2	20.5	16.7	6.9	6.2
82,5°	23.2	19.1	15.7	13.5	11.6	10.9	3.9	3.1	3.7	4.7	4.1	3.1	3.1
85,0°	7.4	6.0	4.9	4.0	3.5	3.2	1.2	1.2	1.2	1.2	1.2	1.2	1.3
87,5°	0.7	0.7	0.6	0.6	0.6	0.6	0.7	0.7	0.7	0.7	0.7	0.7	0.7
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 31 mini toolless		Order number: 5XH613AT08JA EAN: 4069025513663										LP number 59798_2101	
Table of values for luminous intensities										Maximum luminous intensity		sīTeco	
C- planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm										Luminous flux in lm/klm		
0,0°	153.9	153.9	153.9	153.9	153.9	153.9	153.9	153.9	153.9	153.9	153.9	0.2	0.2
2,5°	150.1	149.8	149.7	149.6	149.4	149.3	149.3	149.3	149.3	149.4	149.4	1.8	2.1
5,0°	147.4	146.7	146.1	145.7	145.4	145.0	144.8	144.8	144.8	144.9	144.9	3.7	5.8
7,5°	146.1	145.0	144.3	143.6	143.0	142.5	142.1	142.1	142.1	142.2	142.1	5.6	11.3
10,0°	146.1	145.0	143.9	143.2	142.4	141.8	141.3	141.2	141.3	141.4	141.5	7.5	18.9
12,5°	147.1	145.9	144.8	143.9	143.2	142.7	142.5	142.6	142.8	142.9	143.0	9.6	28.5
15,0°	149.1	147.5	146.3	145.0	144.1	143.4	142.9	142.9	143.0	143.3	143.4	11.7	40.2
17,5°	151.3	149.3	147.8	147.0	146.1	145.1	144.5	144.0	143.9	143.9	144.2	14.0	54.2
20,0°	153.3	152.2	151.1	150.0	149.0	148.1	147.2	146.4	145.9	145.8	146.1	16.4	70.7
22,5°	157.3	155.7	154.9	154.3	153.1	152.0	150.8	149.8	149.0	148.7	149.1	19.0	89.6
25,0°	162.9	161.3	160.4	159.5	158.9	157.6	156.3	155.0	154.1	153.6	154.2	21.6	111.3
27,5°	171.1	168.6	168.0	167.0	166.0	165.1	163.7	162.7	161.7	161.1	161.6	24.4	135.7
30,0°	179.9	177.7	176.3	175.3	174.1	172.9	171.9	170.8	169.7	169.1	169.5	27.4	163.1
32,5°	189.5	186.7	185.2	183.1	181.4	180.1	179.0	177.4	176.0	175.1	175.0	30.5	193.6
35,0°	198.9	194.9	192.0	189.5	186.2	183.6	181.9	179.0	176.9	175.6	175.8	33.6	227.2
37,5°	207.6	200.8	196.1	191.4	185.8	181.2	178.5	175.5	173.1	171.7	171.5	36.5	263.8
40,0°	209.5	203.8	195.1	187.8	180.7	175.2	171.9	169.1	166.9	165.8	166.0	39.3	303.0
42,5°	209.0	199.4	190.8	181.1	173.4	167.7	164.3	161.7	159.7	159.1	159.3	41.7	344.7
45,0°	204.0	191.9	183.0	172.6	165.1	159.6	156.3	152.5	149.3	147.7	147.8	43.7	388.4
47,5°	195.4	183.3	173.3	165.6	156.8	149.0	143.9	140.5	138.4	138.2	139.8	45.6	434.0
50,0°	185.6	173.6	164.0	154.2	144.2	138.5	137.0	136.0	134.9	134.8	136.0	48.2	482.2
52,5°	173.2	162.6	152.2	141.9	140.0	135.1	132.1	130.8	129.2	128.9	132.2	52.1	534.3
55,0°	160.0	150.6	143.1	137.8	135.7	130.5	127.3	127.3	126.6	126.0	130.8	56.4	590.7
57,5°	145.7	142.6	136.2	132.0	131.8	126.7	119.8	116.6	111.9	110.1	114.6	60.7	651.4
60,0°	136.4	129.9	127.7	123.8	118.6	111.3	99.7	93.1	89.3	90.6	96.7	65.1	716.5
62,5°	117.5	122.6	117.6	108.0	97.4	84.2	74.8	70.7	70.4	75.9	88.8	70.5	787.0
65,0°	105.1	107.7	103.0	86.6	70.4	62.2	58.9	58.0	57.6	65.6	91.0	59.1	846.2
67,5°	91.4	95.9	78.9	58.2	51.3	50.5	50.5	45.2	40.7	48.6	78.6	48.7	894.8
70,0°	68.4	57.8	51.5	42.6	42.2	44.3	38.5	25.7	21.0	30.1	60.3	43.2	938.0
72,5°	43.3	34.9	32.5	34.1	37.1	35.6	20.9	16.3	17.0	20.4	34.9	27.8	965.8
75,0°	25.0	22.6	25.6	29.5	28.0	20.4	14.3	12.0	11.5	12.4	17.2	17.6	983.3
77,5°	11.6	14.3	17.1	18.0	15.2	11.7	10.3	8.3	6.8	6.6	10.8	9.5	992.9
80,0°	6.5	7.0	8.1	8.5	8.0	7.4	6.3	4.9	3.3	2.0	1.6	4.4	997.3
82,5°	3.3	3.6	4.1	4.1	4.3	4.1	3.3	2.5	1.9	1.2	1.0	1.9	999.2
85,0°	1.4	1.5	1.6	1.6	1.7	1.7	1.5	1.3	1.0	0.9	0.9	0.6	999.8
87,5°	0.7	0.8	0.8	0.8	0.8	0.8	0.9	0.9	0.9	0.9	0.9	0.2	1000.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

office	industry	traffic	retail	public	sports
--------	----------	---------	--------	--------	--------

Photometric test report

Family Streetlight 31 mini toolless	Order number: 5XH613AT08JA EAN: 4069025513663	LP number 59798_2101
Dimming levels table		environmental temperature: 25°C

sitEco

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W] start of lifetime	Power consumption [W] end of lifetime	Power consumption [W] average
100	254	254	12190	82.5	90.1	86.3
95	238	252	11571	77.0	84.1	80.6
90	223	249	10968	71.9	78.4	75.2
85	208	247	10344	66.9	72.9	69.9
80	194	244	9747	62.3	67.8	65.0
75	180	241	9138	57.6	62.8	60.2
70	166	238	8511	53.0	57.7	55.4
65	153	235	7919	48.9	53.1	51.0
60	140	232	7315	44.7	48.6	46.7
55	127	229	6697	40.5	44.0	42.2
50	115	225	6116	36.8	39.9	38.3
45	102	221	5475	32.7	35.5	34.1
40	90	216	4874	29.0	31.4	30.2
35	78	211	4262	25.3	27.4	26.4
30	66	205	3642	21.6	23.4	22.5
25	55	198	3066	18.4	19.8	19.1
20	43	189	2428	15.0	16.0	15.5
15	32	178	1835	11.8	12.6	12.2
10	21	163	1235	8.4	9.1	8.8
9	18	157	1071	7.2	7.8	7.5

Dimming levels table		environmental temperature: 5°C
----------------------	--	--------------------------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W] start of lifetime	Power consumption [W] end of lifetime	Power consumption [W] average
100	254	254	12570	83.5	91.2	87.4
95	239	252	11951	78.3	85.4	81.8
90	224	249	11313	73.2	79.8	76.5
85	210	247	10703	68.4	74.6	71.5
80	196	245	10078	63.7	69.4	66.6
75	182	242	9442	59.0	64.3	61.6
70	168	239	8794	54.5	59.2	56.8
65	155	236	8179	50.2	54.6	52.4
60	142	233	7554	45.9	50.0	48.0
55	129	229	6920	41.8	45.3	43.6
50	116	225	6273	37.6	40.8	39.2
45	104	221	5667	33.8	36.7	35.2
40	92	217	5053	30.0	32.6	31.3
35	79	211	4377	26.0	28.1	27.0
30	67	205	3745	22.3	24.0	23.2
25	56	199	3159	19.0	20.5	19.8
20	44	190	2511	15.5	16.6	16.0
15	33	179	1912	12.3	13.1	12.7
10	21	163	1249	8.5	9.2	8.8
9	18	157	1082	7.3	8.0	7.6

Photometric test report

Family Streetlight 31 mini toolless	Order number: 5XH613AT08JA EAN: 4069025513663	LP number 59798_2101
Dimming levels table environmental temperature: 15°C		

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W] start of lifetime	Power consumption [W] end of lifetime	Power consumption [W] average
100	254	254	12390	83.0	90.6	86.8
95	239	252	11789	77.8	84.9	81.4
90	224	249	11168	72.7	79.3	76.0
85	209	247	10530	67.7	73.7	70.7
80	195	244	9919	63.0	68.6	65.8
75	181	242	9296	58.3	63.5	60.9
70	167	239	8657	53.7	58.4	56.0
65	154	236	8053	49.5	53.8	51.6
60	141	232	7438	45.3	49.2	47.2
55	128	229	6812	41.2	44.7	43.0
50	115	225	6173	37.0	40.2	38.6
45	103	221	5574	33.3	36.1	34.7
40	91	216	4965	29.5	31.9	30.7
35	79	211	4347	25.8	27.9	26.8
30	67	205	3722	22.2	23.8	23.0
25	55	198	3087	18.6	20.0	19.3
20	44	190	2498	15.4	16.5	16.0
15	32	178	1846	11.9	12.7	12.3
10	21	163	1243	8.5	9.2	8.8
9	18	157	1077	7.2	7.9	7.6

Photometric test report

Family Streetlight 31 mini toolless	Order number: 5XH613AT08JA EAN: 4069025513663	LP number 59798_2101
Luminousfluxs table		siteco

Temperature °C	Luminous flux lm	Power consumption W
25.0	12190.0	82.5
5.0	12570.0	83.5
15.0	12390.0	83.0