

Photometric test report

Family
Streetlight 31 midi

Order number: 5XF3E32D08MA
EAN: 4058352466254

LP number
59127_8



Version	post-top or side-entry mounting
Optic	asymmetric, wide distribution (ST1.0a)
Cover	toughened safety glass
Lamps	LED 3000 K CRI ≥ 70
Controlgear	ECG Plus
Rated values	Net luminous flux = 16800 lm Power consumption = 120.0 W Luminous efficacy = 140 lm/W

serial
documentation
19.04.2021

siteco

Luminous intensity in cd/klm


C180-0

C200-20

C202.5-22.5

C270-90

Imax: 697 cd/klm

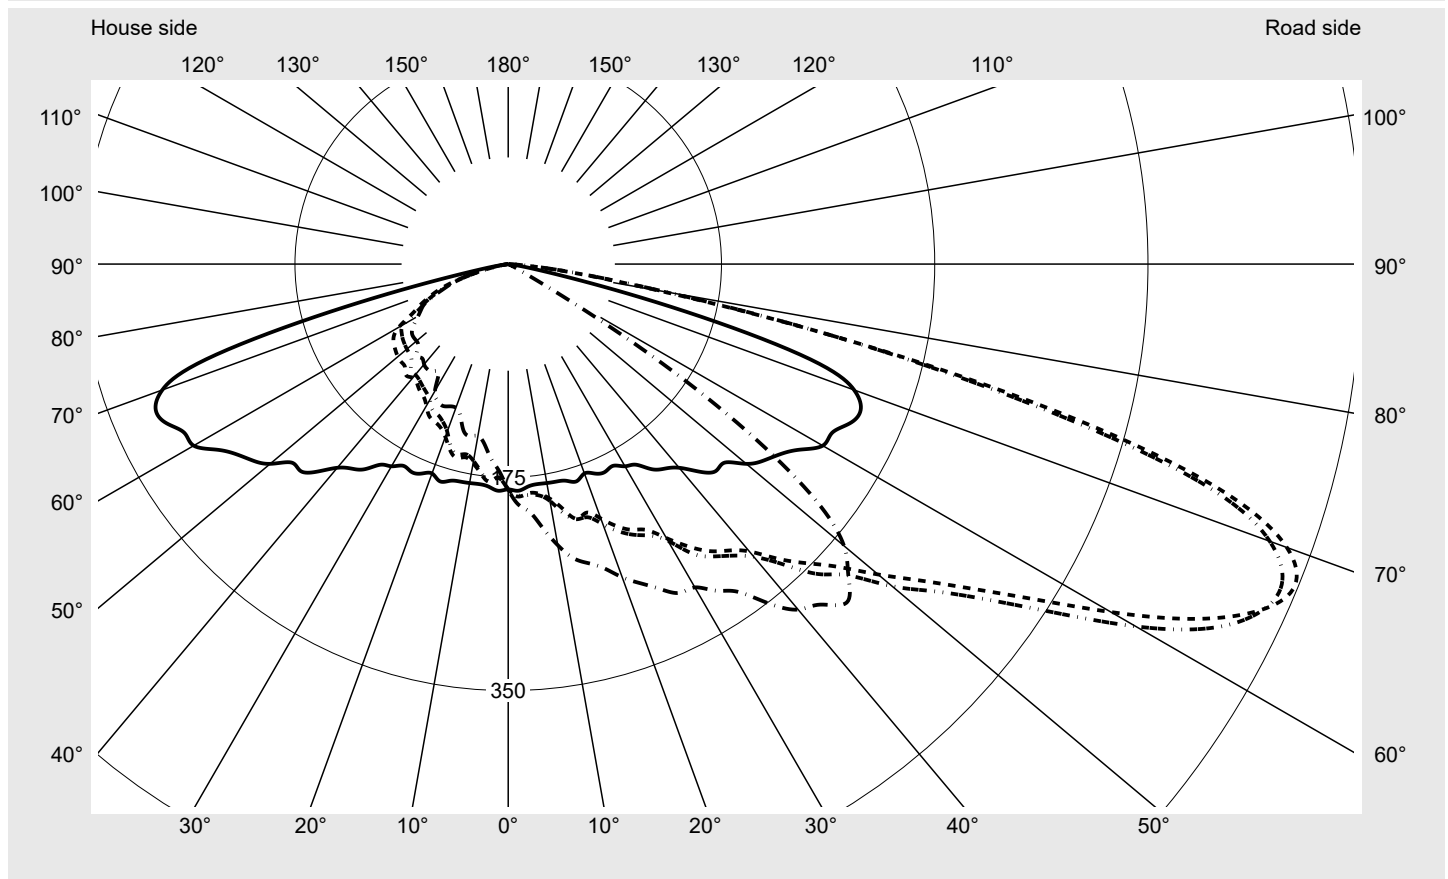

Luminaire output ratios

Eta	100.0%
Eta 0° - 90°	100.0%
Eta 90° - 180°	0.0%

Luminous intensity class acc. to EN13201-2

Class:	G2
Imax 70°	680.0
Imax 80°	130.3
Imax 90°	0.0
Imax >90°	0.0
Imax >95°	0.0

Measurement conditions


DIN EN 13032 and DIN 5032

Photometric test report

Family Streetlight 31 midi	Order number: 5XF3E32D08MA EAN: 4058352466254	LP number 59127_8
--------------------------------------	--	-----------------------------



Envelope curve in cd/klm **KMK 67.5°** **KMK 65°** **KMK 62.5°** **KMK 60°**

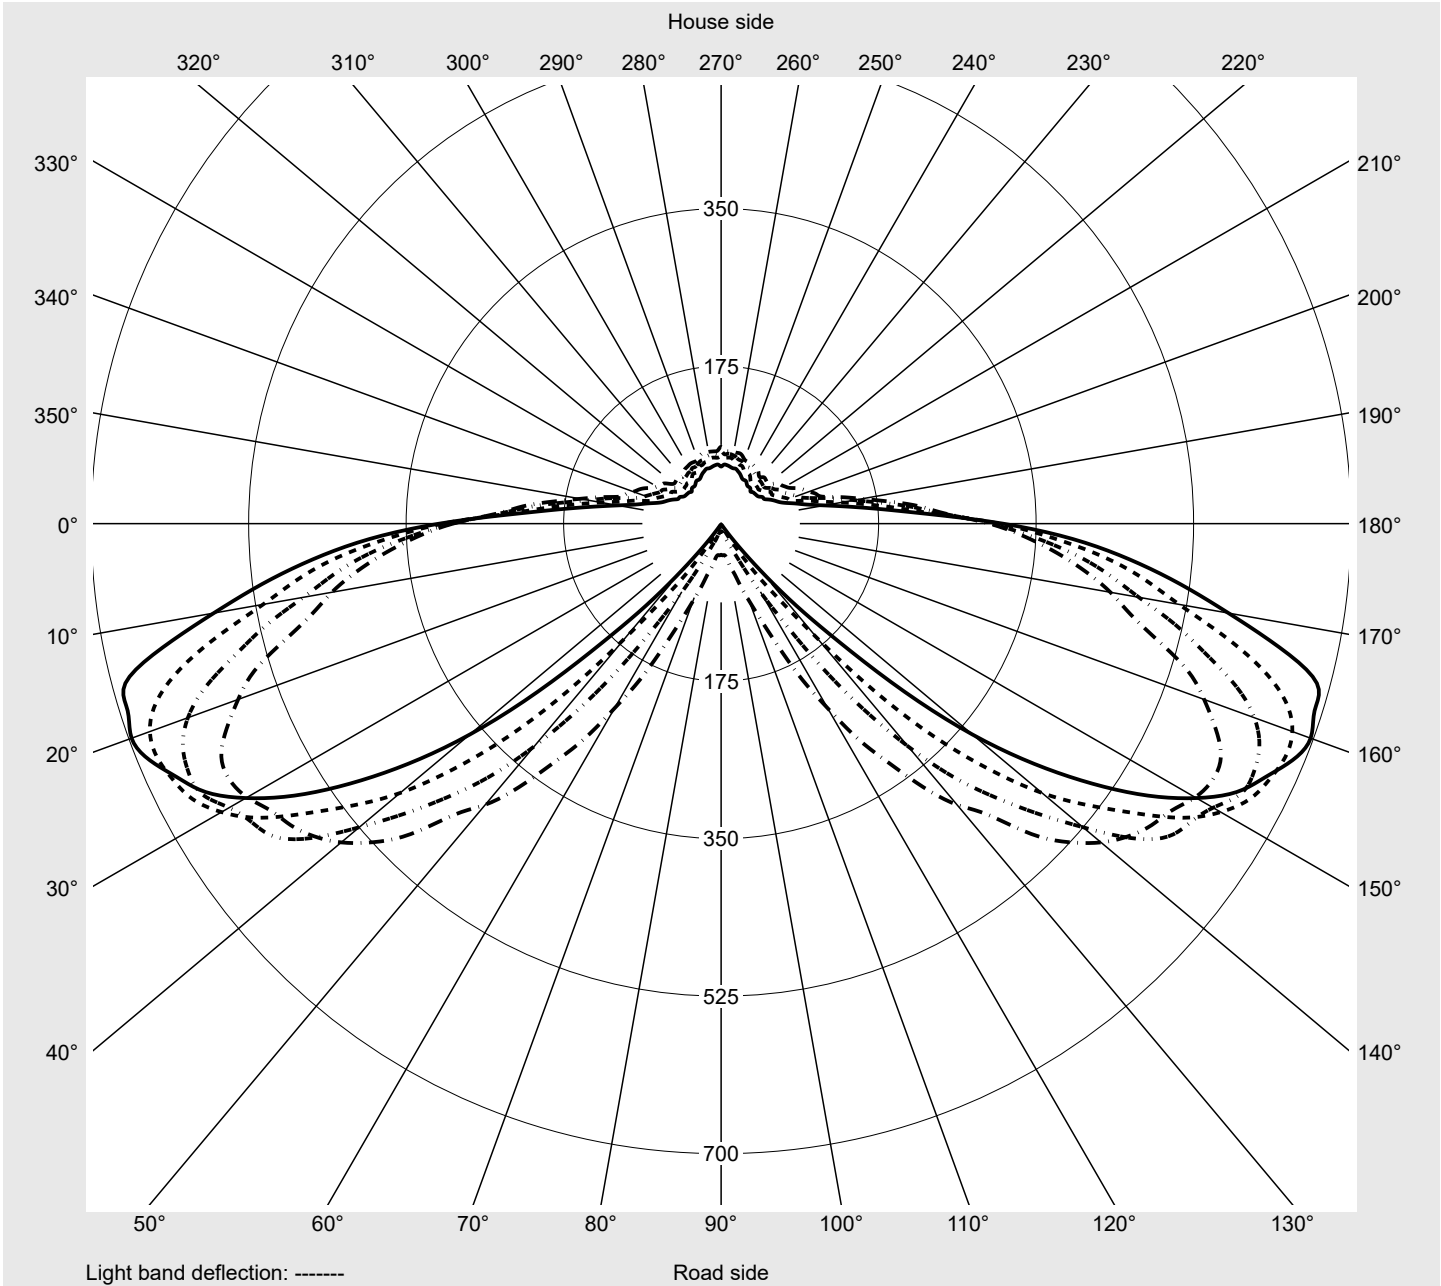

Photometric test report

Family Streetlight 31 midi	Order number: 5XF3E32D08MA EAN: 4058352466254	LP number 59127_8
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	0,0° 180,0°	2,5° 177,5°	5,0° 175,0°	7,5° 172,5°	10,0° 170,0°	12,5° 167,5°	15,0° 165,0°	17,5° 162,5°	20,0° 160,0°	22,5° 157,5°	25,0° 155,0°	27,5° 152,5°	30,0° 150,0°	32,5° 147,5°	35,0° 145,0°
γ	Luminous intensity in cd/klm														
0,0°	184.9	184.9	184.9	184.9	184.9	184.9	184.9	184.9	184.9	184.9	184.9	184.9	184.9	184.9	184.9
2,5°	186.2	187.4	188.5	189.1	189.0	188.5	189.3	190.5	191.0	190.1	189.6	190.9	192.9	192.3	192.6
5,0°	183.4	184.0	183.6	184.1	185.5	187.0	187.6	188.7	188.9	190.2	191.8	192.3	193.5	194.7	195.9
7,5°	182.1	182.2	182.5	184.3	186.9	188.9	189.7	189.7	190.0	191.4	193.3	194.0	194.4	196.8	198.4
10,0°	182.5	183.1	184.6	186.8	189.2	190.9	192.2	193.7	195.3	197.4	199.7	201.1	202.0	203.2	205.8
12,5°	182.8	185.3	188.8	190.8	191.8	193.7	196.3	201.7	205.4	209.3	212.9	214.2	216.5	215.0	218.6
15,0°	184.1	185.9	190.7	195.9	200.7	205.4	211.4	214.2	216.4	216.8	217.9	220.8	220.3	221.6	226.6
17,5°	186.8	187.6	189.8	193.1	197.4	203.1	209.3	210.4	213.9	217.9	222.0	226.5	229.5	235.1	241.0
20,0°	182.8	188.2	194.5	200.0	205.3	211.3	213.1	219.8	222.1	227.2	234.8	240.4	238.5	241.1	241.9
22,5°	186.1	189.9	198.8	205.8	211.4	218.6	222.3	229.7	232.8	237.4	243.8	249.0	250.9	249.5	248.6
25,0°	188.1	192.3	201.9	208.6	213.4	221.6	229.8	236.8	240.6	245.1	250.7	256.0	260.0	259.9	261.2
27,5°	186.6	195.6	204.0	210.2	215.8	225.5	234.6	241.4	246.0	251.1	257.2	263.8	266.6	270.2	276.8
30,0°	191.6	202.2	209.0	216.3	225.2	236.1	246.3	254.6	259.6	262.2	264.5	270.1	283.5	286.2	284.7
32,5°	195.2	204.8	217.3	227.0	234.2	242.3	256.2	265.7	274.6	281.8	286.8	289.0	289.6	290.4	297.1
35,0°	205.5	211.9	221.4	231.5	241.2	249.8	263.1	276.2	287.5	292.9	294.7	297.9	304.0	312.1	316.2
37,5°	211.5	223.1	234.2	245.2	255.9	266.7	278.9	287.7	296.3	301.6	305.4	313.2	318.0	323.8	329.4
40,0°	218.2	232.1	248.3	262.4	274.5	286.2	298.6	302.5	307.8	313.5	320.4	329.9	335.4	337.8	344.9
42,5°	230.8	238.3	257.2	275.4	291.3	304.7	314.7	320.6	328.1	334.3	339.7	346.4	357.9	360.0	365.7
45,0°	240.5	250.9	270.6	286.4	299.8	317.6	322.9	338.6	347.2	359.7	373.3	377.9	384.8	383.2	388.8
47,5°	241.1	264.7	284.8	302.5	320.1	342.3	352.8	358.9	367.9	378.0	389.5	402.4	407.6	410.3	415.3
50,0°	255.0	279.4	296.6	315.8	336.6	354.9	371.8	378.8	396.3	411.2	422.6	430.7	433.9	438.0	454.0
52,5°	264.6	287.4	310.4	334.4	357.0	373.2	397.1	410.8	426.6	441.2	453.6	463.7	473.2	482.4	489.2
55,0°	272.2	299.0	328.5	356.4	380.6	399.0	427.0	445.8	464.4	480.0	493.3	506.8	518.9	527.4	527.4
57,5°	283.5	317.8	351.0	380.9	407.3	431.4	460.7	483.0	511.9	532.6	546.4	561.6	566.8	566.3	566.4
60,0°	298.0	338.5	374.8	408.6	439.2	466.1	502.7	543.8	571.1	594.7	612.8	615.9	608.2	593.4	584.0
62,5°	299.7	348.2	394.8	434.6	471.3	516.3	557.1	599.7	630.5	647.4	653.1	650.7	631.3	618.0	606.1
65,0°	309.3	369.6	427.2	474.4	516.7	570.5	621.7	657.8	675.5	678.4	672.3	662.5	641.0	608.3	560.7
67,5°	313.1	391.0	455.4	514.5	572.5	635.5	685.4	691.4	697.1	687.1	666.9	645.8	609.8	562.5	503.8
70,0°	302.1	385.7	456.2	519.5	578.7	637.5	677.4	674.6	680.0	665.1	633.4	594.4	542.2	486.3	417.2
72,5°	260.0	331.7	406.7	463.7	506.5	551.6	578.9	599.2	609.7	595.8	561.2	509.9	460.2	397.2	299.8
75,0°	151.5	211.6	283.0	334.5	365.1	388.2	434.2	461.5	462.6	444.9	422.2	406.6	364.4	280.7	185.3
77,5°	53.1	77.8	121.9	158.4	186.2	213.8	254.3	269.4	275.8	275.2	268.1	253.6	219.3	160.1	107.2
80,0°	15.9	23.4	36.7	54.4	74.7	92.4	104.9	116.6	126.0	130.3	128.0	119.9	104.4	82.3	62.4
82,5°	3.8	3.2	4.0	9.2	17.3	26.6	37.0	45.9	52.6	56.3	55.3	49.7	45.3	38.4	32.0
85,0°	0.4	0.1	0.1	0.2	1.2	3.5	7.1	12.5	15.7	17.9	17.9	15.9	15.7	14.1	12.4
87,5°	0.0	0.0	0.0	0.1	0.1	0.2	0.6	1.8	3.2	4.2	4.7	4.8	4.7	4.5	3.7
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 31 midi	Order number: 5XF3E32D08MA EAN: 4058352466254	LP number 59127_8
Table of values for luminous intensities		Maximum luminous intensity
siteco		

C-planes	37,5° 142,5°	40,0° 140,0°	42,5° 137,5°	45,0° 135,0°	47,5° 132,5°	50,0° 130,0°	52,5° 127,5°	55,0° 125,0°	57,5° 122,5°	60,0° 120,0°	62,5° 117,5°	65,0° 115,0°	67,5° 112,5°	70,0° 110,0°	72,5° 107,5°
γ	Luminous intensity in cd/klm														
0,0°	184.9	184.9	184.9	184.9	184.9	184.9	184.9	184.9	184.9	184.9	184.9	184.9	184.9	184.9	184.9
2,5°	193.9	194.7	194.4	194.6	195.3	196.7	197.1	196.4	195.5	196.3	195.0	194.9	194.9	195.0	195.3
5,0°	197.6	199.5	200.1	200.8	200.6	201.5	201.9	202.0	202.4	203.8	203.7	203.7	204.8	206.4	207.2
7,5°	201.0	203.9	205.5	209.5	209.8	210.7	212.2	214.3	216.7	218.5	219.8	220.2	221.3	222.8	223.0
10,0°	209.0	212.3	214.5	219.2	219.9	221.5	223.6	226.0	228.3	230.7	232.3	232.9	233.8	234.9	235.3
12,5°	221.9	224.5	227.8	229.0	229.8	230.9	231.7	232.5	234.2	237.0	238.2	238.8	239.6	241.2	242.6
15,0°	228.9	230.4	234.5	238.2	241.7	244.2	244.2	243.0	242.6	242.4	246.4	248.7	250.8	252.7	253.8
17,5°	245.0	247.4	249.7	252.7	252.7	254.2	255.1	256.1	258.3	260.8	260.1	259.1	259.6	260.4	260.7
20,0°	246.8	252.4	255.0	259.9	257.3	259.2	261.1	262.7	265.9	267.5	270.1	271.2	270.3	268.4	267.6
22,5°	252.3	258.0	260.7	265.1	263.0	266.9	271.8	274.6	274.5	272.7	277.7	280.8	280.1	278.7	280.5
25,0°	264.2	267.9	270.5	274.8	274.9	278.9	283.3	284.9	283.1	280.8	285.0	288.0	288.6	289.1	292.1
27,5°	281.7	283.6	285.1	291.1	293.1	294.5	294.3	292.9	291.6	292.7	293.2	293.9	295.9	298.5	300.2
30,0°	289.0	297.4	302.4	301.2	304.5	309.7	311.0	310.1	310.6	312.2	306.8	304.3	303.1	303.5	305.3
32,5°	302.6	305.9	308.7	310.5	312.5	317.8	319.6	318.8	317.6	314.3	312.6	310.8	312.1	315.1	317.5
35,0°	318.5	319.5	320.8	323.4	325.8	326.8	329.0	330.6	329.5	328.1	332.5	334.5	335.0	335.2	336.1
37,5°	333.8	335.9	336.8	338.2	338.9	343.4	346.2	347.5	348.9	347.0	347.4	351.6	353.0	351.6	350.0
40,0°	351.4	355.1	355.9	355.8	357.2	362.1	366.2	368.3	368.2	364.2	365.3	370.3	371.5	369.2	366.8
42,5°	371.9	377.1	378.1	377.1	383.3	382.1	387.6	391.9	385.9	380.5	389.5	393.6	392.1	387.7	385.9
45,0°	392.9	397.4	405.4	406.7	414.5	415.6	417.2	416.3	411.3	413.9	411.0	406.5	401.5	395.9	391.3
47,5°	419.6	424.2	430.0	425.5	427.6	433.3	434.1	430.9	427.0	425.9	418.2	410.5	404.4	402.1	402.8
50,0°	467.0	469.7	464.4	457.0	460.5	461.6	458.8	452.5	442.8	438.6	429.2	413.2	403.3	398.0	388.0
52,5°	494.5	497.3	496.1	487.9	482.8	483.8	473.0	455.2	443.0	427.2	411.7	396.2	384.8	374.9	358.8
55,0°	524.1	521.4	519.6	510.1	495.3	485.5	465.0	439.0	418.7	393.3	370.7	351.8	333.9	316.8	301.1
57,5°	558.2	544.7	531.5	513.0	490.2	459.1	429.0	398.5	362.4	332.5	305.8	281.3	254.1	226.7	207.6
60,0°	570.5	551.0	523.9	487.8	438.7	407.7	369.1	324.1	284.2	236.9	195.8	151.2	116.3	91.8	74.0
62,5°	573.9	524.8	476.9	429.6	381.5	323.0	259.8	193.7	130.8	89.7	59.2	39.2	27.3	21.7	17.8
65,0°	513.9	465.6	404.1	334.5	252.4	166.3	106.4	69.9	38.2	21.3	12.0	7.3	4.9	3.9	3.5
67,5°	438.4	364.5	276.7	187.5	123.6	67.8	30.4	11.1	4.5	2.3	2.2	2.3	2.4	2.4	2.4
70,0°	335.5	243.9	151.9	75.9	37.2	17.1	7.1	4.0	3.1	2.9	2.7	2.8	3.0	2.9	2.7
72,5°	204.3	119.4	57.5	31.9	14.9	7.6	4.8	3.6	3.2	3.4	3.3	3.2	3.1	2.9	2.6
75,0°	108.2	55.3	29.2	14.9	8.7	5.7	3.9	3.2	3.1	3.3	2.8	2.5	2.6	2.6	2.3
77,5°	65.7	36.1	17.7	10.4	6.2	4.3	3.6	3.2	2.6	2.4	1.9	2.1	2.0	1.7	1.7
80,0°	43.3	26.1	14.2	8.3	4.8	3.3	2.5	2.2	1.9	1.5	1.3	1.2	1.1	1.0	0.9
82,5°	24.5	16.5	10.0	5.8	3.3	2.2	1.5	1.1	1.0	0.7	0.7	0.6	0.5	0.5	0.4
85,0°	10.3	7.9	5.0	3.2	1.8	1.2	0.7	0.4	0.3	0.3	0.2	0.2	0.2	0.2	0.2
87,5°	2.9	2.2	1.6	1.0	0.5	0.3	0.2	0.1	0.1	0.1	0.1	0.1	0.1	0.0	0.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 31 midi	Order number: 5XF3E32D08MA EAN: 4058352466254	LP number 59127_8
Table of values for luminous intensities		Maximum luminous intensity
siteco		

C-planes	75,0° 105,0°	77,5° 102,5°	80,0° 100,0°	82,5° 97,5°	85,0° 95,0°	87,5° 92,5°	90,0°	182,5° 357,5°	185,0° 355,0°	187,5° 352,5°	190,0° 350,0°	192,5° 347,5°	195,0° 345,0°	197,5° 342,5°	200,0° 340,0°
γ	Luminous intensity in cd/klm														
0,0°	184.9	184.9	184.9	184.9	184.9	184.9	184.9	184.9	184.9	184.9	184.9	184.9	184.9	184.9	184.9
2,5°	196.6	196.2	196.5	196.8	197.0	197.5	197.8	184.6	182.0	179.8	178.2	177.2	176.0	174.8	175.3
5,0°	205.3	206.3	204.9	204.4	204.4	203.8	204.3	182.8	182.9	182.3	181.2	180.3	179.0	178.3	179.1
7,5°	221.4	220.8	220.6	220.5	220.3	219.4	218.7	181.2	181.6	181.7	180.6	178.7	176.7	175.4	173.1
10,0°	233.8	234.8	235.4	235.8	235.3	234.2	234.2	179.6	178.0	177.0	175.5	173.4	171.2	169.3	165.9
12,5°	239.8	245.9	246.3	246.4	245.8	244.2	247.2	178.5	173.4	170.2	168.3	167.0	165.5	163.5	162.4
15,0°	252.9	254.8	256.1	255.4	253.7	253.3	254.1	181.4	178.4	175.3	173.0	171.3	168.0	168.5	164.5
17,5°	264.0	263.6	266.7	267.2	265.6	263.9	261.7	181.3	177.8	175.0	171.4	166.8	164.0	162.6	159.4
20,0°	270.2	274.7	273.7	273.4	274.3	274.4	273.5	179.3	176.2	173.2	169.5	165.1	161.7	156.7	150.9
22,5°	285.5	283.6	283.0	283.4	284.3	284.8	283.5	181.1	174.2	171.2	167.3	160.9	154.4	151.7	145.2
25,0°	297.2	292.5	292.0	291.8	292.5	294.9	294.0	183.4	175.0	170.4	165.1	157.6	150.7	148.9	142.7
27,5°	301.5	302.2	299.9	297.6	298.9	303.8	304.2	183.4	178.4	171.0	163.4	156.6	152.1	147.0	140.5
30,0°	307.8	310.9	312.2	311.8	310.1	307.1	306.4	185.6	180.1	172.5	163.3	153.1	143.7	137.2	134.2
32,5°	320.6	324.4	325.2	323.5	321.0	319.2	317.8	187.7	177.5	167.4	157.5	149.3	147.4	137.6	129.1
35,0°	336.7	336.0	337.7	337.2	334.0	329.4	328.2	190.7	180.3	172.2	162.0	149.3	142.6	134.7	126.6
37,5°	352.2	351.9	349.8	349.0	349.8	350.9	350.9	195.9	185.5	176.0	164.9	152.2	142.3	130.1	123.0
40,0°	369.1	369.7	365.7	363.1	364.5	368.7	370.1	204.0	191.7	177.6	164.5	153.4	141.0	128.2	121.7
42,5°	386.7	387.0	385.5	380.2	375.4	375.7	379.0	214.6	198.2	179.9	164.2	152.2	137.4	129.1	123.9
45,0°	394.5	396.2	399.3	394.0	384.4	382.7	392.8	221.7	205.7	189.7	172.9	155.2	136.6	124.2	119.8
47,5°	401.9	397.6	392.8	386.4	380.0	378.6	378.6	226.0	211.0	190.1	169.0	150.6	139.6	128.2	119.0
50,0°	377.0	373.9	370.3	368.3	366.0	362.2	359.7	235.1	210.6	188.7	169.5	153.0	138.9	128.1	118.2
52,5°	346.4	340.9	334.0	329.8	326.5	319.9	317.7	236.2	215.5	192.6	170.0	149.5	134.7	124.2	116.5
55,0°	287.3	276.2	265.5	257.0	250.7	245.4	238.9	239.9	218.9	193.5	168.3	146.4	131.3	120.3	114.5
57,5°	190.4	172.4	160.3	148.9	142.3	141.9	136.1	248.5	218.9	188.1	162.8	144.9	127.6	117.7	111.5
60,0°	58.3	50.7	41.3	36.2	35.1	35.3	34.6	250.5	221.0	188.3	159.0	136.1	116.0	110.3	103.7
62,5°	12.9	11.6	10.0	9.2	8.8	8.5	8.4	248.4	213.2	178.5	150.1	129.6	109.8	95.9	89.4
65,0°	2.5	2.7	2.8	3.0	3.2	3.0	2.5	241.0	197.5	163.7	135.6	113.1	98.8	83.9	79.7
67,5°	2.3	2.7	2.8	2.9	3.1	3.1	3.0	234.9	181.5	144.0	116.7	97.9	86.3	76.4	69.6
70,0°	2.7	3.2	3.3	3.2	3.0	3.0	3.7	216.0	154.5	117.1	94.0	81.0	71.7	66.1	58.6
72,5°	2.6	3.0	3.1	3.1	2.8	2.5	3.2	174.8	113.3	83.4	68.4	61.0	54.6	48.9	44.3
75,0°	2.1	2.1	2.6	2.6	2.4	2.5	2.2	93.2	65.4	52.1	43.9	39.4	35.2	31.5	29.0
77,5°	1.6	1.5	1.6	1.5	1.5	1.4	1.2	36.1	28.4	23.7	20.6	18.7	16.9	15.2	14.2
80,0°	1.0	1.0	0.9	0.9	0.9	0.8	0.7	13.2	10.9	9.5	8.5	7.6	6.8	6.3	5.7
82,5°	0.5	0.5	0.5	0.5	0.5	0.4	0.5	3.2	2.7	2.5	2.3	2.0	1.7	1.6	1.4
85,0°	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.4	0.3	0.3	0.3	0.3	0.2	0.1	0.1
87,5°	0.0	0.0	0.1	0.1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 31 midi	Order number: 5XF3E32D08MA EAN: 4058352466254	LP number 59127_8
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	202,5° 337,5°	205,0° 335,0°	207,5° 332,5°	210,0° 330,0°	212,5° 327,5°	215,0° 325,0°	217,5° 322,5°	220,0° 320,0°	222,5° 317,5°	225,0° 315,0°	227,5° 312,5°	230,0° 310,0°	232,5° 307,5°	235,0° 305,0°	237,5° 302,5°
γ	Luminous intensity in cd/klm														
0,0°	184.9	184.9	184.9	184.9	184.9	184.9	184.9	184.9	184.9	184.9	184.9	184.9	184.9	184.9	184.9
2,5°	175.7	174.7	172.0	170.3	169.7	170.8	169.8	168.5	168.9	169.1	167.3	167.9	169.2	169.8	169.0
5,0°	179.0	177.8	176.1	173.7	169.7	167.9	167.6	167.0	165.4	165.1	165.9	164.5	164.6	165.0	164.2
7,5°	171.9	170.5	167.7	166.6	164.7	163.0	162.5	162.6	162.2	160.6	162.0	160.6	158.7	157.4	157.1
10,0°	164.0	162.3	159.7	158.7	158.5	157.6	156.8	156.5	156.2	155.2	155.5	154.1	150.9	148.4	147.7
12,5°	159.9	157.4	156.5	154.9	153.6	153.1	152.5	151.0	149.2	150.7	147.9	145.8	144.9	143.3	140.9
15,0°	161.8	157.4	150.8	148.5	150.2	148.6	147.9	146.9	143.4	140.2	142.5	141.9	142.2	143.0	142.3
17,5°	156.8	151.3	143.9	143.0	139.4	140.5	139.7	138.3	138.8	137.6	138.1	138.4	138.1	137.1	135.9
20,0°	146.4	142.7	139.6	136.9	134.1	132.9	131.4	130.7	131.5	132.2	132.3	132.8	132.9	132.6	132.5
22,5°	140.1	137.0	135.9	133.8	131.2	129.2	127.7	127.1	127.5	127.3	128.2	128.8	128.6	126.7	124.6
25,0°	136.5	132.5	130.9	128.7	126.6	126.4	125.9	124.9	123.8	122.2	124.1	124.1	123.2	120.8	118.1
27,5°	134.7	129.4	124.6	119.8	118.7	120.6	122.0	120.9	118.0	116.9	119.4	117.6	116.1	115.8	116.1
30,0°	128.7	123.3	119.4	116.8	112.0	113.0	114.6	114.7	113.5	114.9	114.1	111.5	110.3	110.6	111.5
32,5°	124.9	121.6	117.5	118.4	116.1	116.4	116.3	114.1	110.7	110.0	108.7	109.0	109.3	108.7	107.4
35,0°	122.4	120.8	118.6	113.1	111.4	109.1	108.2	108.4	108.5	107.9	106.3	106.5	106.1	105.5	106.0
37,5°	119.9	117.2	112.9	110.0	107.1	104.5	104.0	105.2	106.0	103.0	101.5	103.0	102.0	100.2	100.9
40,0°	118.6	114.0	107.9	107.1	103.6	101.4	100.9	101.6	101.9	98.6	97.3	100.2	99.6	97.6	97.9
42,5°	118.0	111.8	105.9	103.5	101.1	98.7	96.3	95.4	96.6	97.6	96.4	98.6	98.7	98.4	100.0
45,0°	112.2	105.9	102.6	100.8	100.5	94.7	92.9	93.9	93.2	92.5	93.4	93.2	92.0	92.4	95.3
47,5°	109.6	102.3	98.6	98.2	96.7	92.6	91.5	91.5	89.6	88.6	89.0	90.0	90.3	90.4	90.3
50,0°	108.6	101.8	99.5	99.8	92.8	89.6	88.3	87.6	87.7	87.7	87.4	88.3	87.9	87.0	87.3
52,5°	107.3	100.6	97.6	95.0	89.2	87.2	84.8	83.4	84.2	85.9	82.9	84.2	84.9	83.7	82.1
55,0°	105.9	99.5	96.5	90.0	85.8	84.1	81.7	79.8	79.7	80.5	78.4	78.7	79.1	78.7	77.8
57,5°	103.8	98.5	95.6	87.6	82.4	80.4	78.3	76.3	74.6	73.0	75.0	73.1	71.9	73.1	75.6
60,0°	98.9	93.2	86.0	82.3	79.6	77.8	72.7	68.9	68.8	69.7	69.9	67.3	68.6	71.8	73.1
62,5°	84.4	80.0	76.3	75.0	70.9	68.8	65.1	62.7	62.9	63.8	64.2	64.5	65.0	66.0	67.2
65,0°	75.7	71.3	67.5	64.9	65.4	61.7	59.2	57.7	56.3	57.1	57.4	58.6	57.6	57.3	60.3
67,5°	65.8	62.2	58.3	55.0	54.7	52.2	50.7	50.3	50.0	49.4	48.4	50.6	51.2	51.1	52.8
70,0°	54.2	51.5	48.2	45.0	43.5	42.0	41.0	41.0	41.9	40.6	39.5	42.0	43.3	43.3	43.8
72,5°	41.2	38.9	36.8	34.6	33.0	32.3	30.7	30.3	31.6	30.5	31.2	32.6	32.9	32.5	32.9
75,0°	26.1	23.5	21.9	21.2	20.0	20.8	20.3	19.4	19.7	19.6	19.1	20.0	21.6	22.7	22.7
77,5°	13.5	12.4	10.8	10.3	10.1	10.0	10.1	10.0	10.0	10.4	10.8	10.7	11.1	11.8	12.2
80,0°	5.5	5.0	4.3	4.2	3.9	4.0	4.2	4.1	3.9	4.2	4.5	4.3	4.5	4.8	4.8
82,5°	1.3	1.3	1.3	1.0	1.1	1.1	1.1	1.0	0.9	1.0	1.1	1.2	1.2	1.3	1.4
85,0°	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.0	0.1	0.1	0.1	0.1	0.1
87,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 31 midi	Order number: 5XF3E32D08MA EAN: 4058352466254	LP number 59127_8
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	240,0° 300,0°	242,5° 297,5°	245,0° 295,0°	247,5° 292,5°	250,0° 290,0°	252,5° 287,5°	255,0° 285,0°	257,5° 282,5°	260,0° 280,0°	262,5° 277,5°	265,0° 275,0°	267,5° 272,5°	270,0°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm													Luminous flux in lm/klm	
0,0°	184.9	184.9	184.9	184.9	184.9	184.9	184.9	184.9	184.9	184.9	184.9	184.9	184.9	0.3	0.3
2,5°	169.1	169.0	169.3	169.4	169.4	169.3	168.3	169.2	169.3	169.3	169.1	168.9	170.1	2.2	2.5
5,0°	164.1	163.3	163.6	163.9	163.6	162.8	162.4	161.3	160.9	161.4	161.8	161.1	160.5	4.4	6.8
7,5°	157.0	154.5	154.5	154.3	153.8	153.6	153.0	151.9	152.0	152.3	151.4	149.2	149.1	6.6	13.4
10,0°	147.7	145.6	145.4	145.6	145.8	146.0	145.2	145.1	145.7	145.9	144.9	142.8	143.3	8.8	22.3
12,5°	140.9	141.1	141.3	141.9	142.4	142.4	141.8	142.4	143.2	144.1	144.4	144.1	144.6	11.1	33.4
15,0°	139.2	137.8	136.8	135.1	134.1	134.8	135.5	135.7	137.0	138.6	139.5	139.7	141.5	13.5	46.9
17,5°	134.9	135.6	134.4	133.5	133.3	133.4	133.9	133.4	134.0	133.4	132.3	131.6	130.6	15.9	62.8
20,0°	133.0	131.3	130.8	129.5	128.5	128.5	127.6	129.3	128.8	127.8	126.6	125.2	125.5	18.1	80.9
22,5°	126.4	125.8	124.4	124.1	124.9	125.4	123.6	124.5	123.7	123.5	125.1	127.0	126.4	20.5	101.5
25,0°	120.1	121.8	121.0	121.2	121.8	121.7	121.3	121.1	119.5	119.7	122.8	127.2	128.2	23.0	124.5
27,5°	118.0	119.4	121.0	120.6	118.5	116.9	118.5	118.8	116.3	115.2	117.5	122.3	126.0	25.4	149.9
30,0°	111.4	111.3	111.9	114.0	116.8	118.8	117.5	113.2	112.1	112.4	114.1	117.4	120.3	28.0	177.9
32,5°	107.8	111.2	113.4	114.2	113.9	113.3	113.3	113.6	116.0	116.4	113.2	108.3	106.2	30.7	208.6
35,0°	108.7	109.3	107.7	107.2	108.3	109.4	107.7	108.2	110.3	111.1	109.9	108.0	107.5	33.6	242.2
37,5°	102.8	104.4	103.7	103.6	104.9	106.1	103.5	103.8	106.2	109.7	111.0	109.1	108.8	36.7	278.9
40,0°	99.1	101.1	101.8	102.1	103.0	104.2	102.7	103.3	104.4	108.2	110.4	109.2	107.4	40.1	319.0
42,5°	100.2	100.2	99.9	100.6	102.0	103.4	104.9	105.8	104.6	104.3	105.7	107.2	104.8	43.8	362.8
45,0°	96.4	96.9	95.8	97.0	98.8	99.7	101.8	100.5	99.8	101.4	103.3	104.0	106.2	47.4	410.2
47,5°	87.1	91.1	96.3	96.0	94.0	95.3	96.7	96.7	96.3	99.0	101.1	99.8	100.2	50.6	460.8
50,0°	87.9	88.4	90.5	91.3	92.5	95.9	97.0	95.8	95.4	96.4	97.7	98.3	98.2	53.9	514.7
52,5°	82.2	83.5	86.1	90.5	93.3	93.0	93.3	94.4	93.7	92.5	92.7	95.1	98.2	56.2	570.9
55,0°	76.9	80.0	82.9	87.4	89.9	89.1	88.9	90.4	90.3	89.6	90.0	92.1	96.5	57.0	627.9
57,5°	75.6	78.7	79.0	79.3	81.4	84.8	85.2	83.9	85.8	88.1	89.6	90.3	91.4	56.1	684.0
60,0°	73.8	74.8	75.0	74.8	75.9	78.8	80.8	80.7	80.9	80.8	80.7	81.6	85.4	53.0	737.0
62,5°	67.4	69.5	69.3	70.4	72.2	73.5	74.0	76.0	77.2	78.0	77.8	77.3	80.4	50.1	787.1
65,0°	63.0	63.4	63.0	65.3	68.1	68.6	70.4	70.8	73.1	73.9	73.6	73.5	74.7	47.5	834.6
67,5°	54.8	54.8	55.3	57.5	59.7	61.4	63.1	62.9	63.5	64.7	65.5	65.5	63.5	44.8	879.4
70,0°	45.2	45.2	46.4	47.8	49.5	51.5	52.8	53.2	52.7	53.9	55.5	55.2	53.0	40.5	919.9
72,5°	35.0	35.2	35.6	37.3	38.8	39.1	40.3	41.9	43.4	44.2	44.1	43.5	44.5	33.7	953.6
75,0°	22.4	22.8	24.4	24.5	24.9	27.1	27.9	28.2	29.1	29.4	29.0	28.7	29.5	23.9	977.5
77,5°	12.4	12.7	13.1	13.8	14.9	15.9	16.4	16.2	16.3	16.7	17.3	17.7	17.0	13.4	990.9
80,0°	4.9	5.4	5.5	5.9	6.2	6.4	6.5	6.7	6.8	7.1	7.5	7.6	7.1	6.0	996.9
82,5°	1.5	1.7	1.8	1.9	2.0	2.0	2.0	2.2	2.3	2.4	2.5	2.5	2.3	2.3	999.2
85,0°	0.1	0.1	0.1	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.7	999.8
87,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.2	1000.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family Streetlight 31 midi	Order number: 5XF3E32D08MA EAN: 4058352466254	LP number 59127_8
--------------------------------------	--	-----------------------------

Dimming levels table	environmental temperature: 25°C	sITeco
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Luminous flux [lm]	Power consumption [W]
100	254	16800	120.0
95	241	15940	114.0
90	229	15146	108.3
85	216	14304	101.8
80	203	13463	95.4
75	190	12593	89.2
70	178	11789	83.4
65	164	10913	77.1
60	151	10096	71.2
55	138	9244	65.4
50	125	8392	59.6
45	112	7540	54.0
40	99	6689	48.3
35	87	5911	43.4
30	74	5057	37.8
25	62	4217	32.7
20	50	3382	27.4
15	37	2545	22.6