

Photometric test report

Family
Monsun® 12

Order number: 51FE107P680R
EAN: 4058352539477

LP number
58939_85

serial
documentation
21.10.2021

siteco




Version prismatic diffuser, opal, PMMA, wide distribution
Lamps LED 6500 K | CRI ≥ 80
Controlgear ECG
Rated values Net luminous flux = 7900 lm
Power consumption = 43.2 W
Luminous efficacy = 182.9 lm/W

Luminous intensity in cd/klm

C180-0

C270-90

Imax: 340 cd/klm

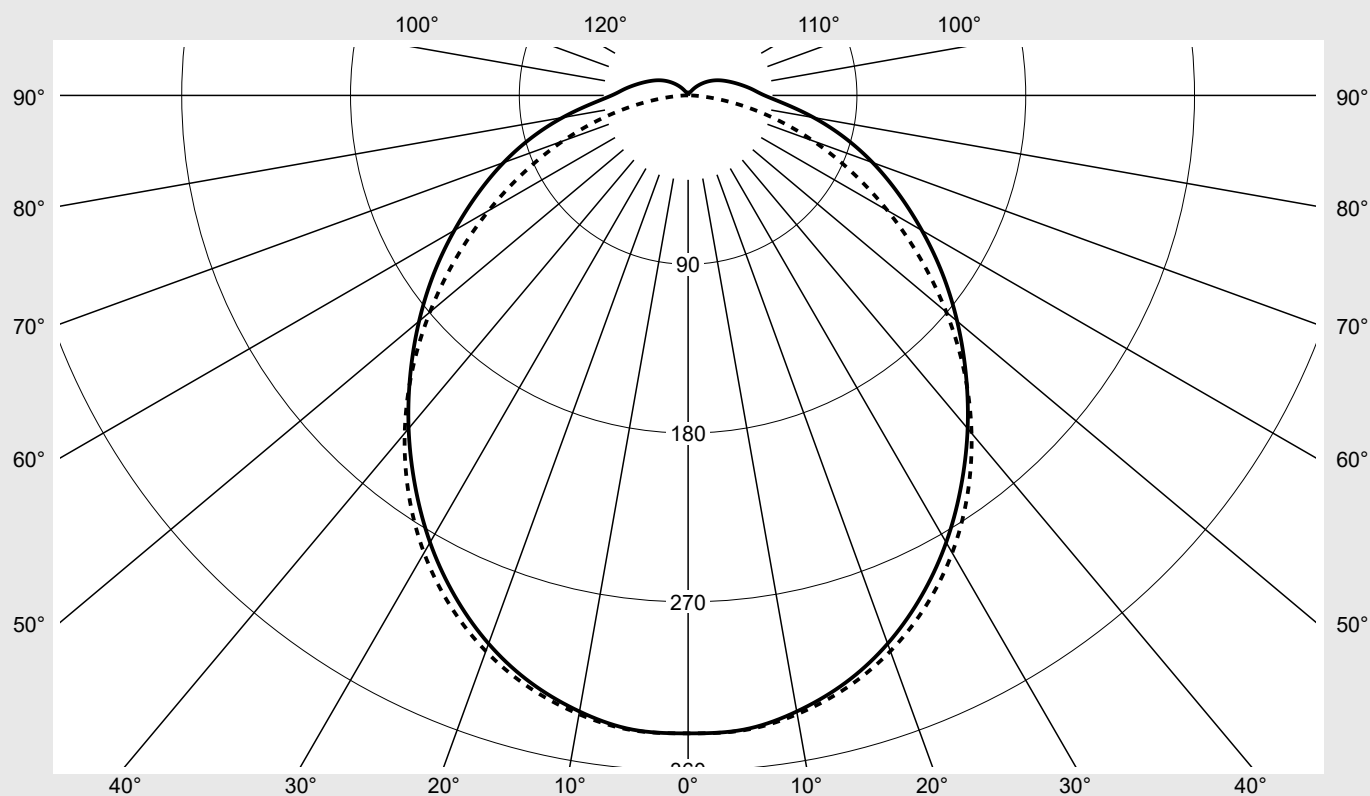

Classifications

DIN 5040 A 4 1
CIE N1=47 N2=77 N3=93
N4=94 N5=100

Luminaire light output ratios

η_{LB} 100.0%
 ϕ_u 94.2%
 ϕ_o 5.8%

Measurement conditions

DIN EN 13032 and DIN 5032

Photometric test report

Family Monsun® 12	Order number: 51FE107P680R EAN: 4058352539477	LP number 58939_85
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C- planes	0° 180°	15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°	90° 270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm							Luminous flux in lm/klm	
0°	340.1	340.1	340.1	340.1	340.1	340.1	340.1	2.0	2.0
5°	339.4	338.3	336.5	337.9	339.5	339.4	339.8	16.2	18.2
10°	333.5	333.0	331.2	332.8	334.6	334.7	335.0	31.7	49.9
15°	324.2	324.2	322.5	324.2	326.1	326.4	326.9	46.1	96.0
20°	311.0	311.6	310.1	311.9	314.1	314.7	315.3	58.6	154.6
25°	294.4	295.4	294.1	296.0	298.4	299.4	300.2	68.7	223.4
30°	275.2	276.6	275.1	276.8	279.4	280.7	281.6	76.1	299.5
35°	253.9	255.2	253.8	254.9	257.1	258.4	259.7	80.5	380.0
40°	231.8	232.9	231.3	231.1	232.5	233.8	235.1	81.9	461.9
45°	209.4	209.9	207.8	205.9	206.1	206.6	208.2	80.4	542.4
50°	187.2	187.1	184.8	181.3	179.3	178.3	179.7	76.6	619.0
55°	165.5	164.8	162.1	157.0	153.1	150.2	150.9	70.7	689.7
60°	143.9	142.9	139.5	133.7	127.9	123.2	122.7	63.3	753.0
65°	123.6	122.5	117.8	111.0	104.2	97.9	96.0	54.9	808.0
70°	104.7	103.3	97.1	89.4	81.7	74.3	71.0	45.8	853.8
75°	86.1	84.4	77.8	69.2	60.2	52.2	47.8	36.3	890.0
80°	68.0	66.1	60.2	50.5	40.7	32.1	26.9	26.7	916.7
85°	51.8	50.0	44.6	35.3	24.7	15.7	10.1	18.3	935.0
90°	40.8	39.2	34.4	26.0	15.9	6.9	1.8	13.1	948.2
95°	34.8	33.5	29.7	22.7	13.6	5.1	1.6	11.2	959.3
100°	29.9	28.8	25.4	19.2	11.3	3.7	1.4	9.4	968.7
105°	25.7	24.7	21.4	16.1	8.8	2.4	1.2	7.7	976.4
110°	22.1	20.9	18.0	13.0	6.6	1.4	1.1	6.1	982.5
115°	19.0	17.8	15.0	10.4	4.7	1.2	1.1	4.9	987.4
120°	16.0	14.8	12.2	7.9	3.1	1.2	1.0	3.8	991.2
125°	13.0	11.9	9.4	5.6	1.7	1.1	0.9	2.7	993.9
130°	10.1	9.1	6.9	3.7	1.4	1.1	1.0	1.9	995.9
135°	7.3	6.5	4.6	2.1	1.4	1.1	1.1	1.3	997.1
140°	4.8	4.1	2.7	1.7	1.4	1.1	1.1	0.8	998.0
145°	2.6	2.3	1.9	1.7	1.4	1.2	1.2	0.5	998.5
150°	2.0	2.0	1.9	1.6	1.3	1.3	1.3	0.4	998.9
155°	1.9	1.9	1.7	1.6	1.4	1.4	1.4	0.4	999.3
160°	1.7	1.7	1.6	1.4	1.4	1.4	1.4	0.3	999.6
165°	1.4	1.4	1.4	1.4	1.4	1.4	1.4	0.2	999.8
170°	1.3	1.4	1.4	1.4	1.4	1.4	1.4	0.1	999.9
175°	1.4	1.4	1.4	1.4	1.4	1.4	1.4	0.1	1000.0
180°	1.4	1.4	1.4	1.4	1.4	1.4	1.4	0.0	1000.0

Photometric test report

Family Monsun® 12			Order number: 51FE107P680R EAN: 4058352539477							LP number 58939_85	
UGR-Table			Standard room							siteco	
Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions		View crosswise (C0)					View endwise (C90)				
x	y										
2H	2H	21.0	22.7	21.4	23.0	23.3	21.0	22.7	21.3	23.0	23.3
	3H	22.7	24.3	23.1	24.6	25.0	22.4	23.9	22.7	24.2	24.6
	4H	23.6	25.0	24.0	25.4	25.7	22.9	24.3	23.3	24.7	25.1
	6H	24.3	25.7	24.7	26.0	26.4	23.2	24.6	23.7	25.0	25.4
	8H	24.7	25.9	25.1	26.3	26.7	23.4	24.7	23.8	25.0	25.4
	12H	25.0	26.2	25.4	26.6	27.0	23.4	24.6	23.9	25.0	25.5
4H	2H	21.7	23.2	22.1	23.5	23.9	21.7	23.1	22.1	23.5	23.9
	3H	23.6	24.9	24.1	25.3	25.7	23.3	24.5	23.7	24.9	25.3
	4H	24.6	25.7	25.0	26.1	26.6	23.9	25.0	24.3	25.4	25.9
	6H	25.5	26.5	26.0	26.9	27.4	24.4	25.4	24.8	25.8	26.3
	8H	25.9	26.8	26.4	27.3	27.8	24.5	25.4	25.0	25.9	26.4
	12H	26.3	27.2	26.8	27.6	28.1	24.6	25.5	25.1	25.9	26.4
8H	4H	24.9	25.8	25.4	26.3	26.7	24.3	25.2	24.8	25.7	26.1
	6H	26.0	26.8	26.5	27.2	27.7	24.9	25.7	25.4	26.2	26.7
	8H	26.5	27.2	27.0	27.7	28.2	25.1	25.8	25.6	26.3	26.8
	12H	27.1	27.7	27.6	28.2	28.7	25.3	25.9	25.8	26.4	26.9
12H	4H	25.0	25.8	25.4	26.2	26.7	24.4	25.2	24.9	25.7	26.2
	6H	26.1	26.8	26.6	27.2	27.8	25.1	25.8	25.6	26.2	26.7
	8H	26.7	27.3	27.2	27.8	28.3	25.4	25.9	25.9	26.4	27.0

Luminance table		Max. for $\gamma \geq 65^\circ$		Photometric dimensions in mm:		L = 1590 B = 87	H(C0) = 21 H(C90) = 21	H(C180) = 21 H(C270) = 21
C-planes	γ	0° 180°	15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°	90° 270°
			Luminance in cd/m²					
45° 50° 55° 60°		13621.9	13706.3	13806.6	14095.3	14703.6	15518.0	16594.5
		12919.4	12967.3	13064.3	13263.6	13765.2	14538.5	15718.1
		12250.8	12265.0	12340.1	12437.4	12825.1	13500.9	14743.9
		11589.9	11580.1	11600.3	11637.1	11892.6	12450.7	13704.6
65° 70° 75° 80°		11008.9	10982.4	10889.5	10820.4	10972.3	11392.3	12616.0
		10510.0	10450.6	10179.4	9987.2	10004.9	10277.6	11446.6
		9989.9	9895.6	9515.9	9129.9	8903.5	8995.3	10056.3
		9438.6	9281.9	8901.5	8215.3	7643.1	7388.8	8223.7
85°		9036.4	8845.1	8431.5	7571.1	6435.6	5514.4	5743.3

Photometric test report

Family Monsun® 12	Order number: 51FE107P680R EAN: 4058352539477	LP number 58939_85
Luminance values in cd/m²		siteco

