

Photometric test report

Family
Monsun® 21

Order number: **51FG20DP440BHD**
EAN: **4058352520390**

LP number
59060_71



Version prismatic diffuser, opal, polycarbonate, wide distribution
Lamps LED 4000 K | CRI ≥ 80
Controlgear ECG-DALI
Rated values Net luminous flux = 4810 lm
Power consumption = 37.4 W
Luminous efficacy = 128.6 lm/W

serial
documentation
01.07.2021


sitEco

Luminous intensity in cd/klm

C180-0

C270-90

Imax: **319 cd/klm**

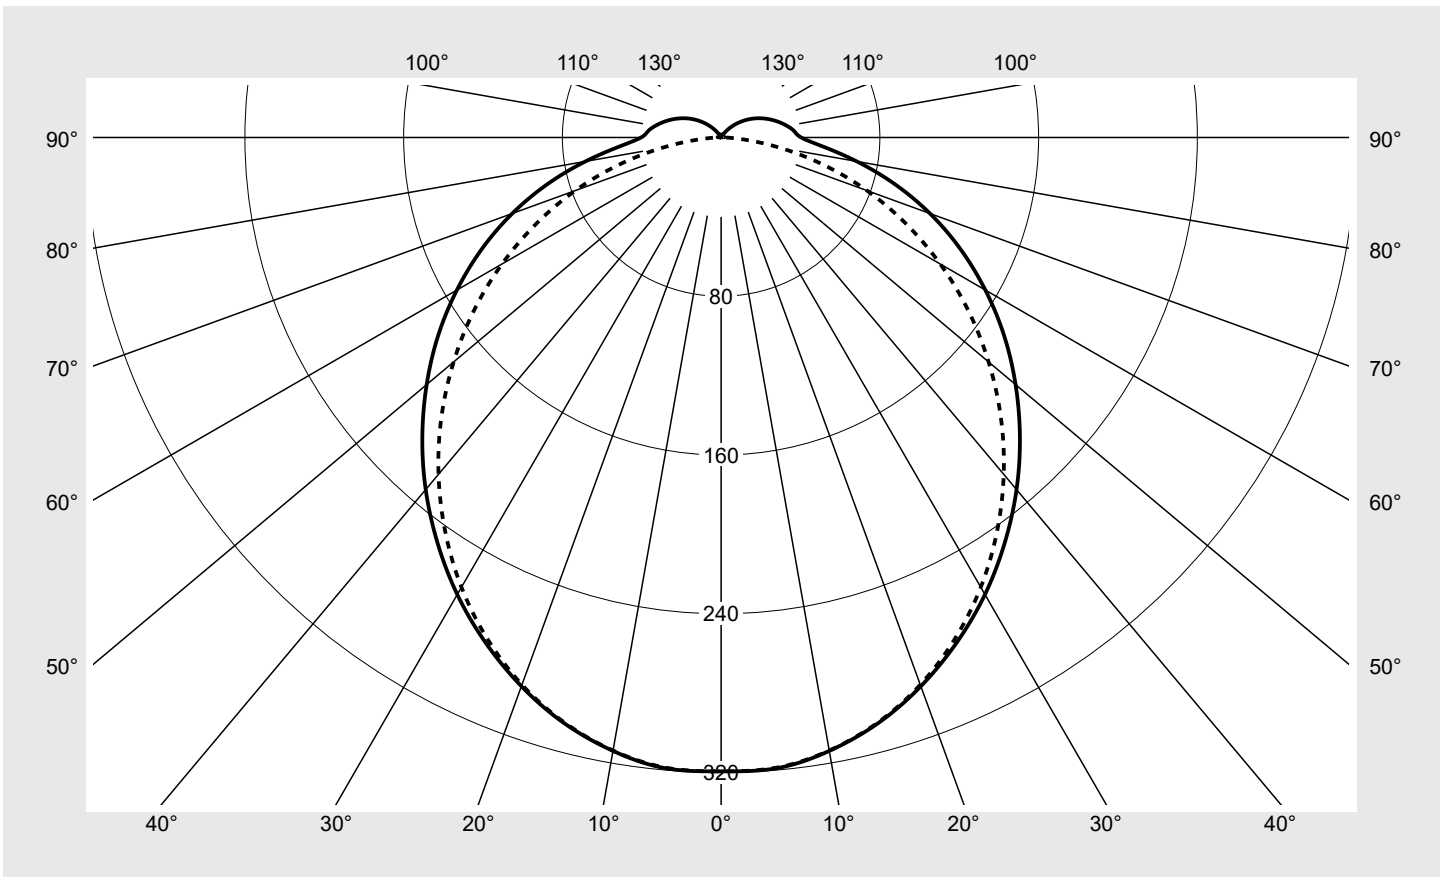

Classifications

DIN 5040 A 4 1
CIE N1=45 N2=75 N3=93
N4=94 N5=100

Luminaire light output ratios

η_{LB} 100.0%
 ϕ_u 93.7%
 ϕ_o 6.3%

Measurement conditions

DIN EN 13032 and DIN 5032

Photometric test report

Family Monsun® 21	Order number: 51FG20DP440BHD EAN: 4058352520390	LP number 59060_71
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes γ	0° 180°	15°	30°	45°	60°	75°	90° 270°	Phi-zone	Total Phi-zone
		165° 195° 345°	150° 210° 330°	135° 225° 315°	120° 240° 300°	105° 255° 285°			
Luminous intensity in cd/klm							Luminous flux in lm/klm		
0°	319.4	319.4	319.4	319.4	319.4	319.4	319.4	1.9	1.9
5°	319.1	317.8	316.0	317.2	318.6	318.6	318.8	15.2	17.1
10°	313.9	312.8	311.0	312.1	313.5	313.5	313.7	29.8	46.9
15°	305.6	304.7	302.7	303.7	305.0	304.9	305.2	43.2	90.1
20°	294.3	293.5	291.4	292.2	293.3	293.1	293.5	54.9	145.0
25°	280.9	280.2	277.7	277.9	278.8	278.5	278.8	64.6	209.6
30°	265.9	265.3	262.4	261.6	261.9	261.4	261.7	72.0	281.6
35°	249.2	248.5	245.6	243.7	242.9	242.2	242.4	77.0	358.5
40°	231.6	230.8	227.5	224.6	222.7	221.4	221.6	79.5	438.0
45°	212.9	211.8	208.5	204.2	201.3	199.0	199.4	79.5	517.5
50°	193.7	192.3	188.8	183.7	179.4	175.9	176.0	77.3	594.9
55°	174.1	172.4	168.8	162.7	157.2	152.3	152.1	73.1	667.9
60°	153.8	152.1	148.1	141.4	134.9	128.8	127.5	66.9	734.9
65°	133.1	131.4	127.0	119.9	112.8	105.5	102.8	59.2	794.0
70°	112.0	110.4	105.0	98.0	90.2	82.2	78.2	49.9	843.9
75°	90.5	88.8	83.0	75.7	67.3	58.8	53.6	39.3	883.2
80°	69.4	67.4	62.0	54.0	45.3	36.4	30.4	28.3	911.6
85°	51.2	49.1	43.8	35.9	26.7	17.7	11.3	18.6	930.2
90°	40.3	38.3	33.0	25.3	16.4	7.5	1.9	12.9	943.1
95°	36.9	35.1	30.2	22.8	14.1	5.6	1.6	11.6	954.7
100°	33.7	31.9	27.1	20.1	11.9	4.0	1.5	10.1	964.8
105°	30.1	28.5	23.8	17.3	9.5	2.6	1.3	8.6	973.4
110°	26.5	24.6	20.5	14.4	7.3	1.5	1.2	7.1	980.4
115°	22.8	21.1	17.3	11.6	5.2	1.3	1.2	5.7	986.1
120°	19.1	17.5	14.1	8.9	3.4	1.3	1.1	4.4	990.5
125°	15.4	13.9	10.8	6.2	1.7	1.2	1.0	3.2	993.6
130°	11.8	10.5	7.7	3.9	1.4	1.2	1.0	2.2	995.8
135°	8.3	7.2	5.0	2.0	1.4	1.2	1.1	1.4	997.2
140°	5.1	4.3	2.5	1.6	1.3	1.1	1.0	0.8	998.0
145°	2.4	2.0	1.8	1.6	1.4	1.2	1.2	0.5	998.5
150°	1.9	1.9	1.8	1.5	1.4	1.3	1.2	0.4	999.0
155°	1.8	1.8	1.6	1.5	1.4	1.3	1.3	0.4	999.3
160°	1.6	1.6	1.5	1.5	1.4	1.4	1.3	0.3	999.6
165°	1.5	1.5	1.4	1.4	1.4	1.4	1.3	0.2	999.8
170°	1.4	1.4	1.4	1.4	1.4	1.4	1.3	0.1	999.9
175°	1.3	1.3	1.3	1.4	1.4	1.4	1.3	0.1	1000.0
180°	1.3	1.3	1.3	1.3	1.3	1.3	1.3	0.0	1000.0

Photometric test report

Family Monsun® 21	Order number: 51FG20DP440BHD EAN: 4058352520390	LP number 59060_71
-----------------------------	--	------------------------------

UGR-Table	Standard room	siteco
------------------	----------------------	---------------

Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions	View crosswise (C0)					View endwise (C90)					
x	y										
2H	2H	19.6	21.3	19.9	21.6	21.9	19.4	21.1	19.7	21.4	21.7
	3H	21.4	22.9	21.8	23.3	23.6	20.9	22.5	21.3	22.8	23.2
	4H	22.2	23.7	22.6	24.0	24.4	21.5	23.0	21.9	23.4	23.7
	6H	22.9	24.3	23.3	24.7	25.0	22.0	23.3	22.4	23.7	24.1
	8H	23.3	24.5	23.7	24.9	25.3	22.1	23.4	22.5	23.8	24.2
	12H	23.5	24.8	24.0	25.1	25.6	22.2	23.4	22.6	23.8	24.2
4H	2H	20.3	21.8	20.7	22.1	22.5	20.2	21.6	20.5	22.0	22.3
	3H	22.3	23.6	22.7	24.0	24.4	21.9	23.2	22.3	23.6	24.0
	4H	23.3	24.4	23.7	24.8	25.3	22.6	23.8	23.1	24.2	24.6
	6H	24.1	25.1	24.6	25.6	26.0	23.2	24.2	23.6	24.6	25.1
	8H	24.5	25.5	25.0	25.9	26.4	23.3	24.3	23.8	24.7	25.2
	12H	24.9	25.7	25.4	26.2	26.7	23.4	24.3	23.9	24.8	25.2
8H	4H	23.6	24.5	24.1	25.0	25.5	23.1	24.0	23.5	24.4	24.9
	6H	24.6	25.4	25.1	25.9	26.4	23.7	24.5	24.2	25.0	25.5
	8H	25.1	25.8	25.6	26.3	26.8	24.0	24.7	24.5	25.2	25.7
	12H	25.6	26.2	26.1	26.7	27.3	24.2	24.8	24.7	25.3	25.8
12H	4H	23.7	24.5	24.1	25.0	25.4	23.2	24.0	23.6	24.4	24.9
	6H	24.7	25.4	25.2	25.9	26.4	23.9	24.6	24.4	25.1	25.6
	8H	25.3	25.9	25.8	26.4	26.9	24.2	24.8	24.7	25.3	25.8

Luminance table	Max. for $\gamma \geq 65^\circ$	Photometric dimensions in mm:	L = 1590	H(C0) = 21	H(C180) = 21
			B = 87	H(C90) = 21	H(C270) = 21

C-planes	γ	Luminance in cd/m ²							
		0° 180°	15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°	90° 270°	
45°		8435.6	8423.9	8433.4	8510.9	8741.6	9100.6	9675.7	
50°		8138.0	8114.2	8127.0	8183.1	8385.0	8731.2	9371.6	
55°		7849.1	7810.6	7822.3	7845.7	8017.0	8337.0	9048.9	
60°		7540.3	7502.2	7499.1	7498.2	7635.6	7923.5	8669.1	
65°		7215.5	7175.1	7142.2	7119.7	7230.0	7470.9	8221.2	
70°		6846.1	6801.4	6706.4	6665.2	6726.7	6921.7	7669.4	
75°		6394.8	6337.8	6180.2	6084.3	6055.9	6169.2	6867.9	
80°		5868.4	5764.9	5587.2	5346.3	5182.0	5110.0	5672.0	
85°		5438.9	5293.4	5044.1	4680.0	4237.0	3786.7	3923.2	


Photometric test report

Family Monsun® 21	Order number: 51FG20DP440BHD EAN: 4058352520390	LP number 59060_71
------------------------------------	--	-------------------------------------

Luminance values in cd/m²

γ 65°
 γ 70°
 γ 75°
 γ 80°
 γ 85°

siteco

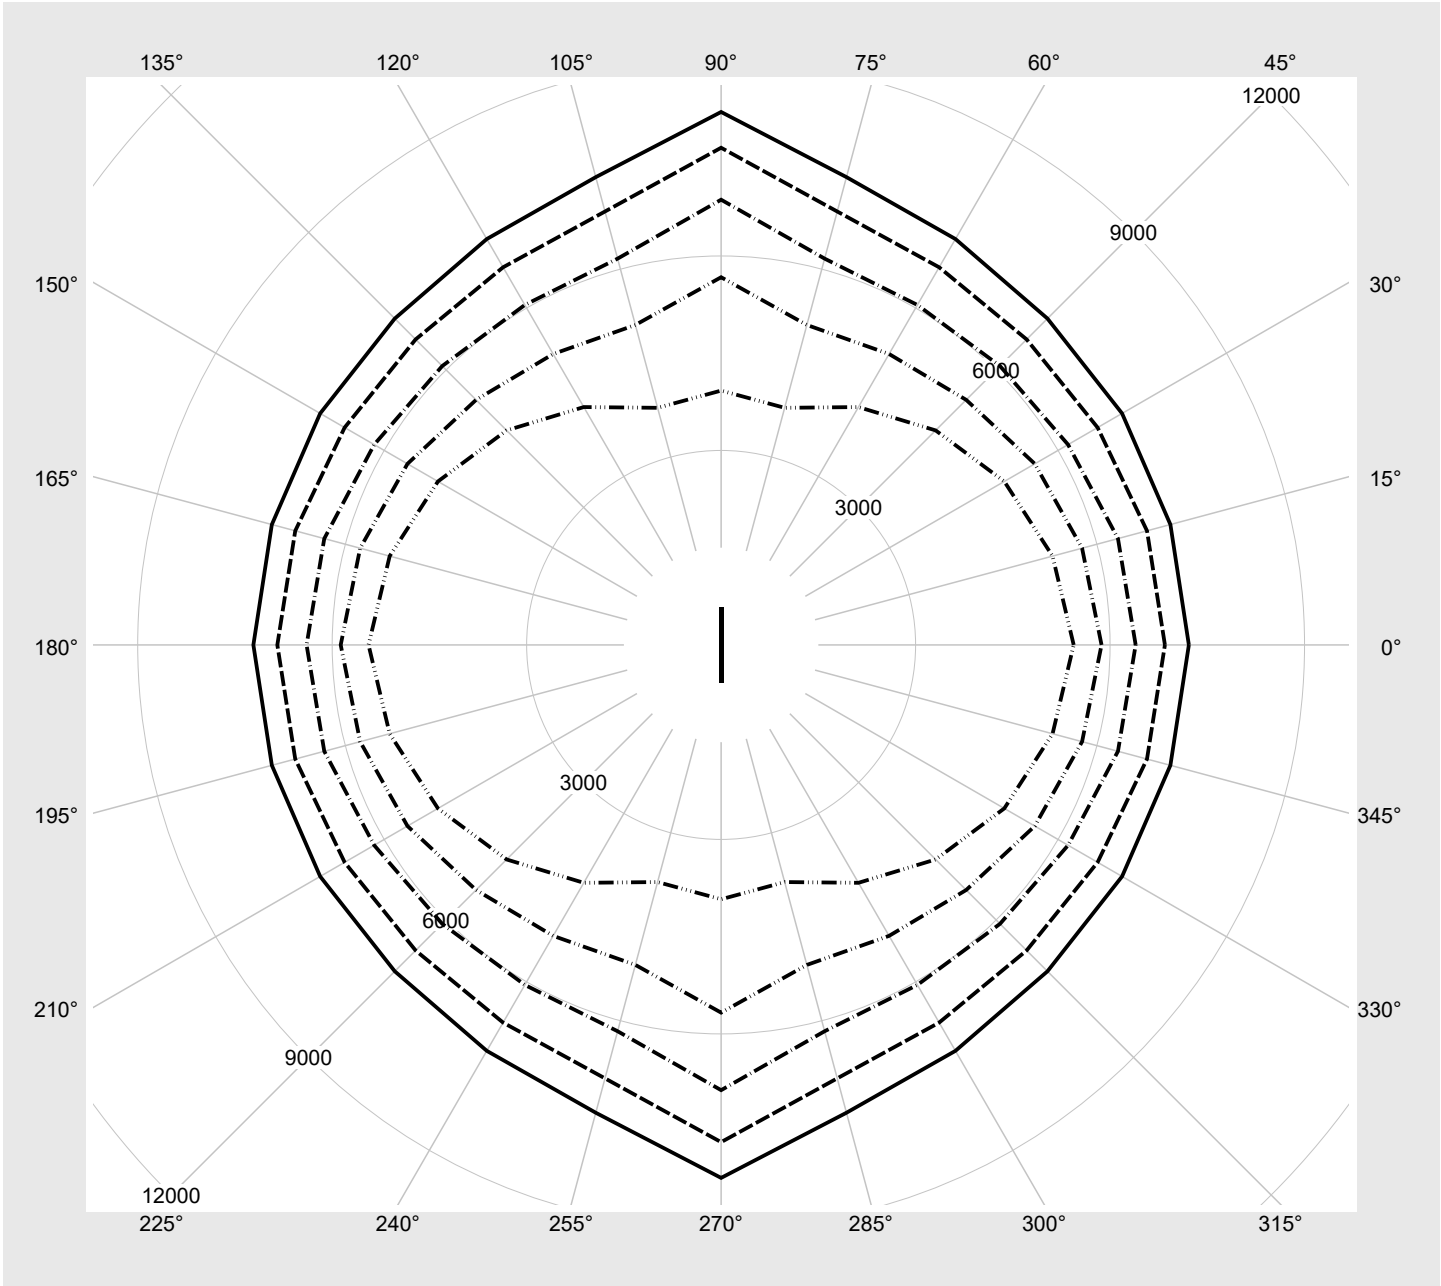

Photometric test report

Family Monsun® 21	Order number: 51FG20DP440BHD EAN: 4058352520390	LP number 59060_71
-----------------------------	--	------------------------------

Dimming levels table	environmental temperature: 25°C	sITeco
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]
100	254	254	4810	37.4
95	240	252	4561	35.6
90	227	250	4326	33.7
85	214	248	4090	32.1
80	201	245	3852	30.3
75	188	243	3613	28.7
70	175	240	3372	27.0
65	162	238	3130	25.2
60	149	234	2886	23.6
55	136	231	2640	22.0
50	124	228	2411	20.5
45	111	224	2162	18.8
40	99	219	1932	17.3
35	86	214	1680	15.7
30	74	209	1448	14.1
25	61	202	1194	12.4
20	49	194	957	11.0
15	37	183	719	9.6
10	25	169	480	8.1
5	13	145	240	6.8
3	8	127	139	6.2