

Photometric test report

Family
Ecopack® 31

Order number: 51LJ12MNM70A3G
EAN: 4058352671115

LP number
59349_9



Version diffuser optic, frosted, polycarbonate,
adjustable color temperature: 3000K | 4000K |
5000K, extremely wide distribution, emergency
light element 3h operating duration

Lamps LED 4000 K | CRI ≥ 80

Controlgear ECG Multilumen

Setting factory setting: colour temperature 4000K


Rated values Net luminous flux = 7000 lm
Power consumption = 51.5 W
Luminous efficacy = 135.9 lm/W

serial
documentation
19.08.2022

siteco

Luminous intensity in cd/klm **C180-0** **C270-90**

Imax: 250 cd/klm

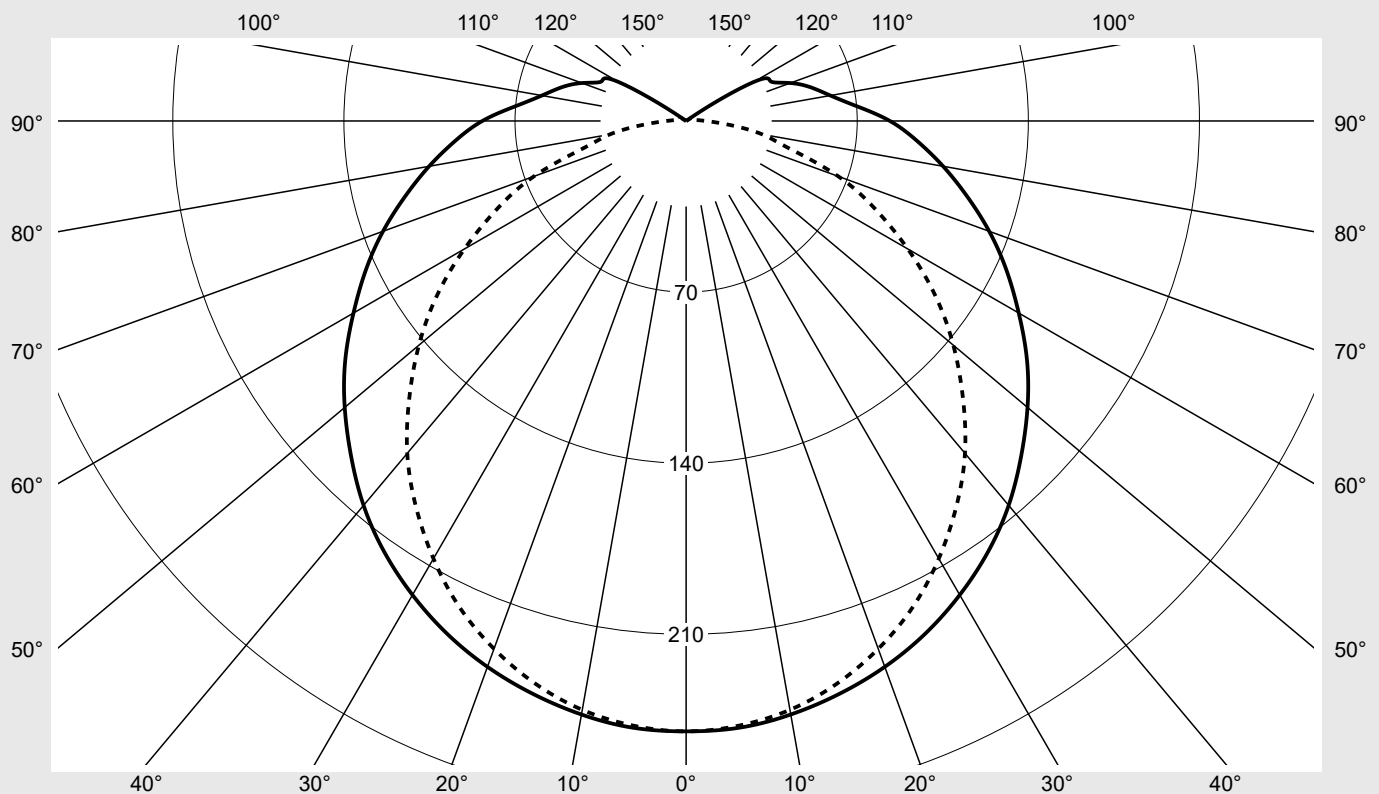

Classifications

DIN 5040 B 3 1
CIE N1=39 N2=67 N3=87
N4=89 N5=100

Luminaire light output ratios

η_{LB} 100.0%
 ϕ_u 89.0%
 ϕ_o 11.0%

Measurement conditions

DIN EN 13032 and DIN 5032

Photometric test report

Family Ecopack® 31	Order number: 51LJ12MNM70A3G EAN: 4058352671115	LP number 59349_9
Table of values for luminous intensities		Maximum luminous intensity
		sITeco

C-planes γ	0° 180°	15°	30°	45°	60°	75°	90° 270°	Phi-zone	Total Phi-zone
		165° 195° 345°	150° 210° 330°	135° 225° 315°	120° 240° 300°	105° 255° 285°			
Luminous intensity in cd/klm								Luminous flux in lm/klm	
0°	249.7	249.7	249.7	249.7	249.7	249.7	249.7	1.5	1.5
5°	249.2	249.0	248.9	248.9	248.9	248.6	248.3	11.9	13.4
10°	246.5	246.5	246.5	246.0	245.5	245.0	244.6	23.4	36.8
15°	242.6	242.6	242.6	241.2	239.9	239.1	238.3	34.2	71.0
20°	237.6	237.4	237.2	235.0	232.8	231.3	229.8	44.0	114.9
25°	231.4	231.0	230.5	227.1	223.8	221.6	219.4	52.5	167.4
30°	223.9	223.0	222.0	217.4	212.7	209.7	206.7	59.4	226.8
35°	215.3	214.0	212.6	206.8	200.9	196.8	192.7	64.7	291.5
40°	205.3	203.7	202.1	195.0	187.8	182.7	177.5	68.3	359.8
45°	193.8	191.9	190.0	181.6	173.2	166.7	160.1	69.8	429.6
50°	182.3	179.9	177.4	167.8	158.2	150.4	142.7	69.7	499.3
55°	170.2	167.4	164.5	153.6	142.7	133.5	124.4	68.0	567.3
60°	157.1	154.0	150.8	138.5	126.1	115.4	104.7	64.5	631.9
65°	144.6	141.2	137.8	124.2	110.6	98.0	85.5	60.2	692.1
70°	131.9	128.3	124.7	110.2	95.8	81.0	66.3	54.9	746.9
75°	119.0	115.0	111.1	96.0	80.9	62.5	44.0	48.3	795.2
80°	106.8	102.9	99.0	83.5	67.9	49.8	31.7	42.5	837.7
85°	95.0	91.2	87.4	74.0	60.5	39.0	17.4	37.1	874.8
90°	83.4	79.7	76.0	61.4	46.8	27.4	8.1	30.8	905.6
95°	69.9	64.9	59.9	48.7	37.5	20.9	4.4	24.5	930.1
100°	59.9	54.9	50.0	38.0	26.1	14.5	2.9	19.3	949.4
105°	53.0	49.1	45.3	33.5	21.6	12.2	2.8	16.7	966.2
110°	45.4	42.3	39.1	28.4	17.7	10.2	2.7	13.9	980.1
115°	38.2	35.7	33.2	23.7	14.2	8.4	2.5	11.2	991.3
120°	31.9	29.5	27.1	19.0	10.8	6.7	2.5	8.7	1000.0
125°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
130°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
135°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
140°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
145°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
150°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
155°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
160°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
165°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
170°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
175°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
180°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family Ecopack® 31	Order number: 51LJ12MNM70A3G EAN: 4058352671115	LP number 59349_9
------------------------------	--	-----------------------------

UGR-Table	Standard room	siteco
------------------	----------------------	---------------

Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions	View crosswise (C0)					View endwise (C90)					
x	y										
2H	2H	21.6	23.3	22.0	23.7	24.1	21.1	22.8	21.6	23.2	23.7
	3H	23.6	25.2	24.1	25.6	26.1	22.8	24.4	23.3	24.8	25.3
	4H	24.6	26.1	25.1	26.5	27.0	23.4	24.9	23.9	25.4	25.8
	6H	25.6	26.9	26.1	27.4	27.9	24.0	25.4	24.5	25.8	26.3
	8H	26.1	27.4	26.6	27.9	28.4	24.2	25.5	24.7	26.0	26.5
	12H	26.6	27.7	27.1	28.3	28.8	24.4	25.6	24.9	26.1	26.7
4H	2H	22.3	23.8	22.8	24.2	24.7	22.0	23.4	22.4	23.8	24.3
	3H	24.6	25.8	25.1	26.3	26.9	23.8	25.1	24.3	25.6	26.1
	4H	25.8	26.9	26.3	27.4	28.0	24.7	25.8	25.2	26.3	26.9
	6H	26.9	27.9	27.4	28.4	29.0	25.4	26.4	25.9	26.9	27.5
	8H	27.5	28.4	28.0	29.0	29.6	25.7	26.7	26.3	27.2	27.8
	12H	28.0	28.8	28.6	29.4	30.1	25.9	26.8	26.5	27.4	28.0
8H	4H	26.2	27.1	26.7	27.7	28.3	25.2	26.1	25.8	26.7	27.3
	6H	27.6	28.4	28.1	28.9	29.6	26.2	27.0	26.8	27.6	28.2
	8H	28.3	29.0	28.9	29.6	30.2	26.7	27.4	27.3	28.0	28.7
	12H	28.9	29.6	29.6	30.2	30.9	27.1	27.7	27.7	28.3	29.0
12H	4H	26.2	27.0	26.8	27.6	28.3	25.3	26.1	25.9	26.7	27.4
	6H	27.6	28.3	28.3	29.0	29.6	26.4	27.1	27.0	27.7	28.4
	8H	28.4	29.1	29.1	29.7	30.4	27.0	27.6	27.6	28.2	28.9

Luminance table	Max. for $\gamma \geq 65^\circ$	Photometric dimensions in mm:	L = 1443	H(C0) = 29	H(C180) = 29
			B = 56	H(C90) = 0	H(C270) = 0

C-planes	γ	Luminance in cd/m ²							
		0° 180°	15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°	90° 270°	
45°		15645.5	15671.3	16067.1	16283.6	16855.5	18005.5	19617.6	
50°		15193.5	15185.1	15578.3	15742.2	16292.1	17482.6	19230.7	
55°		14777.3	14742.8	15143.7	15231.5	15733.2	16928.2	18785.9	
60°		14351.0	14293.8	14707.6	14681.0	15086.5	16230.0	18143.3	
65°		14046.7	13963.0	14393.4	14259.2	14580.4	15610.3	17517.8	
70°		13793.3	13687.4	14146.7	13915.7	14172.1	14997.9	16787.6	
75°		13576.8	13430.6	13909.3	13581.3	13778.5	13932.7	14710.5	
80°		13527.4	13376.4	13938.4	13531.8	13724.0	14117.9	15822.2	
85°		13643.1	13491.6	14178.6	14176.1	15193.4	15291.1	17273.2	


Photometric test report

Family
Ecopack® 31

Order number: 51LJ12MNM70A3G
EAN: 4058352671115

LP number
59349_9

Luminance values in cd/m² γ 65° γ 70° γ 75° γ 80° γ 85° **siteco**

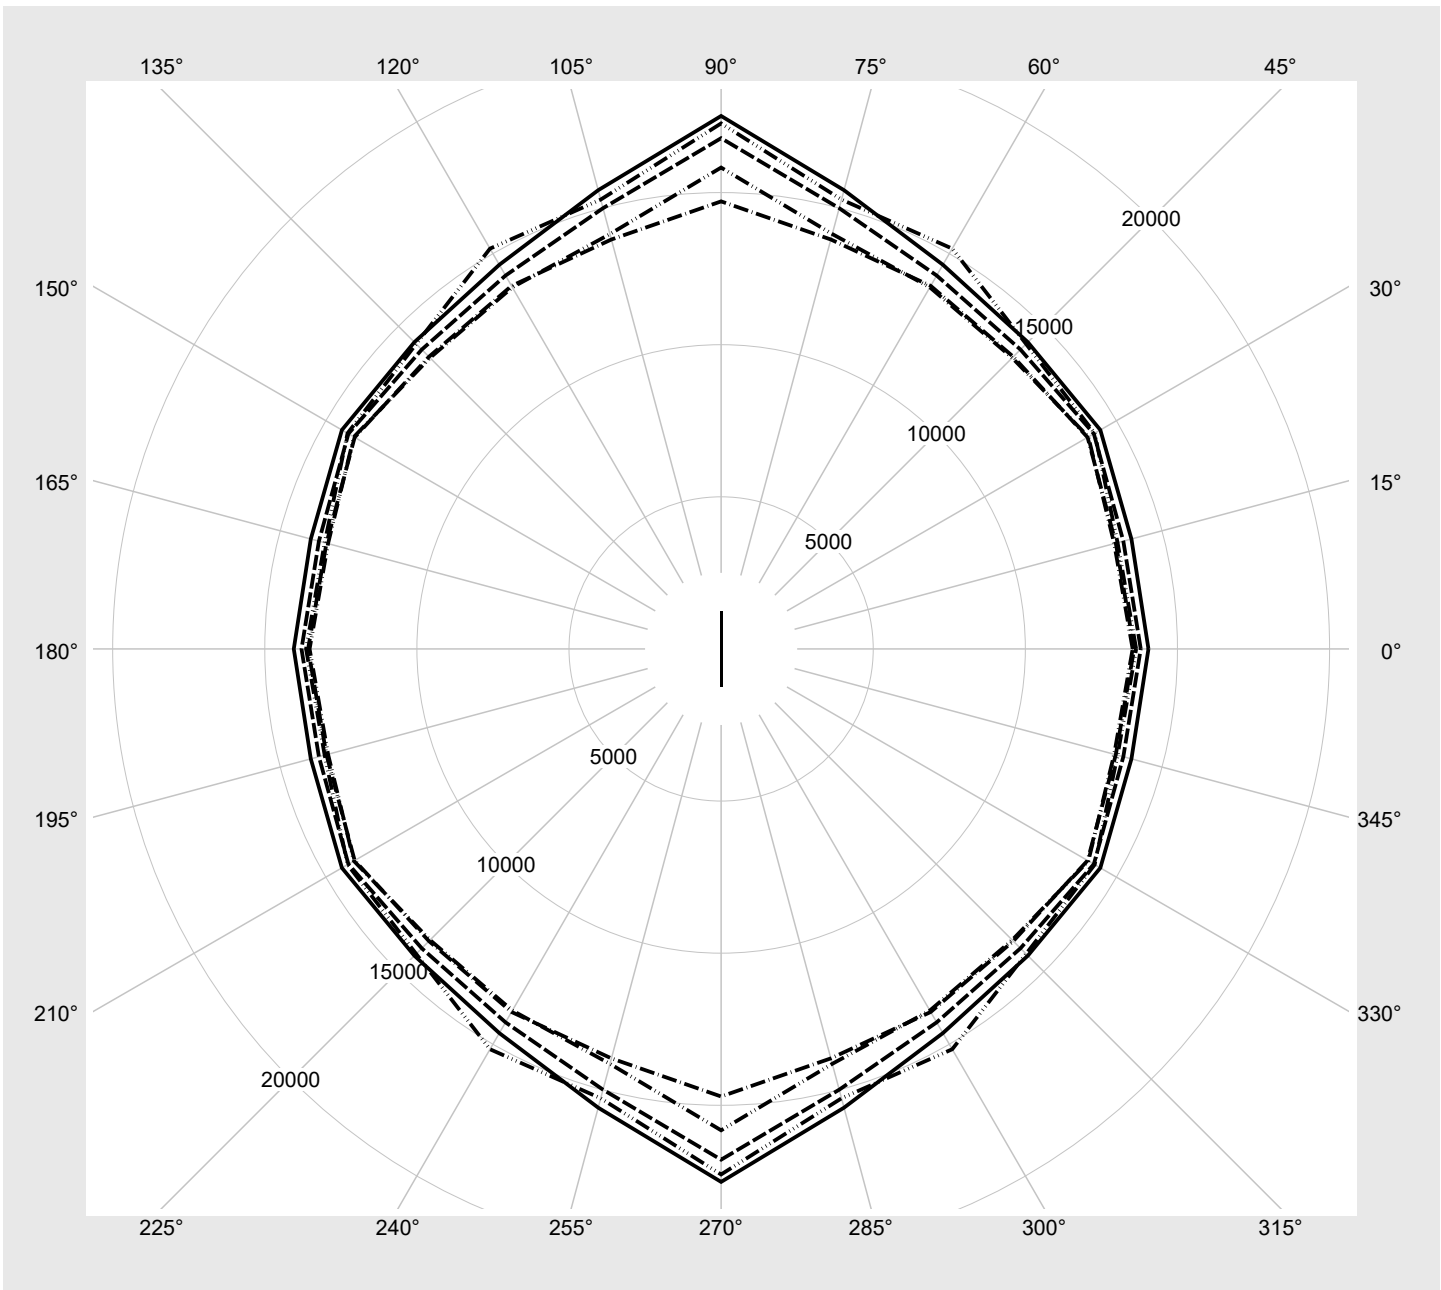

Photometric test report

Family Ecopack® 31	Order number: 51LJ12MNM70A3G EAN: 4058352671115	LP number 59349_9
------------------------------	--	------------------------------------

Multilumen Table	environmental temperature: 25°C	sITeco
-------------------------	---------------------------------	---------------

DIP-Step	Switch Setting		Luminous flux [lm]	Power consumption [W]
	1	2		
3	ON	ON	7000	51.5
2	ON	OFF	6020	43.5
1	OFF	ON	5070	35.5
0	OFF	OFF	4110	28.5