

Photometric test report

Family
Ecopack® 31

Order number: 51LJ12MNM70A3G
EAN: 4058352671115

LP number
59349_12



Version diffuser optic, frosted, polycarbonate,
adjustable color temperature: 3000K | 4000K |
5000K, extremely wide distribution, emergency
light element 3h operating duration

Lamps LED 4000 K | CRI ≥ 80

Controlgear ECG Multilumen

Setting emergency light operation: 3 h


Rated values Net luminous flux = 540 lm
Power consumption = 4.0 W
Luminous efficacy = 135 lm/W

serial
documentation
19.08.2022

siteco

Luminous intensity in cd/klm C180-0 C270-90

Imax: 250 cd/klm

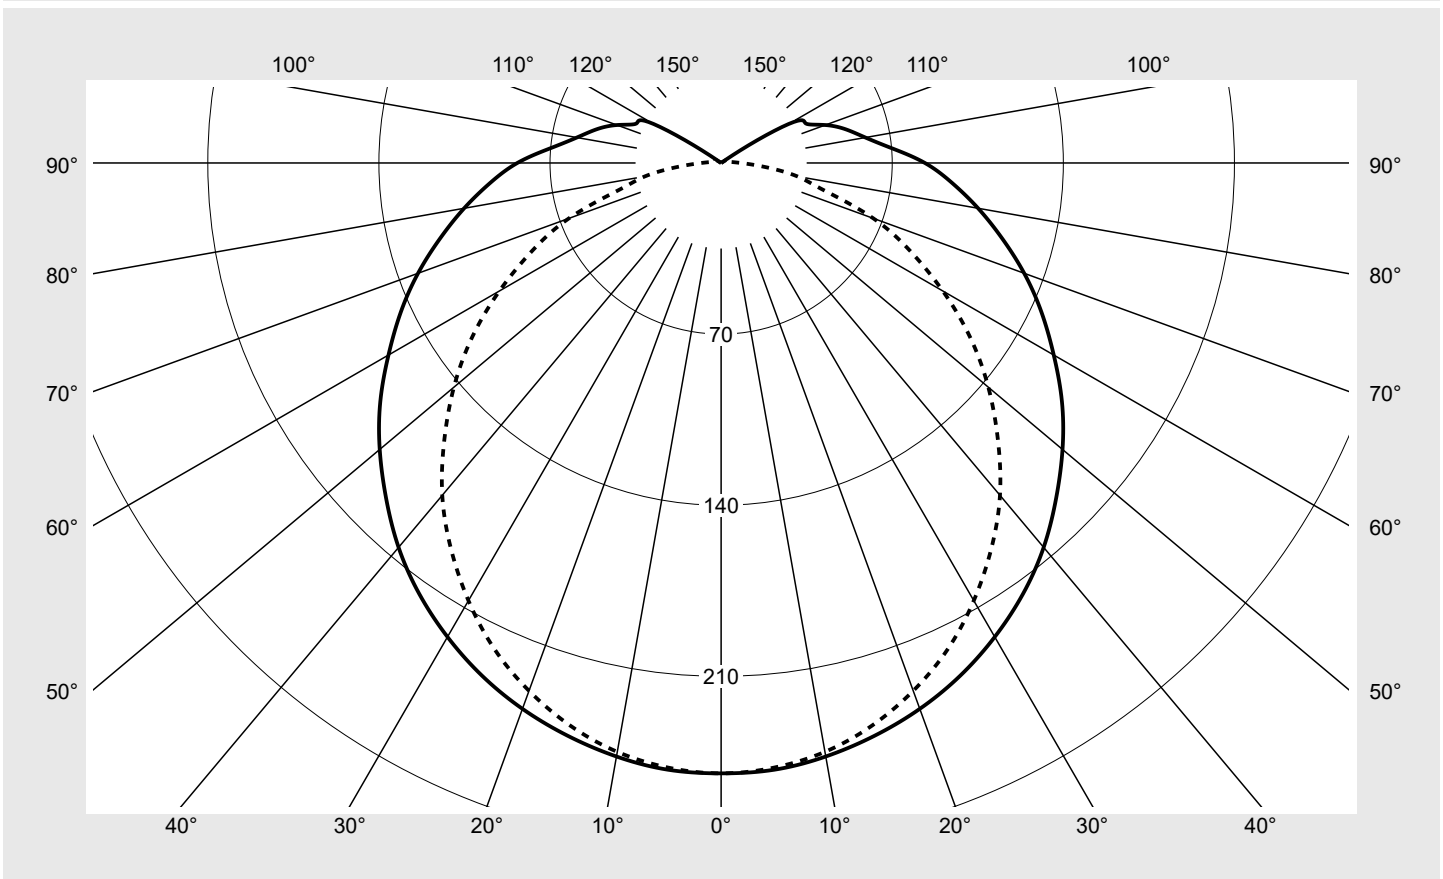

Classifications

DIN 5040 B 3 1
CIE N1=39 N2=67 N3=87
N4=89 N5=100

Luminaire light output ratios

η_{LB} 100.0%
 ϕ_u 89.0%
 ϕ_o 11.0%

Measurement conditions

DIN EN 13032 and DIN 5032

Photometric test report

Family Ecopack® 31	Order number: 51LJ12MNM70A3G EAN: 4058352671115	LP number 59349_12
Table of values for luminous intensities		Maximum luminous intensity



C-planes γ	0° 180°	15°	30°	45°	60°	75°	90° 270°	Phi-zone	Total Phi-zone
		165° 195° 345°	150° 210° 330°	135° 225° 315°	120° 240° 300°	105° 255° 285°			
Luminous intensity in cd/klm								Luminous flux in lm/klm	
0°	249.7	249.7	249.7	249.7	249.7	249.7	249.7	1.5	1.5
5°	249.2	249.0	248.9	248.9	248.9	248.6	248.3	11.9	13.4
10°	246.5	246.5	246.5	246.0	245.5	245.0	244.6	23.4	36.8
15°	242.6	242.6	242.6	241.2	239.9	239.1	238.3	34.2	71.0
20°	237.6	237.4	237.2	235.0	232.8	231.3	229.8	44.0	114.9
25°	231.4	231.0	230.5	227.1	223.8	221.6	219.4	52.5	167.4
30°	223.9	223.0	222.0	217.4	212.7	209.7	206.7	59.4	226.8
35°	215.3	214.0	212.6	206.8	200.9	196.8	192.7	64.7	291.5
40°	205.3	203.7	202.1	195.0	187.8	182.7	177.5	68.3	359.8
45°	193.8	191.9	190.0	181.6	173.2	166.7	160.1	69.8	429.6
50°	182.3	179.9	177.4	167.8	158.2	150.4	142.7	69.7	499.3
55°	170.2	167.4	164.5	153.6	142.7	133.5	124.4	68.0	567.3
60°	157.1	154.0	150.8	138.5	126.1	115.4	104.7	64.5	631.9
65°	144.6	141.2	137.8	124.2	110.6	98.0	85.5	60.2	692.1
70°	131.9	128.3	124.7	110.2	95.8	81.0	66.3	54.9	746.9
75°	119.0	115.0	111.1	96.0	80.9	62.5	44.0	48.3	795.2
80°	106.8	102.9	99.0	83.5	67.9	49.8	31.7	42.5	837.7
85°	95.0	91.2	87.4	74.0	60.5	39.0	17.4	37.1	874.8
90°	83.4	79.7	76.0	61.4	46.8	27.4	8.1	30.8	905.6
95°	69.9	64.9	59.9	48.7	37.5	20.9	4.4	24.5	930.1
100°	59.9	54.9	50.0	38.0	26.1	14.5	2.9	19.3	949.4
105°	53.0	49.1	45.3	33.5	21.6	12.2	2.8	16.7	966.2
110°	45.4	42.3	39.1	28.4	17.7	10.2	2.7	13.9	980.1
115°	38.2	35.7	33.2	23.7	14.2	8.4	2.5	11.2	991.3
120°	31.9	29.5	27.1	19.0	10.8	6.7	2.5	8.7	1000.0
125°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
130°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
135°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
140°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
145°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
150°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
155°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
160°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
165°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
170°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
175°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
180°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family Ecopack® 31	Order number: 51LJ12MNM70A3G EAN: 4058352671115	LP number 59349_12
------------------------------	--	------------------------------

UGR-Table	Standard room	siteco
------------------	----------------------	---------------

Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions	View crosswise (C0)					View endwise (C90)					
x	y										
2H	2H	12.7	14.4	13.1	14.8	15.2	12.2	13.9	12.7	14.3	14.8
	3H	14.7	16.3	15.2	16.7	17.2	13.9	15.5	14.4	15.9	16.4
	4H	15.7	17.2	16.2	17.6	18.1	14.5	16.0	15.0	16.5	16.9
	6H	16.7	18.0	17.2	18.5	19.0	15.1	16.5	15.6	16.9	17.4
	8H	17.2	18.5	17.7	19.0	19.5	15.3	16.6	15.8	17.1	17.6
	12H	17.7	18.8	18.2	19.3	19.9	15.5	16.7	16.0	17.2	17.8
4H	2H	13.4	14.9	13.9	15.3	15.8	13.1	14.5	13.5	14.9	15.4
	3H	15.7	16.9	16.2	17.4	18.0	14.9	16.2	15.4	16.7	17.2
	4H	16.9	18.0	17.4	18.5	19.1	15.8	16.9	16.3	17.4	18.0
	6H	18.0	19.0	18.5	19.5	20.1	16.5	17.5	17.0	18.0	18.6
	8H	18.6	19.5	19.1	20.1	20.7	16.8	17.8	17.4	18.3	18.9
	12H	19.1	19.9	19.7	20.5	21.2	17.0	17.9	17.6	18.5	19.1
8H	4H	17.3	18.2	17.8	18.8	19.4	16.3	17.2	16.9	17.8	18.4
	6H	18.7	19.5	19.2	20.0	20.7	17.3	18.1	17.9	18.7	19.3
	8H	19.4	20.1	20.0	20.7	21.3	17.8	18.5	18.4	19.1	19.8
	12H	20.0	20.7	20.7	21.3	22.0	18.2	18.8	18.8	19.4	20.1
12H	4H	17.3	18.1	17.9	18.7	19.4	16.4	17.2	17.0	17.8	18.5
	6H	18.7	19.4	19.3	20.1	20.7	17.5	18.2	18.1	18.8	19.5
	8H	19.5	20.2	20.2	20.8	21.5	18.1	18.7	18.7	19.3	20.0

Luminance table	Max. for $\gamma \geq 65^\circ$	Photometric dimensions in mm:	L = 1443	H(C0) = 29	H(C180) = 29
			B = 56	H(C90) = 0	H(C270) = 0

C-planes	γ	Luminance in cd/m ²							
		0° 180°	15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°	90° 270°	
45°		1206.9	1208.9	1239.5	1256.2	1300.3	1389.0	1513.4	
50°		1172.1	1171.4	1201.8	1214.4	1256.8	1348.7	1483.5	
55°		1140.0	1137.3	1168.2	1175.0	1213.7	1305.9	1449.2	
60°		1107.1	1102.7	1134.6	1132.5	1163.8	1252.0	1399.6	
65°		1083.6	1077.1	1110.3	1100.0	1124.8	1204.2	1351.4	
70°		1064.1	1055.9	1091.3	1073.5	1093.3	1157.0	1295.0	
75°		1047.4	1036.1	1073.0	1047.7	1062.9	1074.8	1134.8	
80°		1043.5	1031.9	1075.3	1043.9	1058.7	1089.1	1220.6	
85°		1052.5	1040.8	1093.8	1093.6	1172.1	1179.6	1332.5	

Photometric test report

Family Ecopack® 31	Order number: 51LJ12MNM70A3G EAN: 4058352671115	LP number 59349_12
-------------------------------------	--	-------------------------------------



Luminance values in cd/m²

γ 65°	γ 70°	γ 75°	γ 80°	γ 85°
--------------	--------------	--------------	--------------	--------------

