

## Photometric test report

Family  
**Scriptus®**

Order number: **5MZ323D04WA**  
EAN: **4058352124918**

LP number  
**57370\_1**



**Version** asymmetrical design, MLA-optic, direct/indirect wide distribution, UGR≤19

**Lamps** 1 x LED 4000K / CRI ≥ 80  
(unbekannt LED 4000K / CRI = 80)

**Controlgear** ECG-DALI

**Setting** factory setting: direct and indirect light

**Rated values** Net luminous flux = 12070 lm  
Power consumption = 90.8 W  
Luminous efficacy = 132.9 lm/W

serial  
documentation  
**06.08.2017**


siteco

Luminous intensity in cd/klm

**C180-0**

**C270-90**

**Imax: 473 cd/klm**

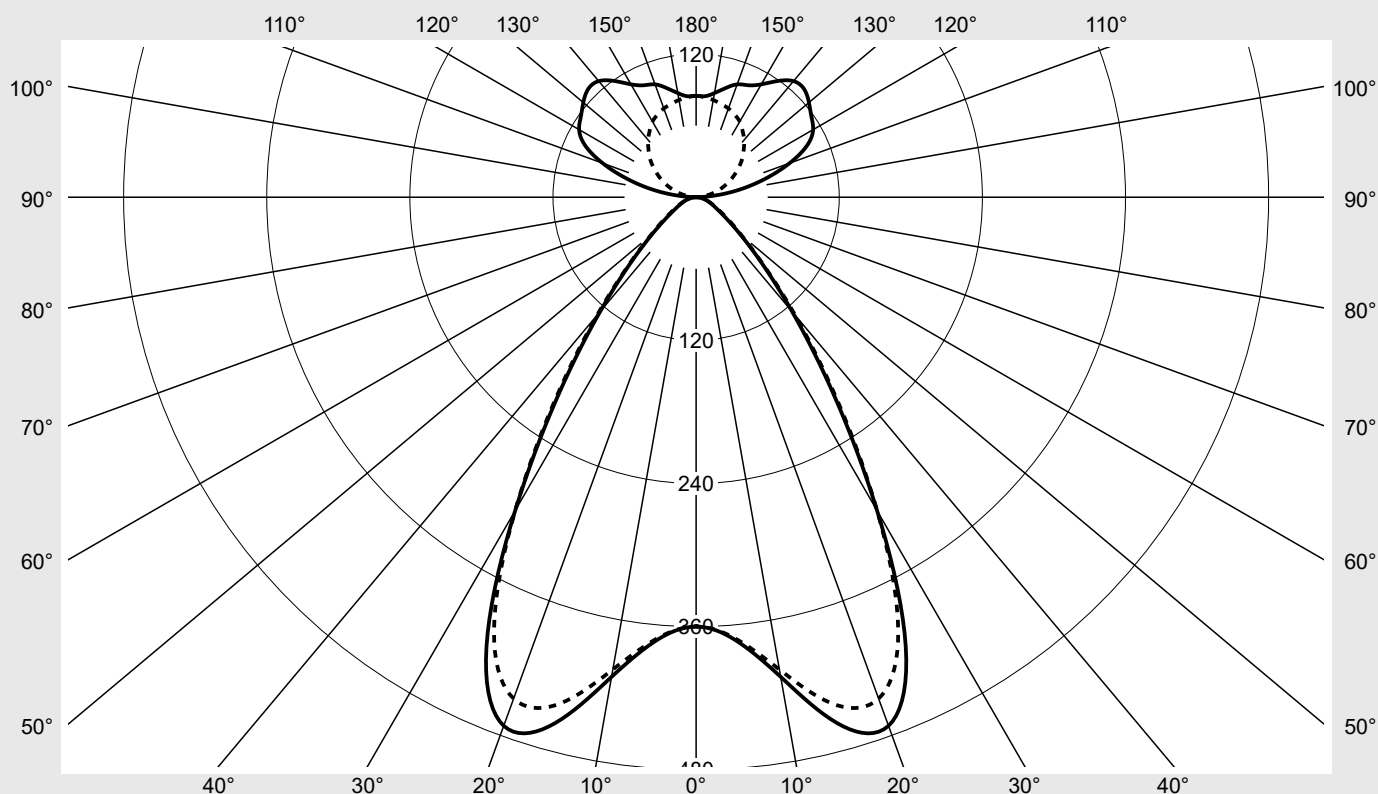

#### Classifications

DIN 5040 C 6 2  
CIE N1=82 N2=95 N3=99  
N4=60 N5=100

#### Luminaire light output ratios

$\eta_{LB}$  100.0%  
 $\phi_u$  59.9%  
 $\phi_o$  40.1%

#### Measurement conditions

DIN EN 13032 and DIN 5032

## Photometric test report

Family <b>Scriptus®</b>	Order number: <b>5MZ323D04WA</b> EAN: <b>4058352124918</b>	LP number <b>57370_1</b>
Table of values for luminous intensities		Maximum luminous intensity
		<b>siteco</b>

C-planes $\gamma$	0° 180°	15°	30°	45°	60°	75°	90° 270°	Phi-zone	Total Phi-zone
		165° 195° 345°	150° 210° 330°	135° 225° 315°	120° 240° 300°	105° 255° 285°			
Luminous intensity in cd/klm								Luminous flux in lm/klm	
0°	360.0	360.0	360.0	360.0	360.0	360.0	360.0	2.2	2.2
5°	372.4	371.4	370.8	371.8	370.9	370.8	371.1	17.7	19.9
10°	408.3	406.9	405.5	404.9	403.0	401.6	402.0	38.5	58.4
15°	456.4	455.3	452.0	446.6	443.0	439.7	439.3	63.5	121.9
20°	471.6	473.4	470.6	466.4	458.2	449.2	447.4	86.8	208.6
25°	415.9	419.6	421.5	418.1	414.3	401.5	401.0	95.9	304.5
30°	303.4	306.4	312.1	314.1	313.7	303.7	303.5	84.7	389.2
35°	199.8	200.8	208.8	212.7	211.3	203.2	203.8	64.9	454.1
40°	125.3	127.2	130.4	134.6	133.0	129.4	129.2	45.9	500.0
45°	77.2	77.4	79.1	82.2	82.6	80.2	78.8	31.0	531.0
50°	47.9	47.9	48.9	50.5	51.3	50.6	49.8	20.9	551.8
55°	30.7	31.1	32.3	33.0	33.0	33.4	33.3	14.6	566.4
60°	20.9	22.0	22.4	22.9	22.8	22.8	22.7	10.7	577.1
65°	15.4	15.8	15.9	16.3	16.6	16.3	16.2	8.0	585.1
70°	11.4	11.2	11.9	11.8	11.8	11.7	11.6	6.0	591.1
75°	7.4	7.9	8.3	8.2	7.7	7.9	7.9	4.2	595.3
80°	4.6	4.9	4.7	4.6	4.5	4.7	4.7	2.5	597.8
85°	2.3	2.3	2.2	2.1	2.2	2.2	2.2	1.2	599.0
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	599.0
95°	15.4	16.0	16.7	15.3	9.6	6.1	3.6	6.7	605.7
100°	37.4	38.4	38.7	33.7	21.9	13.6	9.8	15.3	621.0
105°	60.3	61.4	62.6	52.5	32.7	20.2	16.6	23.6	644.6
110°	83.4	84.5	83.6	67.2	40.7	26.8	23.3	30.6	675.2
115°	102.7	101.5	97.5	75.4	46.1	33.6	30.1	34.8	710.0
120°	113.3	111.9	105.3	79.0	50.6	40.1	36.8	36.6	746.6
125°	118.0	116.4	110.0	80.6	55.5	46.5	43.7	36.6	783.2
130°	123.5	122.1	111.0	80.6	60.6	52.5	50.6	36.0	819.2
135°	128.1	124.7	109.0	80.9	66.7	57.8	56.5	34.3	853.5
140°	127.0	121.6	103.3	82.3	72.8	62.9	62.7	31.6	885.1
145°	118.9	113.3	98.4	85.1	77.4	67.6	67.9	28.0	913.1
150°	109.3	105.2	96.5	89.3	80.1	71.4	73.2	24.4	937.5
155°	103.6	101.6	97.4	90.5	81.6	75.3	76.4	20.7	958.2
160°	100.6	99.2	95.2	89.2	82.8	78.4	79.2	16.7	974.9
165°	94.6	93.8	90.8	86.9	83.6	81.2	80.9	12.4	987.3
170°	88.7	88.2	87.1	85.6	83.8	83.1	82.8	8.1	995.4
175°	85.0	85.4	84.9	85.0	84.8	84.6	84.1	4.1	999.5
180°	85.0	85.0	85.0	85.0	85.0	85.0	85.0	0.5	1000.0

## Photometric test report

Family <b>Scriptus®</b>	Order number: <b>5MZ323D04WA</b> EAN: <b>4058352124918</b>	LP number <b>57370_1</b>
----------------------------	---	-----------------------------

<b>UGR-Table</b>	<b>Standard room</b>	<b>siteco</b>
------------------	----------------------	---------------

Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions	View crosswise (C0)					View endwise (C90)					
x	y										
2H	2H	13.5	14.4	14.3	15.2	16.2	13.7	14.6	14.5	15.4	16.4
	3H	13.6	14.4	14.5	15.3	16.4	13.9	14.6	14.7	15.5	16.6
	4H	13.7	14.5	14.6	15.3	16.4	14.0	14.7	14.9	15.6	16.7
	6H	13.8	14.5	14.7	15.4	16.5	14.1	14.7	15.0	15.6	16.7
	8H	13.8	14.3	14.7	15.2	16.4	14.0	14.6	14.9	15.5	16.6
	12H	13.8	14.3	14.7	15.2	16.4	14.0	14.6	14.9	15.5	16.6
4H	2H	13.4	14.1	14.3	15.0	16.1	13.5	14.2	14.4	15.1	16.2
	3H	13.7	14.3	14.6	15.2	16.4	13.9	14.5	14.8	15.4	16.5
	4H	13.9	14.5	14.9	15.4	16.5	14.1	14.6	15.0	15.5	16.7
	6H	14.1	14.6	15.0	15.5	16.7	14.3	14.7	15.2	15.6	16.8
	8H	14.1	14.5	15.0	15.4	16.6	14.2	14.6	15.2	15.6	16.8
	12H	14.1	14.5	15.1	15.4	16.6	14.3	14.6	15.3	15.6	16.8
8H	4H	13.9	14.3	14.8	15.2	16.4	14.0	14.4	14.9	15.3	16.5
	6H	14.1	14.4	15.0	15.4	16.6	14.2	14.5	15.1	15.5	16.7
	8H	14.2	14.5	15.2	15.5	16.7	14.3	14.6	15.3	15.6	16.8
	12H	14.3	14.6	15.3	15.5	16.8	14.4	14.7	15.4	15.6	16.9
12H	4H	13.9	14.2	14.8	15.2	16.4	14.0	14.3	14.9	15.3	16.5
	6H	14.1	14.4	15.1	15.4	16.6	14.2	14.5	15.2	15.5	16.7
	8H	14.2	14.5	15.2	15.5	16.7	14.3	14.6	15.3	15.6	16.8

<b>Luminance table</b>	<b>Max. for <math>\gamma \geq 65^\circ</math></b>	<b>Photometric dimensions in mm:</b>	<b>L = 1710</b> <b>B = 95</b>
------------------------	---	--------------------------------------	----------------------------------

C-planes	$\gamma$	Luminance in cd/m <sup>2</sup>							
		0° 180°	15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°	90° 270°	
45°		8111.5	8135.9	8311.3	8640.7	8676.2	8430.8	8284.5	
50°		5533.2	5534.9	5653.6	5840.9	5928.7	5844.3	5751.1	
55°		3974.3	4032.1	4188.5	4274.2	4271.0	4321.4	4319.4	
60°		3112.7	3264.1	3324.3	3406.1	3388.8	3384.7	3369.0	
65°		2706.6	2779.0	2801.9	2861.8	2925.4	2873.9	2848.6	
70°		2484.8	2422.2	2583.0	2552.8	2573.6	2552.1	2523.2	
75°		2125.2	2272.5	2386.7	2341.9	2222.8	2274.8	2256.1	
80°		1962.2	2091.5	1991.8	1962.2	1945.1	2030.7	2003.3	
85°		1927.5	1924.9	1849.9	1828.6	1843.1	1892.5	1888.3	

**Photometric test report**

<b>Family</b> <b>Scriptus®</b>	<b>Order number: 5MZ323D04WA</b> <b>EAN: 4058352124918</b>	<b>LP number</b> <b>57370_1</b>
-----------------------------------	---	------------------------------------

**Luminance values in cd/m<sup>2</sup>**

γ 65°
γ 70°
γ 75°
γ 80°
γ 85°

