

## Photometric test report

**Family**  
Floodlight 20 midi LED

**Order number: 5XA7682E3A1AC**  
**EAN: 4058352223451**

**LP number**  
**58576\_20**



**Version** mounting bracket  
**Optic** asymmetric distribution PL43  
**Cover** toughened safety glass  
**Lamps** 1 x LED 5000K / CRI ≥ 70  
 (unbekannt LED 5000K / CRI = 70)  
**Controlgear** ECG-DALI  
**Rated values** Net luminous flux = 28900 lm  
 Power consumption = 207.8 W  
 Luminous efficacy = 139.1 lm/W

**serial**  
**documentation**  
25.08.2021

**sitEco**

**Luminous intensity in cd/klm**


**C180-0**

**C230-50**

**C235-55**

**C270-90**

**Imax: 733 cd/klm**

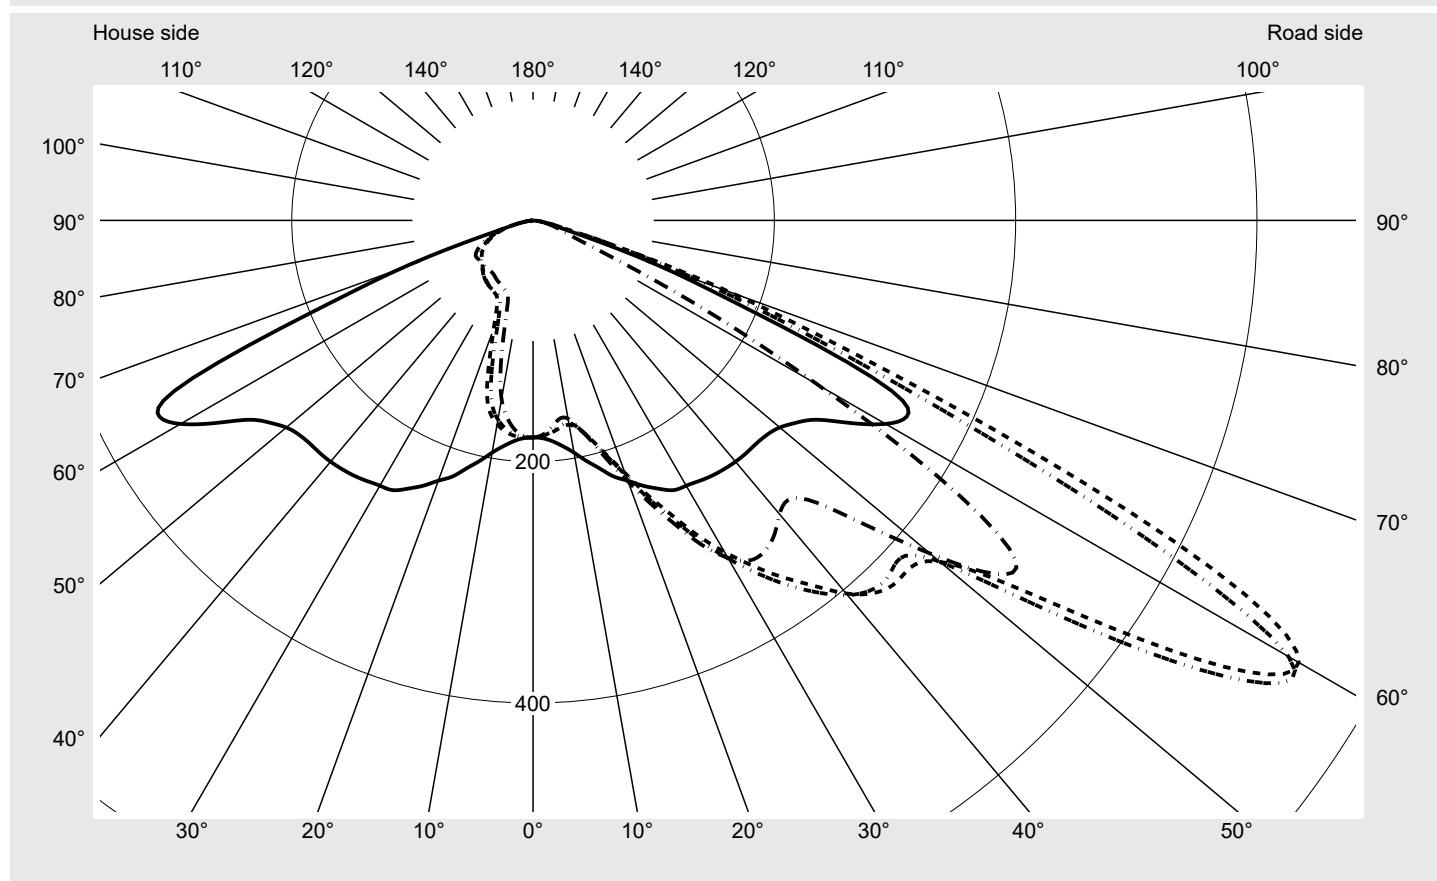

### Luminaire output ratios

Eta	100.0%
Eta 0° - 90°	100.0%
Eta 90° - 180°	0.0%

### Luminous intensity class acc. to EN13201-2

Class:	G6
Imax 70°	250.7
Imax 80°	13.8
Imax 90°	0.0
Imax >90°	0.0
Imax >95°	0.0


### Measurement conditions

DIN EN 13032 and DIN 5032

**Photometric test report**

<b>Family</b> <b>Floodlight 20 midi LED</b>	<b>Order number: 5XA7682E3A1AC</b> <b>EAN: 4058352223451</b>	<b>LP number</b> <b>58576_20</b>
--	---	-------------------------------------

**Envelope curve in cd/klm**      **KMK 60°**    **KMK 57.5°**    **KMK 55°**    **KMK 52.5°**      **siteco**

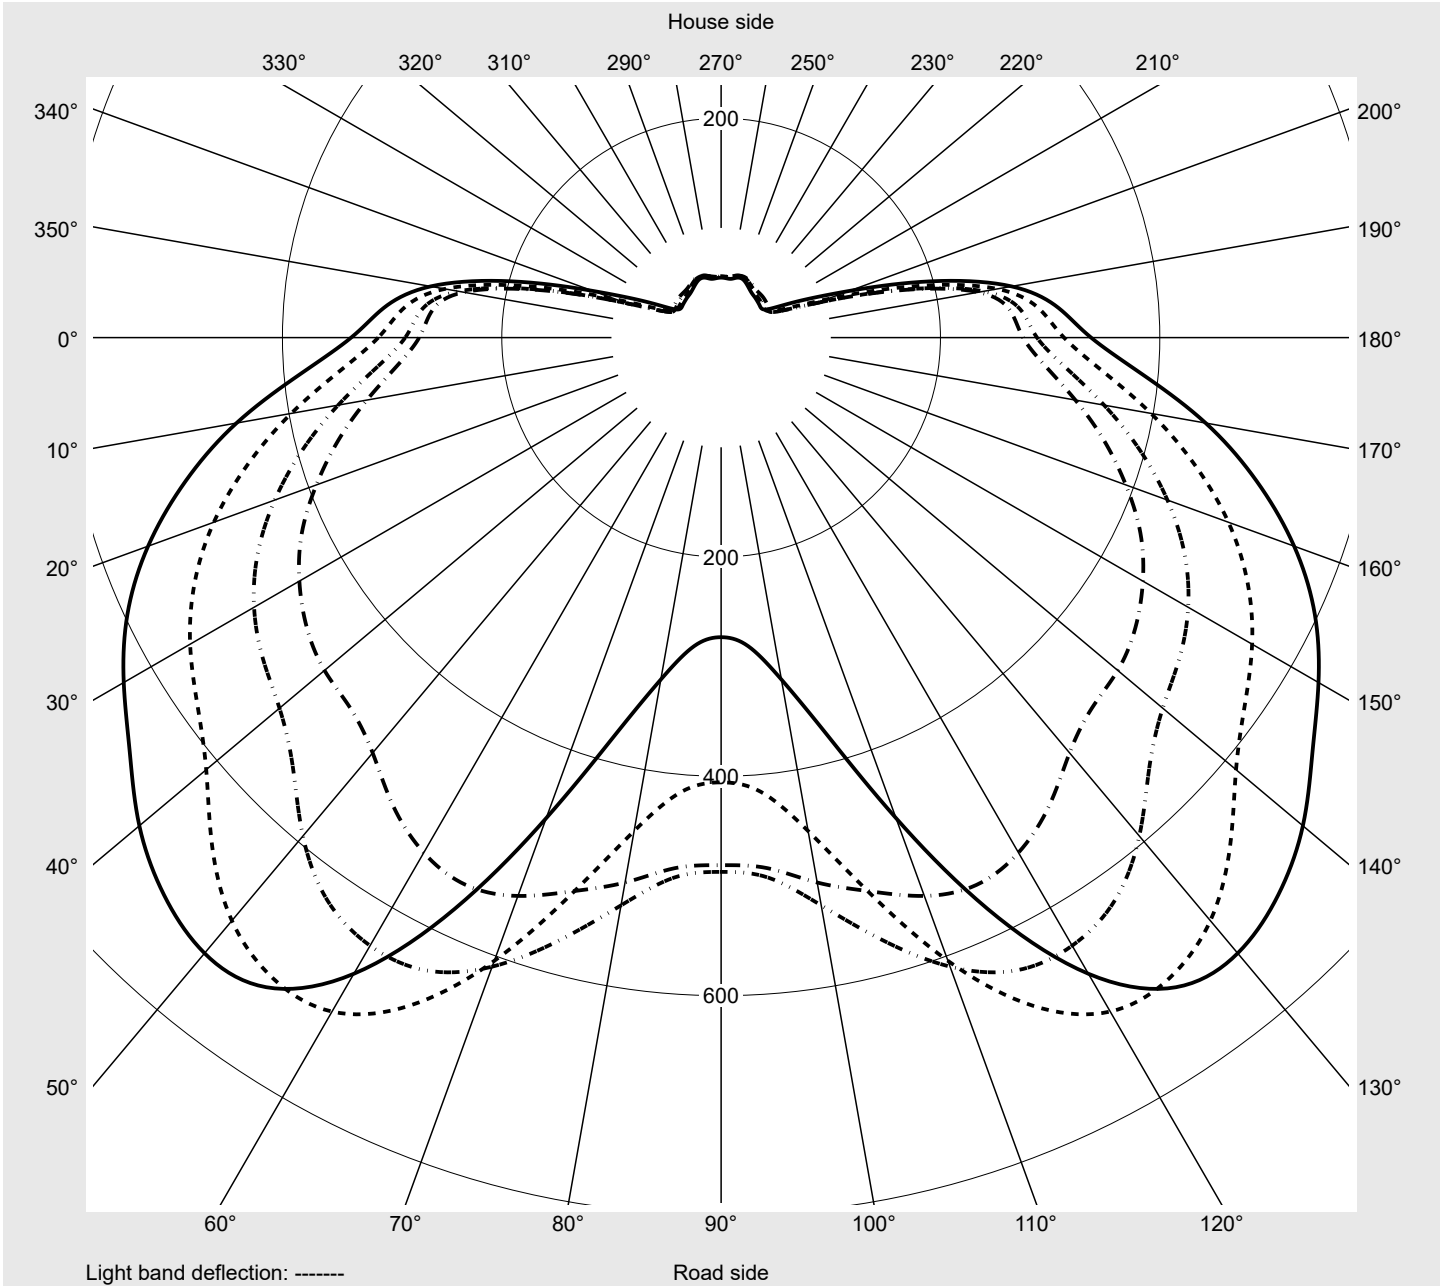

## Photometric test report

<b>Family</b> <b>Floodlight 20 midi LED</b>	<b>Order number: 5XA7682E3A1AC</b> <b>EAN: 4058352223451</b>	<b>LP number</b> <b>58576_20</b>
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>
		<b>siteco</b>

C-planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
γ	Luminous intensity in cd/klm												
0,0°	179.9	179.9	179.9	179.9	179.9	179.9	179.9	179.9	179.9	179.9	179.9	179.9	179.9
2,5°	180.7	180.4	180.3	180.3	180.2	180.2	180.1	179.9	179.6	179.4	179.2	178.9	178.7
5,0°	183.7	183.4	182.9	182.4	181.8	181.2	180.4	179.5	178.5	177.5	176.6	175.7	174.9
7,5°	188.8	188.0	186.9	185.6	184.1	182.6	180.9	179.0	177.0	175.1	173.3	171.8	170.3
10,0°	195.5	194.5	192.6	190.3	187.8	185.1	182.2	179.4	176.6	174.2	172.1	170.5	169.2
12,5°	204.2	202.3	199.5	196.0	192.4	188.8	185.5	182.6	180.2	178.5	177.4	176.7	176.5
15,0°	212.7	210.5	206.6	202.2	198.1	194.5	191.7	189.8	188.7	188.2	188.6	189.0	189.2
17,5°	222.6	218.8	214.2	209.6	205.7	202.9	201.4	201.1	202.0	203.2	204.3	205.5	206.5
20,0°	229.6	226.1	221.4	216.9	213.9	212.6	213.3	215.5	217.8	220.3	222.9	225.1	227.0
22,5°	238.0	233.6	228.9	225.2	223.5	224.4	228.1	232.3	236.6	241.1	245.4	249.1	250.8
25,0°	245.3	242.0	238.0	235.4	235.1	238.8	244.2	250.4	256.6	262.6	267.9	272.3	275.4
27,5°	252.1	248.7	246.0	245.2	248.7	255.8	263.3	271.1	278.8	286.6	293.6	298.6	302.1
30,0°	253.9	252.1	250.7	252.4	259.9	269.9	280.3	290.3	299.9	309.1	317.3	323.8	328.0
32,5°	256.1	255.0	255.6	260.4	271.1	283.3	295.9	308.4	320.0	330.1	339.6	347.2	351.5
35,0°	258.4	258.8	262.3	270.7	283.3	297.5	311.7	325.9	339.5	351.0	361.1	369.2	372.1
37,5°	259.9	262.2	269.2	281.6	295.7	311.3	327.3	343.0	358.0	371.4	381.6	388.9	388.5
40,0°	261.1	265.5	276.9	292.5	308.5	325.7	343.7	361.7	378.1	393.0	403.6	405.4	400.4
42,5°	261.5	268.2	284.0	302.1	321.0	340.5	360.0	379.7	396.9	411.3	418.8	415.4	406.2
45,0°	261.6	270.9	290.5	311.6	332.9	354.4	376.5	396.4	412.8	424.4	424.9	416.8	401.9
47,5°	263.0	275.1	297.2	320.8	344.1	366.4	387.2	405.7	419.4	427.7	425.2	413.8	401.7
50,0°	267.0	283.1	309.3	337.2	363.9	388.2	409.6	426.5	438.2	442.5	440.2	440.2	447.9
52,5°	275.3	296.7	328.0	361.3	392.7	421.9	444.1	461.2	472.1	478.0	494.3	521.3	542.3
55,0°	288.0	315.6	354.6	395.1	433.1	466.3	491.8	510.1	525.7	552.5	593.3	626.2	640.2
57,5°	312.7	349.0	398.0	446.9	492.3	529.8	559.1	583.1	612.9	656.3	694.0	712.9	709.6
60,0°	337.3	385.8	448.7	505.5	556.0	597.4	629.0	658.3	692.5	718.5	732.8	723.1	669.8
62,5°	350.0	407.7	477.2	540.5	593.3	632.6	659.3	681.3	689.2	682.0	654.5	579.5	477.7
65,0°	316.3	376.8	447.1	504.0	548.1	577.7	594.3	595.3	578.0	540.7	466.8	384.3	313.0
67,5°	196.1	254.1	308.0	354.9	392.3	417.5	425.2	415.6	385.9	336.8	287.6	242.8	197.9
70,0°	116.8	142.9	168.8	199.2	226.4	242.1	250.7	246.5	228.8	200.6	173.1	148.7	126.7
72,5°	48.9	42.1	39.5	55.6	105.4	131.8	133.6	125.8	106.5	85.8	80.1	78.5	69.5
75,0°	22.3	19.5	19.2	20.9	34.8	56.7	57.8	50.8	30.9	26.0	32.2	32.5	30.1
77,5°	13.4	12.3	12.2	12.9	16.0	21.6	22.1	17.4	15.3	15.3	17.4	19.0	21.7
80,0°	7.7	7.4	7.7	8.1	8.7	10.2	10.2	9.4	9.7	10.0	10.4	10.9	12.2
82,5°	4.1	4.1	4.3	4.6	4.8	5.1	5.7	5.7	5.9	6.0	6.1	6.0	5.9
85,0°	1.9	1.8	1.9	2.0	2.2	2.4	2.6	2.8	2.8	2.8	2.7	2.6	2.4
87,5°	0.9	0.9	0.8	0.8	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.6	0.6
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
100,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
110,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
120,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
130,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
140,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
150,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
160,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
170,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

## Photometric test report

<b>Family</b> Floodlight 20 midi LED	<b>Order number: 5XA7682E3A1AC</b> <b>EAN: 4058352223451</b>	<b>LP number</b> 58576_20
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>

**siteco**

C-planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
$\gamma$	Luminous intensity in cd/klm												
0,0°	179.9	179.9	179.9	179.9	179.9	179.9	179.9	179.9	179.9	179.9	179.9	179.9	179.9
2,5°	178.4	178.2	178.1	178.0	177.9	177.9	180.8	180.8	180.8	180.8	180.7	180.7	180.6
5,0°	174.1	173.4	172.9	172.6	172.5	172.5	184.0	183.9	183.7	183.4	183.0	182.4	181.8
7,5°	169.0	167.8	167.0	166.4	166.1	166.0	189.0	188.8	188.2	187.3	186.2	184.7	182.9
10,0°	168.2	167.4	167.0	166.8	166.9	166.9	196.1	195.7	194.6	192.8	190.4	187.3	183.8
12,5°	176.3	176.2	176.2	176.5	176.6	176.7	204.8	204.3	202.6	199.6	195.5	190.6	184.6
15,0°	189.4	189.4	189.7	190.1	190.5	190.5	214.0	213.3	210.7	206.2	200.3	192.9	184.0
17,5°	207.3	208.0	208.5	209.2	209.8	209.9	223.3	222.1	218.4	212.3	204.0	193.6	180.1
20,0°	228.2	228.8	229.4	229.9	230.3	230.3	231.5	229.8	224.9	217.0	205.7	190.3	166.4
22,5°	252.4	252.9	253.3	253.8	254.0	253.8	239.6	237.7	231.4	220.5	203.7	177.1	144.0
25,0°	276.7	276.9	277.0	277.7	278.0	277.7	247.5	245.1	236.8	222.0	193.8	156.1	119.5
27,5°	303.6	303.1	302.4	303.2	303.6	303.3	253.3	250.0	239.7	217.0	174.8	130.8	95.4
30,0°	328.6	326.1	324.3	324.2	323.9	322.9	255.2	251.2	238.8	203.2	152.9	107.3	78.5
32,5°	350.6	346.3	343.1	340.9	337.1	334.2	257.1	252.7	235.1	186.8	130.3	88.3	69.8
35,0°	368.8	361.3	356.5	350.6	340.0	334.7	258.7	253.5	225.8	166.7	106.8	73.1	65.2
37,5°	380.8	369.5	363.2	351.9	334.9	328.5	259.4	252.9	212.7	146.0	88.0	65.4	62.8
40,0°	387.7	373.0	363.3	343.5	323.9	317.9	259.7	250.3	199.2	127.8	76.1	61.9	60.7
42,5°	390.0	371.4	353.5	331.6	318.1	313.9	259.4	246.9	189.4	115.0	70.4	59.4	58.8
45,0°	384.4	366.9	352.3	340.9	332.2	329.9	258.7	243.2	181.7	105.8	65.8	57.1	57.0
47,5°	396.0	389.7	384.4	380.6	373.9	373.2	258.9	240.0	175.3	100.4	62.3	55.0	55.2
50,0°	458.1	458.1	448.9	441.8	432.1	429.5	260.8	237.4	169.3	94.5	59.2	53.0	53.5
52,5°	550.7	541.8	522.6	504.5	485.6	481.0	265.5	238.4	165.7	91.4	57.0	51.1	51.7
55,0°	636.6	610.4	568.8	525.7	494.3	487.2	275.3	243.2	167.6	91.4	55.9	49.3	49.7
57,5°	672.1	604.8	524.7	456.8	415.8	405.5	292.0	255.8	180.6	101.7	61.0	48.6	47.5
60,0°	574.7	466.3	375.8	316.6	282.4	273.2	309.0	268.9	198.3	124.4	79.5	53.3	45.7
62,5°	381.2	303.5	247.0	203.1	171.1	163.0	313.6	273.2	210.0	145.1	101.0	67.1	46.2
65,0°	254.3	201.4	146.7	98.7	73.7	72.1	277.5	248.6	202.2	149.0	104.6	72.8	50.4
67,5°	162.1	121.9	57.2	40.9	37.9	36.6	147.3	155.0	152.5	128.7	92.2	62.6	49.8
70,0°	105.4	79.1	39.4	31.3	29.5	28.0	47.6	43.2	62.9	70.1	56.8	49.6	43.3
72,5°	55.6	44.1	29.7	23.8	22.1	20.8	26.2	23.8	25.9	32.8	30.3	29.8	29.6
75,0°	29.5	29.7	23.0	18.3	17.0	15.7	18.4	16.6	17.8	20.4	20.1	19.7	19.5
77,5°	24.2	22.5	16.4	13.4	12.2	11.1	13.5	11.8	12.6	13.9	13.6	13.6	13.5
80,0°	13.8	12.7	10.0	9.0	7.9	7.1	7.8	7.7	8.0	8.9	8.9	8.8	8.8
82,5°	5.7	5.7	5.2	4.6	4.1	3.8	4.3	4.4	4.5	4.9	5.2	5.2	5.3
85,0°	2.2	2.0	1.8	1.6	1.5	1.4	2.0	2.0	2.1	2.3	2.4	2.5	2.5
87,5°	0.6	0.6	0.6	0.6	0.6	0.6	0.9	0.9	0.9	1.0	1.0	1.0	1.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
100,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
110,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
120,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
130,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
140,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
150,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
160,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
170,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

## Photometric test report

<b>Family</b> Floodlight 20 midi LED	<b>Order number: 5XA7682E3A1AC</b> <b>EAN: 4058352223451</b>	<b>LP number</b> 58576_20
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>
		<b>sITeCO</b>

C-planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm											Luminous flux in lm/klm	
0,0°	179.9	179.9	179.9	179.9	179.9	179.9	179.9	179.9	179.9	179.9	179.9	0.3	0.3
2,5°	180.5	180.3	180.0	179.8	179.6	179.4	179.1	178.9	178.7	178.7	178.8	2.1	2.4
5,0°	181.0	180.2	179.2	178.2	177.2	176.4	175.5	174.8	174.4	174.2	174.1	4.3	6.7
7,5°	180.8	178.6	176.4	174.2	172.0	170.0	168.2	166.7	165.6	165.1	164.9	6.3	13.0
10,0°	179.9	175.8	171.6	167.6	163.5	159.9	156.7	153.9	151.9	150.8	150.4	8.4	21.4
12,5°	178.0	171.0	163.7	156.5	149.3	142.5	136.1	130.8	127.0	124.6	123.8	10.4	31.8
15,0°	173.7	161.6	147.6	133.7	121.5	111.6	103.7	97.8	93.7	91.2	90.4	12.4	44.2
17,5°	160.5	139.0	119.5	103.6	91.7	83.3	77.4	73.6	71.1	69.7	69.2	14.5	58.7
20,0°	138.8	114.2	95.2	82.1	74.1	69.9	67.5	66.0	64.9	64.1	63.8	16.8	75.5
22,5°	114.0	92.0	78.5	71.5	68.4	66.7	65.3	64.0	63.0	62.2	61.8	19.5	95.0
25,0°	92.1	76.9	70.6	68.4	67.0	65.7	64.4	63.2	62.0	60.9	60.5	22.3	117.3
27,5°	76.0	69.9	68.2	67.3	66.3	65.3	64.0	62.6	61.2	59.9	59.2	25.3	142.7
30,0°	69.2	67.5	67.0	66.5	66.0	65.1	63.9	62.3	60.7	59.0	58.2	28.3	171.0
32,5°	66.4	65.9	65.9	65.9	65.8	65.1	63.7	62.0	60.1	58.2	57.1	31.3	202.3
35,0°	64.3	64.3	64.7	65.1	65.2	64.7	63.3	61.3	59.2	57.1	55.9	34.1	236.4
37,5°	62.5	62.8	63.3	64.0	64.2	63.9	62.6	60.7	58.6	56.4	55.0	36.8	273.2
40,0°	60.8	61.3	61.9	62.5	63.0	62.9	62.0	60.3	58.3	56.2	54.9	39.3	312.5
42,5°	59.2	59.8	60.2	61.0	61.6	62.1	61.6	60.0	58.1	56.3	55.1	41.7	354.3
45,0°	57.5	58.1	58.5	59.1	60.2	61.3	61.1	59.6	58.0	56.4	55.2	44.2	398.5
47,5°	55.9	56.5	56.7	57.3	58.8	60.4	60.6	59.2	57.6	56.2	55.1	47.2	445.7
50,0°	54.3	54.8	55.0	55.7	57.5	59.4	59.9	58.8	57.0	55.8	55.0	52.3	498.0
52,5°	52.5	53.2	53.5	54.3	56.1	58.3	59.3	58.5	56.9	55.7	55.2	59.5	557.5
55,0°	50.6	51.4	52.0	52.9	54.7	57.4	58.8	58.6	56.7	55.8	55.6	67.2	624.7
57,5°	48.3	49.4	50.2	51.3	53.2	56.2	58.2	58.2	56.1	55.7	56.0	73.8	698.5
60,0°	45.8	46.8	47.9	49.2	51.4	54.4	56.9	56.6	54.4	54.3	54.7	75.4	773.9
62,5°	43.1	43.7	44.7	46.1	48.5	51.4	54.1	53.6	51.5	51.2	51.5	70.8	844.7
65,0°	41.0	40.4	41.3	42.9	45.0	48.1	50.7	50.1	47.7	47.1	47.5	59.6	904.3
67,5°	40.3	36.4	37.3	38.9	41.3	44.1	45.9	44.8	41.9	41.5	42.4	41.3	945.6
70,0°	36.6	32.1	32.9	34.8	37.1	39.4	40.3	38.5	35.5	36.6	37.0	25.2	970.8
72,5°	27.7	26.2	27.5	29.5	31.6	33.3	33.6	30.8	28.6	31.2	32.2	13.1	983.9
75,0°	19.9	20.5	21.9	23.7	25.4	26.8	26.5	23.8	21.8	23.3	24.5	6.9	990.8
77,5°	13.9	14.6	15.4	17.1	18.7	19.9	18.8	16.8	15.2	15.4	15.8	4.3	995.1
80,0°	9.1	9.5	10.1	11.1	12.3	12.9	11.8	10.5	9.4	9.1	8.9	2.6	997.7
82,5°	5.4	5.6	5.9	6.1	6.3	6.2	5.8	5.2	4.7	4.5	4.4	1.4	999.1
85,0°	2.5	2.5	2.6	2.7	2.7	2.7	2.6	2.3	2.1	2.0	2.0	0.6	999.8
87,5°	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	0.9	0.9	0.9	0.2	1000.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
100,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
110,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
120,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
130,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
140,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
150,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
160,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
170,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

## Photometric test report

<b>Family</b> Floodlight 20 midi LED	<b>Order number: 5XA7682E3A1AC</b> <b>EAN: 4058352223451</b>	<b>LP number</b> 58576_20
---	---	------------------------------

<b>Dimming levels table</b>	environmental temperature: 25°C	<b>sITeco</b>
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]
100	254	254	28900	207.8
95	239	252	27455	196.0
90	225	250	26010	184.4
85	211	247	24565	173.1
80	196	245	23120	161.9
75	184	242	21675	151.1
70	170	239	20230	140.2
65	156	236	18785	129.8
60	143	233	17340	119.6
55	131	230	15895	109.2
50	118	226	14450	99.2
45	105	222	13005	89.5
40	92	217	11560	79.9
35	81	212	10115	70.4
30	69	206	8670	61.0
25	57	199	7225	51.8
20	46	191	5780	43.0
15	34	180	4334	34.2