

Photometric test report

Family
Floodlight FL21 micro

Order number: 5XA7762A1A1A
EAN: 4058352631058

LP number
59324_8



Version mounting bracket
Optic direct, asymmetric narrow distribution,
asymmetric wide distribution
A430002
Cover toughened safety glass
Lamps LED 2200 K | CRI ≥ 70
Controlgear ECG SITECO IQ
Rated values Net luminous flux = 2520 lm
Power consumption = 23.1 W
Luminous efficacy = 109.1 lm/W

serial
documentation
05.07.2022

siteco

Luminous intensity in cd/klm


C180-0

C220-40

C225-45

C270-90

Imax: 1028 cd/klm

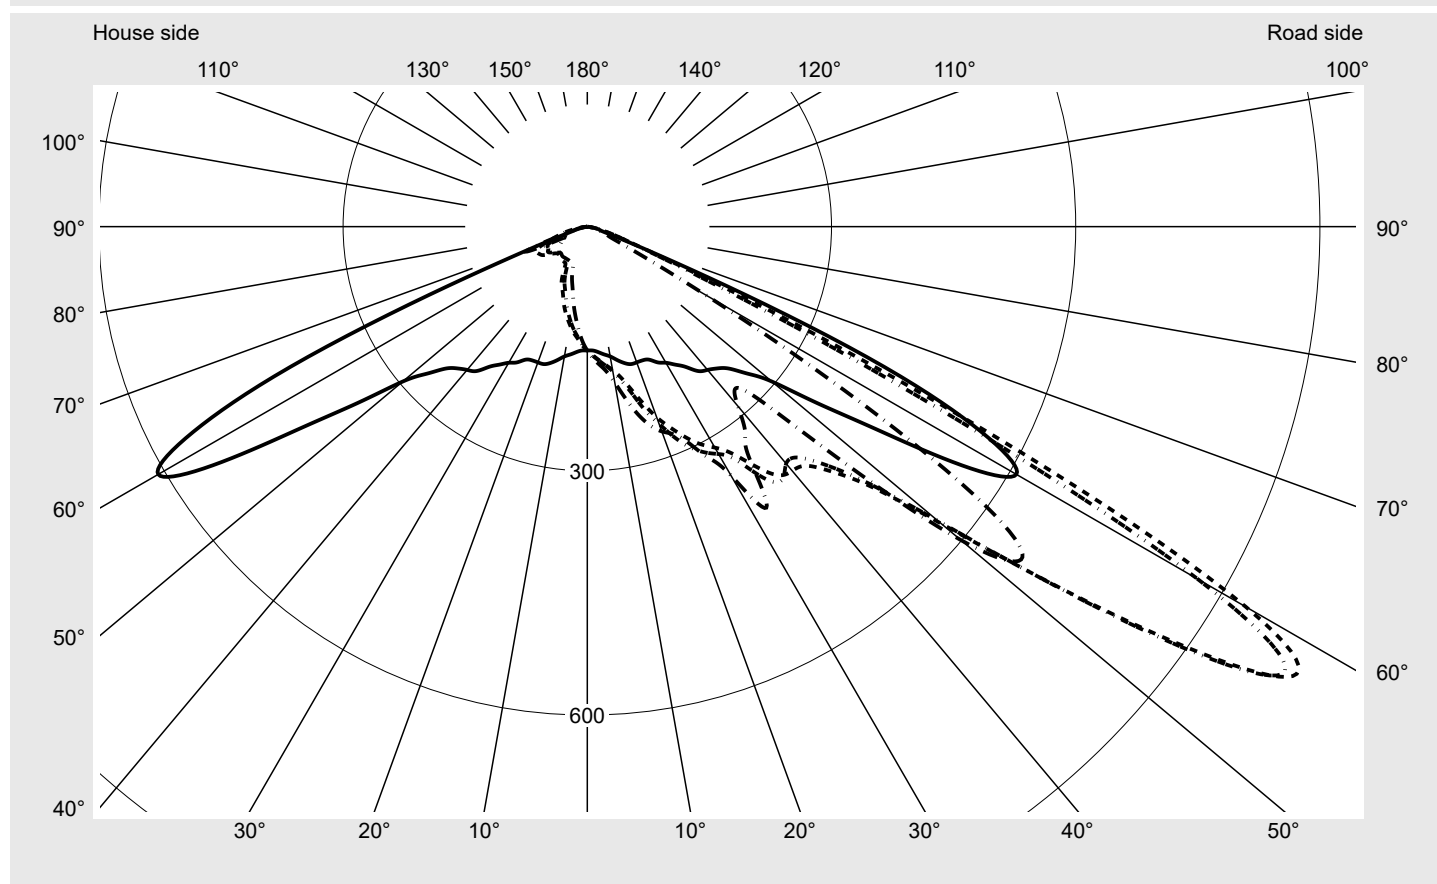

Luminaire output ratios

Eta	100.0%
Eta 0° - 90°	100.0%
Eta 90° - 180°	0.0%

Luminous intensity class acc. to EN13201-2


Class:	G6
Imax 70°	56.8
Imax 80°	12.2
Imax 90°	0.0
Imax >90°	0.0
Imax >95°	0.0

Measurement conditions

DIN EN 13032 and DIN 5032

Photometric test report

Family Floodlight FL21 micro	Order number: 5XA7762A1A1A EAN: 4058352631058	LP number 59324_8
Envelope curve in cd/klm	KMK 57.5° KMK 55° KMK 52.5° KMK 50°	sit eco

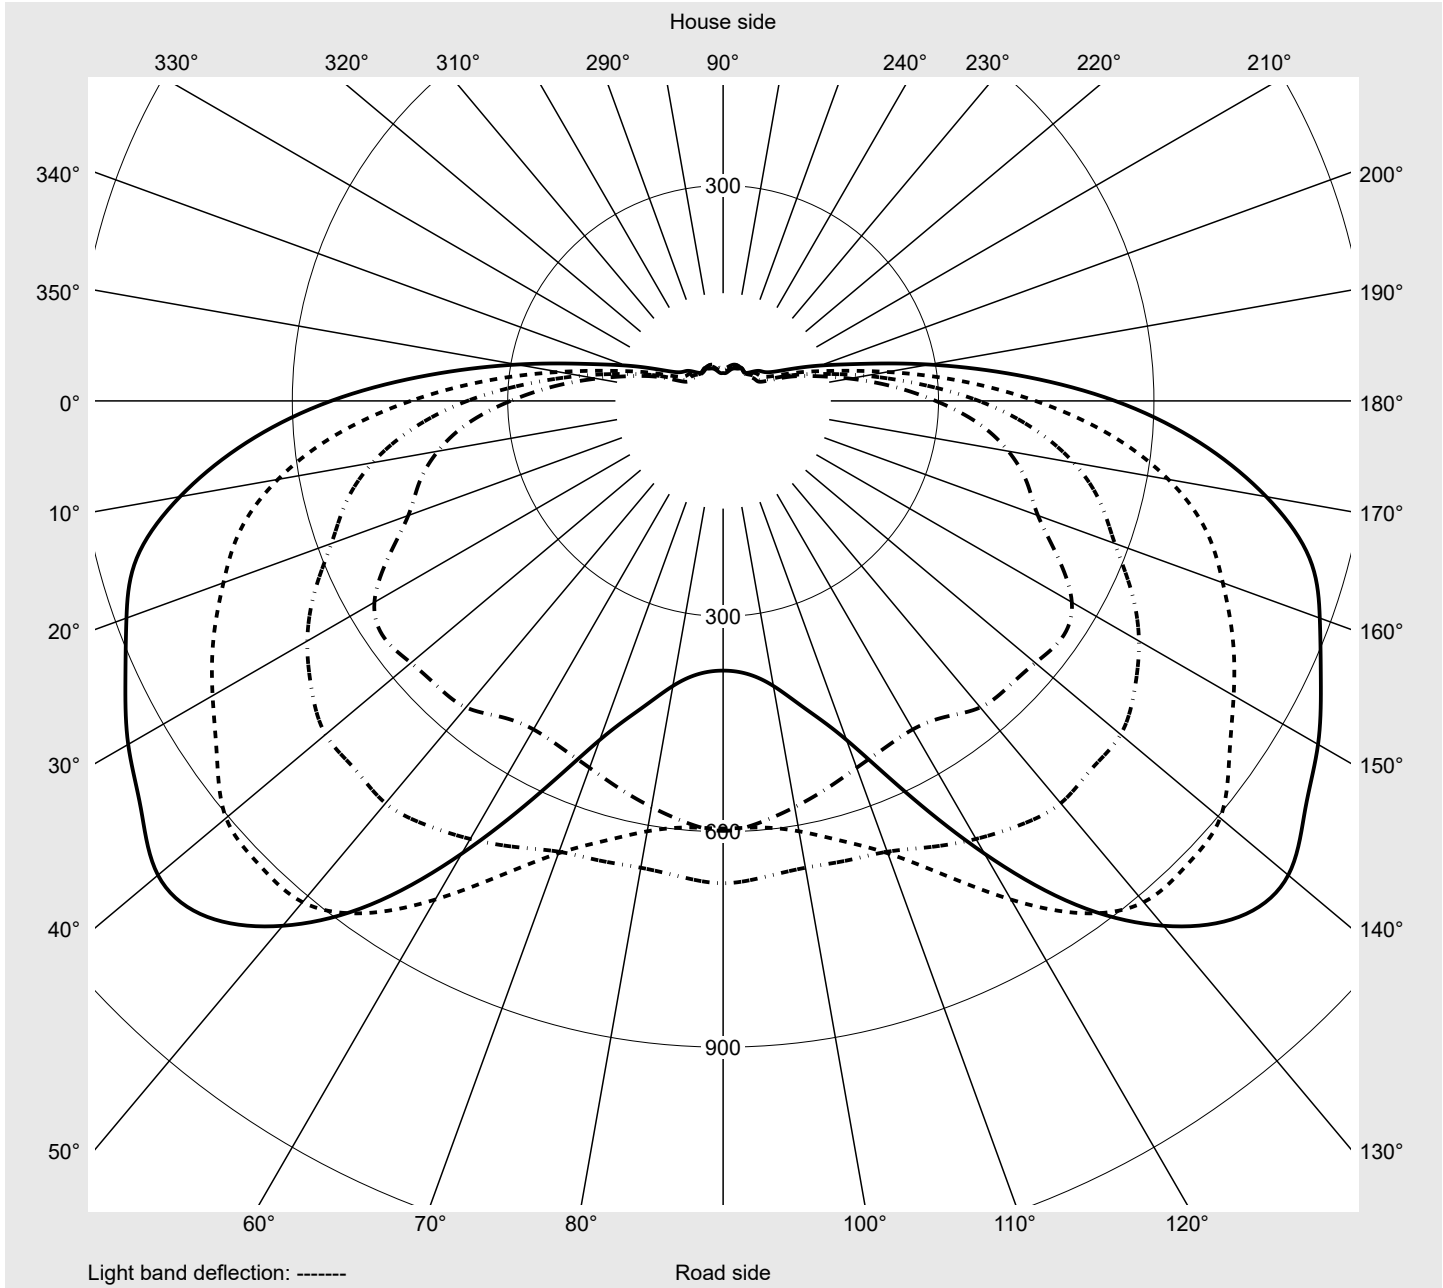

Photometric test report

Family Floodlight FL21 micro		Order number: 5XA7762A1A1A EAN: 4058352631058										LP number 59324_8	
Table of values for luminous intensities										Maximum luminous intensity		siteco	
C- planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
γ	Luminous intensity in cd/klm												
0,0°	152.2	152.2	152.2	152.2	152.2	152.2	152.2	152.2	152.2	152.2	152.2	152.2	152.2
2,5°	152.3	153.0	153.7	154.6	155.3	156.3	157.0	157.8	158.3	158.8	159.4	159.9	160.3
5,0°	154.8	156.4	157.9	159.2	160.4	161.7	162.8	163.8	164.6	165.3	166.1	166.8	167.4
7,5°	158.3	160.7	162.8	164.5	166.0	167.4	168.9	170.2	171.2	172.2	173.1	174.2	175.2
10,0°	161.9	165.2	167.7	169.8	171.5	173.3	175.1	177.1	178.9	180.6	182.3	184.6	186.8
12,5°	167.7	171.2	174.2	176.3	178.7	180.7	183.5	186.4	189.6	193.9	198.1	201.5	204.5
15,0°	173.2	177.5	180.9	183.3	185.9	189.5	193.7	199.5	206.4	212.2	217.8	222.1	224.9
17,5°	177.1	182.4	186.7	190.2	193.7	198.9	206.9	217.3	227.3	236.6	241.4	244.7	246.6
20,0°	177.5	184.8	190.4	195.2	200.4	207.6	220.3	234.4	249.1	257.8	264.4	266.4	264.0
22,5°	177.7	187.1	194.4	200.5	207.2	218.0	233.3	252.2	267.4	280.2	286.9	283.9	276.1
25,0°	180.4	191.8	199.9	206.4	213.8	226.3	244.2	265.8	285.4	299.0	301.2	296.2	287.2
27,5°	188.1	200.6	209.2	215.8	223.8	236.9	257.5	280.9	301.2	312.6	313.9	308.8	301.6
30,0°	193.1	209.1	219.9	227.7	236.0	250.6	271.7	293.7	313.5	322.6	325.6	325.1	320.8
32,5°	201.0	221.2	235.2	244.9	255.0	271.6	292.4	314.0	330.1	339.4	345.2	350.9	361.4
35,0°	210.2	237.3	255.5	267.6	281.5	300.6	322.7	345.2	359.0	376.4	398.4	422.1	433.1
37,5°	223.6	254.8	273.0	282.1	291.2	307.6	340.0	368.9	384.9	392.6	407.4	414.1	406.9
40,0°	229.7	265.6	288.3	302.2	314.2	335.8	372.7	393.1	391.6	380.1	387.7	395.5	385.4
42,5°	236.2	272.1	298.8	316.0	330.4	357.6	397.9	410.2	398.4	384.8	386.4	388.5	373.9
45,0°	246.7	287.3	317.1	337.4	354.7	391.9	438.4	444.4	425.8	413.9	406.8	395.1	374.0
47,5°	267.4	312.7	349.1	374.8	397.0	442.8	491.3	494.2	472.5	464.7	453.0	428.7	407.6
50,0°	296.0	356.6	403.4	438.0	466.6	514.2	560.8	575.9	567.6	562.4	557.2	537.5	528.3
52,5°	356.2	432.5	495.8	543.5	580.6	627.5	668.7	699.7	722.8	725.3	731.5	721.0	704.4
55,0°	435.0	541.1	629.6	696.2	740.6	783.2	821.0	860.8	903.7	913.7	911.3	871.0	801.9
57,5°	545.9	666.4	768.1	845.4	884.3	918.5	956.8	989.9	1027.5	1016.2	954.2	856.5	728.1
60,0°	608.6	730.6	824.8	896.5	919.4	933.1	940.4	948.8	934.3	866.0	760.2	619.5	467.5
62,5°	545.3	656.2	724.2	765.9	757.5	731.9	698.8	668.4	601.9	505.0	395.9	301.2	215.6
65,0°	378.6	423.0	450.1	456.4	434.8	398.6	363.7	333.3	275.5	216.2	163.7	135.3	103.7
67,5°	139.6	158.6	161.6	157.4	150.7	139.6	130.7	125.0	108.3	94.3	80.9	68.1	55.2
70,0°	44.6	46.3	46.2	46.5	48.0	49.2	51.5	53.6	54.7	54.9	52.8	50.0	45.0
72,5°	20.8	21.6	21.3	21.5	23.1	24.5	26.2	29.2	32.7	36.1	38.4	36.7	32.9
75,0°	16.0	17.1	16.2	15.9	16.8	17.3	18.6	21.0	22.6	23.0	23.4	23.7	22.3
77,5°	12.8	13.1	11.7	11.2	11.5	11.8	12.5	13.3	13.8	13.4	13.3	13.8	13.9
80,0°	8.4	7.4	6.6	6.2	6.5	7.0	7.1	7.4	7.6	7.6	7.5	7.5	7.4
82,5°	3.3	3.1	2.8	2.9	3.0	3.1	3.3	3.4	3.5	3.5	3.4	3.2	3.4
85,0°	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.2	1.2	1.1	1.1
87,5°	0.9	0.9	0.9	0.8	0.8	0.8	0.8	0.7	0.7	0.7	0.7	0.6	0.6
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Floodlight FL21 micro	Order number: 5XA7762A1A1A EAN: 4058352631058	LP number 59324_8
---------------------------------	--	----------------------

Table of values for luminous intensities	Maximum luminous intensity	siteco
--	----------------------------	--------

C- planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
γ	Luminous intensity in cd/klm												
0,0°	152.2	152.2	152.2	152.2	152.2	152.2	152.2	152.2	152.2	152.2	152.2	152.2	152.2
2,5°	160.6	160.8	161.1	161.4	161.7	161.8	151.4	150.4	149.6	148.7	148.0	147.2	146.5
5,0°	167.7	168.2	168.9	169.5	169.9	170.1	153.1	151.1	148.8	146.6	144.5	142.3	140.0
7,5°	175.8	176.4	177.3	178.3	179.1	179.3	155.5	152.3	148.8	145.0	141.2	137.8	134.3
10,0°	188.5	190.1	191.4	193.0	194.2	194.6	158.3	153.9	148.5	143.2	137.9	132.8	127.6
12,5°	207.2	209.5	211.6	213.6	215.4	215.9	162.8	156.8	149.6	142.6	135.1	127.8	120.8
15,0°	227.5	230.2	232.6	234.9	237.1	237.9	167.0	159.0	150.4	141.3	132.0	122.9	114.2
17,5°	247.3	247.7	249.2	251.5	254.6	255.8	168.8	159.6	148.3	137.5	126.9	116.7	106.5
20,0°	260.1	257.7	258.4	260.9	265.1	267.7	167.5	155.5	143.0	130.9	119.3	108.2	97.1
22,5°	269.1	264.8	264.9	267.5	272.7	276.0	164.8	151.0	136.6	123.6	111.4	99.7	89.3
25,0°	279.2	274.8	275.5	279.8	287.5	292.4	165.4	158.3	132.9	118.3	104.6	92.9	83.6
27,5°	294.3	291.5	294.7	303.4	313.8	318.9	170.3	150.8	132.1	115.3	100.6	89.2	78.3
30,0°	316.4	316.4	323.0	335.2	348.1	353.2	172.7	152.5	132.6	113.6	98.3	85.8	67.3
32,5°	366.6	368.8	377.4	392.0	404.2	409.3	175.9	152.6	132.3	113.5	97.8	79.5	57.2
35,0°	418.3	389.2	363.8	354.3	349.9	346.8	181.1	155.2	133.0	113.5	95.0	67.7	54.0
37,5°	383.2	357.6	344.1	337.1	323.5	318.7	188.0	158.6	133.0	112.1	86.7	58.6	52.8
40,0°	358.5	327.8	311.7	296.1	289.1	288.0	190.3	157.7	130.6	108.0	72.1	56.0	51.9
42,5°	339.3	306.9	286.3	272.3	269.4	269.6	192.1	157.2	129.4	104.8	67.7	56.1	51.9
45,0°	340.2	312.0	299.3	295.5	300.3	305.2	198.5	158.5	127.1	100.4	65.4	56.0	51.8
47,5°	391.0	388.0	392.3	406.5	423.4	433.8	212.7	165.8	123.3	98.4	65.5	55.5	52.2
50,0°	533.1	543.7	558.7	574.4	589.4	598.8	235.6	179.0	133.3	98.3	65.3	55.1	53.4
52,5°	685.4	668.2	662.8	660.2	665.4	671.8	273.1	201.6	145.0	105.7	72.9	58.3	56.2
55,0°	728.4	670.4	634.1	608.6	596.4	595.5	328.0	232.1	161.8	117.4	84.6	67.1	61.8
57,5°	601.1	502.5	444.1	403.1	381.6	375.6	411.7	291.6	199.2	144.0	105.7	81.2	70.2
60,0°	350.7	269.8	222.6	190.8	173.2	166.1	469.5	341.1	239.3	169.8	121.1	89.6	74.0
62,5°	160.1	123.8	98.7	80.3	69.1	64.9	435.8	324.6	239.9	176.3	122.8	91.3	73.9
65,0°	80.8	64.0	45.1	36.5	32.8	32.8	290.9	224.9	173.3	132.3	102.5	77.3	69.5
67,5°	48.3	42.3	33.9	30.0	27.2	26.2	104.6	83.1	83.7	71.8	60.3	54.1	59.0
70,0°	38.8	32.2	27.1	23.2	20.6	19.6	32.8	27.7	30.9	33.7	32.9	34.2	44.2
72,5°	28.8	24.2	20.4	17.9	16.2	14.9	20.5	19.6	19.5	20.5	20.3	22.1	31.4
75,0°	20.5	17.6	14.5	12.5	12.1	11.1	15.4	14.4	14.2	14.7	14.1	15.7	23.2
77,5°	13.5	11.8	9.9	9.0	8.9	8.4	12.4	10.2	9.7	9.9	9.6	10.8	16.0
80,0°	7.3	6.5	5.5	5.0	4.5	4.3	7.2	5.7	5.4	5.9	5.6	6.3	9.6
82,5°	3.1	2.7	2.5	2.3	2.1	2.1	3.0	2.8	2.5	2.7	2.8	2.8	4.0
85,0°	1.0	1.0	1.0	0.9	0.9	0.9	1.3	1.3	1.3	1.2	1.2	1.2	1.1
87,5°	0.6	0.6	0.5	0.5	0.5	0.5	0.9	0.9	1.0	1.0	1.0	0.9	0.9
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Floodlight FL21 micro				Order number: 5XA7762A1A1A EAN: 4058352631058								LP number 59324_8			
Table of values for luminous intensities												Maximum luminous intensity		siteco	
C- planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone		
γ	Luminous intensity in cd/klm											Luminous flux in lm/klm			
0,0°	152.2	152.2	152.2	152.2	152.2	152.2	152.2	152.2	152.2	152.2	152.2	0.2	0.2		
2,5°	145.7	144.9	144.1	143.4	142.8	142.3	141.8	141.3	140.8	140.6	140.5	1.8	2.0		
5,0°	137.7	135.7	133.8	132.1	130.6	129.3	128.2	127.2	126.5	126.0	125.9	3.6	5.6		
7,5°	130.8	127.4	124.1	121.2	118.5	116.2	114.2	112.7	111.7	111.1	111.0	5.4	11.0		
10,0°	122.6	118.0	113.7	109.8	106.3	103.4	101.0	99.0	97.6	96.8	96.6	7.2	18.2		
12,5°	114.3	108.4	103.1	98.2	93.9	90.3	87.3	84.9	83.3	82.4	82.1	9.2	27.4		
15,0°	106.0	98.6	92.1	86.5	81.9	78.5	75.8	73.8	72.6	71.9	71.7	11.3	38.6		
17,5°	96.8	88.4	81.9	77.1	73.2	69.9	67.1	64.8	63.1	62.3	62.0	13.4	52.1		
20,0°	87.6	80.4	74.5	68.2	61.9	57.2	54.2	52.5	51.6	51.3	51.2	15.5	67.5		
22,5°	81.1	73.1	63.5	55.5	51.8	50.5	49.8	49.4	49.1	49.0	49.0	17.5	85.1		
25,0°	74.8	63.3	54.3	51.2	50.2	49.5	49.0	48.6	48.2	48.0	48.0	19.8	104.9		
27,5°	64.0	53.7	51.1	50.3	49.7	49.1	48.5	48.1	47.6	47.4	47.4	22.4	127.3		
30,0°	53.7	51.2	50.3	50.0	49.6	49.0	48.5	48.0	47.5	47.1	47.1	25.4	152.7		
32,5°	51.9	50.5	50.1	50.0	49.6	49.2	48.7	48.2	47.6	47.1	47.1	29.5	182.2		
35,0°	51.5	50.3	49.9	49.7	49.6	49.3	49.1	48.6	48.0	47.2	47.1	33.1	215.2		
37,5°	50.8	49.9	49.5	49.5	49.4	49.3	49.4	49.1	48.5	47.5	47.4	35.0	250.3		
40,0°	49.8	49.2	48.8	49.0	49.2	49.6	50.0	49.9	49.0	47.8	47.5	36.5	286.7		
42,5°	49.3	48.3	48.1	48.5	49.4	50.0	50.6	49.9	48.7	47.1	46.6	38.2	325.0		
45,0°	48.8	47.6	47.5	48.4	49.5	49.9	50.2	50.1	48.6	46.6	45.9	42.0	367.0		
47,5°	49.1	47.5	47.5	48.5	49.2	50.4	51.2	51.7	49.7	46.9	46.3	49.8	416.7		
50,0°	51.0	48.7	48.4	48.6	50.2	52.5	53.3	52.1	49.0	46.1	45.3	63.0	479.8		
52,5°	54.8	51.7	49.3	49.5	51.9	52.9	53.0	50.8	47.0	44.2	43.3	79.3	559.1		
55,0°	59.7	55.4	50.8	50.4	52.4	52.1	51.1	48.6	44.2	41.5	40.5	93.7	652.8		
57,5°	65.1	57.4	50.9	49.9	51.7	49.6	48.1	45.9	41.8	38.9	38.8	99.5	752.3		
60,0°	67.5	55.2	49.8	48.4	48.8	47.2	44.9	43.5	39.8	37.2	37.4	90.6	843.0		
62,5°	69.4	54.7	48.1	45.0	45.1	44.3	43.1	42.3	39.8	37.0	36.9	68.1	911.1		
65,0°	68.9	53.6	45.3	41.5	42.3	42.6	41.8	41.0	38.0	35.5	35.9	41.0	952.1		
67,5°	61.5	48.1	40.4	38.0	39.8	41.1	40.2	38.2	34.3	38.8	79.9	19.3	971.4		
70,0°	49.3	40.7	35.6	34.2	36.8	38.4	36.3	32.5	27.8	26.1	56.8	10.1	981.6		
72,5°	38.9	34.9	31.3	30.1	32.4	33.8	30.8	25.4	20.2	20.4	27.1	6.9	988.4		
75,0°	30.5	29.4	26.0	26.3	28.5	26.6	20.9	14.4	12.0	13.0	14.0	5.0	993.5		
77,5°	22.1	22.1	17.8	15.8	18.7	18.8	15.1	9.0	7.9	7.5	7.5	3.4	996.9		
80,0°	12.2	11.5	9.8	9.5	8.6	5.6	5.0	4.0	3.4	3.4	3.3	1.8	998.7		
82,5°	4.8	4.0	3.6	3.1	2.4	1.7	1.6	1.3	1.1	1.0	1.0	0.8	999.5		
85,0°	1.1	1.0	1.0	0.9	0.9	0.8	0.8	0.8	0.7	0.7	0.7	0.3	999.8		
87,5°	0.9	0.9	0.8	0.8	0.8	0.7	0.7	0.7	0.7	0.7	0.6	0.2	1000.0		
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0		

Photometric test report

Family Floodlight FL21 micro	Order number: 5XA7762A1A1A EAN: 4058352631058	LP number 59324_8
Dimming levels table environmental temperature: 25°C		

Luminous flux [%]	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]start of lifetime	Power consumption [W]end of lifetime	Power consumption [W]average
100	254	254	2520	23.1	23.8	23.5
95	241	252	2391	21.7	22.4	22.0
90	229	250	2272	20.4	21.1	20.8
85	216	248	2143	19.1	19.7	19.4
80	203	246	2014	17.8	18.3	18.0
75	190	243	1885	16.6	17.1	16.8
70	178	241	1766	15.4	15.9	15.6
65	165	238	1637	14.3	14.7	14.5
60	152	235	1508	13.1	13.5	13.3
55	140	232	1389	12.1	12.4	12.2
50	127	229	1260	10.9	11.3	11.1
45	114	225	1131	9.9	10.2	10.0
40	102	221	1012	8.9	9.2	9.0
35	89	216	883	7.9	8.1	8.0
30	76	210	754	6.9	7.1	7.0
25	63	203	625	5.9	6.1	6.0
20	51	195	506	5.1	5.2	5.2
15	39	185	387	4.2	4.3	4.2