

Photometric test report

Family
Floodlight FL21 micro

Order number: 5XA7762A1B1A
EAN: 4058352669488

LP number
59238_33



Version mounting bracket
Optic direct, symmetric ellipsoid distribution
R120004
Cover toughened safety glass
Lamps LED 2200 K | CRI ≥ 70
Controlgear ECG SITECO iQ
Rated values Net luminous flux = 2560 lm
Power consumption = 23.1 W
Luminous efficacy = 110.8 lm/W


serial
documentation
05.07.2022

siteco

Luminous intensity in cd/klm

C180-0

Imax: 2873 cd/klm

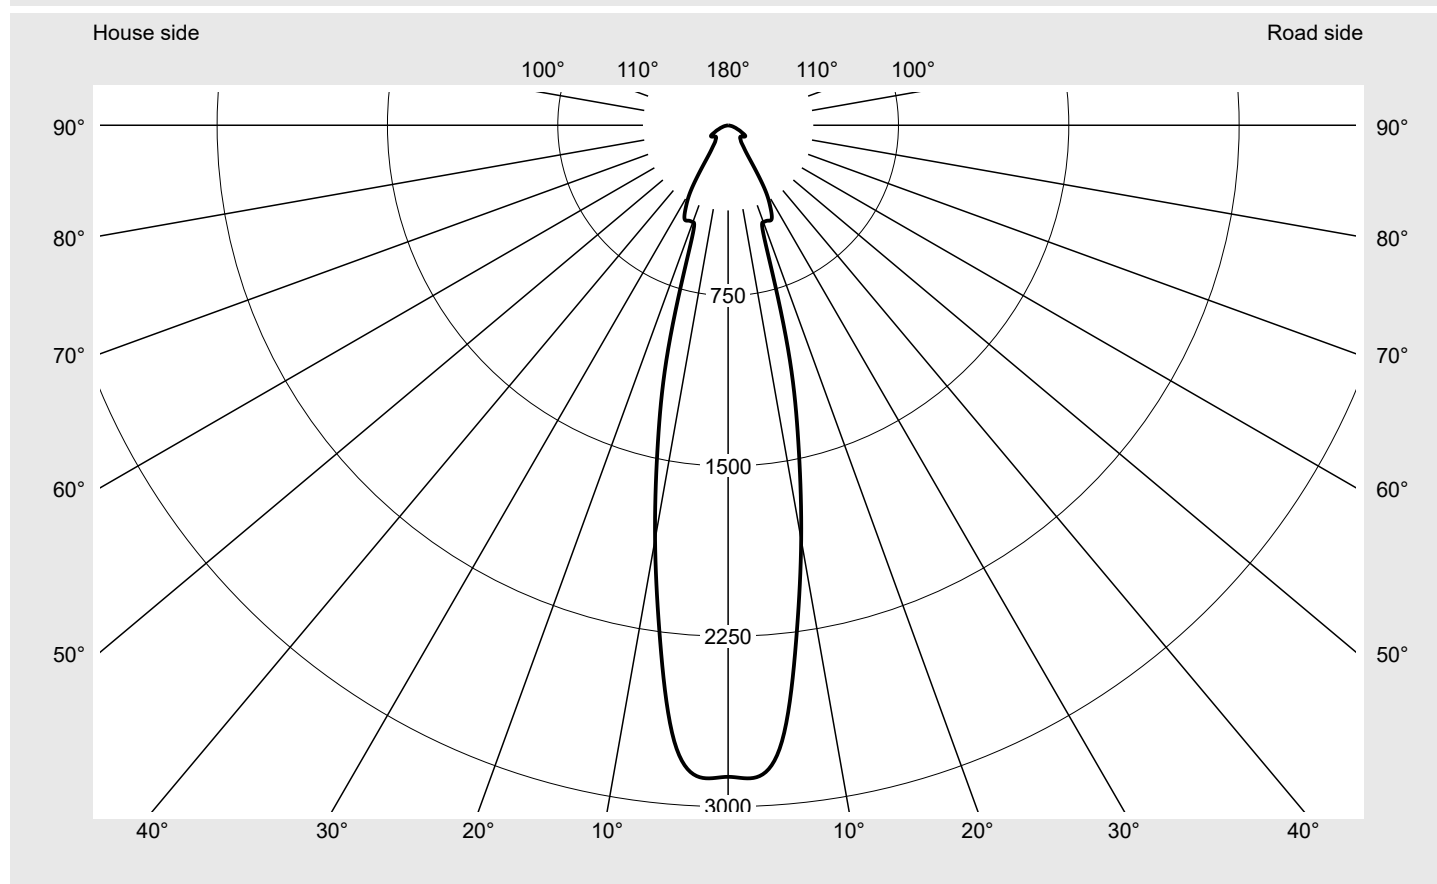

Luminaire output ratios

Eta	100.0%
Eta 0° - 90°	100.0%
Eta 90° - 180°	0.0%

Luminous intensity class acc. to EN13201-2

Class:	G6
Imax 70°	36.4
Imax 80°	9.1
Imax 90°	0.0
Imax >90°	0.0
Imax >95°	0.0

Measurement conditions

DIN EN 13032 and DIN 5032

Photometric test report

Family
Floodlight FL21 micro


Order number: 5XA7762A1B1A
EAN: 4058352669488

LP number
59238_33

Envelope curve in cd/klm

KMK 2,5°KMK 0°

siteco

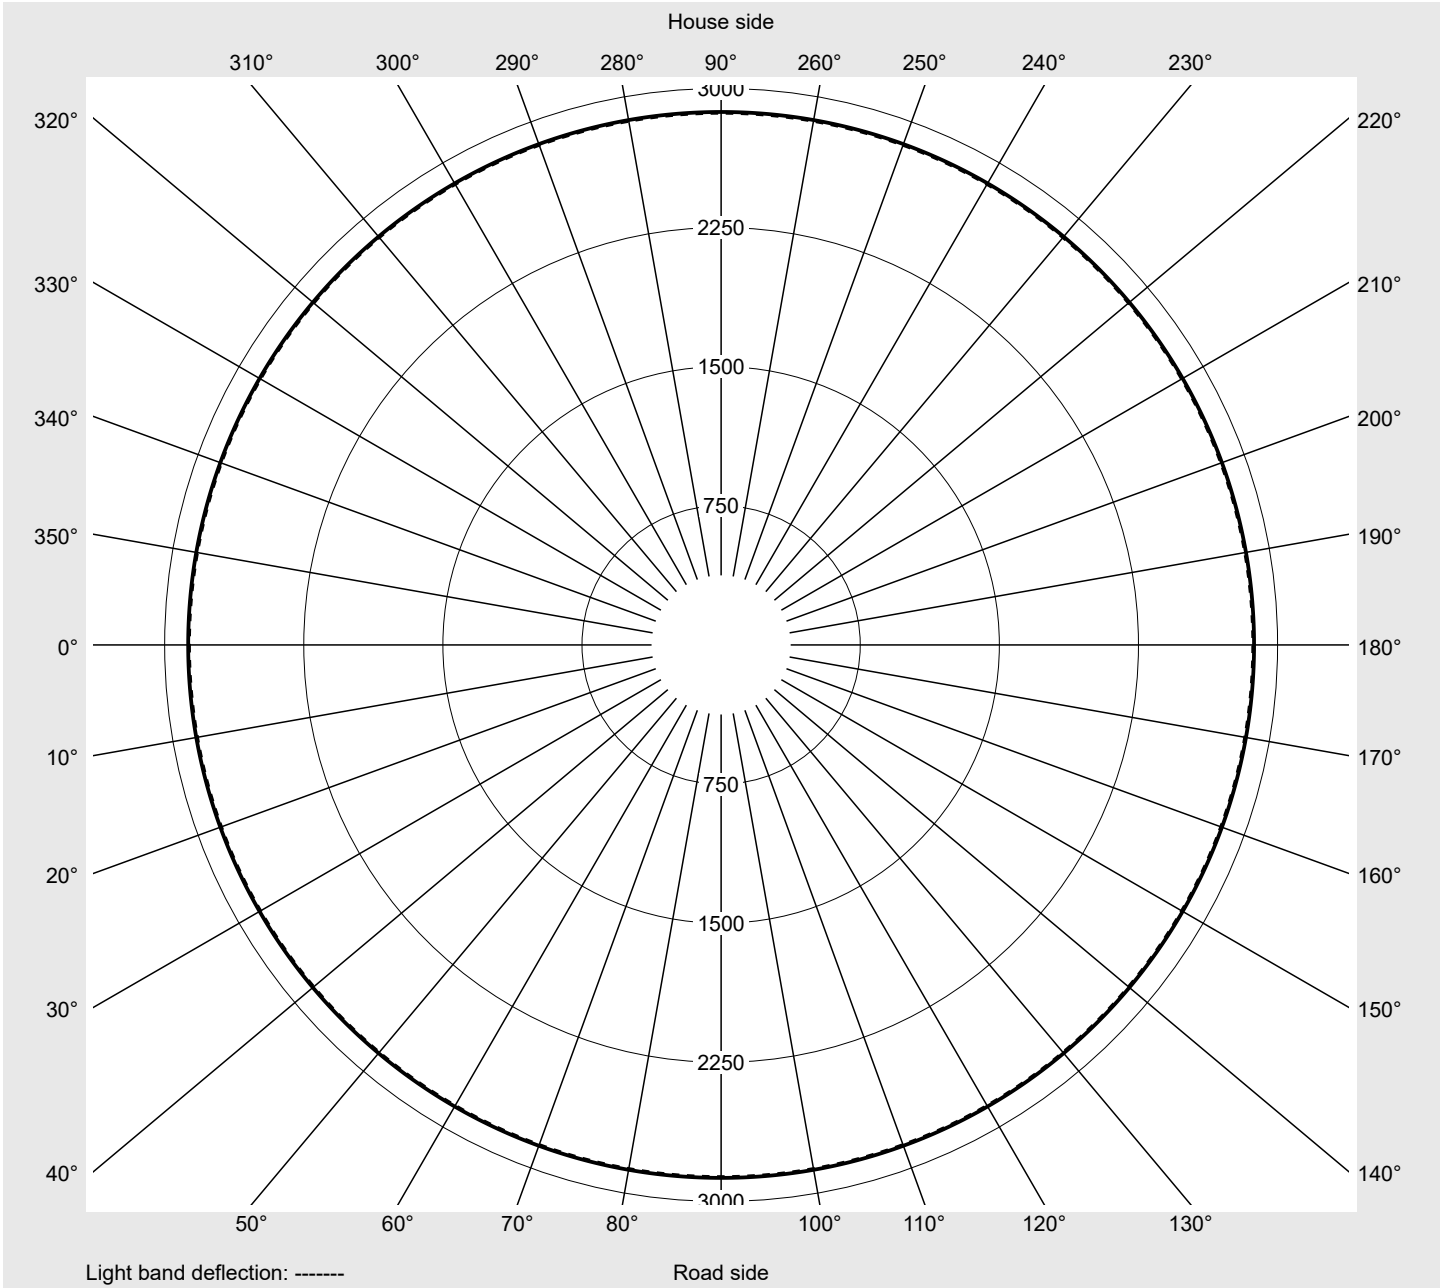

Photometric test report

Family Floodlight FL21 micro	Order number: 5XA7762A1B1A EAN: 4058352669488	LP number 59238_33
Table of values for luminous intensities Maximum luminous intensity		sITeco

C- planes	0°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm		Luminous flux in lm/klm
0,0°	2868.8	4.3	4.3
2,5°	2873.2	34.4	38.6
5,0°	2722.5	65.0	103.7
7,5°	2292.0	82.0	185.7
10,0°	1852.6	88.2	273.9
12,5°	1427.9	84.7	358.6
15,0°	1018.5	72.3	430.9
17,5°	552.2	45.5	476.4
20,0°	453.7	42.5	518.9
22,5°	454.7	47.7	566.6
25,0°	454.2	52.6	619.2
27,5°	400.1	50.6	669.9
30,0°	317.0	43.5	713.3
32,5°	178.5	26.3	739.6
35,0°	121.9	19.2	758.8
37,5°	96.3	16.1	774.9
40,0°	86.4	15.2	790.1
42,5°	78.8	14.6	804.7
45,0°	75.0	14.5	819.2
47,5°	74.2	15.0	834.2
50,0°	76.8	16.1	850.4
52,5°	82.1	17.9	868.2
55,0°	87.5	19.7	887.9
57,5°	89.5	20.7	908.6
60,0°	83.0	19.7	928.3
62,5°	67.2	16.3	944.6
65,0°	57.1	14.2	958.8
67,5°	43.9	11.1	969.9
70,0°	36.4	9.4	979.3
72,5°	27.1	7.1	986.4
75,0°	21.2	5.6	992.0
77,5°	13.7	3.7	995.6
80,0°	9.1	2.5	998.1
82,5°	4.7	1.3	999.4
85,0°	1.8	0.5	999.9
87,5°	0.5	0.1	1000.0
90,0°	0.0	0.0	1000.0

Photometric test report

Family Floodlight FL21 micro	Order number: 5XA7762A1B1A EAN: 4058352669488	LP number 59238_33
Dimming levels table environmental temperature: 25°C		

Luminous flux [%]	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]start of lifetime	Power consumption [W]end of lifetime	Power consumption [W]average
100	254	254	2560	23.1	23.8	23.5
95	241	252	2429	21.7	22.4	22.0
90	229	250	2308	20.4	21.1	20.8
85	216	248	2177	19.1	19.7	19.4
80	203	246	2046	17.8	18.3	18.0
75	190	243	1915	16.6	17.1	16.8
70	178	241	1794	15.4	15.9	15.6
65	165	238	1663	14.3	14.7	14.5
60	152	235	1532	13.1	13.5	13.3
55	140	232	1411	12.1	12.4	12.2
50	127	229	1280	10.9	11.3	11.1
45	114	225	1149	9.9	10.2	10.0
40	102	221	1028	8.9	9.2	9.0
35	89	216	897	7.9	8.1	8.0
30	76	210	766	6.9	7.1	7.0
25	63	203	635	5.9	6.1	6.0
20	51	195	514	5.1	5.2	5.2
15	39	185	393	4.2	4.3	4.2