

Photometric test report

Family
Floodlight FL21 mini

Order number: 5XA7772B1B1A
EAN: 4058352653814

LP number
59238_54



Version	mounting bracket
Optic	symmetric distribution RS12
Cover	toughened safety glass
Lamps	LED 2200 K CRI ≥ 70
Controlgear	ECG SITECO iQ
Rated values	Net luminous flux = 5230 lm Power consumption = 45.5 W Luminous efficacy = 114.9 lm/W


serial
documentation
26.08.2022

siteco

Luminous intensity in cd/klm

C180-0

Imax: 2873 cd/klm

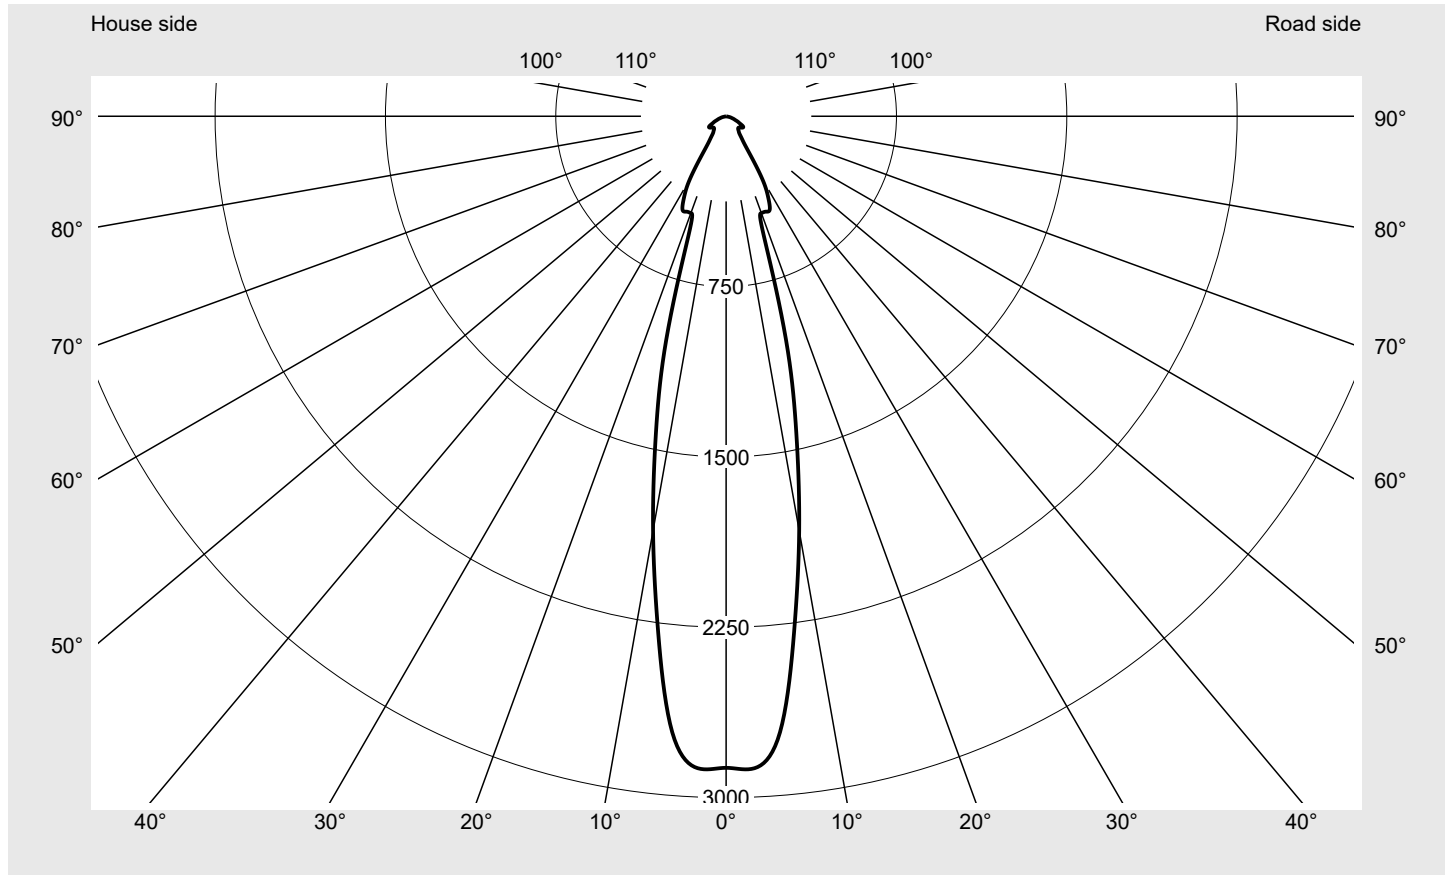

Luminaire output ratios

Eta	100.0%
Eta 0° - 90°	100.0%
Eta 90° - 180°	0.0%

Luminous intensity class acc. to EN13201-2

Class:	G6
Imax 70°	36.4
Imax 80°	9.1
Imax 90°	0.0
Imax >90°	0.0
Imax >95°	0.0


Measurement conditions

DIN EN 13032 and DIN 5032

Photometric test report

Family Floodlight FL21 mini	Order number: 5XA7772B1B1A EAN: 4058352653814	LP number 59238_54
---------------------------------------	--	------------------------------

Envelope curve in cd/klm KMK 2.5° KMK 0° siteco

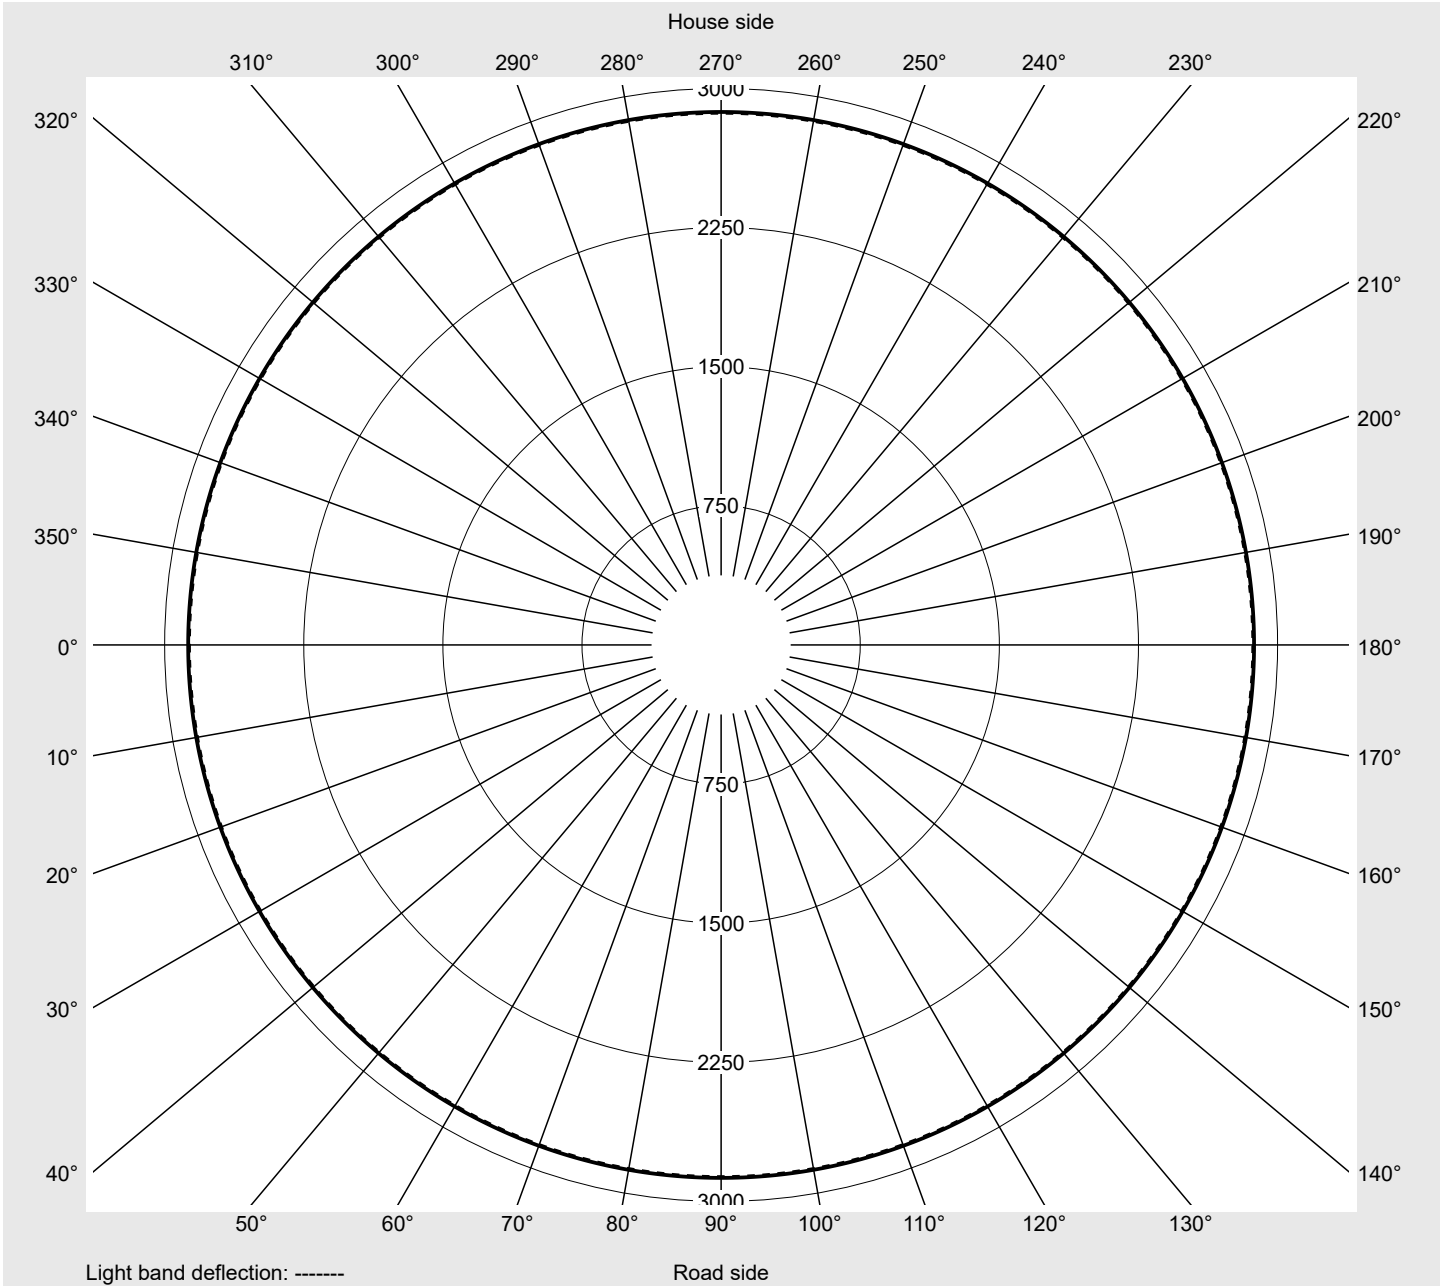

Photometric test report

Family Floodlight FL21 mini	Order number: 5XA7772B1B1A EAN: 4058352653814	LP number 59238_54
---------------------------------------	--	------------------------------

sITeco

Table of values for luminous intensities	Maximum luminous intensity
---	-----------------------------------

C-planes	0°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm	Luminous flux in lm/klm	
0,0°	2868.8	4.3	4.3
2,5°	2873.2	34.4	38.6
5,0°	2722.5	65.0	103.7
7,5°	2292.0	82.0	185.7
10,0°	1852.6	88.2	273.9
12,5°	1427.9	84.7	358.6
15,0°	1018.5	72.3	430.9
17,5°	552.2	45.5	476.4
20,0°	453.7	42.5	518.9
22,5°	454.7	47.7	566.6
25,0°	454.2	52.6	619.2
27,5°	400.1	50.6	669.9
30,0°	317.0	43.5	713.3
32,5°	178.5	26.3	739.6
35,0°	121.9	19.2	758.8
37,5°	96.3	16.1	774.9
40,0°	86.4	15.2	790.1
42,5°	78.8	14.6	804.7
45,0°	75.0	14.5	819.2
47,5°	74.2	15.0	834.2
50,0°	76.8	16.1	850.4
52,5°	82.1	17.9	868.2
55,0°	87.5	19.7	887.9
57,5°	89.5	20.7	908.6
60,0°	83.0	19.7	928.3
62,5°	67.2	16.3	944.6
65,0°	57.1	14.2	958.8
67,5°	43.9	11.1	969.9
70,0°	36.4	9.4	979.3
72,5°	27.1	7.1	986.4
75,0°	21.2	5.6	992.0
77,5°	13.7	3.7	995.6
80,0°	9.1	2.5	998.1
82,5°	4.7	1.3	999.4
85,0°	1.8	0.5	999.9
87,5°	0.5	0.1	1000.0
90,0°	0.0	0.0	1000.0

Photometric test report

Family Floodlight FL21 mini	Order number: 5XA7772B1B1A EAN: 4058352653814	LP number 59238_54
---------------------------------------	--	-------------------------------------

Dimming levels table	environmental temperature: 25°C	siteco
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]	Power consumption [W]	Power consumption [W]
				start of lifetime	end of lifetime	average
100	254	254	5230	45.5	48.0	46.8
95	241	252	4962	42.8	45.1	44.0
90	229	250	4715	40.3	42.5	41.4
85	216	248	4448	37.7	39.7	38.7
80	203	246	4180	35.1	37.0	36.0
75	190	243	3912	32.7	34.4	33.6
70	178	241	3665	30.5	32.1	31.3
65	165	238	3397	28.2	29.6	28.9
60	152	235	3130	25.8	27.1	26.4
55	140	232	2883	23.6	24.9	24.2
50	127	229	2615	21.4	22.6	22.0
45	114	225	2347	19.3	20.3	19.8
40	102	221	2100	17.4	18.2	17.8
35	89	216	1833	15.3	16.1	15.7
30	76	210	1565	13.3	13.9	13.6
25	63	203	1297	11.4	11.9	11.6
20	51	195	1050	9.5	9.9	9.7
15	39	185	803	8.2	8.3	8.2