

Photometric test report

Family Streetlight 11 mini LED

Order number: 5XC2F41E08HE
EAN: 4058352583814

LP number
58932_35



Version	post-top or side-entry mounting
Optic	direct, asymmetric, right wide distribution ZCR0001
Cover	transparent, PMMA
Lamps	LED 4000 K CRI ≥ 70
Controlgear	ECG SITECO iQ
Rated values	Net luminous flux = 7530 lm Power consumption = 58.6 W Luminous efficacy = 128.5 lm/W

serial
documentation
17.11.2021

siteco

Luminous intensity in cd/klm


C180-0

C205-25

C210-30

C270-90

Imax: 835 cd/klm

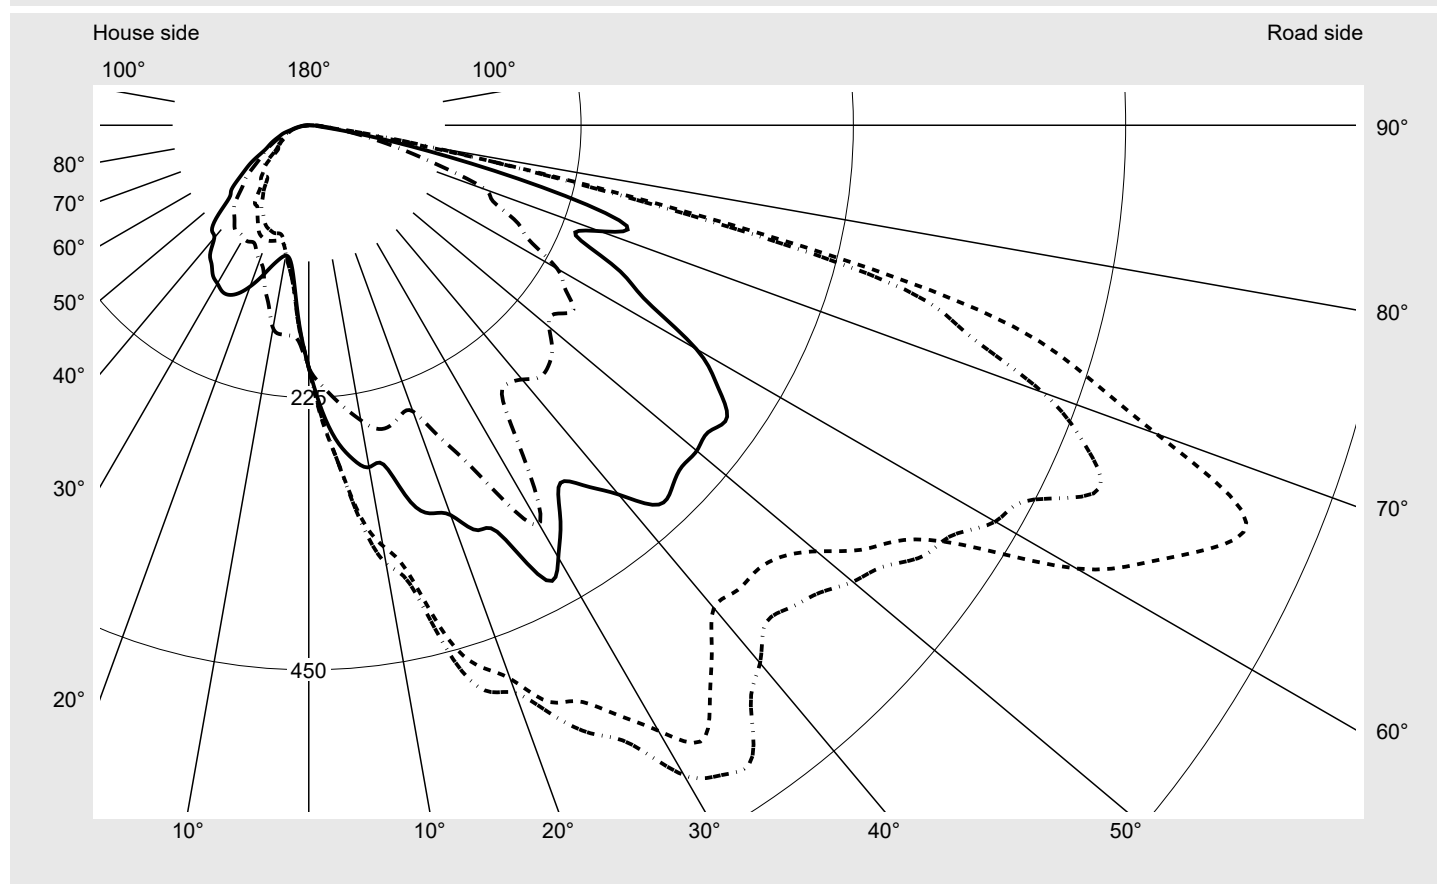

Luminaire output ratios

Eta	100.0%
Eta 0° - 90°	100.0%
Eta 90° - 180°	0.0%

Measurement conditions

DIN EN 13032 and DIN 5032


Luminous intensity class acc. to EN13201-2

Class:	G3
Imax 70°	745.4
Imax 80°	99.8
Imax 90°	0.0
Imax >90°	0.0
Imax >95°	0.0

Photometric test report

Family Streetlight 11 mini LED	Order number: 5XC2F41E08HE EAN: 4058352583814	LP number 58932_35
Envelope curve in cd/klm KMK 67.5° KMK 65° KMK 62.5° KMK 60°		

siteco

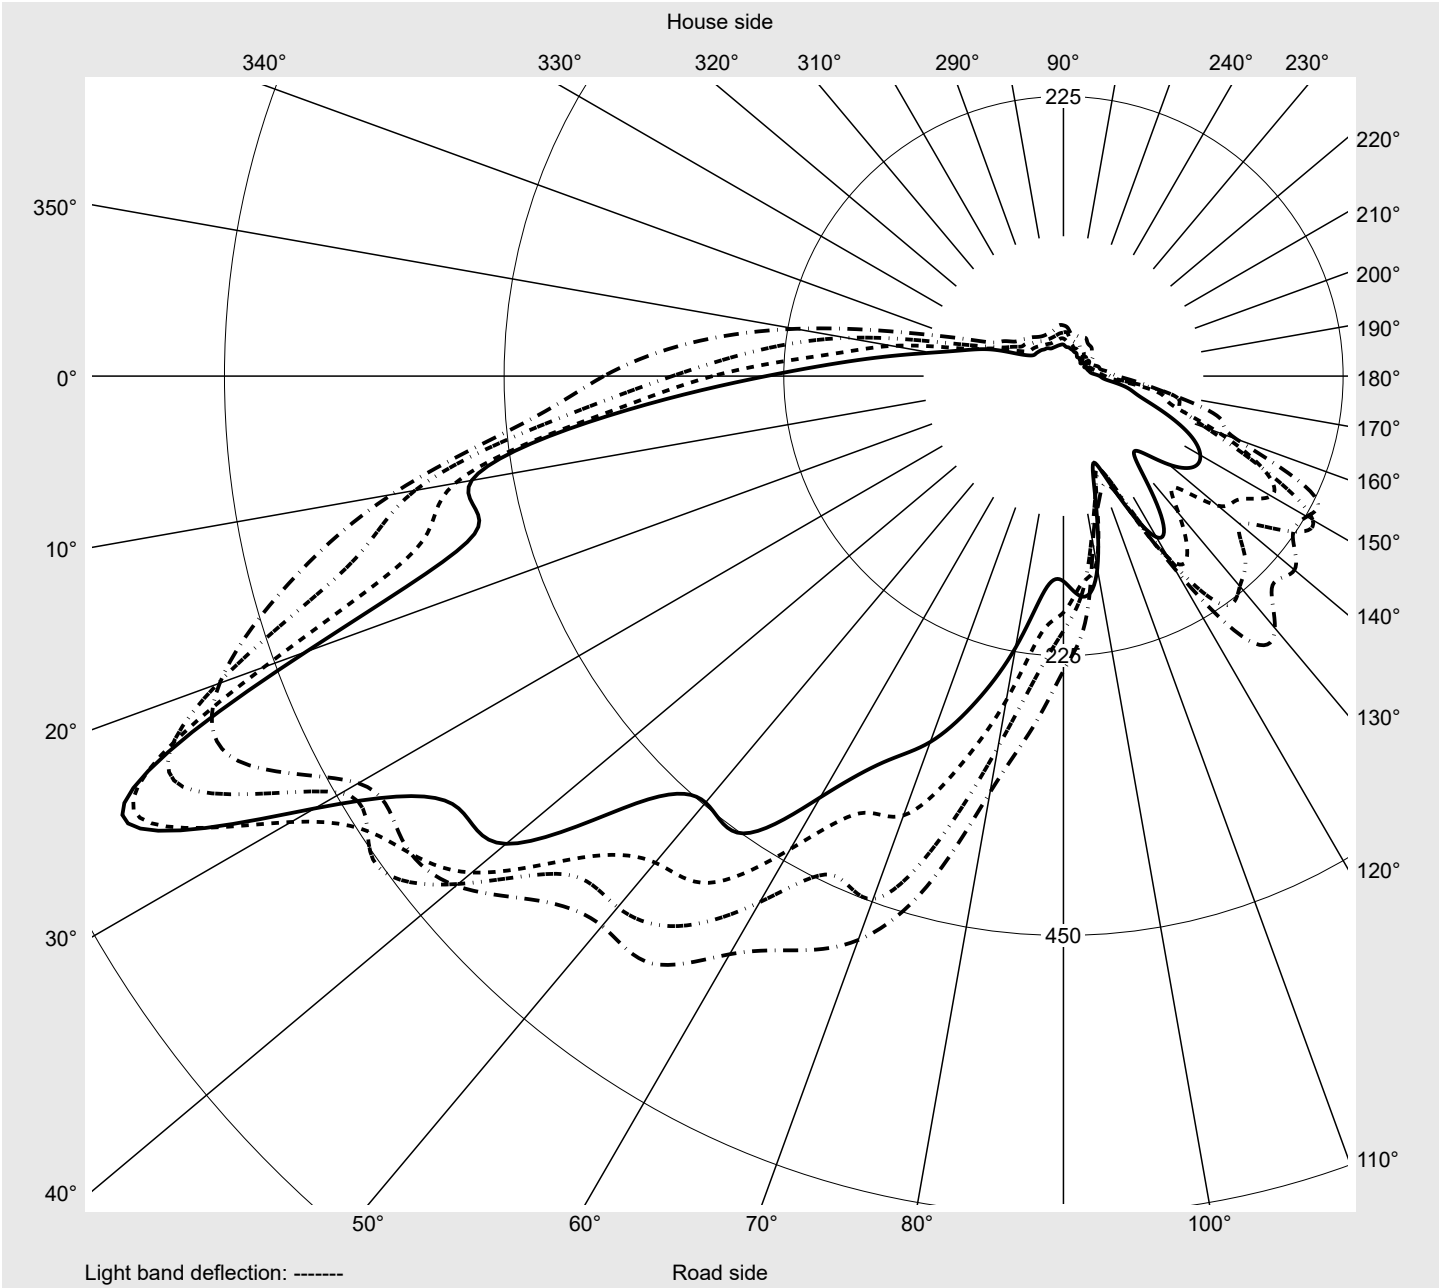

Photometric test report

Family Streetlight 11 mini LED	Order number: 5XC2F41E08HE EAN: 4058352583814	LP number 58932_35
Table of values for luminous intensities		Maximum luminous intensity

siteco

C- planes	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°
γ	Luminous intensity in cd/klm													
0,0°	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4
2,5°	234.1	234.9	237.3	240.8	241.6	242.8	241.0	237.7	235.3	233.0	232.8	231.6	231.0	228.3
5,0°	261.2	274.7	280.2	280.4	280.2	280.2	280.4	284.7	292.2	294.5	290.2	286.1	279.2	272.0
7,5°	278.1	285.5	296.7	312.2	320.2	325.7	330.8	334.2	337.7	341.6	344.7	337.3	324.0	305.1
10,0°	286.9	306.5	317.5	333.2	348.1	353.0	367.9	377.7	385.5	392.6	387.1	382.2	380.4	370.4
12,5°	287.5	311.6	325.9	341.4	366.3	378.3	389.1	397.1	396.5	401.8	410.4	399.3	380.2	365.9
15,0°	321.0	348.3	375.3	395.9	415.1	436.1	454.0	454.0	437.7	426.9	418.1	405.1	387.3	372.4
17,5°	336.3	373.0	394.9	420.2	442.0	468.7	490.4	492.8	496.7	479.3	459.7	426.5	401.4	377.7
20,0°	342.8	381.8	414.0	451.8	478.1	486.7	499.3	516.5	509.9	502.6	491.2	469.5	449.1	404.0
22,5°	362.2	388.5	420.0	462.8	495.7	515.2	527.7	528.3	523.0	522.2	517.5	523.0	492.8	457.3
25,0°	372.0	427.1	474.6	494.0	505.0	525.0	554.8	571.6	591.8	558.7	552.4	540.3	517.7	472.4
27,5°	423.4	473.2	493.6	496.1	514.0	548.5	576.5	613.0	634.2	640.7	614.4	566.1	555.0	523.2
30,0°	412.4	439.7	479.7	545.0	564.4	577.7	620.1	609.5	622.2	649.5	647.9	601.8	565.4	534.2
32,5°	387.1	449.1	500.6	557.3	582.8	603.4	636.5	654.6	661.1	673.8	686.7	657.7	608.3	579.3
35,0°	361.6	404.6	441.8	492.2	562.0	577.9	638.5	639.3	685.4	719.9	733.4	716.7	669.3	635.8
37,5°	375.7	403.4	418.1	448.7	498.1	547.1	599.9	660.1	690.1	741.8	773.8	772.4	729.7	678.3
40,0°	398.3	408.5	417.9	438.5	462.0	520.8	580.1	662.4	724.4	792.2	768.9	783.8	736.9	693.2
42,5°	425.5	426.5	428.3	445.5	482.8	522.4	558.7	635.0	718.5	747.5	786.8	754.0	716.7	689.7
45,0°	424.2	435.9	437.7	464.6	490.6	521.8	563.4	603.2	697.5	757.7	764.8	741.1	729.5	678.5
47,5°	417.9	426.1	448.5	480.4	508.9	528.3	572.0	596.5	654.4	723.6	744.4	731.3	718.9	674.4
50,0°	418.5	440.6	481.0	489.3	519.5	547.7	586.9	607.3	642.0	679.5	718.5	716.2	687.5	666.5
52,5°	416.3	441.6	490.4	507.7	546.3	576.1	598.9	628.7	649.7	657.1	685.6	686.0	659.5	636.5
55,0°	421.8	451.2	494.0	548.3	605.4	597.9	620.3	641.6	618.7	628.3	641.6	632.4	625.4	597.1
57,5°	400.2	460.2	545.7	614.8	680.9	647.5	630.5	633.2	637.3	604.8	599.9	608.7	567.1	557.5
60,0°	369.8	436.5	548.9	645.4	722.4	732.6	655.0	649.7	637.9	596.9	577.5	576.9	537.1	509.7
62,5°	314.7	412.4	529.7	597.7	724.4	781.7	670.9	678.1	635.6	566.9	557.9	540.1	488.7	442.6
65,0°	282.2	378.3	497.1	539.7	684.4	825.4	717.5	656.9	621.4	547.7	511.0	497.7	439.3	388.1
67,5°	239.2	368.1	483.4	490.6	648.3	835.4	695.6	600.1	585.4	486.1	447.9	449.1	391.4	342.8
70,0°	255.9	379.3	476.9	494.8	561.4	745.4	645.6	559.9	510.8	436.5	401.0	392.2	324.2	291.0
72,5°	275.1	380.6	448.3	489.1	547.9	663.8	568.7	464.8	396.5	364.2	319.4	302.8	259.4	217.5
75,0°	204.5	315.3	388.5	434.2	476.7	543.6	487.3	345.7	283.4	250.4	266.7	273.2	216.7	162.4
77,5°	112.2	180.8	224.7	278.1	266.1	275.5	248.5	199.0	172.8	169.0	193.4	205.1	156.5	116.9
80,0°	47.7	55.1	72.4	96.9	82.0	82.4	99.1	99.8	98.7	98.5	77.7	98.5	86.7	68.4
82,5°	12.2	14.1	15.9	18.4	21.4	23.5	31.6	41.6	37.8	35.7	33.9	40.0	41.6	41.4
85,0°	8.0	8.8	9.8	10.8	11.4	12.0	12.0	12.0	12.0	12.7	14.3	16.5	18.8	21.4
87,5°	3.5	5.3	6.1	6.7	7.1	7.6	7.6	7.3	7.1	6.7	6.5	6.5	6.7	7.3
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 11 mini LED	Order number: 5XC2F41E08HE EAN: 4058352583814	LP number 58932_35
Table of values for luminous intensities		Maximum luminous intensity

siteco

C- planes	70°	75°	80°	85°	90°	95°	100°	105°	110°	115°	120°	125°	130°	135°
γ	Luminous intensity in cd/klm													
0,0°	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4
2,5°	225.1	222.6	220.2	217.7	213.6	209.4	205.1	201.2	196.3	192.8	190.4	188.6	186.5	184.5
5,0°	261.8	248.1	237.5	230.8	225.1	221.2	214.1	207.7	197.7	189.8	183.4	176.7	172.0	166.9
7,5°	291.4	283.4	268.3	254.7	236.5	225.9	215.3	200.4	188.6	177.5	172.4	160.2	150.8	144.7
10,0°	346.3	318.7	294.3	265.1	247.5	228.3	210.8	195.7	181.0	165.1	157.1	150.6	145.7	141.4
12,5°	357.9	333.8	294.3	277.3	256.7	230.2	216.5	199.4	180.2	166.9	159.8	153.7	142.0	136.9
15,0°	347.5	323.4	302.6	272.0	257.5	241.8	220.8	196.9	178.8	167.7	161.6	150.4	141.8	139.0
17,5°	347.5	317.7	297.7	265.1	251.6	227.7	208.1	190.4	176.5	164.3	156.9	152.8	149.4	144.1
20,0°	367.1	328.7	323.0	282.6	251.6	242.2	212.4	192.0	171.8	163.7	157.5	154.7	154.7	151.4
22,5°	386.3	351.2	328.1	295.7	276.7	253.8	223.2	196.7	176.9	164.5	156.9	155.1	157.7	158.3
25,0°	430.8	386.3	341.0	317.9	305.9	270.6	231.6	194.7	173.2	164.7	157.9	157.1	160.6	165.1
27,5°	475.5	434.2	385.3	368.5	349.8	307.5	237.9	192.4	170.6	158.6	155.9	160.8	165.7	173.0
30,0°	518.7	476.5	411.6	377.3	380.6	291.0	227.9	183.2	164.5	158.8	157.3	164.1	173.2	181.2
32,5°	548.3	502.0	409.1	338.3	337.5	265.3	209.2	177.7	158.3	154.3	159.4	169.6	179.8	191.0
35,0°	594.0	514.6	418.7	327.3	280.8	235.3	187.3	167.9	154.9	154.5	162.4	175.3	189.8	200.0
37,5°	602.4	508.1	427.3	337.1	269.4	214.7	175.9	162.4	153.2	154.1	165.7	181.6	196.9	207.9
40,0°	627.3	540.1	456.3	351.8	274.3	202.4	169.4	158.1	147.5	151.6	167.1	188.3	205.7	218.8
42,5°	625.2	560.3	489.3	373.4	282.2	201.2	168.6	155.7	142.6	149.6	165.5	192.8	209.8	238.3
45,0°	648.9	555.9	494.4	372.4	280.4	206.1	165.7	149.8	138.6	144.7	165.9	191.8	223.0	243.9
47,5°	636.0	546.1	474.6	363.6	272.8	204.7	167.7	144.1	135.7	141.6	162.6	194.7	232.6	260.2
50,0°	596.1	513.8	447.3	340.6	259.2	212.8	169.6	137.9	130.0	136.3	161.8	204.1	251.0	260.4
52,5°	585.6	493.8	403.4	319.1	256.1	207.7	161.0	129.4	121.8	129.2	170.6	224.7	270.6	261.2
55,0°	576.9	485.3	382.6	305.5	266.7	222.0	163.2	124.5	114.7	136.9	177.9	239.6	270.4	266.5
57,5°	528.7	471.8	344.9	309.8	251.0	208.5	150.6	118.2	105.1	123.9	177.3	253.8	276.3	256.1
60,0°	482.8	425.3	340.0	283.8	237.1	199.4	136.5	107.5	93.5	108.2	178.8	259.6	264.7	237.9
62,5°	447.7	386.5	303.0	241.0	205.1	174.7	131.0	99.2	82.0	100.8	169.6	224.5	220.8	206.7
65,0°	376.1	326.1	264.9	208.1	190.2	167.7	152.6	104.1	79.0	104.9	169.2	173.7	144.3	126.5
67,5°	313.2	271.0	221.8	173.2	165.1	178.1	157.1	97.7	74.5	109.4	149.6	136.9	93.9	85.5
70,0°	255.1	226.9	179.4	146.5	155.3	166.1	127.1	83.3	73.9	92.0	116.3	106.1	67.3	73.3
72,5°	190.2	181.6	133.0	116.5	118.6	115.3	83.9	47.5	49.2	64.7	63.9	63.7	47.1	58.6
75,0°	129.2	128.4	107.5	92.6	85.1	67.1	44.3	31.4	29.6	46.1	35.7	38.8	38.4	40.6
77,5°	91.8	89.8	79.2	66.5	58.8	42.6	29.8	25.3	24.3	24.9	29.0	29.0	29.0	26.9
80,0°	64.7	61.4	54.9	43.7	38.0	27.1	21.4	20.6	19.0	19.0	20.6	19.8	18.4	19.4
82,5°	41.6	39.0	34.1	28.4	23.1	17.3	14.5	15.5	16.1	13.3	12.7	13.5	12.9	12.9
85,0°	22.0	20.0	17.8	15.3	11.6	8.8	7.1	8.4	10.0	8.4	7.8	8.2	8.0	8.0
87,5°	7.8	7.8	6.1	4.7	3.9	2.9	2.7	3.3	3.1	3.5	3.7	3.7	3.7	3.7
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 11 mini LED	Order number: 5XC2F41E08HE EAN: 4058352583814	LP number 58932_35
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C- planes	140°	145°	150°	155°	160°	165°	170°	175°	180°	185°	190°	195°	200°	205°
γ	Luminous intensity in cd/klm													
0,0°	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4
2,5°	182.8	181.8	180.8	179.4	176.5	173.5	171.2	169.0	167.9	167.9	168.6	169.2	169.8	169.8
5,0°	161.6	156.7	153.9	150.0	146.7	141.8	138.4	135.1	133.9	133.7	134.5	135.3	136.3	137.9
7,5°	139.8	134.7	131.8	129.4	125.9	121.2	118.8	115.9	113.9	113.5	115.3	117.1	118.8	119.6
10,0°	134.3	129.0	126.9	124.1	120.0	116.5	114.3	112.0	109.4	107.3	107.3	106.7	106.7	107.7
12,5°	132.2	131.0	128.1	127.9	124.7	122.4	119.8	117.5	113.7	110.2	107.5	105.1	101.6	99.0
15,0°	136.1	134.7	134.1	134.5	133.0	131.8	129.2	126.7	121.4	116.7	113.3	108.8	103.9	98.6
17,5°	142.2	142.2	143.0	145.7	145.5	144.9	142.0	138.6	131.8	125.5	120.8	114.5	107.7	100.2
20,0°	150.6	151.4	154.9	158.1	158.8	158.1	155.3	150.6	141.8	134.1	127.5	119.2	110.4	101.2
22,5°	159.4	162.8	168.3	171.8	172.8	171.0	166.9	161.0	150.0	140.8	132.2	121.6	110.6	100.2
25,0°	168.8	174.3	180.8	184.1	183.7	180.8	174.9	167.3	154.7	144.7	134.3	121.8	108.6	97.3
27,5°	180.2	185.9	191.0	192.0	190.2	186.5	180.2	170.4	154.9	142.8	132.0	120.2	103.5	91.0
30,0°	188.8	194.1	197.5	197.1	195.1	191.8	181.6	167.9	151.0	138.6	125.5	110.8	96.1	84.7
32,5°	198.5	202.6	204.7	207.7	201.8	188.6	176.5	163.2	147.3	135.7	125.1	104.5	88.4	79.4
35,0°	206.7	214.7	219.6	206.9	193.7	188.3	177.1	159.4	140.0	126.9	115.9	98.4	81.8	77.5
37,5°	217.5	227.5	211.6	202.2	199.0	181.0	164.3	149.0	133.9	122.2	109.4	89.4	77.1	66.1
40,0°	234.9	223.6	218.1	201.6	183.9	178.3	162.8	144.1	121.4	109.0	97.1	79.8	76.9	60.8
42,5°	235.9	228.7	210.0	199.0	191.4	167.9	150.0	136.7	118.4	103.3	87.7	76.5	68.2	58.2
45,0°	248.1	224.3	215.3	192.6	190.4	173.9	147.1	125.7	107.5	92.0	76.1	67.7	59.2	51.8
47,5°	241.4	231.0	211.4	191.6	175.5	160.2	143.5	110.4	89.4	80.0	65.9	64.7	51.2	48.0
50,0°	249.6	230.2	211.6	191.4	170.6	160.8	124.1	103.7	83.7	70.6	57.1	51.4	42.4	37.1
52,5°	248.3	232.8	197.9	184.3	201.4	155.9	119.0	99.8	73.7	56.9	48.8	43.5	40.6	31.8
55,0°	245.9	221.2	202.4	211.4	207.9	151.4	113.7	86.7	63.9	51.0	44.5	38.6	39.8	34.1
57,5°	251.4	216.7	208.5	242.8	194.7	141.6	100.8	70.0	54.9	44.3	36.1	31.4	33.5	30.0
60,0°	242.6	225.3	226.1	219.2	147.9	130.2	90.6	61.6	43.7	36.9	30.6	29.2	25.7	25.3
62,5°	185.9	216.5	231.6	178.6	123.0	96.9	90.4	51.2	37.8	31.8	25.9	23.7	21.6	22.2
65,0°	162.2	172.8	193.0	177.7	133.0	90.8	78.4	45.9	33.7	27.5	23.5	21.4	20.2	19.6
67,5°	110.6	127.5	127.1	112.6	86.9	63.7	51.2	34.9	29.2	23.5	21.2	20.0	19.2	18.6
70,0°	69.2	79.2	75.3	71.6	50.2	43.1	32.9	27.3	25.1	20.4	19.2	18.6	18.0	17.5
72,5°	55.3	49.8	49.6	34.9	29.6	26.5	25.1	23.1	21.6	17.5	16.7	16.3	15.9	15.7
75,0°	39.2	36.7	29.6	25.3	23.3	21.4	20.8	17.3	15.9	15.1	14.5	14.1	13.9	13.5
77,5°	25.5	23.5	22.9	19.8	18.4	16.9	15.7	13.7	12.7	12.0	11.6	11.4	11.2	11.0
80,0°	18.2	17.1	16.9	14.9	13.9	12.9	11.4	10.6	9.8	9.4	9.0	8.8	8.6	8.6
82,5°	12.7	12.0	11.8	10.8	10.0	9.2	8.6	7.8	7.3	6.9	6.7	6.7	6.5	6.3
85,0°	8.0	7.8	7.3	7.1	6.7	6.3	5.9	5.5	5.1	4.9	4.7	4.7	4.5	4.5
87,5°	3.5	3.5	3.3	3.3	3.1	2.9	2.7	2.7	2.4	2.4	2.4	2.4	2.4	2.4
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 11 mini LED	Order number: 5XC2F41E08HE EAN: 4058352583814	LP number 58932_35
Table of values for luminous intensities		Maximum luminous intensity

siteco

C- planes	210°	215°	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°	275°
γ	Luminous intensity in cd/klm													
0,0°	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4
2,5°	170.6	172.8	175.3	178.3	180.4	180.4	179.6	179.6	178.8	177.9	176.7	177.1	179.6	182.6
5,0°	138.4	140.0	142.8	148.4	156.1	165.1	167.7	168.1	169.0	169.2	170.2	172.4	174.5	176.7
7,5°	120.2	121.2	124.9	125.3	126.3	129.6	140.4	151.8	159.8	168.1	173.0	173.7	174.3	174.7
10,0°	108.8	109.6	112.6	116.9	120.8	122.6	124.9	130.6	147.7	156.3	159.6	165.1	170.2	168.8
12,5°	96.7	99.2	100.4	100.4	102.8	106.7	116.5	120.6	129.4	137.7	141.2	147.7	152.6	157.3
15,0°	92.6	88.2	85.9	85.1	85.9	87.7	90.2	103.3	110.4	119.6	124.9	128.8	139.8	143.2
17,5°	93.5	86.5	80.4	76.7	75.3	75.7	75.7	78.8	88.6	100.6	111.8	121.2	124.9	126.7
20,0°	92.4	84.7	77.7	72.4	69.0	67.7	69.4	72.6	77.5	84.3	94.3	111.0	119.0	118.8
22,5°	90.8	81.0	73.7	68.2	65.3	65.3	65.7	69.0	70.6	79.2	90.2	99.0	112.8	118.6
25,0°	86.9	77.3	69.2	63.7	62.0	62.6	65.3	69.4	71.6	76.1	86.7	97.1	107.1	116.3
27,5°	82.0	73.1	65.1	59.8	57.1	61.2	67.3	70.0	71.8	77.5	88.4	97.3	108.4	117.1
30,0°	78.4	71.8	61.4	57.5	56.9	59.8	66.5	71.0	73.5	77.7	89.6	100.4	107.5	114.3
32,5°	70.8	63.9	59.2	58.2	58.2	59.8	63.5	68.0	72.8	76.3	92.8	103.1	105.9	108.2
35,0°	64.5	58.2	57.5	58.8	60.4	60.4	63.5	63.9	71.6	75.9	86.7	100.8	105.9	104.5
37,5°	56.5	53.7	57.7	63.5	61.4	60.8	62.4	64.5	72.0	78.8	82.4	95.5	100.8	97.9
40,0°	55.3	53.3	58.4	60.8	58.0	58.2	61.8	66.7	73.3	77.3	81.4	90.8	95.9	84.9
42,5°	56.9	64.3	62.4	58.4	57.1	58.8	61.4	65.3	71.6	70.8	78.6	87.3	91.4	79.6
45,0°	52.2	68.4	68.0	58.4	55.7	58.0	59.0	59.6	65.1	65.9	71.0	80.4	82.8	73.3
47,5°	50.0	57.5	68.2	68.4	58.2	48.6	53.1	56.3	58.8	61.4	65.3	74.7	73.9	70.0
50,0°	42.9	48.4	61.0	81.4	66.3	52.4	49.6	52.2	55.1	59.4	58.6	65.7	68.4	63.3
52,5°	34.9	40.6	48.4	66.1	74.9	61.0	47.3	48.4	50.6	53.3	51.4	57.1	58.8	55.5
55,0°	31.2	31.6	40.4	56.3	65.9	71.4	55.1	44.1	45.3	46.5	44.7	52.2	50.6	50.8
57,5°	28.0	29.4	34.7	41.4	49.0	51.8	46.7	40.4	39.2	39.8	39.8	44.1	45.1	46.9
60,0°	26.5	29.2	30.0	32.0	32.4	33.5	35.5	33.9	34.1	34.1	34.7	39.0	40.8	41.0
62,5°	23.9	22.9	23.7	23.3	25.3	25.1	26.5	29.2	28.8	29.2	30.2	34.9	35.1	34.5
65,0°	21.4	19.8	20.2	21.4	20.8	22.2	23.5	24.3	24.3	26.3	26.7	28.4	30.2	30.2
67,5°	22.0	17.8	17.8	18.6	19.2	19.0	21.0	21.2	22.0	22.7	23.5	23.7	25.3	25.3
70,0°	19.8	16.5	15.9	15.9	16.1	16.7	17.5	18.4	19.2	19.6	19.4	20.2	21.0	21.8
72,5°	15.9	14.9	14.3	14.1	14.1	14.5	14.7	15.1	16.1	16.3	16.1	16.3	17.1	18.0
75,0°	13.3	12.9	12.4	12.2	12.2	12.2	12.4	12.4	13.3	13.3	13.1	13.3	13.5	14.1
77,5°	10.8	10.6	10.2	10.0	10.0	10.0	10.0	10.0	10.6	10.6	10.0	10.2	10.4	10.8
80,0°	8.4	8.2	8.0	7.8	7.6	7.6	7.6	7.6	8.0	7.8	7.1	6.7	7.3	8.0
82,5°	6.1	6.1	5.9	5.7	5.7	5.5	5.3	5.3	5.3	5.7	4.5	3.5	4.7	5.5
85,0°	4.5	4.3	4.1	4.1	3.9	3.7	3.5	3.3	3.3	3.1	2.9	2.4	2.9	2.9
87,5°	2.4	2.4	2.4	2.2	2.2	2.2	2.0	1.8	1.6	1.4	1.2	1.0	0.8	1.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 11 mini LED	Order number: 5XC2F41E08HE EAN: 4058352583814	LP number 58932_35
Table of values for luminous intensities		Maximum luminous intensity

siteco

C-planes	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°	330°	335°	340°	345°
γ	Luminous intensity in cd/klm													
0,0°	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4
2,5°	184.5	186.5	189.2	192.8	196.3	199.4	201.4	204.5	206.3	209.0	210.8	215.1	219.2	222.0
5,0°	177.5	179.0	179.8	181.4	184.5	190.0	197.3	205.1	213.6	220.8	223.4	227.3	231.8	235.5
7,5°	169.8	173.2	179.8	185.7	188.3	190.0	196.3	211.6	219.0	225.3	230.6	238.1	243.0	249.4
10,0°	170.4	169.8	170.2	171.2	178.3	189.8	198.8	218.1	226.7	227.9	232.4	234.9	241.0	251.4
12,5°	156.1	158.3	158.6	163.7	164.7	170.6	179.8	202.0	206.9	218.1	220.8	226.1	234.1	244.3
15,0°	143.9	146.5	148.8	149.6	149.0	159.6	165.1	184.5	196.9	203.9	209.4	219.2	237.5	262.4
17,5°	129.4	135.7	139.2	141.8	146.9	155.1	172.6	179.6	182.0	191.8	205.9	222.0	241.6	262.4
20,0°	121.4	126.3	134.9	142.4	151.6	161.2	168.8	171.6	176.9	184.9	199.2	213.6	231.2	269.8
22,5°	123.3	131.0	134.3	141.2	149.4	152.6	156.5	156.7	161.4	175.7	190.8	212.2	236.3	267.9
25,0°	124.5	132.4	127.7	132.6	136.1	134.1	138.4	143.7	152.6	165.9	182.8	200.8	224.7	259.8
27,5°	118.4	122.6	119.2	119.4	119.8	123.9	129.6	136.7	145.1	158.8	177.3	203.9	231.8	262.4
30,0°	114.7	112.2	116.9	114.5	111.0	115.9	122.8	130.8	142.8	154.3	172.8	200.6	227.3	260.6
32,5°	106.7	100.8	106.1	105.9	103.1	107.3	115.1	125.3	135.5	150.8	173.7	197.9	229.2	259.8
35,0°	95.5	92.4	97.3	94.3	94.7	98.4	105.5	113.5	127.5	138.8	165.1	195.5	221.0	254.9
37,5°	84.5	84.1	87.1	85.7	85.7	87.9	94.5	105.3	116.9	127.9	150.6	194.3	232.0	262.4
40,0°	77.5	76.9	79.8	78.2	76.3	78.2	84.7	93.9	105.9	116.7	135.3	186.3	226.9	262.6
42,5°	72.6	70.8	71.4	71.2	70.2	71.0	76.3	84.1	96.5	109.8	129.0	168.1	231.8	274.3
45,0°	69.4	66.3	65.3	64.9	64.9	66.1	70.2	76.9	90.0	102.0	121.2	144.1	221.8	288.9
47,5°	67.7	62.0	60.2	60.2	60.0	61.6	65.9	72.6	82.6	97.3	112.0	127.5	203.9	287.3
50,0°	61.8	56.9	55.3	54.5	55.3	57.1	61.4	66.3	76.1	89.4	100.2	114.5	180.6	268.9
52,5°	56.9	51.8	50.2	49.4	50.0	52.4	56.1	60.8	67.5	79.0	89.6	101.0	144.5	255.7
55,0°	49.4	46.9	45.3	44.7	45.3	47.7	51.0	54.5	59.6	68.2	77.3	88.4	111.8	237.3
57,5°	43.7	41.6	40.6	40.4	40.8	43.3	45.9	48.8	51.8	57.3	64.9	74.5	108.2	196.1
60,0°	38.6	36.9	36.3	36.1	36.7	38.4	40.6	42.4	45.3	48.4	56.1	64.1	89.0	136.9
62,5°	33.3	32.4	32.0	32.2	32.6	34.1	35.7	37.1	40.0	41.4	47.1	54.5	70.6	106.5
65,0°	29.0	28.6	28.2	28.6	29.2	30.0	31.2	32.4	33.3	34.7	40.2	50.2	64.9	86.1
67,5°	24.9	24.5	24.3	24.5	25.9	26.3	27.3	28.0	28.6	29.4	33.5	43.7	62.9	81.0
70,0°	21.2	21.0	20.8	21.0	22.4	22.9	23.3	23.7	24.1	24.7	27.8	34.7	52.4	72.2
72,5°	17.3	17.3	17.5	18.2	19.2	19.8	19.6	19.4	19.8	20.2	23.3	28.2	37.5	61.8
75,0°	14.1	14.3	14.7	15.1	16.3	16.5	15.9	15.5	15.7	16.5	17.8	22.9	25.3	48.4
77,5°	11.2	11.2	11.4	12.0	13.3	13.3	12.9	12.0	12.0	12.7	13.3	16.7	20.0	33.3
80,0°	8.4	8.4	8.6	9.2	9.8	10.0	9.4	8.8	8.8	9.2	9.6	10.4	15.9	21.6
82,5°	5.7	5.5	5.7	6.3	6.7	6.3	6.1	5.9	5.9	6.3	6.5	6.9	7.6	8.4
85,0°	2.7	3.3	3.3	3.3	3.3	3.3	3.3	3.5	3.5	3.7	3.9	4.3	4.7	5.1
87,5°	1.0	1.2	1.2	1.4	1.4	1.4	1.6	1.6	1.6	1.8	2.0	2.2	2.7	3.1
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 11 mini LED	Order number: 5XC2F41E08HE EAN: 4058352583814	LP number 58932_35
Table of values for luminous intensities		Maximum luminous intensity siteco

C- planes	350°	355°	Phi-zone	Total Phi-zone
Luminous intensity in cd/klm		Luminous flux in lm/klm		
0,0°	200.4	200.4	0.3	0.3
2,5°	224.3	227.3	2.4	2.7
5,0°	241.6	251.2	4.8	7.5
7,5°	260.4	269.8	7.3	14.8
10,0°	263.6	273.8	9.9	24.7
12,5°	258.5	272.0	12.2	36.9
15,0°	281.2	295.7	14.9	51.8
17,5°	277.9	298.3	17.6	69.4
20,0°	299.6	312.6	20.6	90.0
22,5°	287.5	323.2	23.7	113.6
25,0°	300.6	328.3	27.0	140.6
27,5°	306.3	358.5	30.9	171.5
30,0°	304.0	357.3	33.9	205.4
32,5°	309.4	353.6	36.8	242.2
35,0°	303.6	339.8	38.9	281.1
37,5°	333.4	361.2	41.1	322.3
40,0°	346.7	366.5	43.3	365.6
42,5°	343.8	386.5	45.3	410.9
45,0°	333.6	405.9	46.9	457.9
47,5°	339.1	405.9	47.9	505.7
50,0°	336.7	398.9	48.6	554.3
52,5°	318.1	401.2	49.2	603.5
55,0°	303.2	390.0	49.8	653.4
57,5°	257.5	352.8	49.8	703.1
60,0°	219.0	302.4	48.9	752.0
62,5°	177.1	244.1	46.3	798.4
65,0°	140.0	193.2	43.5	841.8
67,5°	108.4	159.0	39.4	881.2
70,0°	93.5	158.6	35.2	916.3
72,5°	86.1	162.2	29.9	946.3
75,0°	57.7	90.0	23.8	970.0
77,5°	41.6	64.3	15.3	985.4
80,0°	24.1	29.0	7.8	993.2
82,5°	9.6	11.0	3.8	997.0
85,0°	5.9	6.7	2.0	999.1
87,5°	3.5	4.1	0.9	1000.0
90,0°	0.0	0.0	0.0	1000.0
180,0°	0.0	0.0	0.0	1000.0

Photometric test report

Family Streetlight 11 mini LED	Order number: 5XC2F41E08HE EAN: 4058352583814	LP number 58932_35
Dimming levels table		environmental temperature: 25°C
		siteco

Luminous flux [%]	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]start of lifetime	Power consumption [W]end of lifetime	Power consumption [W]average
100	254	254	7530	58.6	60.9	59.8
95	241	252	7145	55.1	57.2	56.2
90	229	250	6789	51.9	53.9	52.9
85	216	248	6403	48.6	50.4	49.5
80	203	246	6018	45.3	47.0	46.2
75	190	243	5633	42.2	43.8	43.0
70	178	241	5277	39.3	40.8	40.0
65	165	238	4892	36.2	37.7	37.0
60	152	235	4506	33.3	34.5	33.9
55	140	232	4150	30.6	31.7	31.2
50	127	229	3765	27.6	28.6	28.1
45	114	225	3380	24.8	25.6	25.2
40	102	221	3024	22.3	23.1	22.7
35	89	216	2638	19.5	20.2	19.8
30	76	210	2253	16.7	17.3	17.0
25	63	203	1868	14.1	14.6	14.4
20	51	195	1512	11.7	12.1	11.9
15	38	184	1127	9.2	9.4	9.3
14	35	181	1038	8.6	8.8	8.7