

Photometric test report

Family Streetlight 21 mini LED

Order number: 5XE2M31D08JB
EAN: 4058352681817

LP number
59158_39



Version	post-top or side-entry mounting
Optic	asymmetric, wide distribution (ST1.0a G), Back Light Control (BLC)
Cover	toughened safety glass
Lamps	LED 3000 K CRI ≥ 70
Controlgear	ECG SITECO iQ
Rated values	Net luminous flux = 9530 lm Power consumption = 71.6 W Luminous efficacy = 133.1 lm/W

serial
documentation
23.08.2022

siteco

Luminous intensity in cd/klm


C180-0

C195-15

C200-20

C270-90

Imax: 530 cd/klm

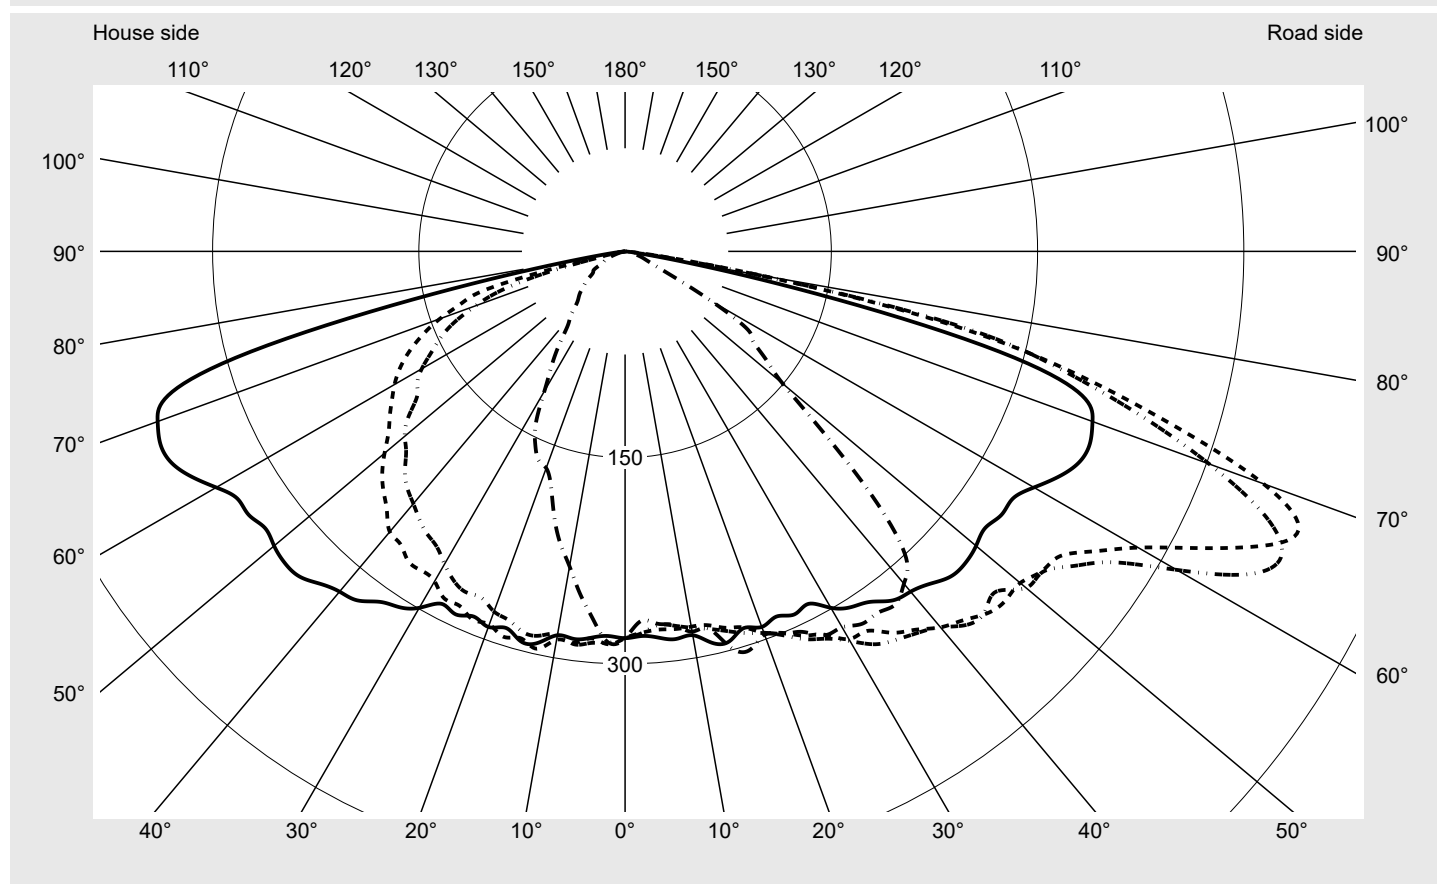

Luminaire output ratios

Eta	100.0%
Eta 0° - 90°	100.0%
Eta 90° - 180°	0.0%

Measurement conditions

DIN EN 13032 and DIN 5032

Luminous intensity class acc. to EN13201-2

Class:	G4
Imax 70°	494.0
Imax 80°	97.3
Imax 90°	0.0
Imax >90°	0.0
Imax >95°	0.0

Photometric test report

Family
Streetlight 21 mini LED

Order number: **5XE2M31D08JB**
EAN: **4058352681817**

LP number
59158_39

Envelope curve in cd/klm


KMK 67.5°

KMK 65°

KMK 62.5°

KMK 60°

siteco

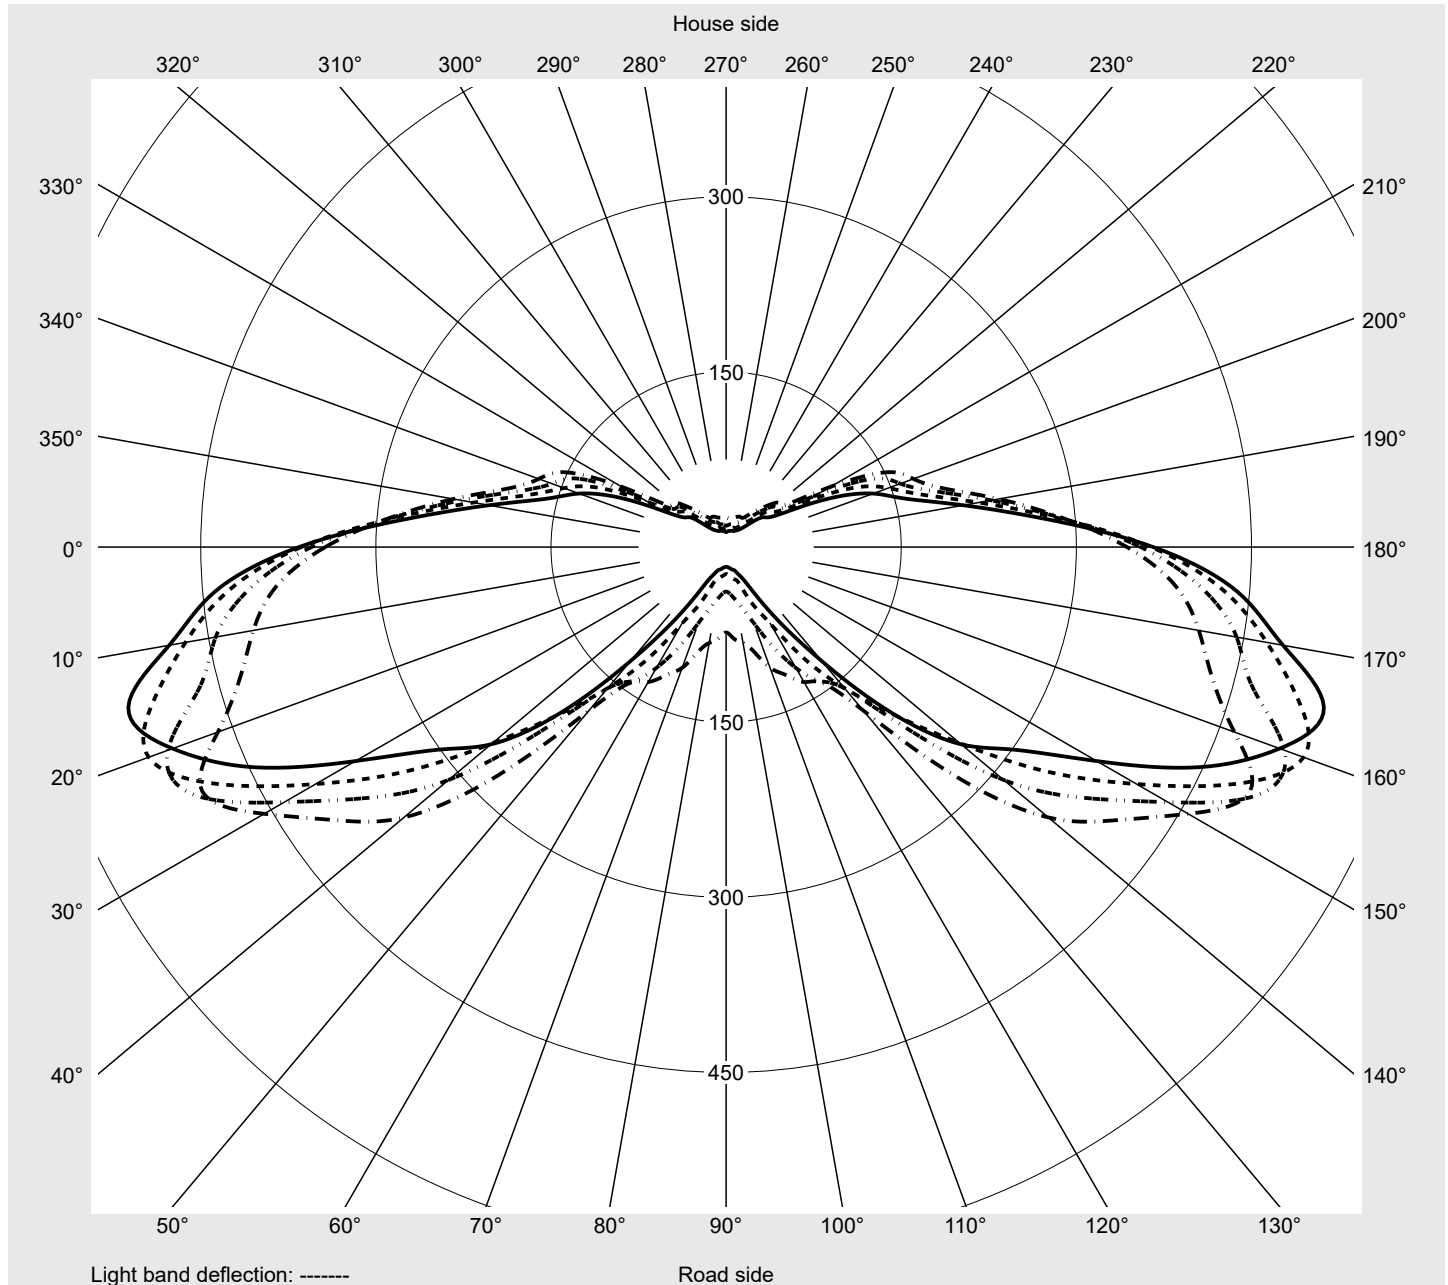

Photometric test report

Family Streetlight 21 mini LED	Order number: 5XE2M31D08JB EAN: 4058352681817	LP number 59158_39
-----------------------------------	--	-----------------------

Table of values for luminous intensities	Maximum luminous intensity	siteco
--	----------------------------	--------

C- planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
γ	Luminous intensity in cd/klm												
0,0°	281.3	281.3	281.3	281.3	281.3	281.3	281.3	281.3	281.3	281.3	281.3	281.3	281.3
2,5°	280.0	279.5	279.2	277.7	277.9	277.2	277.5	277.2	275.6	274.9	274.1	272.2	271.9
5,0°	282.0	279.0	278.0	276.1	272.9	271.2	268.2	269.1	269.6	270.1	269.8	269.1	270.9
7,5°	284.3	282.5	280.2	277.0	274.6	269.8	270.2	271.2	274.2	276.9	275.3	277.1	278.7
10,0°	283.5	278.8	278.9	277.1	277.9	275.3	275.0	274.3	277.9	276.8	278.3	280.6	285.6
12,5°	291.5	283.0	278.6	278.5	281.2	284.6	289.1	289.5	285.3	284.2	286.1	285.7	287.3
15,0°	293.5	287.3	282.6	283.4	285.9	287.5	291.2	291.6	289.1	290.7	289.2	288.4	292.5
17,5°	287.2	283.0	284.7	286.8	291.0	295.5	294.3	295.6	291.9	292.9	293.3	291.2	291.8
20,0°	290.7	291.7	292.2	295.1	295.4	298.3	298.7	298.0	297.8	295.7	296.5	296.5	299.4
22,5°	287.5	290.7	295.2	300.3	302.4	303.2	304.2	303.3	305.0	303.4	306.4	303.6	308.2
25,0°	291.3	293.7	300.6	308.4	311.2	310.2	305.1	310.6	315.6	314.0	311.9	310.8	313.1
27,5°	289.0	299.0	309.0	314.3	317.6	319.7	315.4	321.2	315.6	313.1	310.8	312.4	317.4
30,0°	299.3	307.0	319.6	325.6	327.2	326.9	321.7	323.1	317.8	323.1	319.9	314.6	319.2
32,5°	306.6	316.1	327.3	327.3	338.8	336.8	328.0	332.2	327.0	328.7	324.9	323.3	321.4
35,0°	311.1	323.0	331.4	338.6	344.6	341.3	340.8	340.2	334.2	335.6	333.1	338.0	343.9
37,5°	319.9	329.0	340.9	346.8	349.7	351.4	343.0	340.3	343.7	357.2	349.0	349.3	350.7
40,0°	323.1	341.3	350.9	356.9	356.9	355.3	348.8	348.2	355.8	358.7	355.6	359.4	347.1
42,5°	328.0	352.6	360.8	363.9	368.3	358.2	356.2	364.4	370.1	370.9	367.6	359.1	344.9
45,0°	334.6	357.9	364.8	372.3	370.2	361.6	366.2	373.8	385.7	385.3	368.9	360.6	349.9
47,5°	335.6	361.2	371.9	375.5	366.2	374.6	379.7	390.8	395.5	392.9	373.7	358.5	330.6
50,0°	333.2	358.6	375.4	375.2	380.7	383.0	391.4	407.7	423.6	398.5	367.7	329.8	282.7
52,5°	330.3	358.8	373.2	382.1	382.9	396.7	409.7	434.6	441.4	401.3	350.0	291.1	233.7
55,0°	334.1	363.5	378.1	386.3	398.8	423.8	441.5	441.1	420.3	385.7	309.2	234.7	184.4
57,5°	334.5	363.0	386.9	405.8	420.8	451.3	460.8	432.9	394.6	333.1	244.9	182.0	145.6
60,0°	343.4	386.8	411.2	430.9	463.3	495.1	456.9	407.8	360.3	277.0	182.7	141.5	133.5
62,5°	355.2	409.6	444.0	467.2	508.8	502.5	436.9	374.5	310.3	220.8	158.1	140.1	119.6
65,0°	363.9	427.8	470.2	507.6	526.4	480.2	405.9	335.1	261.4	202.9	157.6	116.6	75.7
67,5°	365.9	439.7	484.4	530.1	504.6	446.2	366.6	302.8	262.8	201.3	127.5	74.5	38.3
70,0°	361.8	427.3	480.7	494.0	452.1	390.2	353.2	342.1	271.3	160.9	82.6	40.8	21.3
72,5°	348.5	390.9	432.9	414.9	389.5	361.2	397.1	367.5	221.1	100.7	40.3	20.0	14.8
75,0°	281.9	295.0	323.9	333.1	324.9	367.7	367.8	233.4	109.1	39.6	15.4	12.6	11.4
77,5°	143.0	161.3	198.8	233.5	244.3	250.6	175.4	81.5	27.2	12.1	10.0	8.7	7.3
80,0°	40.2	63.0	91.1	97.3	95.2	86.7	27.8	12.7	6.5	6.7	7.5	5.6	4.2
82,5°	8.8	13.8	20.6	21.5	16.3	17.5	5.0	3.3	2.6	3.3	3.9	2.7	2.0
85,0°	1.2	1.3	1.5	1.6	1.4	1.7	1.3	1.2	1.1	0.9	1.1	0.8	0.7
87,5°	0.3	0.3	0.4	0.4	0.4	0.4	0.4	0.3	0.3	0.3	0.3	0.3	0.3
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 21 mini LED		Order number: 5XE2M31D08JB EAN: 4058352681817										LP number 59158_39	
Table of values for luminous intensities										Maximum luminous intensity		siteco	
C- planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
γ	Luminous intensity in cd/klm												
0,0°	281.3	281.3	281.3	281.3	281.3	281.3	281.3	281.3	281.3	281.3	281.3	281.3	281.3
2,5°	272.1	269.9	267.0	268.1	268.5	269.0	281.4	284.1	286.0	285.0	286.1	285.9	287.0
5,0°	269.3	272.2	271.3	271.9	270.8	271.9	283.4	282.6	282.5	285.9	285.5	283.5	281.1
7,5°	280.9	281.1	280.2	277.5	274.1	274.1	286.0	287.6	287.0	288.0	286.8	283.0	277.5
10,0°	287.1	285.1	283.0	280.7	279.3	280.8	287.8	290.8	286.8	282.7	279.5	273.9	268.3
12,5°	285.5	284.2	286.0	288.9	286.6	281.0	295.5	295.8	296.0	286.2	277.7	269.6	261.9
15,0°	292.0	290.2	289.8	292.0	297.5	298.6	293.5	294.0	291.5	286.7	277.3	264.8	251.5
17,5°	294.8	294.5	298.3	293.0	297.4	303.5	292.3	293.3	293.9	281.3	267.6	258.9	240.9
20,0°	299.0	299.5	304.2	296.9	296.7	296.7	294.8	297.3	288.7	278.8	264.7	247.9	234.6
22,5°	307.0	303.9	307.2	305.2	303.5	301.1	292.3	292.7	289.8	272.7	253.1	235.2	224.2
25,0°	308.5	307.0	306.5	307.6	304.1	305.3	288.3	287.7	284.5	273.6	248.9	229.8	214.2
27,5°	309.7	310.9	309.1	310.5	312.1	314.7	284.8	292.0	284.6	269.9	246.9	218.6	204.8
30,0°	318.8	313.0	316.5	319.3	321.1	315.6	288.4	288.0	277.1	262.6	236.5	216.2	195.1
32,5°	328.3	327.3	324.1	328.0	321.7	321.1	292.1	283.3	275.4	254.8	232.4	204.0	187.3
35,0°	333.0	330.3	327.3	330.3	321.0	320.8	293.4	280.5	274.9	250.9	222.6	198.5	180.2
37,5°	347.6	338.1	337.0	331.1	320.5	323.3	300.7	280.1	268.4	245.7	215.7	189.0	173.6
40,0°	336.7	326.6	325.9	326.6	319.5	315.5	299.6	275.7	266.2	239.6	208.1	184.4	173.4
42,5°	338.1	330.2	318.5	318.1	304.4	302.6	299.3	268.9	256.4	234.2	201.3	180.8	167.8
45,0°	331.0	306.8	290.4	268.8	256.0	259.8	300.8	268.3	248.2	226.4	193.0	177.1	163.8
47,5°	292.1	250.6	224.1	205.0	194.0	197.9	301.3	257.8	239.6	216.0	186.1	176.6	150.4
50,0°	230.3	192.7	175.9	164.2	151.9	149.7	291.8	255.7	228.4	209.2	179.8	170.6	134.0
52,5°	178.9	156.0	144.3	133.1	130.3	129.2	290.2	246.4	216.9	199.0	174.2	152.8	114.9
55,0°	145.4	130.5	117.0	116.4	114.2	113.5	290.0	243.5	208.9	184.8	172.7	133.8	95.4
57,5°	121.3	117.8	115.4	113.0	105.4	105.7	290.5	241.2	201.0	179.3	161.5	119.5	77.5
60,0°	120.8	110.0	93.0	83.4	79.0	73.2	288.7	237.1	193.6	170.7	151.6	103.2	63.9
62,5°	93.2	69.2	54.5	45.9	40.4	38.1	287.6	230.5	184.8	158.7	138.3	87.8	57.4
65,0°	54.2	33.9	28.7	26.2	24.3	23.1	285.3	219.6	173.6	147.8	120.0	76.2	53.1
67,5°	26.5	21.4	19.9	18.4	17.4	16.9	275.2	206.3	159.8	134.0	99.6	61.1	44.4
70,0°	17.3	16.2	15.1	13.9	13.6	13.6	271.2	190.7	143.4	115.8	76.3	41.8	37.8
72,5°	13.4	12.4	11.4	10.8	10.3	10.1	262.2	181.5	124.0	94.7	40.9	29.8	31.2
75,0°	9.9	9.0	7.8	7.7	7.0	7.0	234.3	162.3	97.6	56.0	20.7	21.7	24.4
77,5°	6.2	5.7	5.2	5.0	4.7	4.7	137.1	75.6	26.2	11.1	9.8	13.4	15.8
80,0°	3.7	3.3	3.1	3.0	2.9	2.6	42.3	12.7	5.3	5.7	5.5	8.1	8.7
82,5°	1.7	1.8	1.5	1.5	1.5	1.4	7.6	3.1	2.7	2.5	2.5	3.6	4.0
85,0°	0.7	0.7	0.6	0.6	0.5	0.6	1.3	1.2	1.1	1.1	1.0	1.1	1.0
87,5°	0.2	0.2	0.1	0.1	0.1	0.1	0.3	0.3	0.2	0.3	0.2	0.2	0.2
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 21 mini LED				Order number: 5XE2M31D08JB EAN: 4058352681817								LP number 59158_39			
Table of values for luminous intensities												Maximum luminous intensity		sīteco	
C- planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone		
γ	Luminous intensity in cd/klm											Luminous flux in lm/klm			
0,0°	281.3	281.3	281.3	281.3	281.3	281.3	281.3	281.3	281.3	281.3	281.3	0.4	0.4		
2,5°	286.8	285.3	284.3	284.7	284.2	283.3	284.6	283.3	283.5	283.7	284.6	3.3	3.8		
5,0°	278.6	276.1	273.1	270.4	269.6	267.2	264.9	267.7	269.2	270.0	268.4	6.5	10.3		
7,5°	270.7	265.2	261.6	259.4	254.7	252.2	249.7	249.3	251.4	252.1	251.1	9.8	20.1		
10,0°	262.4	258.2	251.3	247.1	241.7	240.5	235.9	232.2	229.7	232.0	232.6	12.8	32.9		
12,5°	253.0	248.1	241.3	233.4	227.8	225.9	222.1	221.1	217.0	216.2	217.6	15.9	48.8		
15,0°	243.5	238.9	227.1	220.2	215.6	207.2	202.8	202.4	199.4	197.5	199.3	18.9	67.7		
17,5°	230.7	224.5	216.6	207.3	197.9	192.6	186.1	186.7	184.9	178.1	179.1	21.6	89.3		
20,0°	224.7	212.9	200.9	190.3	179.3	178.3	173.5	168.8	172.8	171.2	167.7	24.4	113.7		
22,5°	214.9	197.6	181.9	175.8	167.5	170.4	169.4	167.1	165.9	164.7	164.5	27.1	140.8		
25,0°	197.9	180.7	172.8	169.2	165.1	160.8	159.9	160.1	158.1	157.3	154.6	29.8	170.6		
27,5°	187.3	175.1	165.8	162.0	159.3	153.5	151.8	145.8	145.0	142.8	140.4	32.4	203.0		
30,0°	177.2	171.0	166.6	158.9	151.2	143.8	132.7	128.8	124.3	120.6	117.3	35.0	238.0		
32,5°	172.7	165.1	158.2	150.4	138.9	130.3	117.7	112.6	105.8	101.8	100.1	37.5	275.5		
35,0°	173.7	161.0	152.4	138.3	123.5	111.2	100.8	90.8	89.5	87.5	84.7	39.9	315.4		
37,5°	166.8	154.7	137.1	122.9	105.2	92.7	86.3	81.1	76.6	73.0	69.0	42.2	357.6		
40,0°	159.6	145.5	123.8	107.7	92.7	82.7	77.8	70.9	66.2	62.7	61.7	44.1	401.8		
42,5°	150.3	129.1	106.2	93.0	85.0	75.6	70.1	65.3	59.6	54.9	52.8	46.0	447.8		
45,0°	137.4	114.1	93.1	85.0	75.9	66.1	59.6	54.8	50.9	50.0	47.9	47.0	494.8		
47,5°	124.3	96.6	84.4	75.5	64.4	54.9	48.4	46.6	45.4	44.6	44.2	46.6	541.4		
50,0°	105.0	86.9	74.5	66.3	55.3	47.4	42.9	41.6	41.5	39.7	39.3	46.0	587.4		
52,5°	89.2	76.5	63.7	53.4	45.8	41.0	37.8	37.7	35.4	34.8	35.4	45.4	632.9		
55,0°	75.3	68.1	53.2	44.9	38.3	35.9	34.0	34.1	32.0	31.4	29.8	44.7	677.6		
57,5°	64.5	56.8	45.7	39.7	34.2	32.8	30.9	30.2	29.1	28.8	27.4	44.0	721.6		
60,0°	59.0	50.3	41.2	33.9	28.9	28.5	27.6	26.2	25.5	24.9	25.3	43.4	765.0		
62,5°	53.6	44.6	34.6	28.4	25.6	23.6	22.6	20.3	19.8	18.9	18.3	42.0	807.0		
65,0°	47.4	37.5	28.0	23.1	19.9	17.9	17.8	16.5	16.2	16.0	16.2	40.3	847.3		
67,5°	39.3	28.4	21.3	17.9	16.3	15.1	14.9	14.3	14.0	13.4	12.8	38.3	885.6		
70,0°	31.7	19.8	16.1	15.1	13.5	11.7	11.5	11.5	11.1	11.0	10.7	35.8	921.3		
72,5°	24.4	15.2	12.7	11.7	10.5	9.3	8.6	8.1	7.7	7.5	7.3	32.3	953.6		
75,0°	17.7	11.9	10.0	8.9	7.9	6.4	5.3	5.0	5.2	5.0	4.8	25.5	979.1		
77,5°	11.6	7.9	6.4	5.8	4.8	3.7	3.2	3.1	2.9	2.5	2.7	14.3	993.4		
80,0°	6.9	4.8	3.4	2.9	2.3	1.7	1.3	1.2	0.9	1.0	1.1	5.1	998.5		
82,5°	3.1	2.0	1.3	1.1	0.9	0.4	0.4	0.4	0.4	0.4	0.3	1.3	999.7		
85,0°	0.8	0.7	0.4	0.4	0.2	0.1	0.1	0.1	0.1	0.1	0.1	0.2	999.9		
87,5°	0.1	0.1	0.1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.1	1000.0		
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0		

office	industry	traffic	retail	public	sports
--------	----------	---------	--------	--------	--------

Photometric test report

Family Streetlight 21 mini LED	Order number: 5XE2M31D08JB EAN: 4058352681817	LP number 59158_39
Dimming levels table		environmental temperature: 25°C
		sit eco

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W] start of lifetime	Power consumption [W] end of lifetime	Power consumption [W] average
100	254	254	9530	71.6	74.6	73.1
95	241	252	9042	67.1	69.8	68.4
90	229	250	8592	63.2	65.6	64.4
85	216	248	8104	58.9	61.2	60.0
80	203	246	7616	54.8	56.8	55.8
75	190	243	7129	50.7	52.7	51.7
70	178	241	6679	47.1	48.9	48.0
65	165	238	6191	43.3	44.9	44.1
60	152	235	5703	39.6	41.1	40.4
55	140	232	5253	36.2	37.5	36.8
50	127	229	4765	32.7	33.8	33.2
45	114	225	4277	29.2	30.3	29.8
40	102	221	3827	26.1	27.0	26.6
35	89	216	3339	22.7	23.5	23.1
30	76	210	2851	19.5	20.1	19.8
25	63	203	2364	16.3	16.9	16.6
20	51	195	1914	13.6	14.0	13.8
15	38	184	1426	10.6	10.8	10.7
10	26	171	976	8.0	8.1	8.0

Dimming levels table		environmental temperature: 5°C				
Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W] start of lifetime	Power consumption [W] end of lifetime	Power consumption [W] average
100	254	254	9530	70.3	71.9	71.1
95	241	252	9042	66.0	67.6	66.8
90	229	250	8592	62.2	63.6	62.9
85	216	248	8104	58.1	59.4	58.8
80	203	246	7616	54.2	55.3	54.8
75	190	243	7129	50.3	51.3	50.8
70	178	241	6679	46.7	47.7	47.2
65	165	238	6191	43.0	43.9	43.4
60	152	235	5703	39.4	40.2	39.8
55	140	232	5253	36.0	36.8	36.4
50	127	229	4765	32.7	33.3	33.0
45	114	225	4277	29.1	29.8	29.4
40	102	221	3827	26.1	26.6	26.4
35	89	216	3339	22.7	23.2	23.0
30	76	210	2851	19.5	19.9	19.7
25	63	203	2364	16.4	16.8	16.6
20	51	195	1914	13.7	13.9	13.8
15	38	184	1426	10.7	10.8	10.8
10	26	171	976	8.0	8.1	8.0

Photometric test report

Family Streetlight 21 mini LED	Order number: 5XE2M31D08JB EAN: 4058352681817	LP number 59158_39
Dimming levels table		environmental temperature: 15°C



Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W] start of lifetime	Power consumption [W] end of lifetime	Power consumption [W] average
100	254	254	9530	70.9	73.6	72.2
95	241	252	9042	66.5	69.1	67.8
90	229	250	8592	62.5	65.0	63.8
85	216	248	8104	58.5	60.6	59.6
80	203	246	7616	54.4	56.4	55.4
75	190	243	7129	50.4	52.3	51.4
70	178	241	6679	46.9	48.6	47.8
65	165	238	6191	43.1	44.7	43.9
60	152	235	5703	39.5	40.8	40.2
55	140	232	5253	36.1	37.4	36.8
50	127	229	4765	32.6	33.7	33.2
45	114	225	4277	29.1	30.2	29.6
40	102	221	3827	26.1	27.0	26.6
35	89	216	3339	22.7	23.5	23.1
30	76	210	2851	19.5	20.2	19.8
25	63	203	2364	16.3	17.0	16.6
20	51	195	1914	13.6	14.0	13.8
15	38	184	1426	10.6	10.9	10.8
10	26	171	976	7.9	8.1	8.0

Photometric test report

Family Streetlight 21 mini LED	Order number: 5XE2M31D08JB EAN: 4058352681817	LP number 59158_39
Luminousfluxs table		siteco

Temperature °C	Luminous flux lm	Power consumption W
25.0	9530.0	71.6
5.0	9530.0	70.3
15.0	9530.0	70.9