


# Photometric test report

<b>Family</b> <b>Streetlight 21 mini LED</b>	<b>Order number: 5XE2M33T08GB</b> <b>EAN: 4058352682265</b>	<b>LP number</b> <b>59152_760</b>
	<b>Version</b> post-top or side-entry mounting, Smart Interface up/down <b>Optic</b> direct, asymmetric wide distribution S10B003 <b>Cover</b> toughened safety glass <b>Lamps</b> LED 3000 K   CRI ≥ 70 <b>Controlgear</b> EVG-Smart Interface <b>Rated values</b> Net luminous flux = 5230 lm Power consumption = 40.4 W Luminous efficacy = 129.5 lm/W	<b>serial documentation</b> <b>18.07.2022</b>



**Luminous intensity in cd/klm** C180-0 C205-25 C210-30 C270-90 **Imax: 811 cd/klm**

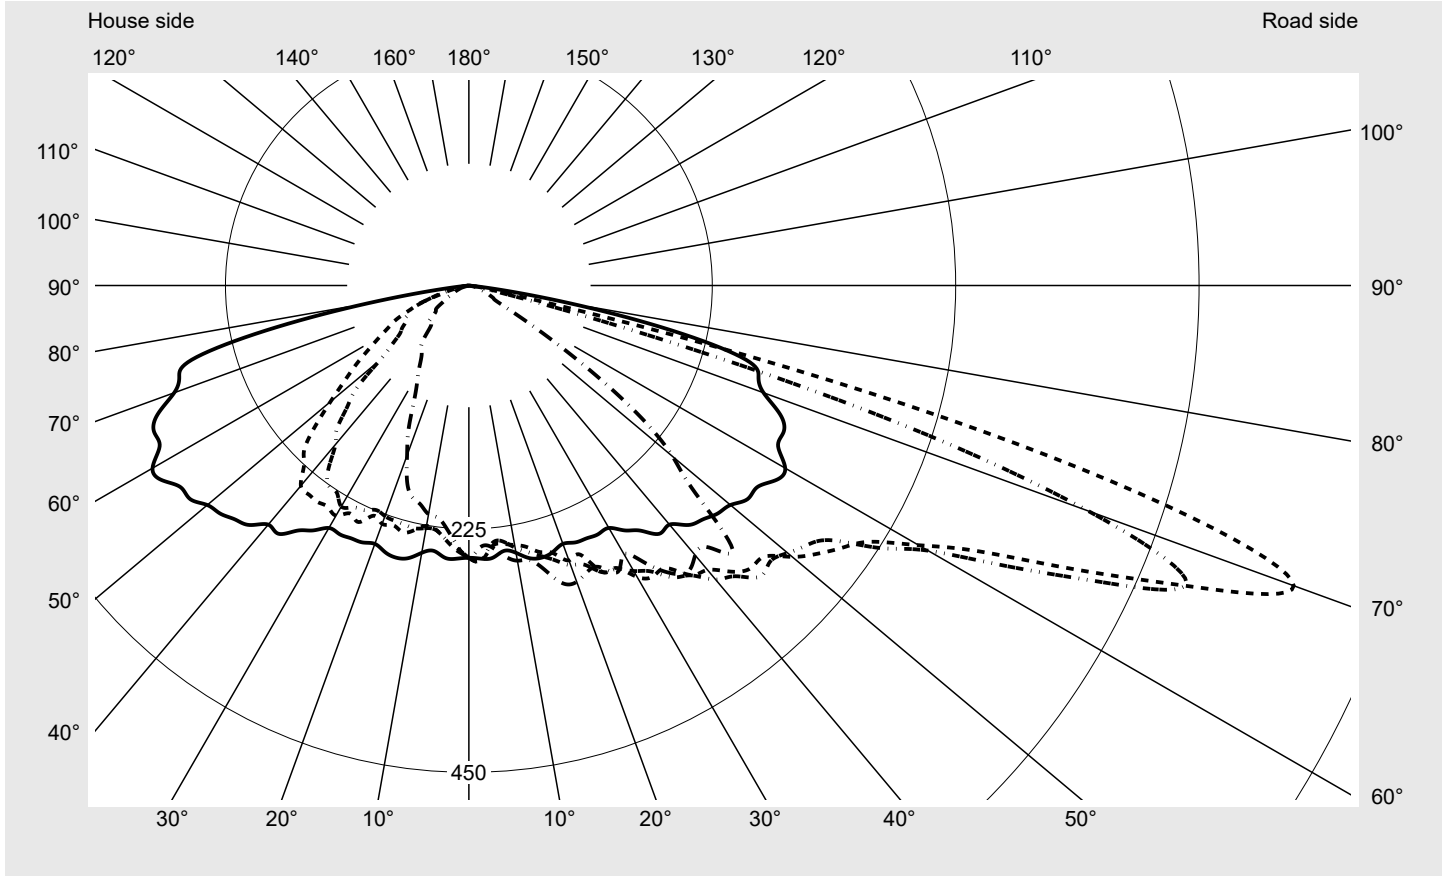

**Luminaire output ratios**

Eta	100.0%
Eta 0° - 90°	100.0%
Eta 90° - 180°	0.0%

**Luminous intensity class acc. to EN13201-2**

Class:	G3
Imax 70°	811.4
Imax 80°	97.1
Imax 90°	0.0
Imax >90°	0.0
Imax >95°	0.0


**Measurement conditions**

DIN EN 13032 and DIN 5032

**Photometric test report**

<b>Family</b> Streetlight 21 mini LED	<b>Order number: 5XE2M33T08GB</b> <b>EAN: 4058352682265</b>	<b>LP number</b> 59152_760
--	--	-------------------------------

**Envelope curve in cd/klm**      **KMK 70°**    **KMK 67.5°**    **KMK 65°**    **KMK 62.5°**      **siteco**

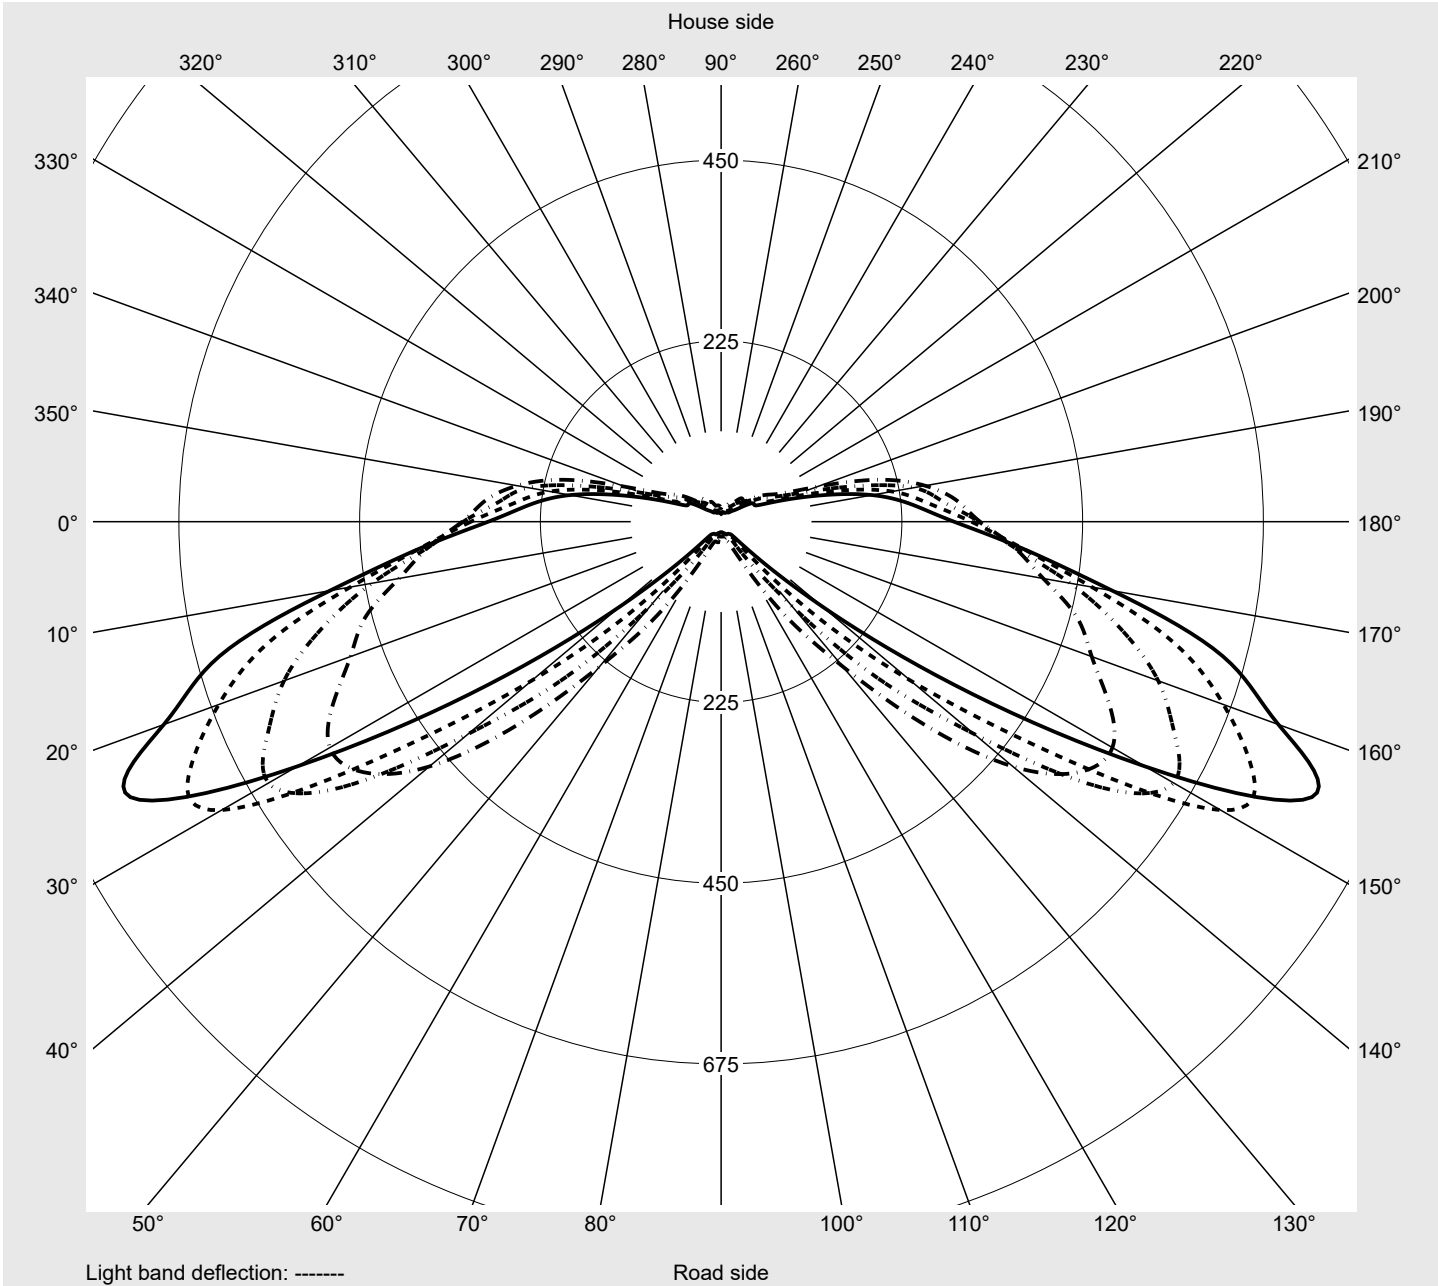

## Photometric test report

<b>Family</b> <b>Streetlight 21 mini LED</b>	<b>Order number: 5XE2M33T08GB</b> <b>EAN: 4058352682265</b>	<b>LP number</b> <b>59152_760</b>
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>
		<b>siteco</b>

C-planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
γ	Luminous intensity in cd/klm												
0,0°	251.7	251.7	251.7	251.7	251.7	251.7	251.7	251.7	251.7	251.7	251.7	251.7	251.7
2,5°	252.7	252.6	255.1	255.9	254.5	255.0	254.0	252.2	251.7	247.4	245.6	244.7	243.6
5,0°	252.7	247.6	244.8	246.2	244.1	242.4	239.8	236.2	239.7	236.4	232.5	233.6	234.3
7,5°	247.5	246.2	247.0	241.4	241.5	240.8	238.5	238.2	237.0	239.8	242.0	244.4	244.4
10,0°	250.9	251.6	254.7	244.8	240.1	243.6	246.0	248.9	247.1	245.5	243.2	248.5	256.4
12,5°	258.1	251.0	248.5	247.9	244.5	247.6	252.4	251.2	250.3	256.2	259.5	260.6	263.5
15,0°	260.4	253.2	248.3	249.4	250.9	255.1	259.0	261.5	258.8	265.7	270.2	267.9	269.6
17,5°	258.3	257.3	247.8	248.7	251.9	259.5	266.5	266.0	275.2	277.4	277.3	277.8	286.1
20,0°	254.1	250.5	251.9	255.9	262.1	270.4	275.0	276.8	276.7	279.1	278.4	285.9	281.5
22,5°	257.0	252.2	255.3	268.1	272.7	269.3	279.3	285.9	287.4	287.8	284.5	282.2	286.1
25,0°	257.8	257.2	270.3	273.8	283.2	292.2	292.5	297.3	302.1	298.9	293.3	289.8	292.8
27,5°	259.1	258.9	269.3	275.9	290.3	294.3	295.3	301.0	295.9	293.4	289.9	296.4	293.1
30,0°	258.8	273.0	282.5	292.7	295.7	311.0	304.7	312.4	300.4	305.3	301.8	299.0	302.9
32,5°	268.4	281.3	284.7	297.6	311.2	318.2	313.4	319.9	315.8	313.8	308.7	313.3	302.9
35,0°	276.6	287.2	295.6	296.7	309.7	318.9	329.3	329.7	312.6	320.8	315.6	320.8	316.5
37,5°	289.2	297.8	300.2	316.3	319.7	337.4	337.7	332.8	327.5	323.7	318.9	318.2	332.2
40,0°	288.5	305.0	310.1	313.4	327.9	343.2	354.8	344.9	337.5	333.4	324.7	347.2	341.1
42,5°	300.3	309.6	317.1	332.9	343.7	358.8	364.5	353.0	347.4	337.7	344.4	349.5	356.9
45,0°	305.8	317.1	325.5	333.0	349.1	369.1	380.6	362.0	354.6	368.9	366.8	388.4	383.2
47,5°	312.0	313.3	325.1	341.9	368.3	370.8	377.7	368.2	368.3	388.5	397.5	390.1	382.7
50,0°	315.7	324.5	327.1	342.0	370.4	390.2	384.7	382.7	398.7	421.6	412.3	380.7	354.1
52,5°	324.5	324.8	337.8	340.4	373.5	407.0	394.1	398.2	435.2	435.4	412.2	358.0	310.7
55,0°	325.2	339.0	343.2	354.4	370.6	422.3	410.7	440.5	443.3	424.3	372.3	320.6	285.2
57,5°	335.5	346.3	354.6	362.1	389.2	440.8	451.8	462.3	460.2	409.5	351.4	299.4	233.2
60,0°	337.7	358.8	382.6	394.8	422.9	480.1	490.2	493.0	465.8	401.4	305.0	234.6	170.2
62,5°	322.3	366.3	407.2	458.3	491.0	532.4	562.5	543.7	474.1	356.4	235.0	151.7	80.7
65,0°	320.9	365.9	441.4	515.0	579.1	622.5	650.4	576.3	411.2	274.5	136.3	61.5	26.5
67,5°	311.5	375.7	468.6	584.1	665.5	729.3	718.0	501.2	307.7	161.4	52.8	22.8	20.7
70,0°	289.9	375.0	494.5	646.3	738.3	811.4	609.3	353.6	163.9	60.9	24.9	18.9	17.3
72,5°	280.7	388.9	529.3	634.1	740.9	675.2	389.9	143.3	60.4	27.9	16.8	16.0	15.2
75,0°	265.2	365.2	466.4	531.9	584.7	383.0	130.8	41.7	27.5	17.8	14.0	12.8	11.6
77,5°	192.5	248.8	264.2	279.3	239.7	78.3	24.8	16.9	12.2	9.5	10.3	8.9	7.8
80,0°	95.5	89.9	86.1	97.1	65.8	14.7	10.3	5.9	5.3	5.7	6.8	5.1	5.0
82,5°	25.0	19.4	13.4	7.5	11.9	4.8	3.8	3.1	3.0	2.4	2.7	2.7	2.2
85,0°	1.0	1.6	1.6	1.3	1.4	1.6	1.4	1.2	1.4	0.9	1.2	0.9	1.0
87,5°	0.4	0.4	0.4	0.5	0.5	0.5	0.3	0.6	0.5	0.4	0.4	0.4	0.4
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

## Photometric test report

<b>Family</b> <b>Streetlight 21 mini LED</b>	<b>Order number: 5XE2M33T08GB</b> <b>EAN: 4058352682265</b>	<b>LP number</b> <b>59152_760</b>
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>
		<b>siteco</b>

C-planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
γ	Luminous intensity in cd/klm												
0,0°	251.7	251.7	251.7	251.7	251.7	251.7	251.7	251.7	251.7	251.7	251.7	251.7	251.7
2,5°	243.6	243.2	243.3	241.2	240.5	242.2	250.2	248.9	247.1	245.4	245.5	243.3	240.0
5,0°	234.1	234.7	239.6	243.4	242.3	242.8	249.9	251.9	245.5	241.3	236.8	236.2	233.4
7,5°	243.7	243.8	244.1	247.6	248.9	252.1	248.0	241.8	234.4	231.7	228.2	228.4	225.5
10,0°	257.2	254.6	250.4	251.4	252.5	258.3	242.9	242.6	235.3	228.9	225.6	227.8	225.5
12,5°	261.6	262.7	263.6	260.7	258.4	260.1	257.9	249.1	241.8	233.6	231.4	229.9	224.5
15,0°	273.9	274.4	275.1	277.9	277.1	272.5	263.7	252.8	241.7	241.0	236.1	228.8	219.4
17,5°	276.7	270.5	275.6	275.9	279.5	288.6	260.3	251.3	244.9	237.3	232.4	228.0	216.6
20,0°	285.2	286.3	287.4	283.7	284.5	291.4	254.3	265.1	245.3	240.9	234.4	226.8	227.8
22,5°	290.7	287.8	282.6	280.9	284.6	286.4	258.8	258.1	247.1	240.8	230.3	224.6	223.8
25,0°	290.9	287.2	284.9	293.2	285.2	287.3	253.7	262.3	252.9	244.0	241.3	229.1	223.8
27,5°	289.3	299.7	289.5	293.7	287.8	298.4	247.8	259.9	263.0	254.6	237.6	231.2	222.7
30,0°	304.3	292.9	297.5	300.8	300.7	286.7	261.7	260.3	261.4	242.3	245.5	235.9	219.5
32,5°	305.9	308.9	297.2	312.5	307.7	304.5	270.7	266.6	261.3	257.8	242.7	227.1	210.7
35,0°	312.3	315.7	323.4	321.9	326.7	324.5	274.1	271.0	269.6	262.0	244.2	226.0	186.2
37,5°	342.6	338.0	331.5	344.3	331.4	333.1	273.8	276.4	276.8	258.8	243.4	213.1	165.6
40,0°	350.0	346.7	344.9	344.4	337.9	325.4	288.1	279.6	275.1	264.7	241.7	191.8	147.8
42,5°	364.9	348.0	345.2	345.9	342.0	328.4	291.2	281.7	286.2	261.6	225.5	181.1	134.3
45,0°	364.0	353.2	344.2	344.8	339.4	344.7	297.8	279.5	275.9	253.2	215.4	159.3	121.5
47,5°	357.3	337.5	304.9	296.2	280.5	284.0	305.0	284.6	285.2	249.7	192.9	141.3	109.9
50,0°	314.0	275.9	263.2	255.3	247.2	245.9	311.3	293.6	273.0	229.3	166.9	107.3	88.1
52,5°	278.1	253.7	229.4	220.1	205.6	201.2	315.6	297.5	264.7	208.9	144.9	89.3	79.1
55,0°	239.5	201.5	165.8	154.9	144.9	137.0	312.2	294.2	259.8	194.6	127.1	78.0	74.1
57,5°	183.6	138.9	110.6	88.6	79.1	74.1	313.5	287.5	236.2	170.2	109.8	73.2	66.2
60,0°	111.5	71.4	46.5	37.5	35.2	32.8	311.2	271.5	216.0	147.6	95.5	67.8	62.2
62,5°	42.8	28.4	25.5	26.0	25.5	25.7	295.3	257.9	201.5	127.0	83.6	67.2	53.8
65,0°	23.4	23.1	22.8	23.5	21.6	21.4	278.4	243.5	170.0	104.7	73.6	60.2	48.1
67,5°	20.9	19.5	18.9	18.8	18.6	18.7	259.7	216.3	148.1	85.9	59.1	57.9	41.2
70,0°	17.3	16.9	14.9	14.9	13.3	13.2	239.7	190.8	125.8	74.2	47.9	45.9	33.0
72,5°	14.5	13.7	11.8	11.8	9.4	10.7	215.6	168.6	110.3	54.9	29.2	33.4	25.5
75,0°	10.2	9.6	8.6	7.6	7.1	8.2	187.2	114.4	77.4	24.7	20.0	22.7	19.4
77,5°	6.8	6.5	5.6	5.4	5.0	4.8	100.2	23.1	17.9	7.8	11.3	11.5	11.8
80,0°	3.9	4.2	3.1	3.3	3.8	3.3	40.0	7.2	6.0	5.2	7.0	6.8	6.4
82,5°	2.1	2.1	1.7	2.3	1.9	1.6	10.0	3.5	3.0	2.4	3.3	3.1	2.9
85,0°	0.8	1.0	0.6	0.7	0.6	0.6	1.5	1.2	1.1	1.1	1.1	1.3	1.1
87,5°	0.4	0.2	0.2	0.2	0.2	0.4	0.3	0.3	0.2	0.4	0.3	0.2	0.1
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

## Photometric test report

<b>Family</b> <b>Streetlight 21 mini LED</b>	<b>Order number: 5XE2M33T08GB</b> <b>EAN: 4058352682265</b>	<b>LP number</b> <b>59152_760</b>
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>
		<b>siteco</b>

C-planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm											Luminous flux in lm/klm	
0,0°	251.7	251.7	251.7	251.7	251.7	251.7	251.7	251.7	251.7	251.7	251.7	0.4	0.4
2,5°	240.3	241.6	238.8	237.8	237.5	239.7	242.6	244.7	244.9	242.1	241.0	2.9	3.3
5,0°	228.5	228.0	227.0	225.7	228.3	227.7	229.0	226.6	226.4	225.7	226.7	5.7	9.0
7,5°	228.3	226.6	219.5	221.8	216.9	216.1	216.6	215.9	217.8	218.5	216.7	8.4	17.4
10,0°	218.6	215.1	214.8	214.4	213.9	212.4	209.8	207.9	207.4	213.1	214.6	11.2	28.6
12,5°	222.9	224.9	218.4	214.2	208.1	211.3	215.6	212.9	208.3	206.4	207.2	14.2	42.8
15,0°	213.8	216.2	213.4	214.0	210.7	206.1	202.7	200.1	201.7	201.8	202.6	17.2	60.1
17,5°	213.2	212.5	216.4	210.3	205.3	203.3	199.8	189.2	192.6	193.9	189.9	20.1	80.2
20,0°	221.3	208.9	205.5	200.6	189.2	182.7	179.3	173.8	164.6	163.6	167.0	22.8	102.9
22,5°	220.7	214.8	198.3	184.9	172.2	159.3	158.7	146.8	146.8	144.1	146.6	25.2	128.1
25,0°	217.0	197.4	182.7	161.6	153.9	143.9	140.8	132.9	136.9	126.6	121.7	27.8	155.9
27,5°	207.1	180.6	159.0	145.7	138.5	128.8	124.3	119.3	110.8	107.1	104.5	29.9	185.9
30,0°	187.4	164.9	146.0	133.8	122.6	115.2	100.8	101.8	98.2	93.7	93.5	32.4	218.3
32,5°	173.5	148.1	134.8	114.4	104.9	102.5	95.5	91.7	86.3	82.3	83.0	35.0	253.3
35,0°	154.6	136.4	115.1	101.4	100.1	95.8	89.4	82.3	80.9	75.6	76.0	37.5	290.8
37,5°	136.6	117.1	104.1	96.7	95.3	87.5	84.6	81.1	77.0	76.2	72.8	40.4	331.2
40,0°	121.4	107.1	99.6	91.1	89.3	82.0	77.5	73.8	68.3	66.8	65.6	42.9	374.0
42,5°	113.6	96.2	91.9	86.0	85.0	79.7	71.7	68.0	59.4	56.2	53.6	45.4	419.4
45,0°	100.6	90.9	85.7	81.0	74.3	66.6	57.9	54.8	51.6	51.5	49.7	47.7	467.1
47,5°	93.6	83.1	73.5	70.4	63.4	53.5	51.8	47.0	51.1	49.2	51.2	48.6	515.7
50,0°	84.1	73.4	60.5	61.0	52.7	47.5	47.1	44.9	45.0	43.7	42.9	48.6	564.3
52,5°	75.3	64.9	55.6	50.1	46.6	40.8	42.4	40.3	40.5	36.3	38.4	48.6	613.0
55,0°	64.4	54.4	47.2	42.8	42.1	38.4	38.0	35.6	33.6	34.1	36.2	47.5	660.5
57,5°	53.1	46.8	44.4	39.8	37.9	35.5	33.5	33.2	32.2	31.5	28.2	46.2	706.7
60,0°	44.6	40.4	41.3	35.5	32.0	30.9	30.1	30.0	29.4	28.7	24.4	44.7	751.4
62,5°	40.0	38.3	37.9	30.7	28.1	26.9	22.0	20.8	20.6	19.4	17.2	44.1	795.5
65,0°	37.9	33.8	30.2	24.9	21.3	19.0	18.2	16.5	16.8	16.2	14.2	43.7	839.1
67,5°	30.5	27.2	21.8	17.6	15.1	15.1	14.7	14.6	14.7	13.4	12.3	42.8	881.9
70,0°	22.9	18.7	15.1	14.0	13.3	12.0	11.9	12.1	11.4	11.7	9.5	40.0	921.9
72,5°	18.9	15.1	13.3	11.8	10.6	9.5	8.2	7.9	7.5	7.0	7.5	34.4	956.3
75,0°	14.0	11.5	8.9	9.5	7.5	5.9	4.0	4.3	4.2	3.7	3.9	25.3	981.7
77,5°	10.3	7.2	5.6	5.4	3.9	2.9	2.4	2.5	1.9	2.4	2.1	12.3	994.0
80,0°	6.0	3.9	3.0	2.5	1.9	1.4	1.2	0.9	1.0	0.9	1.0	4.6	998.6
82,5°	2.5	1.9	0.8	0.6	0.7	0.4	0.3	0.2	0.3	0.4	0.4	1.1	999.7
85,0°	0.9	0.4	0.4	0.2	0.1	0.1	0.1	0.1	0.1	0.1	0.0	0.2	999.9
87,5°	0.1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.1	1000.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

## Photometric test report

<b>Family</b> Streetlight 21 mini LED	<b>Order number: 5XE2M33T08GB</b> <b>EAN: 4058352682265</b>	<b>LP number</b> 59152_760
--	--	-------------------------------

<b>Dimming levels table</b>	environmental temperature: 25°C	<b>siteco</b>
-----------------------------	---------------------------------	---------------

Luminous flux [%]	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]start of lifetime	Power consumption [W]end of lifetime	Power consumption [W]average
100	254	254	5230	40.4	41.1	40.8
95	240	252	4977	38.1	38.8	38.4
90	225	250	4702	35.8	36.4	36.1
85	211	247	4441	33.5	34.1	33.8
80	197	245	4176	31.3	31.9	31.6
75	184	242	3928	29.3	29.8	29.6
70	170	239	3655	27.1	27.5	27.3
65	157	236	3399	25.1	25.5	25.3
60	144	233	3139	23.2	23.5	23.4
55	131	230	2877	21.2	21.5	21.4
50	118	226	2610	19.2	19.5	19.4
45	106	222	2362	17.4	17.6	17.5
40	93	217	2089	15.4	15.6	15.5
35	81	212	1834	13.6	13.8	13.7
30	69	206	1576	11.8	12.0	11.9
25	57	199	1314	10.1	10.2	10.1
20	45	191	1050	8.3	8.4	8.4
15	33	179	783	6.6	6.7	6.6
11	23	166	557	5.2	5.2	5.2

<b>Dimming levels table</b>	environmental temperature: 5°C
-----------------------------	--------------------------------

Luminous flux [%]	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]start of lifetime	Power consumption [W]end of lifetime	Power consumption [W]average
100	254	254	5340	40.9	41.6	41.2
95	240	252	5078	38.6	39.3	39.0
90	226	250	4812	36.4	37.0	36.7
85	212	247	4544	34.2	34.8	34.5
80	198	245	4272	31.9	32.5	32.2
75	184	242	3995	29.8	30.2	30.0
70	171	240	3736	27.7	28.1	27.9
65	158	237	3474	25.7	26.0	25.8
60	145	233	3208	23.6	24.0	23.8
55	132	230	2940	21.6	21.9	21.8
50	119	226	2669	19.6	19.9	19.8
45	106	222	2394	17.6	17.8	17.7
40	94	218	2138	15.8	16.1	16.0
35	82	213	1878	13.9	14.2	14.0
30	69	206	1594	12.0	12.2	12.1
25	57	199	1329	10.2	10.3	10.2
20	45	191	1061	8.5	8.6	8.6
15	33	179	791	6.7	6.8	6.8
11	23	166	563	5.3	5.3	5.3

## Photometric test report

<b>Family</b> Streetlight 21 mini LED	<b>Order number: 5XE2M33T08GB</b> <b>EAN: 4058352682265</b>	<b>LP number</b> 59152_760
<b>Dimming levels table</b>		<b>siteco</b>
environmental temperature: 15°C		

Luminous flux [%]	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]start of lifetime	Power consumption [W]end of lifetime	Power consumption [W]average
100	254	254	5290	40.6	41.4	41.0
95	240	252	5033	38.4	39.1	38.8
90	225	250	4752	36.0	36.7	36.4
85	212	247	4506	34.0	34.5	34.2
80	198	245	4237	31.7	32.3	32.0
75	184	242	3965	29.5	30.0	29.8
70	171	240	3709	27.5	27.9	27.7
65	157	236	3429	25.3	25.7	25.5
60	144	233	3166	23.3	23.7	23.5
55	131	230	2900	21.3	21.6	21.5
50	119	226	2653	19.4	19.7	19.5
45	106	222	2380	17.5	17.7	17.6
40	94	218	2126	15.6	15.9	15.8
35	81	212	1847	13.7	13.9	13.8
30	69	206	1586	11.9	12.1	12.0
25	57	199	1323	10.1	10.3	10.2
20	45	191	1056	8.4	8.5	8.4
15	33	179	787	6.6	6.7	6.6
11	23	166	560	5.2	5.2	5.2

**Photometric test report**

<b>Family</b> Streetlight 21 mini LED	<b>Order number: 5XE2M33T08GB</b> <b>EAN: 4058352682265</b>	<b>LP number</b> <b>59152_760</b>
--	--	--------------------------------------

**Luminousfluxs table** **siteco**

Temperature °C	Luminous flux lm	Power consumption W
25.0	5230.0	40.4
5.0	5340.0	40.9
15.0	5290.0	40.6