

Photometric test report

Family Streetlight 21 midi LED



Order number: 5XE3M31D08MB
EAN: 4058352682692

LP number
59152_348

Version post-top or side-entry mounting
Optic direct, asymmetric wide distribution
S10B003
Cover toughened safety glass
Lamps LED 3000 K | CRI ≥ 70
Controlgear ECG SITECO iQ
Rated values Net luminous flux = 17170 lm
Power consumption = 146.7 W
Luminous efficacy = 117 lm/W

serial
documentation
15.07.2022

siteco

Luminous intensity in cd/klm


C180-0

C205-25

C210-30

C270-90

Imax: 811 cd/klm

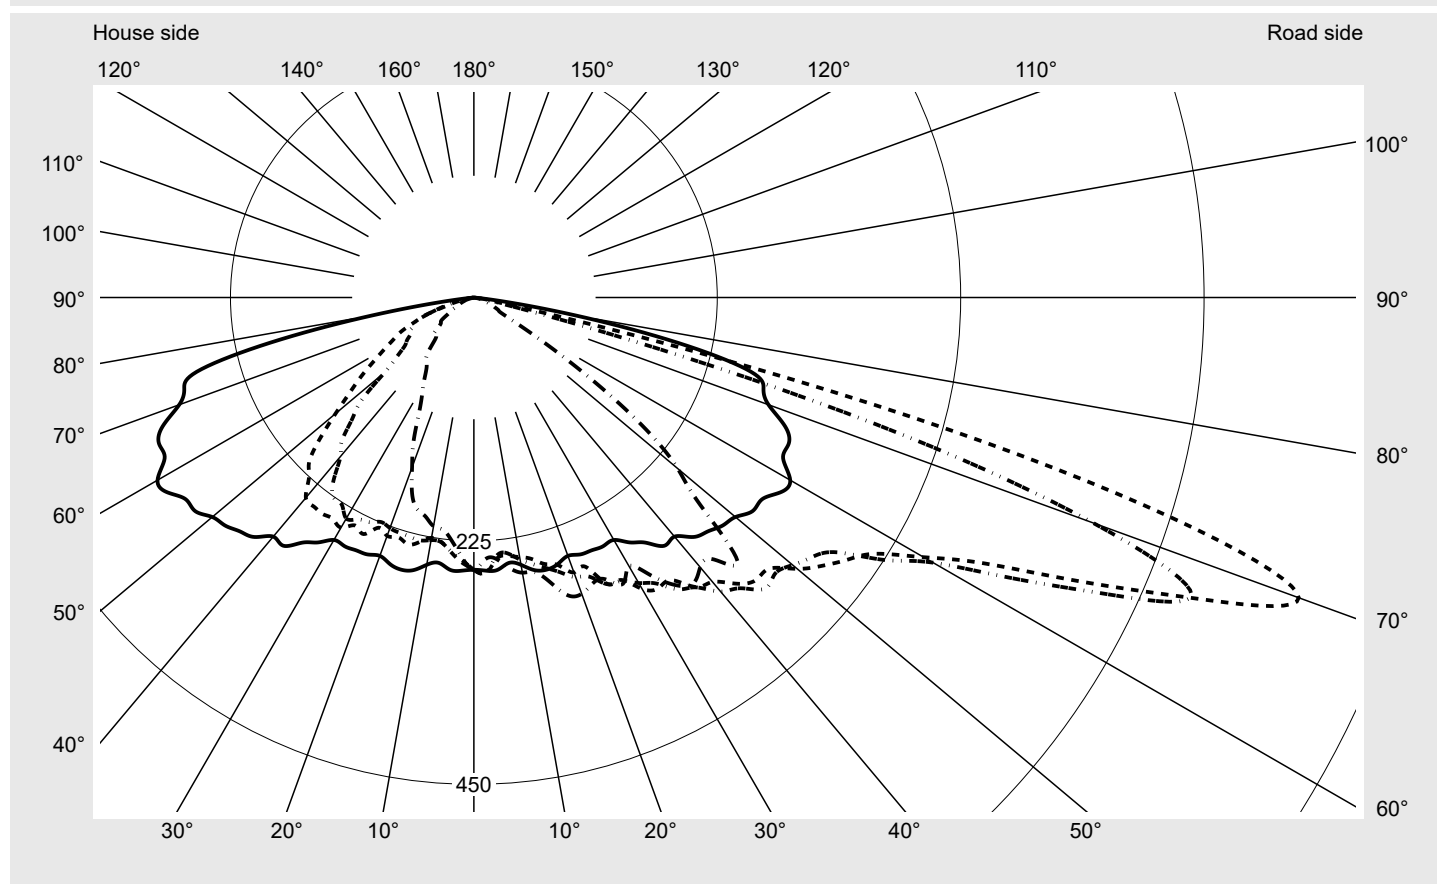

Luminaire output ratios

Eta	100.0%
Eta 0° - 90°	100.0%
Eta 90° - 180°	0.0%

Luminous intensity class acc. to EN13201-2

Class:	G3
Imax 70°	811.4
Imax 80°	97.1
Imax 90°	0.0
Imax >90°	0.0
Imax >95°	0.0

Measurement conditions

DIN EN 13032 and DIN 5032

Photometric test report

Family
Streetlight 21 midi LED

Order number: **5XE3M31D08MB**
EAN: **4058352682692**

LP number
59152_348

Envelope curve in cd/klm


KMK 70°

KMK 67.5°

KMK 65°

KMK 62.5°

siteco

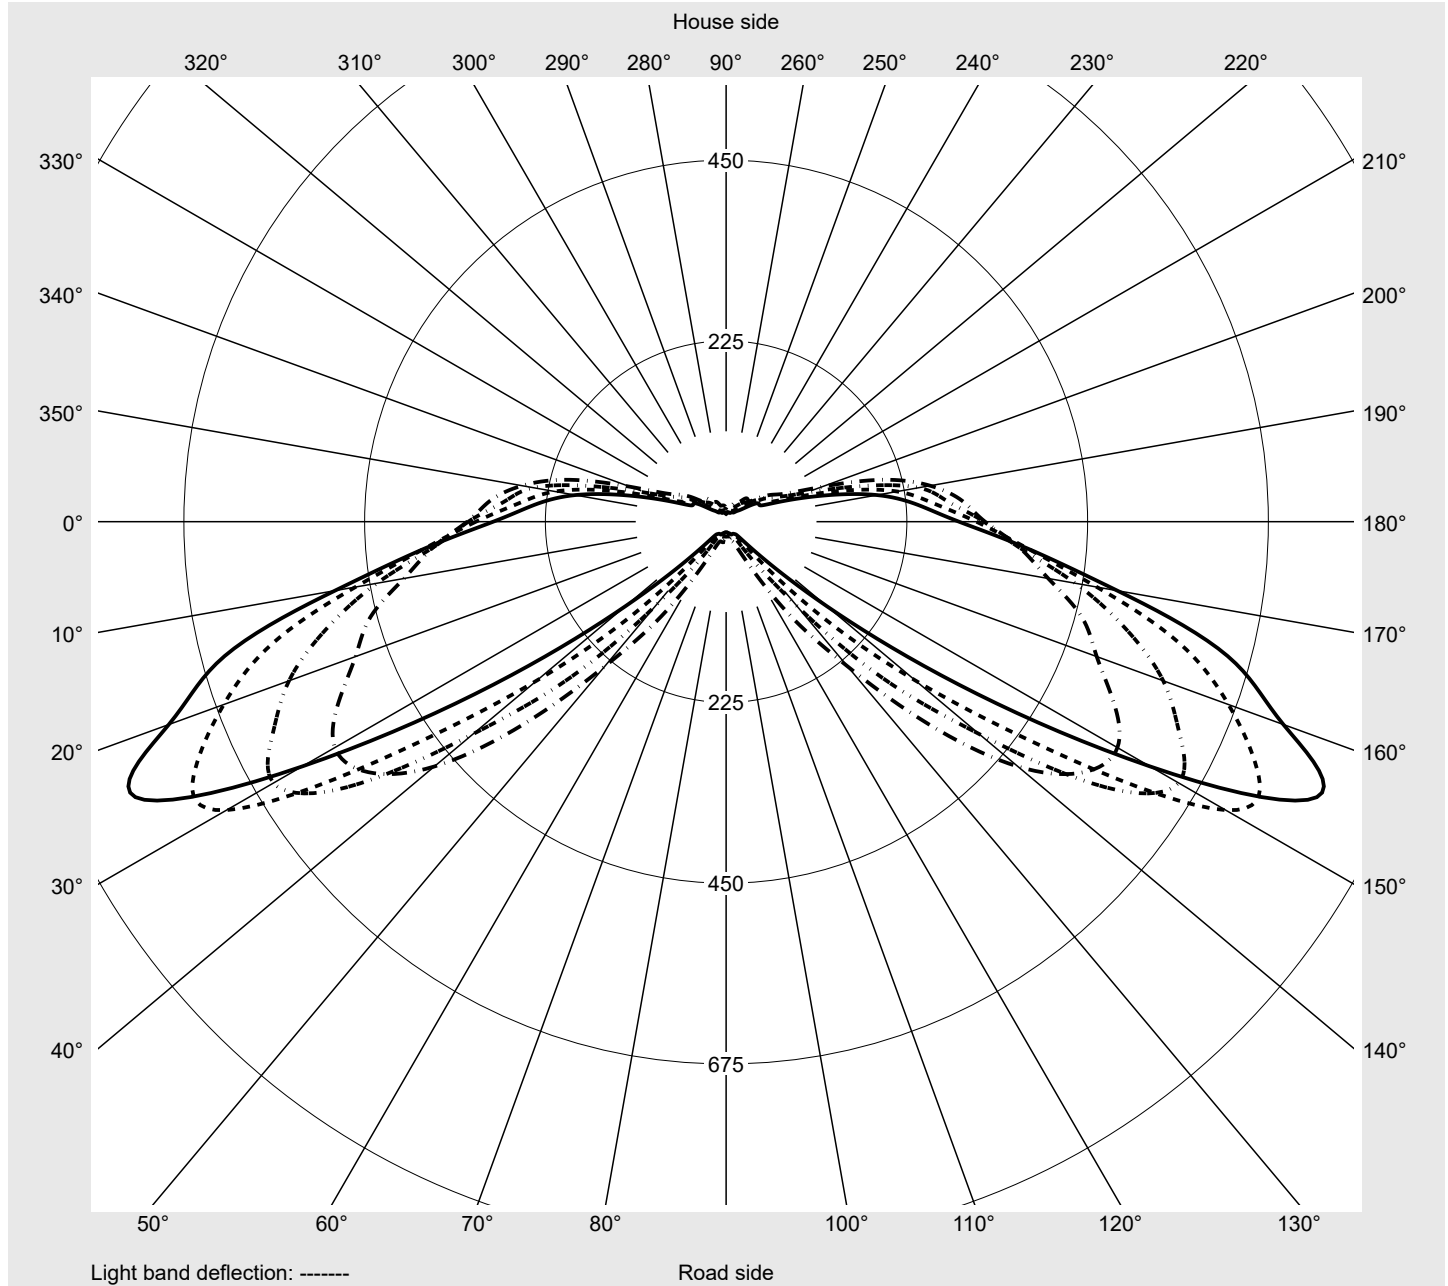

Photometric test report

Family Streetlight 21 midi LED	Order number: 5XE3M31D08MB EAN: 4058352682692	LP number 59152_348
-----------------------------------	--	------------------------

Table of values for luminous intensities	Maximum luminous intensity	siteco
--	----------------------------	--------

C- planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
γ	Luminous intensity in cd/klm												
0,0°	251.7	251.7	251.7	251.7	251.7	251.7	251.7	251.7	251.7	251.7	251.7	251.7	251.7
2,5°	252.7	252.6	255.1	255.9	254.5	255.0	254.0	252.2	251.7	247.4	245.6	244.7	243.6
5,0°	252.7	247.6	244.8	246.2	244.1	242.4	239.8	236.2	239.7	236.4	232.5	233.6	234.3
7,5°	247.5	246.2	247.0	241.4	241.5	240.8	238.5	238.2	237.0	239.8	242.0	244.4	244.4
10,0°	250.9	251.6	254.7	244.8	240.1	243.6	246.0	248.9	247.1	245.5	243.2	248.5	256.4
12,5°	258.1	251.0	248.5	247.9	244.5	247.6	252.4	251.2	250.3	256.2	259.5	260.6	263.5
15,0°	260.4	253.2	248.3	249.4	250.9	255.1	259.0	261.5	258.8	265.7	270.2	267.9	269.6
17,5°	258.3	257.3	247.8	248.7	251.9	259.5	266.5	266.0	275.2	277.4	277.3	277.8	286.1
20,0°	254.1	250.5	251.9	255.9	262.1	270.4	275.0	276.8	276.7	279.1	278.4	285.9	281.5
22,5°	257.0	252.2	255.3	268.1	272.7	269.3	279.3	285.9	287.4	287.8	284.5	282.2	286.1
25,0°	257.8	257.2	270.3	273.8	283.2	292.2	292.5	297.3	302.1	298.9	293.3	289.8	292.8
27,5°	259.1	258.9	269.3	275.9	290.3	294.3	295.3	301.0	295.9	293.4	289.9	296.4	293.1
30,0°	258.8	273.0	282.5	292.7	295.7	311.0	304.7	312.4	300.4	305.3	301.8	299.0	302.9
32,5°	268.4	281.3	284.7	297.6	311.2	318.2	313.4	319.9	315.8	313.8	308.7	313.3	302.9
35,0°	276.6	287.2	295.6	296.7	309.7	318.9	329.3	329.7	312.6	320.8	315.6	320.8	316.5
37,5°	289.2	297.8	300.2	316.3	319.7	337.4	337.7	332.8	327.5	323.7	318.9	318.2	332.2
40,0°	288.5	305.0	310.1	313.4	327.9	343.2	354.8	344.9	337.5	333.4	324.7	347.2	341.1
42,5°	300.3	309.6	317.1	332.9	343.7	358.8	364.5	353.0	347.4	337.7	344.4	349.5	356.9
45,0°	305.8	317.1	325.5	333.0	349.1	369.1	380.6	362.0	354.6	368.9	366.8	388.4	383.2
47,5°	312.0	313.3	325.1	341.9	368.3	370.8	377.7	368.2	368.3	388.5	397.5	390.1	382.7
50,0°	315.7	324.5	327.1	342.0	370.4	390.2	384.7	382.7	398.7	421.6	412.3	380.7	354.1
52,5°	324.5	324.8	337.8	340.4	373.5	407.0	394.1	398.2	435.2	435.4	412.2	358.0	310.7
55,0°	325.2	339.0	343.2	354.4	370.6	422.3	410.7	440.5	443.3	424.3	372.3	320.6	285.2
57,5°	335.5	346.3	354.6	362.1	389.2	440.8	451.8	462.3	460.2	409.5	351.4	299.4	233.2
60,0°	337.7	358.8	382.6	394.8	422.9	480.1	490.2	493.0	465.8	401.4	305.0	234.6	170.2
62,5°	322.3	366.3	407.2	458.3	491.0	532.4	562.5	543.7	474.1	356.4	235.0	151.7	80.7
65,0°	320.9	365.9	441.4	515.0	579.1	622.5	650.4	576.3	411.2	274.5	136.3	61.5	26.5
67,5°	311.5	375.7	468.6	584.1	665.5	729.3	718.0	501.2	307.7	161.4	52.8	22.8	20.7
70,0°	289.9	375.0	494.5	646.3	738.3	811.4	609.3	353.6	163.9	60.9	24.9	18.9	17.3
72,5°	280.7	388.9	529.3	634.1	740.9	675.2	389.9	143.3	60.4	27.9	16.8	16.0	15.2
75,0°	265.2	365.2	466.4	531.9	584.7	383.0	130.8	41.7	27.5	17.8	14.0	12.8	11.6
77,5°	192.5	248.8	264.2	279.3	239.7	78.3	24.8	16.9	12.2	9.5	10.3	8.9	7.8
80,0°	95.5	89.9	86.1	97.1	65.8	14.7	10.3	5.9	5.3	5.7	6.8	5.1	5.0
82,5°	25.0	19.4	13.4	7.5	11.9	4.8	3.8	3.1	3.0	2.4	2.7	2.7	2.2
85,0°	1.0	1.6	1.6	1.3	1.4	1.6	1.4	1.2	1.4	0.9	1.2	0.9	1.0
87,5°	0.4	0.4	0.4	0.5	0.5	0.5	0.3	0.6	0.5	0.4	0.4	0.4	0.4
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 21 midi LED		Order number: 5XE3M31D08MB EAN: 4058352682692										LP number 59152_348	
Table of values for luminous intensities										Maximum luminous intensity		siteco	
C- planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
γ	Luminous intensity in cd/klm												
0,0°	251.7	251.7	251.7	251.7	251.7	251.7	251.7	251.7	251.7	251.7	251.7	251.7	251.7
2,5°	243.6	243.2	243.3	241.2	240.5	242.2	250.2	248.9	247.1	245.4	245.5	243.3	240.0
5,0°	234.1	234.7	239.6	243.4	242.3	242.8	249.9	251.9	245.5	241.3	236.8	236.2	233.4
7,5°	243.7	243.8	244.1	247.6	248.9	252.1	248.0	241.8	234.4	231.7	228.2	228.4	225.5
10,0°	257.2	254.6	250.4	251.4	252.5	258.3	242.9	242.6	235.3	228.9	225.6	227.8	225.5
12,5°	261.6	262.7	263.6	260.7	258.4	260.1	257.9	249.1	241.8	233.6	231.4	229.9	224.5
15,0°	273.9	274.4	275.1	277.9	277.1	272.5	263.7	252.8	241.7	241.0	236.1	228.8	219.4
17,5°	276.7	270.5	275.6	275.9	279.5	288.6	260.3	251.3	244.9	237.3	232.4	228.0	216.6
20,0°	285.2	286.3	287.4	283.7	284.5	291.4	254.3	265.1	245.3	240.9	234.4	226.8	227.8
22,5°	290.7	287.8	282.6	280.9	284.6	286.4	258.8	258.1	247.1	240.8	230.3	224.6	223.8
25,0°	290.9	287.2	284.9	293.2	285.2	287.3	253.7	262.3	252.9	244.0	241.3	229.1	223.8
27,5°	289.3	299.7	289.5	293.7	287.8	298.4	247.8	259.9	263.0	254.6	237.6	231.2	222.7
30,0°	304.3	292.9	297.5	300.8	300.7	286.7	261.7	260.3	261.4	242.3	245.5	235.9	219.5
32,5°	305.9	308.9	297.2	312.5	307.7	304.5	270.7	266.6	261.3	257.8	242.7	227.1	210.7
35,0°	312.3	315.7	323.4	321.9	326.7	324.5	274.1	271.0	269.6	262.0	244.2	226.0	186.2
37,5°	342.6	338.0	331.5	344.3	331.4	333.1	273.8	276.4	276.8	258.8	243.4	213.1	165.6
40,0°	350.0	346.7	344.9	344.4	337.9	325.4	288.1	279.6	275.1	264.7	241.7	191.8	147.8
42,5°	364.9	348.0	345.2	345.9	342.0	328.4	291.2	281.7	286.2	261.6	225.5	181.1	134.3
45,0°	364.0	353.2	344.2	344.8	339.4	344.7	297.8	279.5	275.9	253.2	215.4	159.3	121.5
47,5°	357.3	337.5	304.9	296.2	280.5	284.0	305.0	284.6	285.2	249.7	192.9	141.3	109.9
50,0°	314.0	275.9	263.2	255.3	247.2	245.9	311.3	293.6	273.0	229.3	166.9	107.3	88.1
52,5°	278.1	253.7	229.4	220.1	205.6	201.2	315.6	297.5	264.7	208.9	144.9	89.3	79.1
55,0°	239.5	201.5	165.8	154.9	144.9	137.0	312.2	294.2	259.8	194.6	127.1	78.0	74.1
57,5°	183.6	138.9	110.6	88.6	79.1	74.1	313.5	287.5	236.2	170.2	109.8	73.2	66.2
60,0°	111.5	71.4	46.5	37.5	35.2	32.8	311.2	271.5	216.0	147.6	95.5	67.8	62.2
62,5°	42.8	28.4	25.5	26.0	25.5	25.7	295.3	257.9	201.5	127.0	83.6	67.2	53.8
65,0°	23.4	23.1	22.8	23.5	21.6	21.4	278.4	243.5	170.0	104.7	73.6	60.2	48.1
67,5°	20.9	19.5	18.9	18.8	18.6	18.7	259.7	216.3	148.1	85.9	59.1	57.9	41.2
70,0°	17.3	16.9	14.9	14.9	13.3	13.2	239.7	190.8	125.8	74.2	47.9	45.9	33.0
72,5°	14.5	13.7	11.8	11.8	9.4	10.7	215.6	168.6	110.3	54.9	29.2	33.4	25.5
75,0°	10.2	9.6	8.6	7.6	7.1	8.2	187.2	114.4	77.4	24.7	20.0	22.7	19.4
77,5°	6.8	6.5	5.6	5.4	5.0	4.8	100.2	23.1	17.9	7.8	11.3	11.5	11.8
80,0°	3.9	4.2	3.1	3.3	3.8	3.3	40.0	7.2	6.0	5.2	7.0	6.8	6.4
82,5°	2.1	2.1	1.7	2.3	1.9	1.6	10.0	3.5	3.0	2.4	3.3	3.1	2.9
85,0°	0.8	1.0	0.6	0.7	0.6	0.6	1.5	1.2	1.1	1.1	1.1	1.3	1.1
87,5°	0.4	0.2	0.2	0.2	0.2	0.4	0.3	0.3	0.2	0.4	0.3	0.2	0.1
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 21 midi LED		Order number: 5XE3M31D08MB EAN: 4058352682692										LP number 59152_348	
Table of values for luminous intensities										Maximum luminous intensity		siteco	
C- planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm										Luminous flux in lm/klm		
0,0°	251.7	251.7	251.7	251.7	251.7	251.7	251.7	251.7	251.7	251.7	251.7	0.4	0.4
2,5°	240.3	241.6	238.8	237.8	237.5	239.7	242.6	244.7	244.9	242.1	241.0	2.9	3.3
5,0°	228.5	228.0	227.0	225.7	228.3	227.7	229.0	226.6	226.4	225.7	226.7	5.7	9.0
7,5°	228.3	226.6	219.5	221.8	216.9	216.1	216.6	215.9	217.8	218.5	216.7	8.4	17.4
10,0°	218.6	215.1	214.8	214.4	213.9	212.4	209.8	207.9	207.4	213.1	214.6	11.2	28.6
12,5°	222.9	224.9	218.4	214.2	208.1	211.3	215.6	212.9	208.3	206.4	207.2	14.2	42.8
15,0°	213.8	216.2	213.4	214.0	210.7	206.1	202.7	200.1	201.7	201.8	202.6	17.2	60.1
17,5°	213.2	212.5	216.4	210.3	205.3	203.3	199.8	189.2	192.6	193.9	189.9	20.1	80.2
20,0°	221.3	208.9	205.5	200.6	189.2	182.7	179.3	173.8	164.6	163.6	167.0	22.8	102.9
22,5°	220.7	214.8	198.3	184.9	172.2	159.3	158.7	146.8	146.8	144.1	146.6	25.2	128.1
25,0°	217.0	197.4	182.7	161.6	153.9	143.9	140.8	132.9	136.9	126.6	121.7	27.8	155.9
27,5°	207.1	180.6	159.0	145.7	138.5	128.8	124.3	119.3	110.8	107.1	104.5	29.9	185.9
30,0°	187.4	164.9	146.0	133.8	122.6	115.2	100.8	101.8	98.2	93.7	93.5	32.4	218.3
32,5°	173.5	148.1	134.8	114.4	104.9	102.5	95.5	91.7	86.3	82.3	83.0	35.0	253.3
35,0°	154.6	136.4	115.1	101.4	100.1	95.8	89.4	82.3	80.9	75.6	76.0	37.5	290.8
37,5°	136.6	117.1	104.1	96.7	95.3	87.5	84.6	81.1	77.0	76.2	72.8	40.4	331.2
40,0°	121.4	107.1	99.6	91.1	89.3	82.0	77.5	73.8	68.3	66.8	65.6	42.9	374.0
42,5°	113.6	96.2	91.9	86.0	85.0	79.7	71.7	68.0	59.4	56.2	53.6	45.4	419.4
45,0°	100.6	90.9	85.7	81.0	74.3	66.6	57.9	54.8	51.6	51.5	49.7	47.7	467.1
47,5°	93.6	83.1	73.5	70.4	63.4	53.5	51.8	47.0	51.1	49.2	51.2	48.6	515.7
50,0°	84.1	73.4	60.5	61.0	52.7	47.5	47.1	44.9	45.0	43.7	42.9	48.6	564.3
52,5°	75.3	64.9	55.6	50.1	46.6	40.8	42.4	40.3	40.5	36.3	38.4	48.6	613.0
55,0°	64.4	54.4	47.2	42.8	42.1	38.4	38.0	35.6	33.6	34.1	36.2	47.5	660.5
57,5°	53.1	46.8	44.4	39.8	37.9	35.5	33.5	33.2	32.2	31.5	28.2	46.2	706.7
60,0°	44.6	40.4	41.3	35.5	32.0	30.9	30.1	30.0	29.4	28.7	24.4	44.7	751.4
62,5°	40.0	38.3	37.9	30.7	28.1	26.9	22.0	20.8	20.6	19.4	17.2	44.1	795.5
65,0°	37.9	33.8	30.2	24.9	21.3	19.0	18.2	16.5	16.8	16.2	14.2	43.7	839.1
67,5°	30.5	27.2	21.8	17.6	15.1	15.1	14.7	14.6	14.7	13.4	12.3	42.8	881.9
70,0°	22.9	18.7	15.1	14.0	13.3	12.0	11.9	12.1	11.4	11.7	9.5	40.0	921.9
72,5°	18.9	15.1	13.3	11.8	10.6	9.5	8.2	7.9	7.5	7.0	7.5	34.4	956.3
75,0°	14.0	11.5	8.9	9.5	7.5	5.9	4.0	4.3	4.2	3.7	3.9	25.3	981.7
77,5°	10.3	7.2	5.6	5.4	3.9	2.9	2.4	2.5	1.9	2.4	2.1	12.3	994.0
80,0°	6.0	3.9	3.0	2.5	1.9	1.4	1.2	0.9	1.0	0.9	1.0	4.6	998.6
82,5°	2.5	1.9	0.8	0.6	0.7	0.4	0.3	0.2	0.3	0.4	0.4	1.1	999.7
85,0°	0.9	0.4	0.4	0.2	0.1	0.1	0.1	0.1	0.1	0.1	0.0	0.2	999.9
87,5°	0.1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.1	1000.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

office	industry	traffic	retail	public	sports
--------	----------	---------	--------	--------	--------

Photometric test report

Family Streetlight 21 midi LED	Order number: 5XE3M31D08MB EAN: 4058352682692	LP number 59152_348
Dimming levels table environmental temperature: 25°C		sit eco

Luminous flux [%]	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]start of lifetime	Power consumption [W]end of lifetime	Power consumption [W]average
100	254	254	17170	146.7	161.2	154.0
95	241	252	16291	135.9	149.3	142.6
90	229	250	15480	126.6	138.9	132.8
85	216	248	14601	117.1	128.4	122.8
80	203	246	13722	107.9	118.3	113.1
75	190	243	12844	99.3	108.6	104.0
70	178	241	12033	91.5	100.1	95.8
65	165	238	11154	83.4	91.3	87.4
60	152	235	10275	75.7	82.7	79.2
55	140	232	9464	68.9	75.2	72.1
50	127	229	8585	61.7	67.3	64.5
45	114	225	7706	54.7	59.6	57.2
40	102	221	6895	48.3	52.8	50.6
35	89	216	6016	41.7	45.4	43.6
30	76	210	5137	35.3	38.5	36.9
25	63	203	4259	29.2	31.7	30.4
20	51	195	3448	23.8	25.8	24.8
15	38	184	2569	18.1	19.5	18.8
11	27	172	1825	13.3	14.3	13.8

Dimming levels table environmental temperature: 5°C	
--	--

Luminous flux [%]	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]start of lifetime	Power consumption [W]end of lifetime	Power consumption [W]average
100	254	254	17170	141.2	147.7	144.4
95	241	252	16291	131.5	137.4	134.4
90	229	250	15480	123.1	128.5	125.8
85	216	248	14601	114.1	119.2	116.6
80	203	246	13722	105.6	110.2	107.9
75	190	243	12844	97.3	101.6	99.4
70	178	241	12033	90.1	94.0	92.0
65	165	238	11154	82.4	85.9	84.2
60	152	235	10275	74.9	78.1	76.5
55	140	232	9464	68.2	71.2	69.7
50	127	229	8585	61.2	63.8	62.5
45	114	225	7706	54.4	56.7	55.6
40	102	221	6895	48.1	50.3	49.2
35	89	216	6016	41.6	43.4	42.5
30	76	210	5137	35.3	36.8	36.0
25	63	203	4259	29.3	30.4	29.8
20	51	195	3448	23.9	24.7	24.3
15	38	184	2569	18.2	18.8	18.5
11	27	172	1825	13.4	13.9	13.6

Photometric test report

Family Streetlight 21 midi LED	Order number: 5XE3M31D08MB EAN: 4058352682692	LP number 59152_348
Dimming levels table		environmental temperature: 15°C
		siteco

Luminous flux [%]	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]start of lifetime	Power consumption [W]end of lifetime	Power consumption [W]average
100	254	254	17170	143.5	152.2	147.8
95	241	252	16291	133.4	141.3	137.4
90	229	250	15480	124.6	131.9	128.2
85	216	248	14601	115.4	122.2	118.8
80	203	246	13722	106.6	112.7	109.6
75	190	243	12844	98.2	103.8	101.0
70	178	241	12033	90.7	95.8	93.2
65	165	238	11154	82.8	87.5	85.2
60	152	235	10275	75.2	79.5	77.4
55	140	232	9464	68.5	72.3	70.4
50	127	229	8585	61.4	64.8	63.1
45	114	225	7706	54.5	57.5	56.0
40	102	221	6895	48.2	50.9	49.6
35	89	216	6016	41.6	43.9	42.8
30	76	210	5137	35.3	37.2	36.2
25	63	203	4259	29.1	30.7	29.9
20	51	195	3448	23.8	24.9	24.4
15	38	184	2569	18.1	18.9	18.5
11	27	172	1825	13.4	14.0	13.7

Photometric test report

Family Streetlight 21 midi LED	Order number: 5XE3M31D08MB EAN: 4058352682692	LP number 59152_348
Luminousfluxs table		siteco

Temperature °C	Luminous flux lm	Power consumption W
25.0	17170.0	146.7
5.0	17170.0	141.2
15.0	17170.0	143.5