

## Photometric test report

Family  
MUSHROOM LUMINAIRE LED

Order number: 5XA5235CF14H  
EAN: 4058352831939

LP number  
57120\_27



**Version** post-top- or mounting to wall arm  
**Optic** direct, symmetric wide distribution  
C120005  
**Cover** cover transparent, PMMA  
**Lamps** LED 2200 K | CRI ≥ 70  
**Controlgear** ECG SITECO iQ  
**Rated values** Net luminous flux = 3000 lm  
Power consumption = 23.9 W  
Luminous efficacy = 125.5 lm/W

serial  
documentation  
24.02.2023

siteco

Luminous intensity in cd/klm


C180-0

C205-25

C210-30

C270-90

Imax: 401 cd/klm

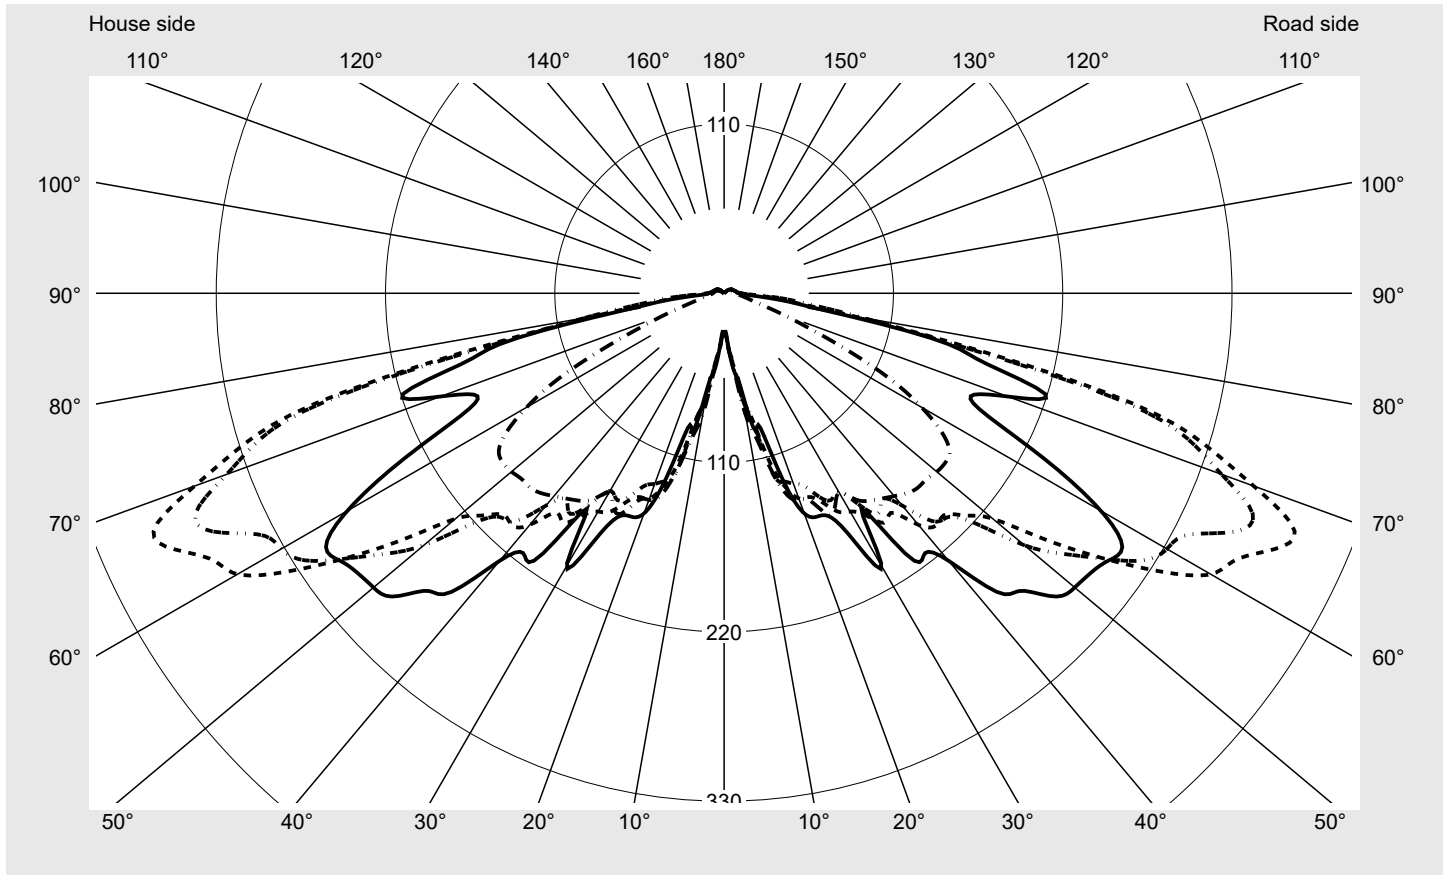

#### Luminaire output ratios

Eta	100.0%
Eta 0° - 90°	97.4%
Eta 90° - 180°	2.6%

#### Luminous intensity class acc. to EN13201-2

Class:	G3
Imax 70°	366.2
Imax 80°	92.9
Imax 90°	11.9
Imax >90°	9.1
Imax >95°	8.3

#### Measurement conditions


DIN EN 13032 and DIN 5032

**Photometric test report**

<b>Family</b> <b>MUSHROOM LUMINAIRE LED</b>	<b>Order number: 5XA5235CF14H</b> <b>EAN: 4058352831939</b>	<b>LP number</b> <b>57120_27</b>
--	--	-------------------------------------



**Envelope curve in cd/klm**      **KMK 67.5°**    **KMK 65°**    **KMK 62.5°**    **KMK 60°**

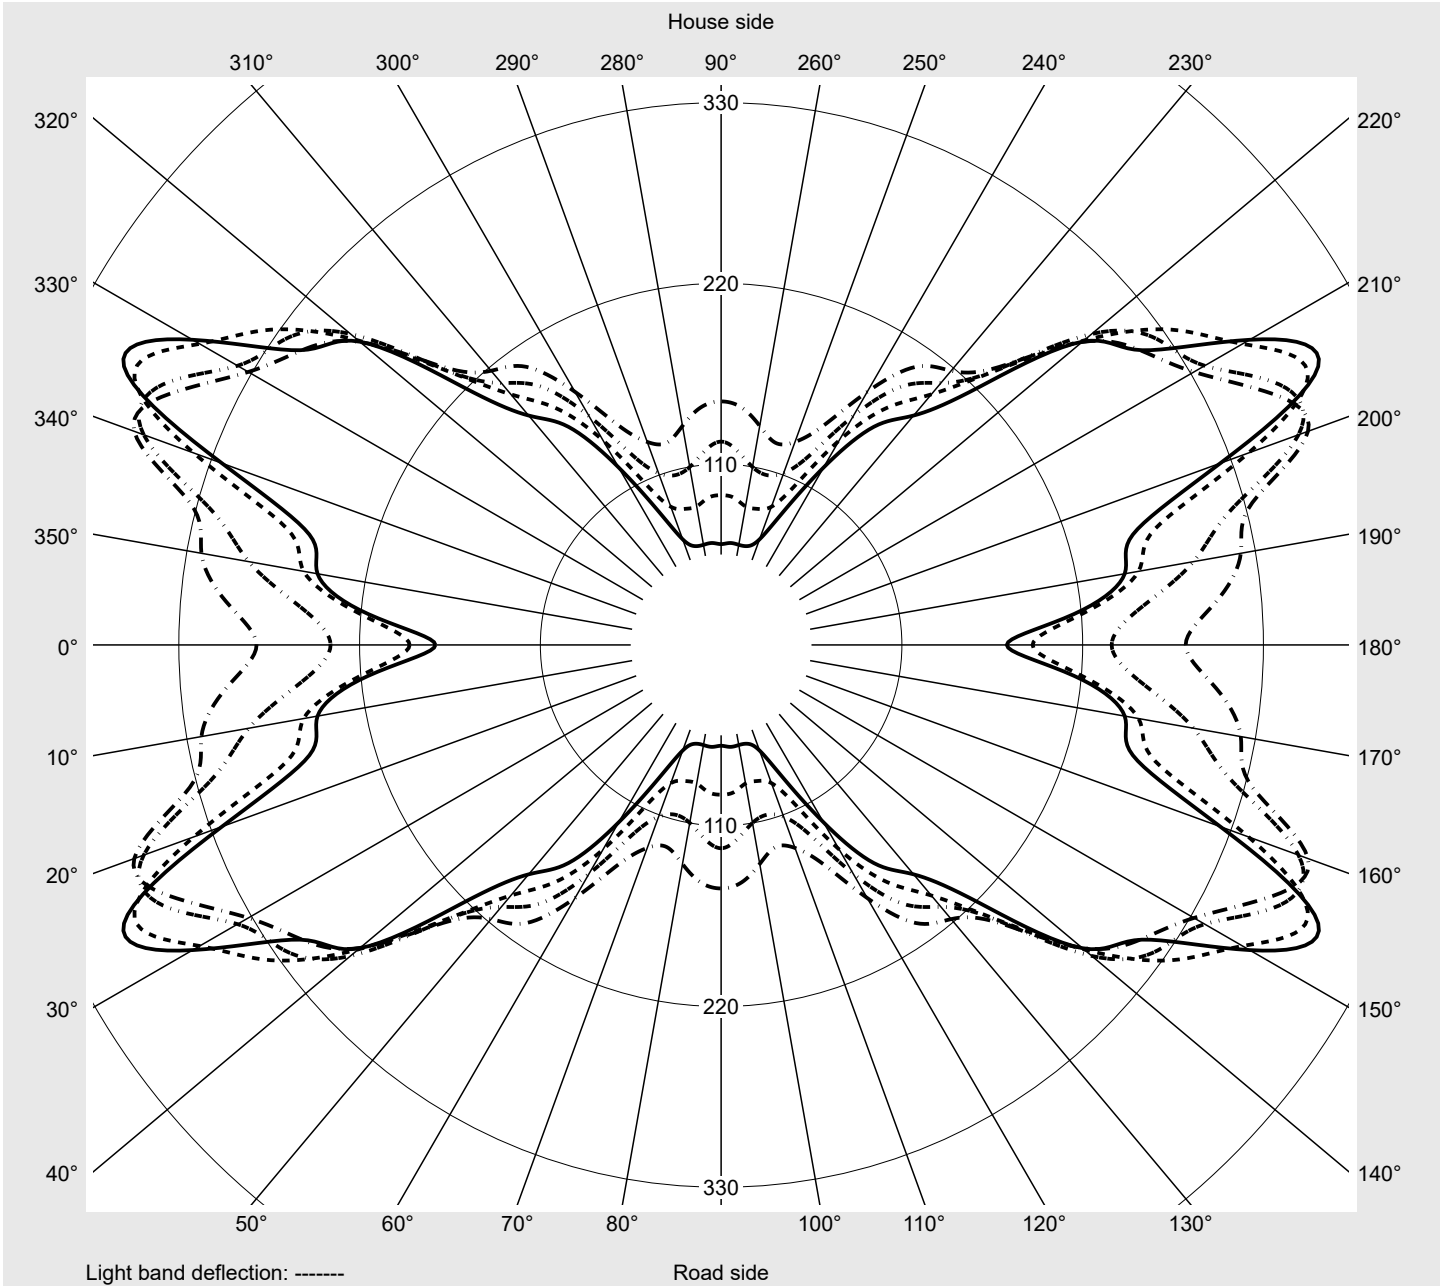

## Photometric test report

<b>Family</b> <b>MUSHROOM LUMINAIRE LED</b>	<b>Order number: 5XA5235CF14H</b> <b>EAN: 4058352831939</b>	<b>LP number</b> <b>57120_27</b>
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>
		<b>siteco</b>


C-planes	0° 180°	5°	10°	15°	20°	25°	30°	35°	40°	45°
		175° 185° 355°	170° 190° 350°	165° 195° 345°	160° 200° 340°	155° 205° 335°	150° 210° 330°	145° 215° 325°	140° 220° 320°	135° 225° 315°
Luminous intensity in cd/klm										
γ										
0,0°	26.9	26.9	26.9	26.9	26.9	26.9	26.9	26.9	26.9	26.9
2,5°	25.3	25.6	25.8	26.2	26.0	26.9	27.3	27.9	27.7	27.3
5,0°	37.9	38.2	38.8	38.6	38.4	37.9	37.7	38.1	38.5	39.5
7,5°	51.8	52.3	51.0	52.1	51.5	48.7	46.8	47.4	49.0	51.3
10,0°	62.2	62.3	63.7	66.4	69.8	70.7	71.1	72.3	71.6	70.4
12,5°	90.5	92.6	93.4	89.7	87.2	83.2	84.2	84.5	90.4	89.8
15,0°	89.9	101.2	103.2	104.3	102.5	112.4	120.5	115.8	118.4	112.5
17,5°	127.6	123.7	127.0	134.8	131.7	131.9	128.3	131.6	129.4	126.6
20,0°	152.3	150.9	149.7	151.7	149.4	141.9	131.8	124.5	123.8	118.1
22,5°	157.1	159.1	165.3	157.6	153.3	143.3	135.4	132.5	123.5	117.1
25,0°	159.6	152.0	158.6	149.9	152.2	149.3	145.8	138.6	124.4	115.9
27,5°	178.8	161.8	157.1	153.6	155.0	159.9	151.1	153.9	145.0	134.0
30,0°	204.8	179.3	197.8	179.9	169.4	163.8	148.3	140.2	142.5	147.0
32,5°	165.9	178.7	174.4	172.2	171.4	170.9	162.7	151.6	157.3	167.3
35,0°	208.5	216.0	210.4	200.0	189.3	181.9	174.8	164.6	163.3	167.0
37,5°	213.6	228.3	227.6	211.3	197.8	179.6	168.8	175.4	184.3	181.1
40,0°	226.9	244.3	235.1	220.1	211.0	196.5	180.1	184.7	195.4	201.2
42,5°	263.7	257.2	241.8	224.5	218.5	204.2	201.0	202.5	202.3	213.0
45,0°	273.3	272.5	263.5	241.7	228.7	203.3	205.7	220.2	223.9	220.2
47,5°	291.7	278.8	285.2	269.3	241.6	213.8	221.0	234.9	240.5	232.4
50,0°	297.4	298.3	308.8	291.1	266.5	227.9	254.7	255.7	245.8	234.4
52,5°	299.4	301.4	302.0	303.9	288.6	262.6	278.2	278.6	253.3	235.0
55,0°	303.7	321.4	318.2	320.1	319.5	300.0	300.6	291.2	265.1	239.5
57,5°	306.8	324.5	322.7	332.5	354.6	336.5	323.0	298.1	275.3	240.9
60,0°	282.7	302.4	321.1	334.7	380.0	365.2	332.2	312.2	286.8	239.2
62,5°	237.7	256.0	291.9	322.4	373.9	374.9	339.8	324.2	294.4	236.4
65,0°	189.6	221.3	257.9	273.5	341.5	393.8	366.4	334.5	288.2	235.8
67,5°	173.9	215.5	249.4	259.4	323.3	400.9	371.4	312.7	287.1	221.8
70,0°	196.1	224.3	258.1	273.0	300.6	366.2	344.0	295.3	256.8	203.8
72,5°	219.3	229.0	241.0	253.7	292.9	327.7	316.6	262.8	205.3	169.2
75,0°	175.7	183.5	207.7	221.0	264.4	272.0	262.5	196.3	145.4	124.9
77,5°	144.3	133.9	140.2	155.5	169.5	163.4	152.2	115.3	98.5	91.1
80,0°	74.0	69.8	74.4	92.9	86.6	85.0	91.9	83.7	74.9	58.4
82,5°	43.2	40.8	43.5	58.4	48.2	45.5	56.7	64.9	56.7	42.4
85,0°	20.8	21.1	22.9	28.4	27.5	30.8	37.8	41.7	33.1	27.9
87,5°	11.2	11.4	12.0	13.5	15.5	16.5	16.6	18.0	19.3	17.8
90,0°	10.0	10.2	10.5	11.2	11.4	11.7	11.9	11.8	11.2	10.8
92,5°	8.8	9.0	9.1	9.1	9.0	9.0	9.0	8.9	8.7	8.6
95,0°	8.6	8.6	8.7	8.5	8.4	8.3	8.2	7.9	7.9	7.7
97,5°	7.9	8.2	8.3	8.1	7.9	7.9	7.8	7.6	7.5	7.4
100,0°	7.5	7.7	7.8	7.8	7.7	7.5	7.5	7.3	7.1	7.0
102,5°	7.1	7.4	7.4	7.4	7.3	7.1	7.1	7.0	6.8	6.6
105,0°	6.9	7.0	7.1	7.0	7.0	6.7	6.7	6.7	6.6	6.4
107,5°	6.5	6.6	6.8	6.6	6.6	6.6	6.5	6.3	6.2	6.2
110,0°	6.1	6.2	6.4	6.3	6.2	6.2	6.1	6.0	6.0	5.8

## Photometric test report

<b>Family</b> <b>MUSHROOM LUMINAIRE LED</b>	<b>Order number: 5XA5235CF14H</b> <b>EAN: 4058352831939</b>	<b>LP number</b> <b>57120_27</b>
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>
		<b>siteco</b>

C-planes $\gamma$	50° 130° 230° 310°	55° 125° 235° 305°	60° 120° 240° 300°	65° 115° 245° 295°	70° 110° 250° 290°	75° 105° 255° 285°	80° 100° 260° 280°	85° 95° 265° 275°	90° 270°	Phi-zone	Total Phi-zone
	Luminous intensity in cd/klm									Luminous flux in lm/klm	
0,0°	26.9	26.9	26.9	26.9	26.9	26.9	26.9	26.9	26.9	0.0	0.0
2,5°	27.2	27.6	27.8	27.7	28.4	29.5	28.6	27.8	27.7	0.3	0.4
5,0°	39.8	39.9	39.6	38.9	38.2	38.0	38.8	39.0	38.9	0.9	1.3
7,5°	55.9	57.1	58.1	55.1	53.8	53.1	52.9	53.0	51.2	1.9	3.2
10,0°	73.9	76.7	75.5	73.7	74.5	78.6	78.8	79.3	80.1	3.4	6.6
12,5°	91.8	95.2	93.6	89.1	88.9	90.9	93.7	95.6	95.8	5.4	12.0
15,0°	110.2	111.7	111.4	110.5	112.7	113.0	114.0	116.4	119.6	7.9	19.8
17,5°	122.6	119.6	121.1	120.0	125.5	131.7	136.5	139.4	138.0	10.6	30.4
20,0°	115.9	123.3	126.3	127.9	130.4	133.5	135.8	138.9	142.9	12.6	43.0
22,5°	120.8	126.7	131.7	134.3	135.8	139.7	144.3	146.7	145.7	14.7	57.7
25,0°	118.2	126.4	133.8	136.7	142.4	147.9	155.0	156.7	158.0	16.5	74.2
27,5°	129.8	129.5	140.9	144.7	147.0	149.0	152.3	154.5	156.1	18.9	93.1
30,0°	143.0	138.9	147.5	155.7	158.4	155.7	154.3	151.6	149.6	21.7	114.8
32,5°	166.8	162.8	160.6	165.8	165.6	158.5	157.5	159.3	158.8	24.3	139.1
35,0°	176.3	179.8	169.7	170.4	173.7	166.1	163.6	164.8	164.5	28.1	167.2
37,5°	183.4	194.4	187.2	181.6	178.8	168.5	166.4	168.2	168.2	31.3	198.5
40,0°	197.3	201.4	199.4	186.8	180.6	169.6	169.0	171.0	172.0	34.7	233.1
42,5°	212.1	207.6	206.6	194.1	181.0	171.8	172.2	174.6	176.1	38.1	271.3
45,0°	221.4	214.9	209.3	200.7	182.3	174.5	175.2	177.6	178.3	41.6	312.8
47,5°	228.2	222.4	212.0	201.2	181.3	175.8	176.0	177.8	178.6	45.2	358.1
50,0°	234.0	226.2	212.4	198.2	178.7	176.1	176.8	179.6	180.4	49.0	407.1
52,5°	235.9	230.6	212.6	190.0	173.6	173.4	176.5	180.7	181.0	52.2	459.3
55,0°	236.2	230.0	205.0	178.3	162.6	164.2	169.8	176.7	178.8	55.4	514.7
57,5°	229.9	223.0	194.8	163.2	148.3	149.5	156.3	163.6	167.5	57.5	572.1
60,0°	217.8	206.6	177.8	147.2	131.5	127.4	135.3	144.9	148.2	57.7	629.9
62,5°	208.1	192.1	160.8	127.2	111.3	107.0	110.0	118.1	123.7	55.8	685.6
65,0°	199.0	176.2	143.7	107.6	89.5	85.7	85.6	89.9	91.1	52.9	738.5
67,5°	182.2	162.0	124.6	89.2	68.4	62.3	61.9	62.3	61.4	50.3	788.8
70,0°	165.3	144.3	105.8	74.7	53.5	41.7	40.9	41.5	41.6	47.4	836.1
72,5°	138.3	119.1	87.5	57.9	42.2	29.5	27.2	26.5	27.3	42.8	879.0
75,0°	117.2	105.9	77.5	45.1	27.8	22.5	20.3	19.7	19.6	35.5	914.4
77,5°	92.7	91.2	66.1	33.4	19.5	17.3	16.3	16.0	15.7	24.6	939.0
80,0°	50.5	51.2	34.1	17.1	14.0	13.2	13.1	13.0	12.8	14.5	953.5
82,5°	33.2	24.3	18.0	12.2	11.3	10.9	10.8	10.7	10.8	9.3	962.8
85,0°	21.8	17.1	14.0	10.6	9.8	9.5	9.3	9.1	9.0	5.9	968.7
87,5°	15.0	12.1	10.5	9.3	8.9	8.7	8.3	8.1	7.7	3.5	972.2
90,0°	10.2	9.8	9.0	8.6	8.3	7.8	7.4	7.3	7.3	2.7	974.9
92,5°	8.5	8.3	8.3	8.1	7.9	7.4	7.1	6.9	6.9	2.3	977.2
95,0°	7.5	7.5	7.1	7.0	6.8	6.6	6.6	6.5	6.5	2.1	979.3
97,5°	7.1	7.0	6.8	6.6	6.6	6.4	6.3	6.3	6.3	2.0	981.3
100,0°	6.7	6.7	6.6	6.4	6.2	6.2	6.1	6.1	6.1	1.9	983.1
102,5°	6.6	6.5	6.2	6.2	6.0	5.9	5.9	5.8	5.7	1.8	984.9
105,0°	6.2	6.2	6.1	5.8	5.8	5.8	5.7	5.6	5.5	1.7	986.6
107,5°	6.0	5.8	5.8	5.8	5.5	5.5	5.5	5.4	5.1	1.6	988.2
110,0°	5.7	5.7	5.6	5.5	5.5	5.4	5.3	5.2	4.7	1.5	989.7

## Photometric test report

<b>Family</b> <b>MUSHROOM LUMINAIRE LED</b>	<b>Order number: 5XA5235CF14H</b> <b>EAN: 4058352831939</b>	<b>LP number</b> <b>57120_27</b>
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>
		

C-planes	0° 180°	5°	10°	15°	20°	25°	30°	35°	40°	45°
		175° 185° 355°	170° 190° 350°	165° 195° 345°	160° 200° 340°	155° 205° 335°	150° 210° 330°	145° 215° 325°	140° 220° 320°	135° 225° 315°
		Luminous intensity in cd/klm								
γ										
112,5°	5.7	6.0	6.0	6.1	5.9	5.8	5.7	5.7	5.7	5.6
115,0°	5.5	5.6	5.7	5.7	5.7	5.7	5.6	5.4	5.4	5.3
117,5°	5.1	5.3	5.3	5.3	5.3	5.3	5.3	5.1	5.1	5.0
120,0°	5.5	5.0	4.9	5.1	5.2	5.0	4.9	4.9	4.9	4.9
122,5°	4.7	4.7	4.9	4.8	4.8	4.8	4.7	4.8	4.6	4.5
125,0°	4.3	4.3	4.4	4.4	4.3	4.3	4.3	4.3	4.2	4.3
127,5°	3.7	3.7	3.7	3.7	3.8	3.7	3.7	3.7	3.6	3.7
130,0°	3.3	2.9	2.9	3.1	3.1	3.0	3.0	2.9	2.9	2.9
132,5°	2.4	2.3	2.3	2.2	2.2	2.2	2.2	2.2	2.3	2.2
135,0°	2.0	2.0	2.0	2.0	2.0	2.0	2.0	2.0	2.0	1.9
137,5°	2.0	1.9	1.8	1.8	1.8	1.8	1.8	1.8	1.8	1.8
140,0°	1.6	1.6	1.6	1.5	1.6	1.5	1.6	1.6	1.5	1.5
142,5°	1.4	1.5	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4
145,0°	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2
147,5°	1.0	1.1	1.1	1.0	1.0	1.0	1.0	1.0	0.9	1.0
150,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
165,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

C-planes	50°	55°	60°	65°	70°	75°	80°	85°	90° 270°	Phi-zone	Total Phi-zone	
	130° 230° 310°	125° 235° 305°	120° 240° 300°	115° 245° 295°	110° 250° 290°	105° 255° 285°	100° 260° 280°	95° 265° 275°				
		Luminous intensity in cd/klm									Luminous flux in lm/klm	
γ												
112,5°	5.6	5.5	5.4	5.3	5.2	5.2	5.1	5.0	4.1	1.4	991.1	
115,0°	5.3	5.3	5.1	5.1	5.1	5.0	5.0	4.4	2.9	1.3	992.4	
117,5°	5.0	4.9	4.9	4.9	4.8	4.9	4.8	4.0	2.4	1.2	993.6	
120,0°	4.9	4.9	4.8	4.7	4.7	4.6	4.6	3.5	2.0	1.1	994.7	
122,5°	4.5	4.5	4.5	4.5	4.5	4.5	4.4	3.2	2.0	1.0	995.8	
125,0°	4.1	4.1	4.1	4.1	4.1	4.1	4.1	2.9	1.8	0.9	996.7	
127,5°	3.7	3.6	3.6	3.5	3.6	3.6	3.3	2.4	1.6	0.8	997.5	
130,0°	2.9	2.9	2.8	2.8	2.9	2.9	2.7	2.0	1.6	0.6	998.0	
132,5°	2.2	2.2	2.2	2.2	2.2	2.2	2.0	1.6	1.4	0.4	998.5	
135,0°	2.0	2.0	2.0	2.0	2.0	2.0	1.8	1.6	1.4	0.4	998.9	
137,5°	1.7	1.8	1.6	1.6	1.6	1.6	1.6	1.4	1.2	0.3	999.2	
140,0°	1.5	1.5	1.6	1.5	1.6	1.6	1.5	1.2	1.2	0.3	999.5	
142,5°	1.3	1.3	1.2	1.3	1.2	1.2	1.2	1.2	1.2	0.2	999.7	
145,0°	1.2	1.1	1.1	1.2	1.2	1.2	1.2	1.0	1.2	0.2	999.9	
147,5°	0.9	1.0	0.9	1.0	1.1	1.0	1.0	1.0	1.0	0.2	1000.0	
150,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0	
165,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0	
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0	

## Photometric test report

<b>Family</b> MUSHROOM LUMINAIRE LED	<b>Order number: 5XA5235CF14H</b> <b>EAN: 4058352831939</b>	<b>LP number</b> 57120_27
---	--	------------------------------

<b>Dimming levels table</b>	environmental temperature: 25°C	<b>siteco</b>
-----------------------------	---------------------------------	---------------

Luminous flux [%]	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]start of lifetime	Power consumption [W]end of lifetime	Power consumption [W]average
100	254	254	3000	23.9	25.5	24.7
95	241	252	2846	22.5	24.0	23.2
90	229	250	2705	21.2	22.6	21.9
85	216	248	2551	19.9	21.2	20.5
80	203	246	2398	18.6	19.8	19.2
75	190	243	2244	17.4	18.5	18.0
70	178	241	2102	16.2	17.2	16.7
65	165	238	1949	14.9	15.9	15.4
60	152	235	1795	13.8	14.6	14.2
55	140	232	1654	12.7	13.4	13.0
50	127	229	1500	11.5	12.2	11.8
45	114	225	1346	10.3	11.0	10.6
40	102	221	1205	9.4	9.9	9.6
35	89	216	1051	8.2	8.7	8.4
30	76	210	898	7.2	7.6	7.4
25	63	203	744	6.2	6.5	6.4
20	51	195	602	5.3	5.5	5.4
15	38	184	449	4.2	4.4	4.3
15	37	183	437	4.1	4.3	4.2