

## Photometric test report

Family  
**LITEPOLE 2**

Order number: **5XA5425RF14H**  
EAN: **4058352836798**

LP number  
**58891\_25**



**Version** post-top- or mounting to wall arm  
**Optic** symmetric, wide distribution (PL1.2s)  
**Cover** cover transparent, PMMA  
**Lamps** LED 4000 K | CRI ≥ 70  
**Controlgear** ECG SITECO iQ  
**Rated values** Net luminous flux = 2990 lm  
Power consumption = 18.5 W  
Luminous efficacy = 161.6 lm/W

serial  
documentation  
24.02.2023

siteco

Luminous intensity in cd/klm


**C180-0**

**C205-25**

**C210-30**

**C270-90**

**Imax: 406 cd/klm**

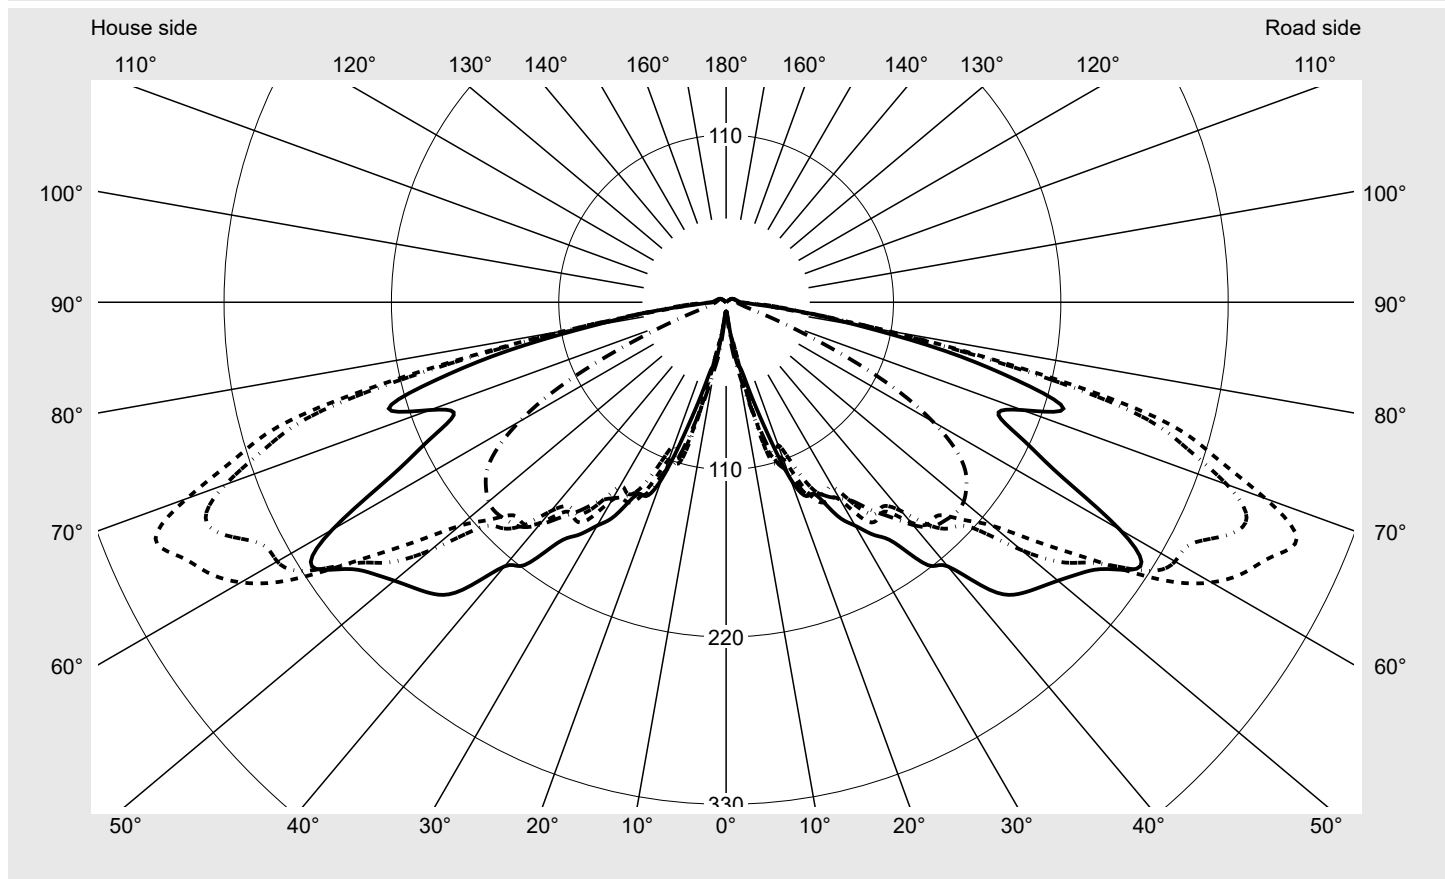

**Luminaire output ratios**

Eta	100.0%
Eta 0° - 90°	97.7%
Eta 90° - 180°	2.3%

**Luminous intensity class acc. to EN13201-2**

Class:	G2
Imax 70°	377.3
Imax 80°	113.1
Imax 90°	9.2
Imax >90°	8.6
Imax >95°	7.7


**Measurement conditions**

DIN EN 13032 and DIN 5032

**Photometric test report**

<b>Family</b> <b>LITEPOLE 2</b>	<b>Order number: 5XA5425RF14H</b> <b>EAN: 4058352836798</b>	<b>LP number</b> <b>58891_25</b>
------------------------------------	--	-------------------------------------

**Envelope curve in cd/klm**      **KMK 67.5°**    **KMK 65°**    **KMK 62.5°**    **KMK 60°**      **siteco**

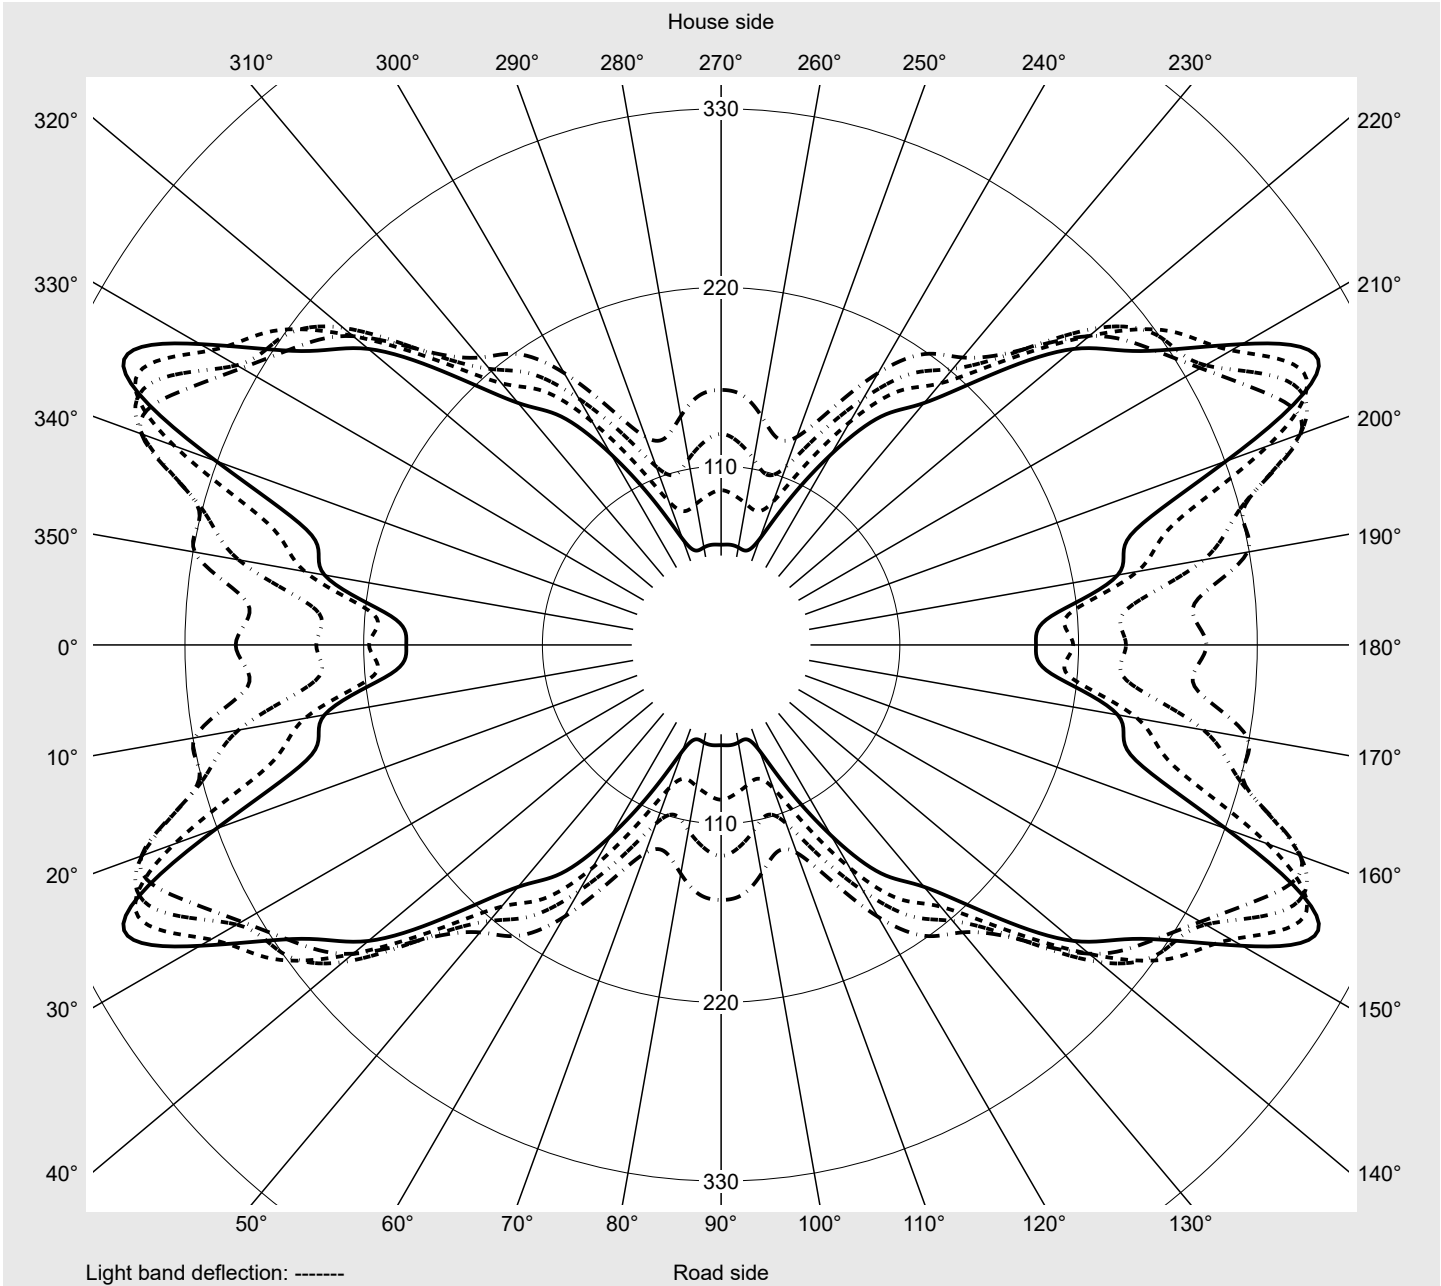

## Photometric test report

<b>Family</b> <b>LITEPOLE 2</b>	<b>Order number: 5XA5425RF14H</b> <b>EAN: 4058352836798</b>	<b>LP number</b> <b>58891_25</b>
------------------------------------	--	-------------------------------------

**sitEco**

<b>Table of values for luminous intensities</b>	<b>Maximum luminous intensity</b>
---	-----------------------------------

C-planes	0° 180°	5°	10°	15°	20°	25°	30°	35°	40°	45°
		175° 185° 355°	170° 190° 350°	165° 195° 345°	160° 200° 340°	155° 205° 335°	150° 210° 330°	145° 215° 325°	140° 220° 320°	135° 225° 315°
Luminous intensity in cd/klm										
γ										
0,0°	6.3	6.3	6.3	6.3	6.3	6.3	6.3	6.3	6.3	6.3
2,5°	6.1	6.3	6.2	6.3	6.3	6.3	6.3	6.4	6.4	6.6
5,0°	8.2	8.5	8.5	8.7	8.8	9.1	9.5	9.9	10.3	10.6
7,5°	18.6	18.9	19.3	19.8	19.8	20.0	20.1	20.7	20.7	21.1
10,0°	40.3	39.6	39.2	36.2	32.4	28.6	26.2	26.1	27.6	30.0
12,5°	44.9	46.8	52.6	52.5	54.2	52.9	56.0	57.8	57.7	56.0
15,0°	63.1	60.1	81.1	76.8	78.6	93.3	99.7	79.8	84.5	85.1
17,5°	90.3	83.2	102.1	99.4	112.8	107.8	110.0	95.1	101.6	94.7
20,0°	123.3	131.2	127.6	122.2	120.3	109.9	100.0	98.2	102.4	99.1
22,5°	137.9	126.6	136.4	141.5	138.9	130.3	116.6	110.5	100.6	96.7
25,0°	139.7	132.6	140.0	140.1	147.1	144.8	136.1	124.5	112.3	101.5
27,5°	158.2	138.8	146.5	141.3	143.0	146.1	141.4	135.4	126.3	118.8
30,0°	169.5	166.0	174.3	159.0	154.8	150.1	140.0	137.0	137.3	140.3
32,5°	181.5	173.1	183.8	171.5	170.0	169.8	158.2	152.6	149.5	157.6
35,0°	193.1	193.6	190.0	175.8	174.8	173.7	170.1	169.9	166.4	169.0
37,5°	217.8	215.0	210.7	186.8	181.3	173.5	169.2	187.5	191.8	190.6
40,0°	226.6	224.5	225.4	205.2	203.8	188.9	179.2	193.5	200.9	205.9
42,5°	256.3	232.2	238.1	214.3	210.2	197.4	199.3	209.7	210.6	219.6
45,0°	271.2	252.4	257.5	229.3	218.5	198.0	209.7	227.9	227.3	229.4
47,5°	278.0	270.5	281.5	256.8	233.3	211.8	219.3	237.8	248.7	244.7
50,0°	284.7	280.4	308.9	280.7	254.6	228.5	253.4	262.7	255.9	250.9
52,5°	292.9	288.8	320.4	292.2	276.9	259.4	281.1	285.2	260.2	248.0
55,0°	305.7	291.7	317.8	304.1	304.8	296.2	299.2	300.8	276.8	253.1
57,5°	322.9	301.1	324.9	321.0	348.1	339.7	328.7	306.9	287.0	259.0
60,0°	298.8	292.5	328.9	334.1	379.7	368.3	340.7	319.5	295.6	255.3
62,5°	249.2	250.6	301.6	332.5	379.2	384.5	344.2	330.2	303.7	254.0
65,0°	216.7	214.5	260.1	288.8	358.1	395.8	362.6	336.8	295.9	247.9
67,5°	193.8	204.1	247.9	260.9	330.7	405.9	370.3	315.3	283.4	235.2
70,0°	207.1	223.1	254.6	265.3	313.4	377.3	350.2	291.4	262.8	212.9
72,5°	232.4	238.6	245.3	257.8	296.2	336.2	316.5	265.2	220.1	184.8
75,0°	197.5	199.9	216.0	231.6	270.6	292.8	274.6	215.3	164.4	136.8
77,5°	146.6	140.2	154.5	175.2	188.9	195.4	185.1	140.9	109.6	95.3
80,0°	89.3	79.5	95.6	110.5	113.1	106.3	104.5	90.2	75.7	59.9
82,5°	53.9	46.3	52.8	64.1	56.8	48.4	56.0	60.7	53.4	37.4
85,0°	24.6	25.3	29.1	34.5	31.8	26.5	33.2	37.1	28.2	17.7
87,5°	14.2	15.0	15.9	17.0	16.5	16.5	18.6	16.7	14.8	11.6
90,0°	9.0	9.1	9.2	9.1	9.0	8.8	8.7	8.4	8.2	8.1
92,5°	8.4	8.6	8.6	8.5	8.3	8.2	8.0	7.9	7.7	7.5
95,0°	7.9	8.1	8.2	8.0	7.9	7.8	7.6	7.5	7.3	7.2
97,5°	7.3	7.6	7.7	7.6	7.5	7.4	7.2	7.1	6.9	6.9
100,0°	7.0	7.3	7.3	7.3	7.0	7.0	6.9	6.7	6.7	6.5
102,5°	6.6	6.9	7.0	6.9	6.7	6.7	6.5	6.4	6.4	6.2
105,0°	6.3	6.4	6.4	6.4	6.4	6.3	6.1	6.1	6.1	5.9
107,5°	6.0	6.1	6.1	6.1	6.0	6.0	5.8	5.8	5.8	5.6
110,0°	5.7	5.8	5.8	5.8	5.7	5.7	5.7	5.5	5.5	5.4

## Photometric test report

<b>Family</b> <b>LITEPOLE 2</b>	<b>Order number: 5XA5425RF14H</b> <b>EAN: 4058352836798</b>	<b>LP number</b> <b>58891_25</b>
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>
		<b>sITeco</b>

C-planes	50°	55°	60°	65°	70°	75°	80°	85°	90°	Phi-zone	Total Phi-zone
	130°	125°	120°	115°	110°	105°	100°	95°			
	230°	235°	240°	245°	250°	255°	260°	265°	270°		
	310°	305°	300°	295°	290°	285°	280°	275°			
$\gamma$	Luminous intensity in cd/klm									Luminous flux in lm/klm	
0,0°	6.3	6.3	6.3	6.3	6.3	6.3	6.3	6.3	6.3	0.0	0.0
2,5°	6.7	6.7	6.7	6.7	6.7	6.7	6.6	6.6	6.6	0.1	0.1
5,0°	10.8	11.1	11.3	11.5	11.8	12.2	12.4	12.4	12.4	0.2	0.3
7,5°	22.2	23.4	25.1	26.8	28.9	30.4	31.8	32.5	31.9	0.8	1.2
10,0°	32.2	35.0	37.5	37.3	41.7	43.0	46.7	45.0	45.2	1.7	2.9
12,5°	54.7	55.3	54.3	56.2	57.2	59.7	63.2	64.8	65.0	3.3	6.2
15,0°	73.2	71.1	73.9	74.5	80.2	81.2	84.4	86.6	87.0	5.7	11.9
17,5°	90.4	89.8	91.9	92.9	97.0	100.4	103.5	108.1	109.8	8.2	20.0
20,0°	97.8	97.1	103.4	105.4	110.2	114.7	119.1	119.1	118.8	10.4	30.5
22,5°	100.5	104.2	110.6	112.2	114.6	120.2	127.4	131.7	136.0	12.6	43.0
25,0°	104.2	108.1	116.5	120.3	126.9	131.6	135.2	136.7	138.5	14.8	57.8
27,5°	114.6	120.6	128.6	134.8	139.0	140.5	142.1	142.5	143.8	17.2	75.0
30,0°	136.5	131.9	137.1	145.8	149.8	148.3	148.9	147.6	148.7	20.3	95.3
32,5°	157.5	151.3	152.3	160.6	161.1	157.8	155.9	154.1	155.0	23.8	119.1
35,0°	175.5	176.3	172.3	172.8	173.3	165.9	162.7	164.4	167.0	27.3	146.4
37,5°	191.4	197.3	191.9	183.7	182.9	175.3	172.5	175.6	178.1	31.3	177.7
40,0°	199.3	204.8	205.7	195.7	192.1	184.7	183.9	188.0	191.1	35.1	212.9
42,5°	216.2	214.5	215.0	208.2	198.1	190.1	190.9	196.0	200.1	39.0	251.8
45,0°	229.7	225.9	225.5	218.4	201.1	193.3	196.6	201.2	203.1	42.9	294.7
47,5°	238.9	237.0	231.6	220.3	201.2	195.0	198.1	203.8	204.9	46.8	341.5
50,0°	244.6	239.4	229.3	215.1	196.9	191.8	196.0	202.6	203.8	50.6	392.1
52,5°	245.7	241.4	224.4	203.6	187.5	185.0	190.1	197.2	199.0	53.6	445.7
55,0°	246.3	241.9	219.2	191.0	174.0	173.7	179.7	188.9	191.7	56.2	501.9
57,5°	244.0	235.4	209.4	173.1	154.7	155.7	164.2	174.5	177.9	58.8	560.7
60,0°	230.9	218.6	193.3	159.7	136.2	132.1	143.0	154.1	157.0	59.5	620.2
62,5°	221.8	203.8	174.9	143.2	116.8	108.5	115.9	125.1	129.8	57.8	678.0
65,0°	210.3	190.7	158.5	121.7	93.9	85.3	88.2	92.5	95.3	54.6	732.6
67,5°	194.4	171.6	135.5	97.9	69.4	60.1	61.0	61.9	61.7	51.1	783.8
70,0°	176.0	154.0	114.0	81.2	54.1	41.3	38.3	38.6	38.3	48.2	832.0
72,5°	155.0	131.0	97.3	66.0	43.6	27.3	23.3	22.5	23.7	44.4	876.4
75,0°	124.8	108.4	80.3	53.2	33.7	20.9	16.7	15.6	15.9	37.7	914.1
77,5°	102.3	98.5	66.6	36.9	21.3	15.4	13.3	12.1	12.1	27.2	941.3
80,0°	55.1	55.1	38.2	22.3	13.3	11.6	10.9	10.4	10.3	16.5	957.8
82,5°	23.5	18.6	15.5	13.9	11.1	9.7	9.1	9.1	8.8	9.3	967.2
85,0°	12.9	11.4	10.6	10.1	9.5	8.6	8.2	8.2	7.9	5.4	972.6
87,5°	9.7	9.1	8.5	9.1	8.2	7.8	7.4	7.4	7.3	3.4	976.0
90,0°	7.8	7.5	7.4	7.2	7.0	6.8	6.7	6.7	6.7	2.2	978.1
92,5°	7.3	7.2	7.0	6.8	6.7	6.5	6.4	6.4	6.4	2.1	980.2
95,0°	7.0	6.9	6.6	6.6	6.4	6.3	6.1	6.1	6.1	2.0	982.1
97,5°	6.7	6.6	6.4	6.3	6.1	6.0	5.9	5.8	5.8	1.8	984.0
100,0°	6.4	6.3	6.2	6.0	5.9	5.8	5.8	5.7	5.7	1.8	985.8
102,5°	6.1	6.1	5.9	5.8	5.6	5.6	5.5	5.5	5.5	1.7	987.4
105,0°	5.8	5.8	5.6	5.5	5.5	5.4	5.3	5.2	5.2	1.6	989.0
107,5°	5.6	5.5	5.4	5.3	5.2	5.2	5.1	5.1	5.1	1.5	990.5
110,0°	5.4	5.3	5.2	5.2	5.1	5.1	4.9	4.9	4.9	1.4	991.9

## Photometric test report

<b>Family</b> <b>LITEPOLE 2</b>	<b>Order number: 5XA5425RF14H</b> <b>EAN: 4058352836798</b>	<b>LP number</b> <b>58891_25</b>
------------------------------------	--	-------------------------------------



<b>Table of values for luminous intensities</b>	<b>Maximum luminous intensity</b>
---	-----------------------------------

C- planes	0° 180°	5°	10°	15°	20°	25°	30°	35°	40°	45°
		175° 185° 355°	170° 190° 350°	165° 195° 345°	160° 200° 340°	155° 205° 335°	150° 210° 330°	145° 215° 325°	140° 220° 320°	135° 225° 315°
Luminous intensity in cd/klm										
γ										
112,5°	5.2	5.5	5.6	5.6	5.4	5.4	5.4	5.4	5.2	5.2
115,0°	5.2	5.2	5.3	5.3	5.1	5.1	5.1	5.1	5.0	4.9
117,5°	4.8	4.9	4.9	4.9	4.8	4.8	4.8	4.8	4.7	4.6
120,0°	4.6	4.6	4.6	4.6	4.5	4.5	4.5	4.5	4.5	4.5
122,5°	4.0	4.2	4.2	4.2	4.1	4.0	4.2	4.0	4.0	4.0
125,0°	3.3	3.3	3.4	3.4	3.4	3.4	3.4	3.4	3.4	3.3
127,5°	2.4	2.4	2.2	2.2	2.2	2.2	2.2	2.2	2.2	2.2
130,0°	1.5	1.5	1.5	1.5	1.6	1.5	1.5	1.5	1.6	1.6
132,5°	1.3	1.5	1.4	1.5	1.5	1.3	1.3	1.4	1.4	1.3
135,0°	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.3	1.2
137,5°	1.0	1.0	1.1	1.0	1.0	1.0	1.0	1.0	1.0	1.0
140,0°	0.9	0.9	0.9	0.9	0.9	0.8	0.9	0.8	0.9	0.8
142,5°	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6
145,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
147,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
150,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
152,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
155,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
157,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
160,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
162,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
165,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
167,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
170,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
172,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
175,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
177,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

### Photometric test report

Family <b>LITEPOLE 2</b>	Order number: <b>5XA5425RF14H</b> EAN: <b>4058352836798</b>	LP number <b>58891_25</b>
-----------------------------	--	------------------------------



<b>Table of values for luminous intensities</b>	<b>Maximum luminous intensity</b>
---	-----------------------------------

C-planes	50°	55°	60°	65°	70°	75°	80°	85°	90°	Phi-zone	Total Phi-zone	
	130°	125°	120°	115°	110°	105°	100°	95°				
	230°	235°	240°	245°	250°	255°	260°	265°	270°			
	310°	305°	300°	295°	290°	285°	280°	275°				
$\gamma$	Luminous intensity in cd/klm										Luminous flux in lm/klm	
112,5°	5.1	5.1	5.0	5.0	4.9	4.9	4.9	4.8	4.8	1.3	993.2	
115,0°	4.9	4.9	4.8	4.8	4.8	4.6	4.6	4.6	4.6	1.2	994.4	
117,5°	4.6	4.6	4.5	4.6	4.5	4.5	4.5	4.4	4.3	1.1	995.5	
120,0°	4.4	4.3	4.3	4.2	4.2	4.2	4.2	4.2	4.2	1.0	996.6	
122,5°	4.0	4.0	4.0	3.9	3.9	3.9	3.9	3.9	3.9	0.9	997.5	
125,0°	3.2	3.2	3.2	3.2	3.1	3.2	3.2	3.1	3.1	0.7	998.2	
127,5°	2.2	2.2	2.2	2.2	2.3	2.2	2.2	2.2	2.1	0.5	998.7	
130,0°	1.6	1.6	1.6	1.5	1.5	1.5	1.5	1.5	1.5	0.3	999.1	
132,5°	1.4	1.4	1.4	1.3	1.3	1.3	1.3	1.3	1.2	0.3	999.3	
135,0°	1.3	1.3	1.2	1.2	1.2	1.2	1.2	1.2	1.2	0.2	999.6	
137,5°	1.0	1.0	1.0	1.0	1.0	1.0	0.9	0.9	0.9	0.2	999.8	
140,0°	0.8	0.8	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.1	999.9	
142,5°	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.1	1000.0	
145,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0	
147,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0	
150,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0	
152,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0	
155,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0	
157,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0	
160,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0	
162,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0	
165,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0	
167,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0	
170,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0	
172,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0	
175,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0	
177,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0	
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0	

## Photometric test report

Family <b>LITEPOLE 2</b>	Order number: <b>5XA5425RF14H</b> EAN: <b>4058352836798</b>	LP number <b>58891_25</b>
-----------------------------	--	------------------------------

<b>Dimming levels table</b>	environmental temperature: 25°C	<b>siteco</b>
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]	Power consumption [W]	Power consumption [W]
				start of lifetime	end of lifetime	average
100	254	254	2990	18.5	19.7	19.1
95	241	252	2837	17.5	18.6	18.0
90	229	250	2696	16.6	17.6	17.1
85	216	248	2543	15.6	16.6	16.1
80	203	246	2390	14.7	15.6	15.2
75	190	243	2237	13.7	14.6	14.2
70	178	241	2095	12.8	13.6	13.2
65	165	238	1942	11.9	12.6	12.2
60	152	235	1789	11.0	11.6	11.3
55	140	232	1648	10.1	10.8	10.4
50	127	229	1495	9.3	9.8	9.6
45	114	225	1342	8.4	8.9	8.6
40	102	221	1201	7.7	8.1	7.9
35	89	216	1048	6.8	7.2	7.0
30	76	210	895	6.0	6.3	6.2
25	63	203	742	5.2	5.5	5.4
20	51	195	600	4.5	4.7	4.6
18	46	191	541	4.1	4.3	4.2