

Photometric test report

Family
DL® 50 mini LED

Order number: 5XA248U41F08GE
EAN: 4058352803813

LP number
59408_9



Version wire mounting
Optic direct, symmetric wide distribution
 P100013
Cover toughened safety glass
Lamps LED 4000 K | CRI ≥ 70
Controlgear ECG SITECO iQ
Rated values Net luminous flux = 5030 lm
 Power consumption = 31.2 W
 Luminous efficacy = 161.2 lm/W

serial
documentation
03.04.2023

siteco


Luminous intensity in cd/klm

C180-0

C185-5

C270-90

Imax: 753 cd/klm

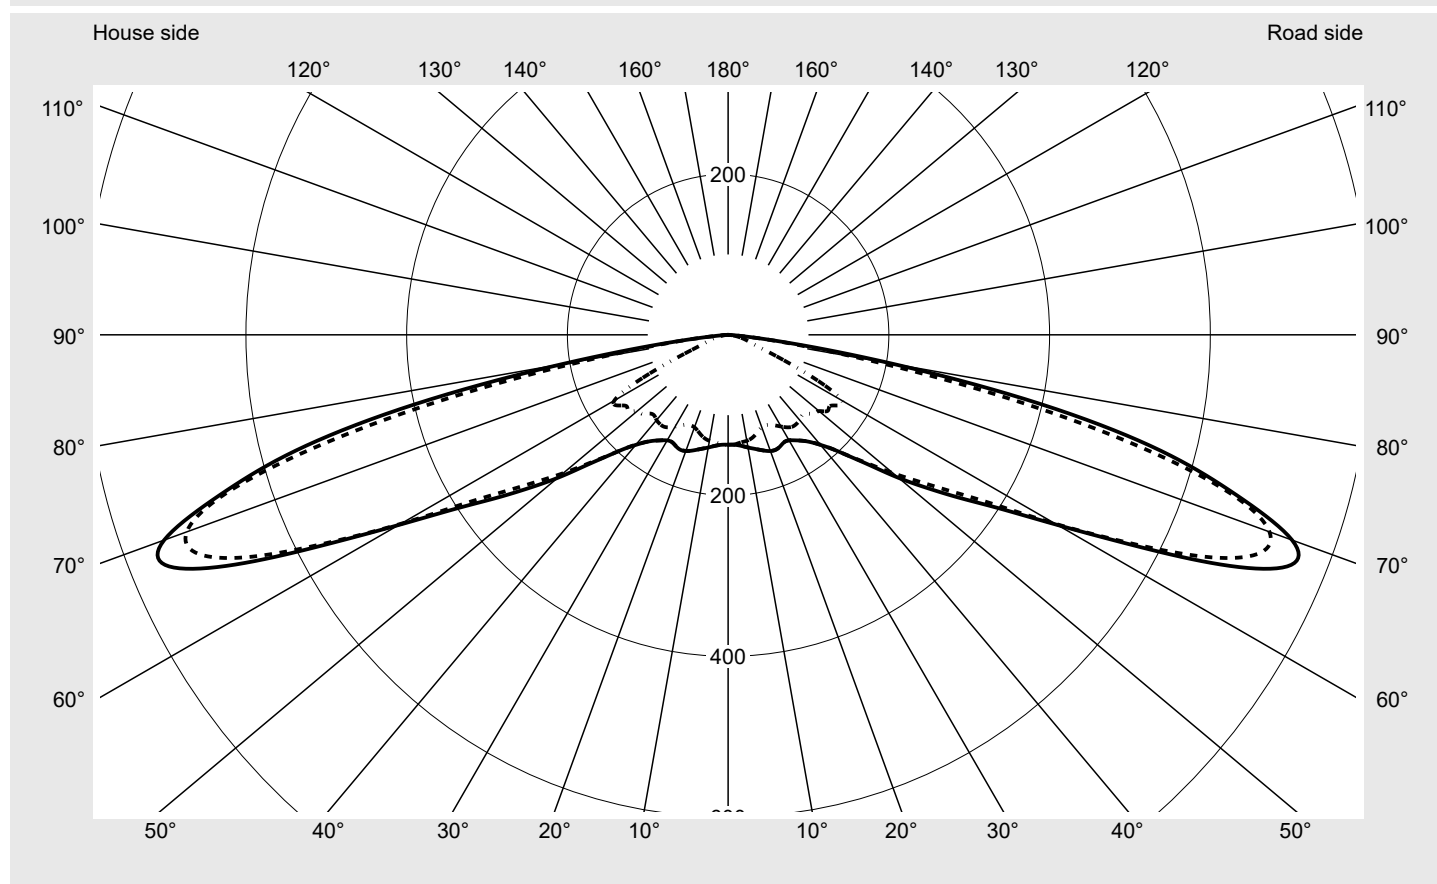

Luminaire output ratios

Eta	100.0%
Eta 0° - 90°	100.0%
Eta 90° - 180°	0.0%

Luminous intensity class acc. to EN13201-2


Class:	---
Imax 70°	746.8
Imax 80°	208.9
Imax 90°	0.0
Imax >90°	0.0
Imax >95°	0.0

Measurement conditions

DIN EN 13032 and DIN 5032

Photometric test report

Family DL® 50 mini LED	Order number: 5XA248U41F08GE EAN: 4058352803813	LP number 59408_9
Envelope curve in cd/klm KMK 67.5° KMK 65° KMK 62.5° KMK 60°		siteco

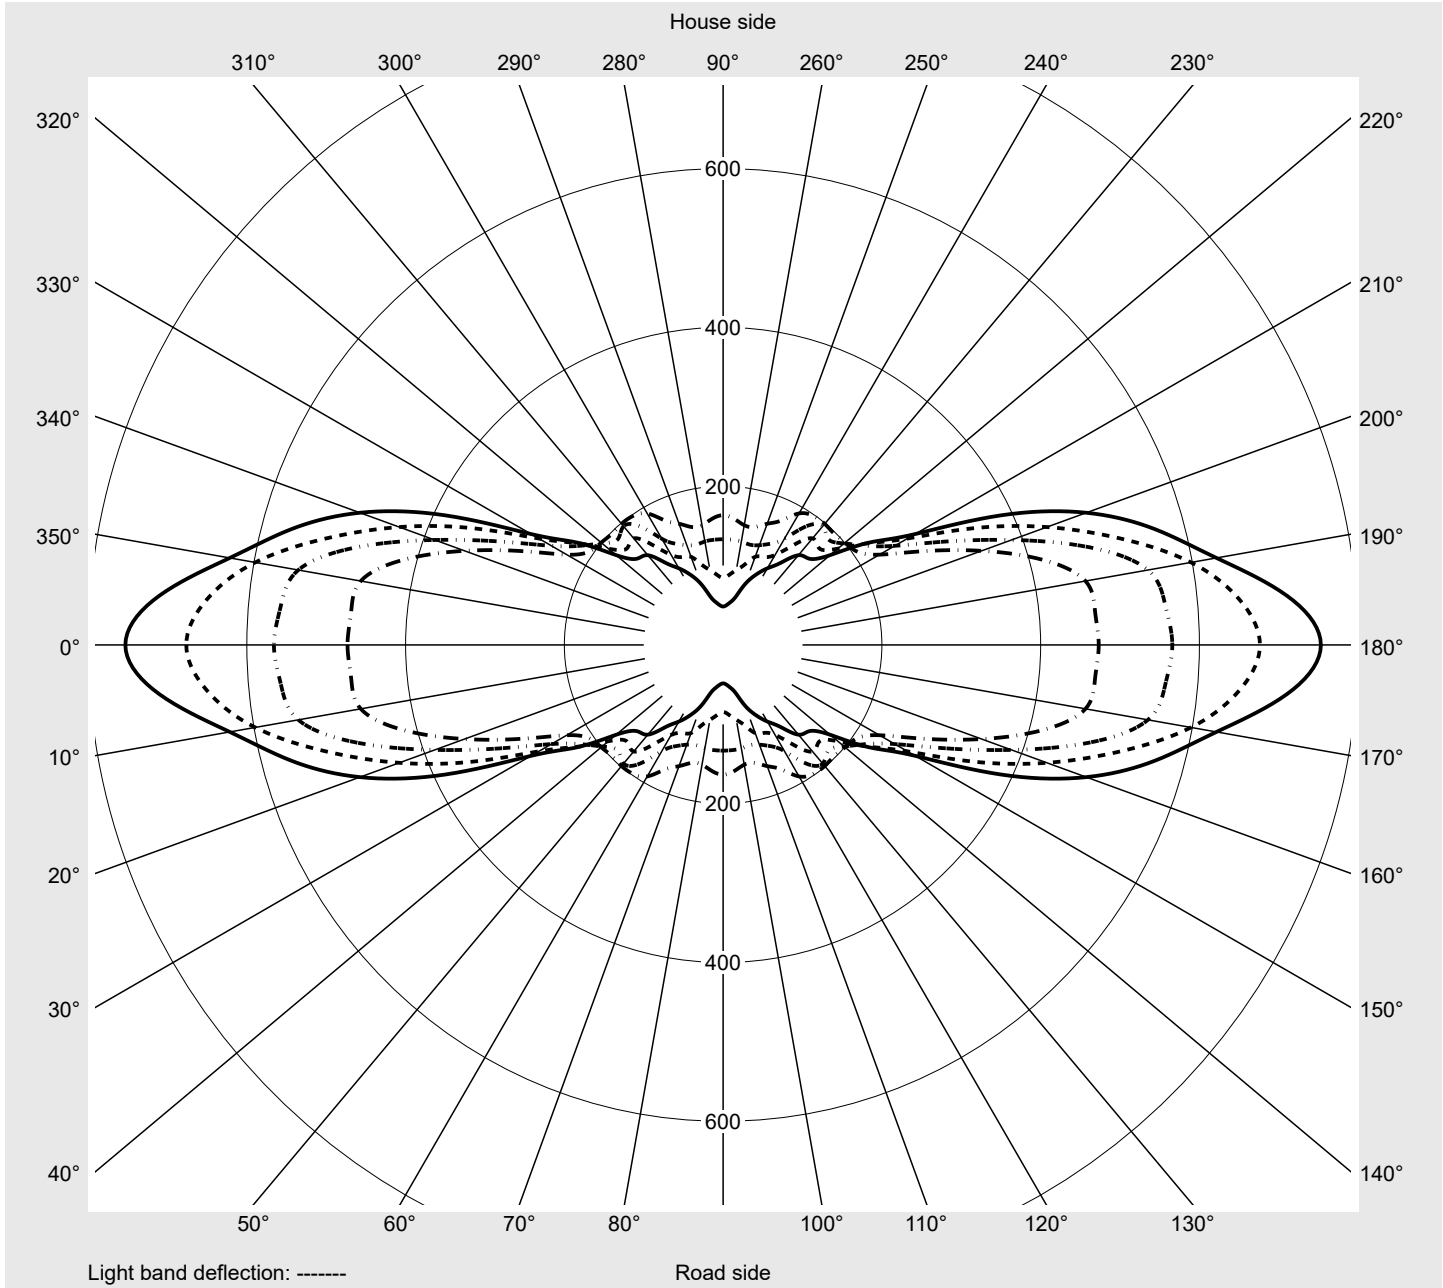

Photometric test report

Family DL® 50 mini LED	Order number: 5XA248U41F08GE EAN: 4058352803813	LP number 59408_9
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C- planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
γ	Luminous intensity in cd/klm												
0,0°	136.7	136.7	136.7	136.7	136.7	136.7	136.7	136.7	136.7	136.7	136.7	136.7	136.7
2,5°	136.8	136.8	136.7	136.6	136.6	136.5	136.4	136.4	136.3	136.2	136.2	136.3	136.3
5,0°	137.8	137.8	137.7	137.6	137.3	137.1	136.9	136.7	136.4	136.2	135.9	135.8	135.6
7,5°	139.8	139.7	139.6	139.3	139.0	138.6	138.1	137.6	137.1	136.6	136.0	135.5	135.2
10,0°	142.4	142.3	142.1	141.8	141.3	140.7	139.9	139.0	138.2	137.4	136.6	136.0	135.4
12,5°	145.0	144.9	144.9	144.6	144.0	143.1	142.0	141.0	139.9	138.9	138.0	137.1	136.1
15,0°	147.9	147.9	147.8	147.6	146.9	146.0	144.6	143.3	142.1	140.9	139.4	137.7	135.9
17,5°	151.1	151.0	150.9	150.5	149.7	148.4	147.0	145.5	143.9	142.0	139.6	137.1	134.6
20,0°	153.9	153.6	153.3	152.8	151.8	150.3	148.7	146.9	144.7	141.8	138.5	135.3	132.3
22,5°	154.9	154.6	154.4	154.3	153.5	152.2	150.3	147.8	144.4	140.3	136.3	132.9	130.5
25,0°	153.2	153.0	153.3	153.8	153.7	153.0	151.3	147.9	143.1	138.2	134.4	131.7	130.3
27,5°	150.8	150.7	151.1	151.8	151.9	151.6	150.1	146.1	140.7	136.2	133.2	132.2	132.1
30,0°	151.7	151.5	151.4	151.1	150.4	149.4	147.3	143.0	138.4	135.0	133.8	134.3	135.6
32,5°	155.7	155.7	155.3	154.4	152.0	148.1	143.0	138.4	136.1	135.3	136.3	137.9	140.3
35,0°	160.9	160.9	160.7	159.5	155.8	149.7	140.0	133.8	133.8	137.4	139.2	141.3	144.9
37,5°	168.2	168.0	167.3	165.4	160.6	151.5	140.6	131.7	131.8	138.4	141.2	144.2	149.6
40,0°	178.8	178.4	176.5	172.6	165.3	153.2	141.8	134.1	131.7	137.9	143.1	148.7	156.3
42,5°	193.1	193.0	188.8	181.4	170.7	154.1	143.3	138.2	135.9	137.4	146.9	154.7	163.5
45,0°	213.9	213.4	205.4	192.1	177.7	155.5	144.3	144.0	143.2	139.2	152.2	161.7	169.7
47,5°	241.1	237.9	224.7	205.5	187.2	159.3	145.5	150.9	152.4	145.3	158.6	169.0	175.9
50,0°	276.9	267.9	247.1	223.7	201.1	168.9	152.2	159.3	164.0	157.3	167.0	178.6	187.4
52,5°	313.8	300.5	274.3	247.8	221.9	186.7	165.3	170.4	176.2	170.3	178.6	191.6	197.3
55,0°	355.0	340.0	314.4	286.3	255.4	215.9	184.7	182.7	185.2	183.5	192.5	197.2	196.6
57,5°	403.4	392.8	375.5	343.0	299.2	249.2	205.7	192.3	192.0	196.7	199.6	198.7	202.6
60,0°	473.2	470.5	463.5	415.6	346.6	279.7	227.5	205.4	200.5	198.0	199.1	198.2	191.3
62,5°	565.9	559.4	543.4	476.4	386.6	308.0	249.7	218.0	199.0	187.9	195.1	182.4	154.4
65,0°	676.3	653.1	598.5	518.1	434.1	347.8	268.1	223.4	188.7	171.7	175.2	152.9	130.9
67,5°	753.0	712.8	631.1	563.3	486.9	386.3	279.4	224.9	176.1	153.6	147.5	126.2	111.4
70,0°	746.8	716.8	643.1	602.3	527.7	416.1	299.5	231.4	170.1	135.7	115.8	98.1	78.1
72,5°	663.4	654.5	602.9	602.5	529.4	421.8	300.0	218.8	160.0	108.4	80.4	61.7	43.7
75,0°	557.3	517.0	414.7	459.4	449.9	351.7	221.8	153.2	107.1	74.1	51.1	37.0	31.2
77,5°	399.1	337.2	222.8	267.3	286.2	197.9	122.6	63.7	46.9	45.7	30.4	24.9	22.1
80,0°	208.9	164.5	127.8	153.2	128.9	103.8	58.2	34.7	29.8	29.5	19.5	16.7	15.1
82,5°	73.2	65.9	118.9	92.4	55.6	49.1	31.4	20.2	16.8	15.8	11.1	9.9	9.4
85,0°	14.5	14.8	46.8	36.5	20.1	16.0	11.0	8.4	7.2	6.4	5.7	5.2	4.7
87,5°	3.5	3.6	4.4	4.0	3.6	3.8	3.3	2.8	2.6	2.3	2.1	1.9	1.7
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family DL® 50 mini LED		Order number: 5XA248U41F08GE EAN: 4058352803813										LP number 59408_9	
Table of values for luminous intensities										Maximum luminous intensity		siteco	
C- planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
γ	Luminous intensity in cd/klm												
0,0°	136.7	136.7	136.7	136.7	136.7	136.7	136.7	136.7	136.7	136.7	136.7	136.7	136.7
2,5°	136.4	136.6	136.6	136.8	137.0	137.0	136.8	136.7	136.6	136.6	136.5	136.4	136.4
5,0°	135.5	135.5	135.5	135.5	135.6	135.7	137.8	137.7	137.6	137.3	137.1	136.9	136.7
7,5°	134.9	134.6	134.5	134.5	134.6	134.6	139.7	139.6	139.3	139.0	138.6	138.1	137.6
10,0°	134.9	134.5	134.1	134.0	133.9	133.9	142.3	142.1	141.8	141.3	140.7	139.9	139.0
12,5°	135.0	134.0	133.2	132.6	132.3	132.3	144.9	144.9	144.6	144.0	143.1	142.0	141.0
15,0°	134.2	132.6	131.1	130.0	129.3	129.2	147.9	147.8	147.6	146.9	146.0	144.6	143.3
17,5°	132.1	130.1	128.2	126.6	125.7	125.4	151.0	150.9	150.5	149.7	148.4	147.0	145.5
20,0°	129.8	127.7	125.7	123.9	122.9	122.5	153.6	153.3	152.8	151.8	150.3	148.7	146.9
22,5°	128.5	126.9	125.2	123.6	122.4	122.0	154.6	154.4	154.3	153.5	152.2	150.3	147.8
25,0°	129.5	128.5	127.2	125.7	124.1	123.5	153.0	153.3	153.8	153.7	153.0	151.3	147.9
27,5°	132.5	132.6	131.6	130.0	128.3	127.1	150.7	151.1	151.8	151.9	151.6	150.1	146.1
30,0°	137.3	138.4	138.3	136.6	133.4	131.8	151.5	151.4	151.1	150.4	149.4	147.3	143.0
32,5°	143.4	145.6	146.3	143.6	139.0	136.5	155.7	155.3	154.4	152.0	148.1	143.0	138.4
35,0°	148.9	152.9	154.5	150.6	143.4	139.5	160.9	160.7	159.5	155.8	149.7	140.0	133.8
37,5°	156.8	161.5	161.6	155.8	145.5	139.7	168.0	167.3	165.4	160.6	151.5	140.6	131.7
40,0°	165.1	168.1	166.4	159.2	146.0	138.5	178.4	176.5	172.6	165.3	153.2	141.8	134.1
42,5°	170.9	172.7	169.1	161.0	145.4	136.2	193.0	188.8	181.4	170.7	154.1	143.3	138.2
45,0°	175.3	175.6	171.1	162.7	149.0	138.6	213.4	205.4	192.1	177.7	155.5	144.3	144.0
47,5°	182.5	182.8	179.7	171.0	155.6	145.3	237.9	224.7	205.5	187.2	159.3	145.5	150.9
50,0°	195.3	196.8	187.5	176.2	157.2	147.7	267.9	247.1	223.7	201.1	168.9	152.2	159.3
52,5°	198.7	196.7	193.4	184.1	166.9	155.8	300.5	274.3	247.8	221.9	186.7	165.3	170.4
55,0°	201.8	207.3	195.9	181.0	167.6	154.6	340.0	314.4	286.3	255.4	215.9	184.7	182.7
57,5°	210.6	192.3	182.1	174.1	170.4	163.5	392.8	375.5	343.0	299.2	249.2	205.7	192.3
60,0°	172.8	162.5	153.8	153.1	159.5	163.4	470.5	463.5	415.6	346.6	279.7	227.5	205.4
62,5°	140.6	133.7	130.8	132.3	133.0	133.1	559.4	543.4	476.4	386.6	308.0	249.7	218.0
65,0°	122.2	118.1	104.8	95.8	88.7	84.4	653.1	598.5	518.1	434.1	347.8	268.1	223.4
67,5°	97.6	82.0	63.7	55.0	50.4	48.4	712.8	631.1	563.3	486.9	386.3	279.4	224.9
70,0°	58.2	46.7	41.0	35.5	33.7	33.2	716.8	643.1	602.3	527.7	416.1	299.5	231.4
72,5°	35.6	32.9	31.0	27.8	26.5	26.2	654.5	602.9	602.5	529.4	421.8	300.0	218.8
75,0°	28.3	26.0	24.7	23.1	21.3	21.0	517.0	414.7	459.4	449.9	351.7	221.8	153.2
77,5°	20.7	19.1	18.1	16.9	16.0	15.9	337.2	222.8	267.3	286.2	197.9	122.6	63.7
80,0°	14.6	13.3	12.5	11.4	11.1	11.0	164.5	127.8	153.2	128.9	103.8	58.2	34.7
82,5°	8.9	7.7	7.0	6.3	6.1	6.1	65.9	118.9	92.4	55.6	49.1	31.4	20.2
85,0°	4.3	3.9	3.5	3.2	3.0	2.9	14.8	46.8	36.5	20.1	16.0	11.0	8.4
87,5°	1.6	1.5	1.4	1.3	1.2	1.2	3.6	4.4	4.0	3.6	3.8	3.3	2.8
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family DL® 50 mini LED		Order number: 5XA248U41F08GE EAN: 4058352803813										LP number 59408_9	
Table of values for luminous intensities										Maximum luminous intensity		sīTeco	
C- planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm										Luminous flux in lm/klm		
0,0°	136.7	136.7	136.7	136.7	136.7	136.7	136.7	136.7	136.7	136.7	136.7	0.2	0.2
2,5°	136.3	136.2	136.2	136.3	136.3	136.4	136.6	136.6	136.8	137.0	137.0	1.6	1.8
5,0°	136.4	136.2	135.9	135.8	135.6	135.5	135.5	135.5	135.5	135.6	135.7	3.3	5.1
7,5°	137.1	136.6	136.0	135.5	135.2	134.9	134.6	134.5	134.5	134.6	134.6	4.9	10.0
10,0°	138.2	137.4	136.6	136.0	135.4	134.9	134.5	134.1	134.0	133.9	133.9	6.6	16.6
12,5°	139.9	138.9	138.0	137.1	136.1	135.0	134.0	133.2	132.6	132.3	132.3	8.2	24.8
15,0°	142.1	140.9	139.4	137.7	135.9	134.2	132.6	131.1	130.0	129.3	129.2	9.9	34.7
17,5°	143.9	142.0	139.6	137.1	134.6	132.1	130.1	128.2	126.6	125.7	125.4	11.5	46.3
20,0°	144.7	141.8	138.5	135.3	132.3	129.8	127.7	125.7	123.9	122.9	122.5	13.1	59.4
22,5°	144.4	140.3	136.3	132.9	130.5	128.5	126.9	125.2	123.6	122.4	122.0	14.7	74.0
25,0°	143.1	138.2	134.4	131.7	130.3	129.5	128.5	127.2	125.7	124.1	123.5	16.2	90.2
27,5°	140.7	136.2	133.2	132.2	132.1	132.5	132.6	131.6	130.0	128.3	127.1	17.7	108.0
30,0°	138.4	135.0	133.8	134.3	135.6	137.3	138.4	138.3	136.6	133.4	131.8	19.4	127.4
32,5°	136.1	135.3	136.3	137.9	140.3	143.4	145.6	146.3	143.6	139.0	136.5	21.3	148.6
35,0°	133.8	137.4	139.2	141.3	144.9	148.9	152.9	154.5	150.6	143.4	139.5	23.2	171.8
37,5°	131.8	138.4	141.2	144.2	149.6	156.8	161.5	161.6	155.8	145.5	139.7	25.3	197.1
40,0°	131.7	137.9	143.1	148.7	156.3	165.1	168.1	166.4	159.2	146.0	138.5	27.4	224.5
42,5°	135.9	137.4	146.9	154.7	163.5	170.9	172.7	169.1	161.0	145.4	136.2	29.8	254.3
45,0°	143.2	139.2	152.2	161.7	169.7	175.3	175.6	171.1	162.7	149.0	138.6	32.4	286.7
47,5°	152.4	145.3	158.6	169.0	175.9	182.5	182.8	179.7	171.0	155.6	145.3	35.7	322.4
50,0°	164.0	157.3	167.0	178.6	187.4	195.3	196.8	187.5	176.2	157.2	147.7	39.7	362.0
52,5°	176.2	170.3	178.6	191.6	197.3	198.7	196.7	193.4	184.1	166.9	155.8	44.2	406.2
55,0°	185.2	183.5	192.5	197.2	196.6	201.8	207.3	195.9	181.0	167.6	154.6	49.2	455.4
57,5°	192.0	196.7	199.6	198.7	202.6	210.6	192.3	182.1	174.1	170.4	163.5	54.7	510.1
60,0°	200.5	198.0	199.1	198.2	191.3	172.8	162.5	153.8	153.1	159.5	163.4	59.6	569.7
62,5°	199.0	187.9	195.1	182.4	154.4	140.6	133.7	130.8	132.3	133.0	133.1	63.2	632.9
65,0°	188.7	171.7	175.2	152.9	130.9	122.2	118.1	104.8	95.8	88.7	84.4	65.9	698.8
67,5°	176.1	153.6	147.5	126.2	111.4	97.6	82.0	63.7	55.0	50.4	48.4	66.8	765.6
70,0°	170.1	135.7	115.8	98.1	78.1	58.2	46.7	41.0	35.5	33.7	33.2	66.4	832.0
72,5°	160.0	108.4	80.4	61.7	43.7	35.6	32.9	31.0	27.8	26.5	26.2	62.2	894.2
75,0°	107.1	74.1	51.1	37.0	31.2	28.3	26.0	24.7	23.1	21.3	21.0	48.3	942.4
77,5°	46.9	45.7	30.4	24.9	22.1	20.7	19.1	18.1	16.9	16.0	15.9	29.2	971.7
80,0°	29.8	29.5	19.5	16.7	15.1	14.6	13.3	12.5	11.4	11.1	11.0	15.8	987.5
82,5°	16.8	15.8	11.1	9.9	9.4	8.9	7.7	7.0	6.3	6.1	6.1	8.6	996.1
85,0°	7.2	6.4	5.7	5.2	4.7	4.3	3.9	3.5	3.2	3.0	2.9	3.2	999.3
87,5°	2.6	2.3	2.1	1.9	1.7	1.6	1.5	1.4	1.3	1.2	1.2	0.7	1000.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family DL® 50 mini LED	Order number: 5XA248U41F08GE EAN: 4058352803813	LP number 59408_9
Dimming levels table environmental temperature: 25°C		

Luminous flux [%]	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]start of lifetime	Power consumption [W]end of lifetime	Power consumption [W]average
100	254	254	5030	31.2	32.2	31.7
95	241	252	4773	29.5	30.4	30.0
90	229	250	4535	27.9	28.7	28.3
85	216	248	4277	26.1	26.9	26.5
80	203	246	4020	24.3	25.2	24.8
75	190	243	3763	22.7	23.4	23.0
70	178	241	3525	21.2	21.9	21.5
65	165	238	3268	19.6	20.2	19.9
60	152	235	3010	18.0	18.6	18.3
55	140	232	2772	16.6	17.0	16.8
50	127	229	2515	15.1	15.5	15.3
45	114	225	2258	13.6	14.0	13.8
40	102	221	2020	12.2	12.6	12.4
35	89	216	1762	10.8	11.1	11.0
30	76	210	1505	9.3	9.6	9.4
25	63	203	1248	7.9	8.1	8.0
20	51	195	1010	6.8	6.9	6.8
15	38	184	753	5.5	5.6	5.6
11	29	175	574	4.5	4.6	4.6