

Photometric test report

Family Streetlight 21 micro LED

Order number: 5XE1C31D08CB
EAN: 4058352739693

LP number
59081_1111



Version post-top or side-entry mounting
Optic direct, asymmetric wide distribution
S080002
Cover toughened safety glass
Lamps LED 3000 K | CRI ≥ 70
Controlgear ECG SITECO iQ
Rated values Net luminous flux = 2870 lm
Power consumption = 19.4 W
Luminous efficacy = 147.9 lm/W

serial
documentation
16.05.2023

siteco

Luminous intensity in cd/klm


C180-0

C200-20

C205-25

C270-90

Imax: 851 cd/klm

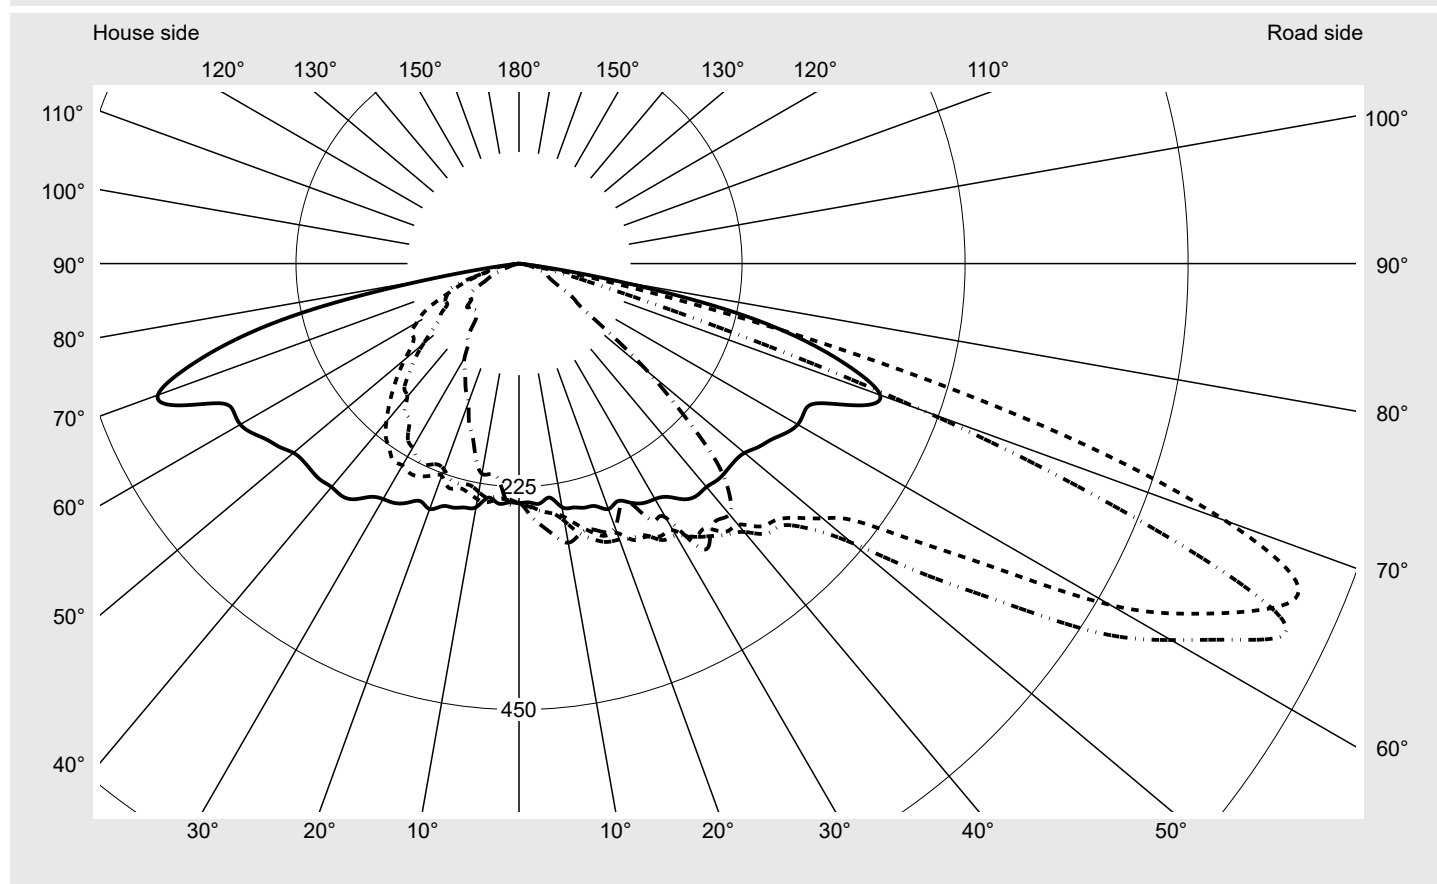

Luminaire output ratios

Eta	100.0%
Eta 0° - 90°	100.0%
Eta 90° - 180°	0.0%

Luminous intensity class acc. to EN13201-2

Class:	G3
Imax 70°	826.1
Imax 80°	99.6
Imax 90°	0.0
Imax >90°	0.0
Imax >95°	0.0

Measurement conditions

DIN EN 13032 and DIN 5032

Photometric test report

Family
Streetlight 21 micro LED

Order number: **5XE1C31D08CB**
EAN: **4058352739693**

LP number
59081_1111

Envelope curve in cd/klm


KMK 67.5°

KMK 65°

KMK 62.5°

KMK 60°

siteco

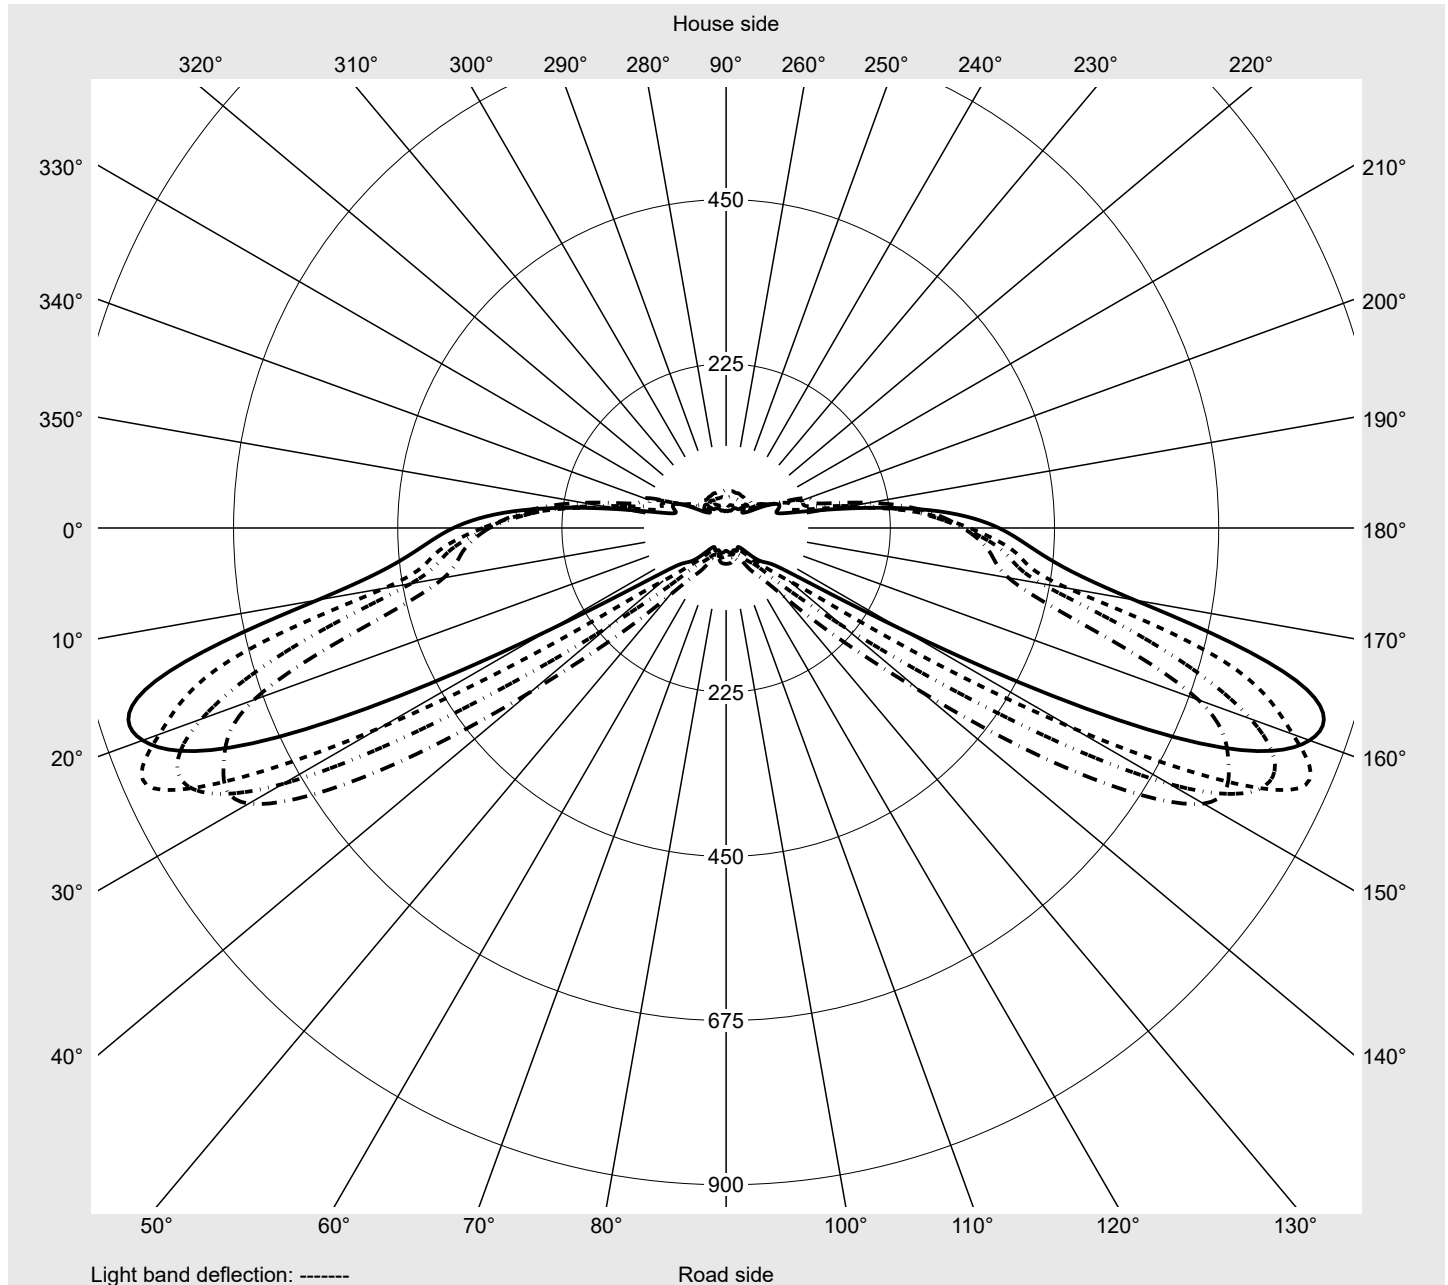

Photometric test report

Family Streetlight 21 micro LED	Order number: 5XE1C31D08CB EAN: 4058352739693	LP number 59081_1111
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C- planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
γ	Luminous intensity in cd/klm												
0,0°	241.6	241.6	241.6	241.6	241.6	241.6	241.6	241.6	241.6	241.6	241.6	241.6	241.6
2,5°	241.2	242.0	242.3	244.6	244.8	245.6	247.5	249.2	247.9	248.6	249.4	249.4	252.1
5,0°	242.8	244.4	246.4	248.5	250.4	250.4	252.4	251.7	252.9	252.6	256.1	257.1	257.8
7,5°	238.1	244.7	246.4	249.3	254.1	253.8	256.3	259.1	262.2	263.1	264.0	270.2	274.3
10,0°	249.5	250.2	252.0	252.1	259.2	263.7	267.3	266.8	269.8	277.2	281.7	280.5	280.0
12,5°	252.1	255.9	263.4	267.0	269.7	278.2	283.8	288.0	292.2	295.4	292.5	284.3	282.5
15,0°	254.9	259.7	266.2	274.9	280.0	287.7	293.3	298.3	295.3	290.9	287.2	283.7	284.2
17,5°	256.6	260.1	271.3	284.8	287.9	294.5	301.9	294.7	290.2	290.7	291.7	283.4	285.5
20,0°	263.5	268.8	274.7	282.1	289.2	296.3	303.4	296.5	296.4	293.4	288.7	286.4	289.0
22,5°	259.6	274.8	287.3	297.4	301.8	299.5	298.4	305.1	306.8	304.8	295.9	292.1	289.5
25,0°	266.1	276.1	285.1	300.8	304.0	302.6	304.5	311.0	310.2	300.7	297.4	287.1	288.5
27,5°	272.3	279.3	296.0	304.9	309.9	314.4	317.9	310.6	307.7	310.4	295.7	288.2	284.2
30,0°	274.3	289.2	300.3	316.6	310.7	316.6	319.9	318.9	312.8	302.3	293.0	291.8	303.0
32,5°	279.1	301.8	308.2	311.8	328.0	326.7	325.8	322.5	315.6	310.9	310.7	313.2	326.1
35,0°	290.3	306.6	313.9	321.4	326.3	335.7	340.7	328.4	326.0	321.2	325.3	345.8	350.0
37,5°	294.9	312.8	318.0	328.7	341.1	344.6	341.9	346.7	346.5	347.6	362.9	374.3	375.4
40,0°	294.3	313.3	322.6	331.9	343.9	353.4	365.0	349.2	364.3	390.5	399.4	410.7	406.8
42,5°	296.2	309.6	325.7	338.2	359.7	369.6	367.0	368.1	396.6	441.2	445.2	430.6	422.9
45,0°	295.8	310.9	331.9	350.3	366.0	373.9	386.4	416.1	448.0	481.0	472.9	440.8	413.9
47,5°	295.0	309.3	335.6	359.3	379.7	395.4	417.5	470.9	503.3	514.4	478.4	422.0	378.4
50,0°	297.1	314.5	341.4	367.3	399.9	438.3	493.0	538.5	552.9	521.1	455.9	389.4	328.3
52,5°	304.1	328.9	343.7	368.4	425.7	514.1	577.6	608.3	578.7	500.9	416.3	327.5	253.0
55,0°	310.1	333.9	356.5	394.4	487.6	595.7	651.0	646.3	561.3	455.6	325.0	237.0	181.1
57,5°	318.6	348.3	372.4	430.0	573.5	693.1	711.4	657.9	500.3	322.7	213.2	147.1	101.6
60,0°	324.7	361.8	392.8	503.4	688.8	759.6	755.3	579.5	348.8	203.5	120.8	83.4	65.9
62,5°	324.4	382.8	438.5	601.3	765.0	821.8	701.7	408.6	209.8	117.2	71.5	56.9	47.8
65,0°	333.4	399.5	475.5	706.3	826.4	849.8	548.2	221.0	113.1	76.8	55.7	41.0	36.7
67,5°	373.8	437.3	568.4	809.1	850.8	678.6	279.2	107.7	74.5	62.1	43.2	32.6	31.2
70,0°	387.7	464.2	653.7	826.1	758.4	435.7	109.8	75.1	59.5	49.6	33.2	30.6	30.4
72,5°	352.6	441.9	676.5	725.8	577.5	196.6	70.4	55.5	45.7	39.8	29.7	22.8	23.7
75,0°	295.8	412.3	568.9	514.5	344.7	80.9	53.8	39.8	29.9	31.3	23.0	17.7	16.7
77,5°	213.1	276.5	324.1	259.9	142.0	43.1	29.2	20.9	19.0	22.5	18.6	15.0	14.8
80,0°	96.9	99.6	98.7	79.6	43.8	20.2	12.7	11.1	13.4	14.1	12.0	9.7	10.4
82,5°	18.6	21.9	19.9	11.4	8.2	6.5	5.2	5.0	6.6	7.4	7.2	5.6	6.1
85,0°	1.2	1.2	1.3	1.4	1.4	1.6	1.6	1.7	2.2	2.8	2.5	2.3	2.1
87,5°	0.3	0.3	0.3	0.4	0.4	0.5	0.5	0.4	0.4	0.4	0.5	0.4	0.4
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 21 micro LED		Order number: 5XE1C31D08CB EAN: 4058352739693										LP number 59081_1111	
Table of values for luminous intensities										Maximum luminous intensity		siteco	
C- planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
γ	Luminous intensity in cd/klm												
0,0°	241.6	241.6	241.6	241.6	241.6	241.6	241.6	241.6	241.6	241.6	241.6	241.6	241.6
2,5°	252.7	252.3	253.5	253.9	252.0	253.8	240.2	239.2	240.4	239.0	237.8	236.9	238.2
5,0°	261.6	262.9	262.6	262.5	264.1	265.6	242.6	240.6	238.7	238.3	235.4	234.3	235.6
7,5°	275.6	278.5	278.2	277.4	277.8	277.0	238.4	241.3	240.2	242.8	238.2	235.5	230.7
10,0°	284.8	286.5	285.3	284.2	283.5	286.0	246.7	248.1	242.7	241.4	234.0	230.9	226.1
12,5°	282.9	285.3	280.5	275.7	279.2	280.2	254.8	247.0	239.2	236.8	229.0	222.6	221.7
15,0°	281.8	277.5	277.9	279.4	277.7	277.4	244.7	239.6	238.4	234.6	230.0	219.2	214.8
17,5°	283.9	277.3	277.7	278.9	281.6	284.0	248.6	244.3	240.8	236.9	228.6	219.6	210.1
20,0°	284.6	279.3	279.5	278.5	278.6	283.3	250.4	244.8	243.7	227.9	221.0	216.4	210.3
22,5°	284.0	276.8	272.6	269.1	269.6	266.4	255.9	245.3	244.2	231.5	219.1	210.1	200.8
25,0°	275.9	270.8	271.0	266.2	274.3	266.8	255.1	246.9	247.0	236.8	224.1	207.1	197.3
27,5°	277.2	288.3	288.6	296.6	291.7	292.3	261.4	252.5	247.8	238.4	222.4	196.8	187.3
30,0°	300.5	303.6	307.8	308.9	315.5	295.9	263.4	249.0	247.9	235.1	214.7	195.0	180.4
32,5°	328.9	326.4	327.8	332.8	327.9	340.2	269.9	256.6	249.9	235.9	208.8	190.6	172.1
35,0°	351.6	348.3	339.6	342.2	331.1	336.2	268.3	256.9	245.4	228.0	192.6	183.8	161.7
37,5°	368.3	358.0	349.0	341.4	341.3	326.8	275.2	256.7	243.1	220.7	189.6	173.4	144.9
40,0°	386.9	376.4	360.5	348.9	343.2	330.2	273.0	257.9	233.4	208.2	175.4	159.5	133.5
42,5°	394.5	377.0	352.8	342.8	324.4	313.6	277.4	255.6	229.9	194.1	171.3	138.8	126.0
45,0°	373.7	341.2	311.2	287.0	275.0	280.3	269.7	257.0	221.7	179.7	156.7	124.5	119.8
47,5°	332.0	291.1	265.7	241.8	221.6	223.1	275.8	249.1	205.7	165.3	142.6	109.4	111.0
50,0°	269.1	232.1	206.2	184.4	172.7	170.4	273.8	244.3	195.3	150.3	126.0	94.7	101.4
52,5°	205.2	169.9	145.0	128.5	115.1	114.5	281.2	239.7	184.0	136.5	110.2	80.3	85.7
55,0°	131.1	105.8	91.9	86.1	80.5	76.4	280.3	234.7	170.5	129.9	97.7	73.5	69.5
57,5°	73.3	66.6	63.9	61.6	62.7	65.4	278.3	218.0	152.3	128.6	92.8	69.3	60.8
60,0°	48.6	47.2	42.4	46.5	48.7	49.2	272.7	199.4	130.1	119.1	83.8	65.0	57.4
62,5°	40.8	39.5	39.7	41.1	40.0	38.8	256.8	173.8	115.3	109.6	83.4	61.6	54.5
65,0°	37.1	33.9	37.3	36.9	36.5	33.5	258.2	159.9	96.1	94.2	81.3	61.6	46.5
67,5°	34.6	32.3	33.4	34.6	33.0	31.3	280.0	147.2	77.5	76.0	77.6	59.7	40.8
70,0°	32.0	32.4	30.4	31.7	27.2	29.4	247.6	108.4	58.8	62.7	73.3	58.4	38.2
72,5°	25.2	26.4	26.2	25.4	24.8	23.6	184.7	71.9	48.7	47.4	57.3	50.8	34.9
75,0°	18.7	17.1	18.0	18.7	18.1	18.1	95.7	27.7	25.4	34.3	36.0	34.8	26.3
77,5°	14.2	12.3	12.0	12.2	12.3	12.3	55.6	9.6	10.9	31.1	30.8	23.9	17.8
80,0°	9.5	8.8	8.8	7.5	7.9	7.8	31.0	5.8	8.6	24.2	22.9	16.0	10.4
82,5°	5.3	5.0	4.6	4.2	4.0	3.9	6.6	3.0	4.1	6.3	5.3	3.5	3.5
85,0°	2.4	2.0	1.4	1.5	1.4	1.5	1.1	1.0	1.1	0.9	0.9	0.9	0.8
87,5°	0.4	0.4	0.3	0.3	0.3	0.2	0.3	0.3	0.2	0.2	0.2	0.2	0.2
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 21 micro LED				Order number: 5XE1C31D08CB EAN: 4058352739693								LP number 59081_1111			
Table of values for luminous intensities												Maximum luminous intensity		sīteco	
C- planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone		
γ	Luminous intensity in cd/klm											Luminous flux in lm/klm			
0,0°	241.6	241.6	241.6	241.6	241.6	241.6	241.6	241.6	241.6	241.6	241.6	0.4	0.4		
2,5°	241.3	240.5	242.5	240.1	240.5	238.9	241.6	240.1	240.9	241.1	242.6	2.9	3.3		
5,0°	232.5	230.0	225.5	221.8	226.5	227.3	225.3	224.8	224.3	223.2	221.9	5.8	9.1		
7,5°	228.8	226.5	219.5	220.7	219.6	217.7	217.0	215.7	214.0	216.2	214.1	8.8	17.9		
10,0°	221.8	216.9	211.2	208.7	206.8	206.5	210.1	210.0	211.5	208.9	215.3	11.8	29.6		
12,5°	221.7	219.0	212.0	208.5	206.1	204.8	203.5	204.8	201.1	201.1	201.2	14.8	44.4		
15,0°	211.3	207.1	204.4	200.9	196.2	194.7	186.5	183.8	185.7	182.0	180.8	17.4	61.9		
17,5°	206.3	200.6	196.9	186.4	183.3	178.8	172.8	169.8	169.5	171.3	167.7	20.1	82.0		
20,0°	201.6	192.2	182.0	171.8	168.4	169.4	161.9	159.0	152.8	148.9	148.7	22.6	104.6		
22,5°	189.5	176.3	168.2	165.5	154.6	153.5	147.6	143.0	146.7	143.6	139.5	25.0	129.6		
25,0°	184.5	169.4	158.8	149.7	145.1	148.3	144.2	138.2	133.4	130.4	128.2	27.4	157.0		
27,5°	173.0	162.7	150.4	149.3	152.3	145.3	136.2	132.8	127.0	122.5	119.2	30.2	187.2		
30,0°	162.4	143.6	144.2	152.2	146.6	139.1	131.5	121.9	116.8	109.9	110.0	32.9	220.1		
32,5°	151.4	142.8	146.9	152.1	141.3	130.1	121.6	111.3	102.8	98.5	94.4	36.1	256.2		
35,0°	140.7	148.0	157.5	143.3	130.4	119.8	107.6	101.9	94.1	89.2	89.6	39.0	295.2		
37,5°	138.0	151.9	149.9	134.8	118.8	107.3	100.5	88.0	82.4	76.3	72.6	41.9	337.1		
40,0°	134.4	154.1	135.3	122.6	107.1	94.1	82.6	75.7	70.2	69.0	67.6	44.8	381.9		
42,5°	138.4	139.5	121.1	109.8	93.4	82.5	71.8	67.9	67.8	68.3	64.3	47.4	429.2		
45,0°	135.6	129.0	109.2	95.4	84.3	74.3	65.8	66.7	65.5	64.6	65.4	48.8	478.1		
47,5°	125.8	116.1	98.6	83.3	73.0	64.2	64.1	63.7	65.2	64.9	63.6	49.6	527.7		
50,0°	107.6	99.0	88.5	78.2	64.9	64.1	63.1	62.8	63.9	65.5	68.4	50.0	577.6		
52,5°	82.9	78.7	77.0	68.7	62.1	60.2	64.1	62.3	63.2	61.5	60.9	49.5	627.1		
55,0°	64.7	64.0	67.3	59.9	58.1	58.2	61.6	60.8	61.2	59.8	60.3	48.5	675.6		
57,5°	53.0	55.4	58.6	53.2	55.7	56.3	57.2	58.4	55.2	57.5	58.2	47.1	722.8		
60,0°	49.5	48.0	49.5	47.1	48.3	48.9	50.3	49.9	51.1	50.6	52.4	45.5	768.2		
62,5°	42.5	42.0	42.1	39.9	42.7	41.6	42.2	42.0	42.4	42.1	39.2	43.6	811.9		
65,0°	40.5	35.1	38.1	36.5	35.7	35.7	33.2	31.9	31.9	30.6	32.6	41.7	853.6		
67,5°	33.0	31.2	36.8	31.9	30.2	29.8	27.8	24.5	24.4	22.9	23.8	39.4	892.9		
70,0°	29.7	26.8	31.6	27.6	24.7	23.0	20.2	19.4	17.5	17.6	16.9	35.6	928.5		
72,5°	23.8	22.1	24.3	22.0	18.8	15.9	14.1	13.3	12.0	11.5	10.8	29.6	958.2		
75,0°	17.8	15.2	17.8	16.9	13.4	11.6	9.2	7.4	6.2	5.9	5.9	21.6	979.7		
77,5°	13.5	11.4	11.0	11.4	10.7	7.7	5.3	3.3	2.5	1.9	1.7	12.8	992.6		
80,0°	7.9	5.9	6.5	6.2	5.3	4.4	3.9	1.5	1.0	0.8	0.8	5.5	998.1		
82,5°	3.3	2.7	2.5	2.3	2.2	1.7	2.0	0.7	0.3	0.2	0.2	1.5	999.6		
85,0°	0.6	0.6	0.5	0.4	0.2	0.2	0.2	0.1	0.0	0.1	0.1	0.3	999.9		
87,5°	0.1	0.1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.1	1000.0		
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0		

office	industry	traffic	retail	public	sports
--------	----------	---------	--------	--------	--------

Photometric test report

Family Streetlight 21 micro LED	Order number: 5XE1C31D08CB EAN: 4058352739693	LP number 59081_1111
Dimming levels table		environmental temperature: 25°C
		sit eco

Luminous flux [%]	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]start of lifetime	Power consumption [W]end of lifetime	Power consumption [W]average
100	254	254	2870	19.4	19.9	19.6
95	241	252	2723	18.2	18.8	18.5
90	229	250	2588	17.2	17.7	17.4
85	216	248	2441	16.2	16.6	16.4
80	203	246	2294	15.1	15.6	15.4
75	190	243	2147	14.2	14.6	14.4
70	178	241	2011	13.2	13.6	13.4
65	165	238	1864	12.3	12.6	12.4
60	152	235	1717	11.3	11.6	11.4
55	140	232	1582	10.4	10.7	10.6
50	127	229	1435	9.5	9.8	9.6
45	114	225	1288	8.6	8.8	8.7
40	102	221	1153	7.8	8.0	7.9
35	89	216	1006	6.9	7.1	7.0
30	76	210	859	6.1	6.3	6.2
25	63	203	712	5.3	5.4	5.4
20	51	195	576	4.5	4.6	4.6
17	42	188	475	4.0	4.1	4.0

Dimming levels table		environmental temperature: 5°C
----------------------	--	--------------------------------

Luminous flux [%]	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]start of lifetime	Power consumption [W]end of lifetime	Power consumption [W]average
100	254	254	2870	19.2	19.8	19.5
95	241	252	2723	18.1	18.7	18.4
90	229	250	2588	17.2	17.7	17.4
85	216	248	2441	16.1	16.6	16.4
80	203	246	2294	15.1	15.6	15.4
75	190	243	2147	14.1	14.5	14.3
70	178	241	2011	13.2	13.7	13.4
65	165	238	1864	12.2	12.6	12.4
60	152	235	1718	11.3	11.6	11.4
55	140	232	1582	10.4	10.7	10.6
50	127	229	1435	9.5	9.8	9.6
45	114	225	1288	8.6	8.9	8.8
40	102	221	1153	7.8	8.1	8.0
35	89	216	1006	6.9	7.1	7.0
30	76	210	859	6.1	6.3	6.2
25	63	203	712	5.4	5.5	5.4
20	51	195	576	4.6	4.7	4.6
17	42	188	475	4.0	4.1	4.0

Photometric test report

Family Streetlight 21 micro LED	Order number: 5XE1C31D08CB EAN: 4058352739693	LP number 59081_1111
Dimming levels table environmental temperature: 15°C		

Luminous flux [%]	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]start of lifetime	Power consumption [W]end of lifetime	Power consumption [W]average
100	254	254	2870	19.2	19.8	19.5
95	241	252	2723	18.1	18.7	18.4
90	229	250	2588	17.2	17.6	17.4
85	216	248	2441	16.1	16.6	16.4
80	203	246	2294	15.1	15.6	15.4
75	190	243	2147	14.1	14.5	14.3
70	178	241	2011	13.2	13.6	13.4
65	165	238	1864	12.2	12.6	12.4
60	152	235	1718	11.3	11.6	11.4
55	140	232	1582	10.4	10.7	10.6
50	127	229	1435	9.4	9.7	9.6
45	114	225	1288	8.6	8.8	8.7
40	102	221	1153	7.8	8.0	7.9
35	89	216	1006	6.9	7.1	7.0
30	76	210	859	6.2	6.3	6.2
25	63	203	712	5.3	5.4	5.4
20	51	195	576	4.6	4.7	4.6
17	42	188	475	4.0	4.2	4.1

Photometric test report

Family Streetlight 21 micro LED	Order number: 5XE1C31D08CB EAN: 4058352739693	LP number 59081_1111
Luminousfluxs table		siteco

Temperature °C	Luminous flux lm	Power consumption W
25.0	2870.0	19.4
5.0	2870.0	19.2
15.0	2870.0	19.2