

Photometric test report

Family Streetlight 21 micro LED

Order number: 5XE1P41D08CB
EAN: 4058352740743

LP number
59337_409



Version post-top or side-entry mounting
Optic direct, asymmetric wide distribution
S150002
Cover toughened safety glass
Lamps LED 4000 K | CRI ≥ 70
Controlgear ECG SITECO iQ
Rated values Net luminous flux = 2930 lm
Power consumption = 19.4 W
Luminous efficacy = 151 lm/W

serial
documentation
16.05.2023

siteco

Luminous intensity in cd/klm


C180-0

C215-35

C217,5-37,5

C270-90

Imax: 1158 cd/klm

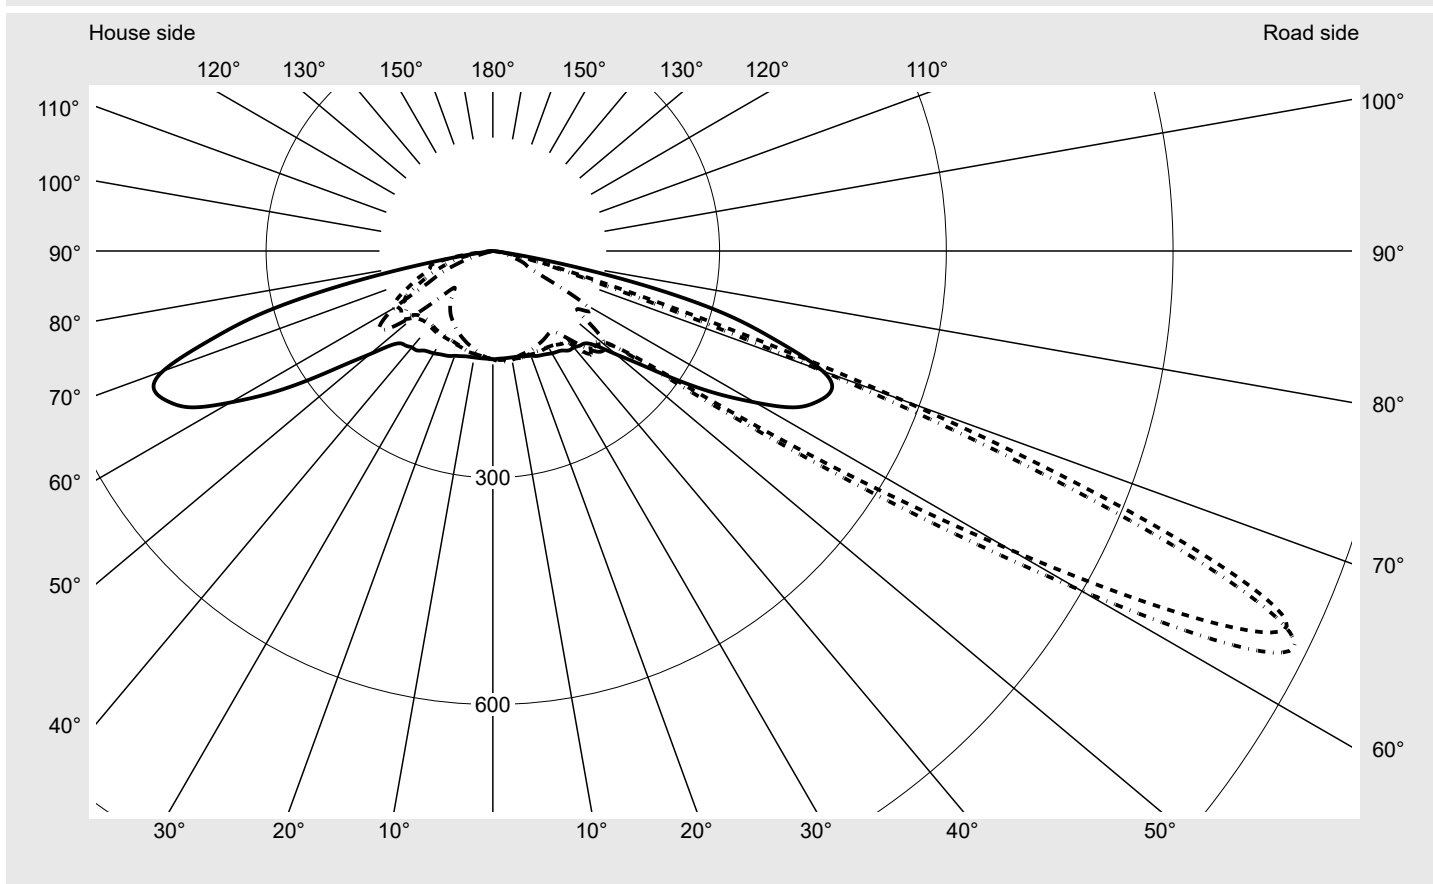

Luminaire output ratios

Eta	100.0%
Eta 0° - 90°	100.0%
Eta 90° - 180°	0.0%

Luminous intensity class acc. to EN13201-2

Class:	---
Imax 70°	798.1
Imax 80°	214.2
Imax 90°	0.0
Imax >90°	0.0
Imax >95°	0.0

Measurement conditions

DIN EN 13032 and DIN 5032

Photometric test report

Family
Streetlight 21 micro LED

Order number: **5XE1P41D08CB**
EAN: **4058352740743**

LP number
59337_409

Envelope curve in cd/klm


KMK 65°

KMK 62.5°

KMK 60°

KMK 57.5°

siteco

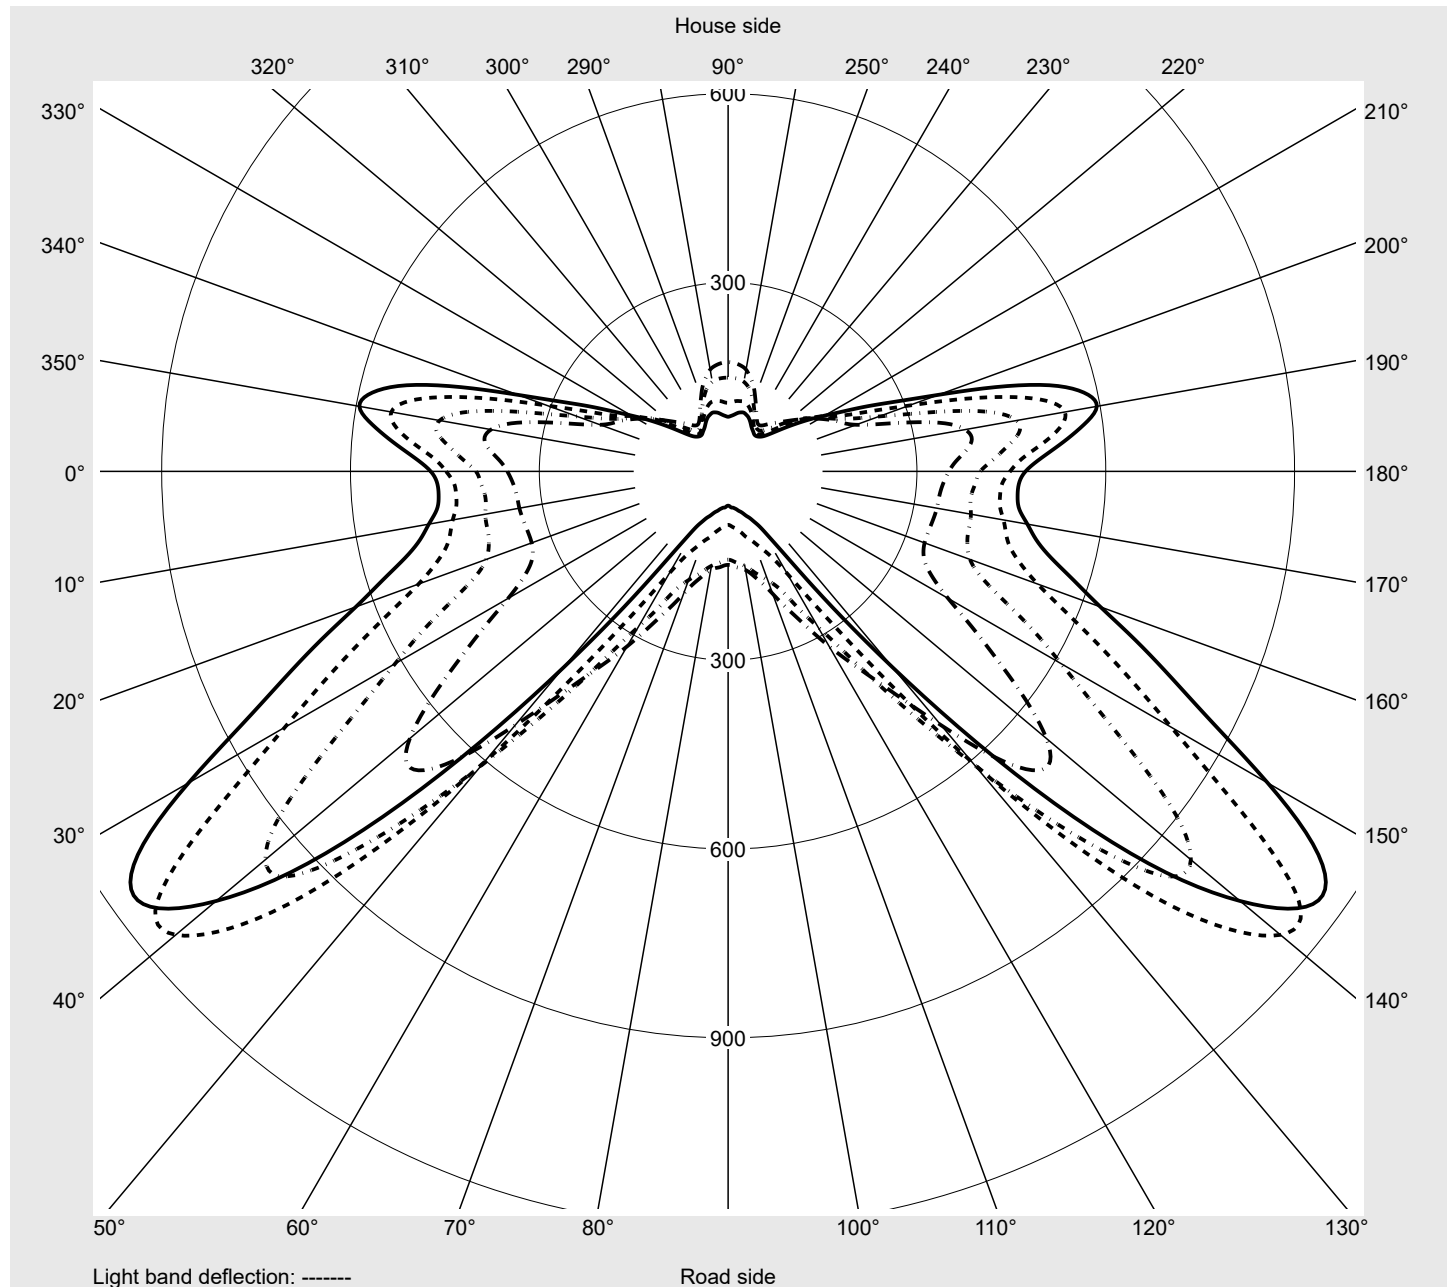

Photometric test report

Family Streetlight 21 micro LED	Order number: 5XE1P41D08CB EAN: 4058352740743	LP number 59337_409
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C- planes	0,0° 180,0°	2,5° 177,5°	5,0° 175,0°	7,5° 172,5°	10,0° 170,0°	12,5° 167,5°	15,0° 165,0°	17,5° 162,5°	20,0° 160,0°	22,5° 157,5°	25,0° 155,0°	27,5° 152,5°	30,0° 150,0°	32,5° 147,5°	35,0° 145,0°
γ	Luminous intensity in cd/klm														
0,0°	143.3	143.3	143.3	143.3	143.3	143.3	143.3	143.3	143.3	143.3	143.3	143.3	143.3	143.3	143.3
2,5°	142.8	142.8	142.8	142.9	143.1	143.1	143.1	143.2	143.3	143.4	143.5	143.6	143.7	143.8	143.9
5,0°	142.7	142.9	143.0	143.1	143.3	143.5	143.6	143.7	143.9	143.9	144.0	144.1	144.2	144.3	144.4
7,5°	142.8	143.0	143.2	143.4	143.5	143.7	143.9	143.9	144.1	144.1	144.2	144.3	144.3	144.4	144.5
10,0°	143.0	143.3	143.5	143.6	143.9	144.0	144.0	144.1	144.2	144.3	144.4	144.5	144.7	144.8	145.1
12,5°	143.4	143.6	143.9	144.1	144.3	144.4	144.4	144.4	144.5	144.7	144.9	145.1	145.3	145.5	145.6
15,0°	144.2	144.5	144.8	144.9	145.1	145.1	145.1	145.2	145.4	145.6	145.7	146.0	146.0	146.1	146.1
17,5°	145.8	146.0	146.1	146.2	146.1	146.1	146.3	146.6	146.9	147.3	147.5	147.4	147.2	146.6	146.1
20,0°	147.6	147.9	147.9	147.8	147.6	147.5	148.0	148.5	149.0	149.4	149.3	149.1	148.4	147.2	145.9
22,5°	150.4	150.6	150.6	150.3	149.8	149.8	150.4	151.2	151.9	152.3	152.2	151.2	150.0	148.4	146.5
25,0°	152.1	152.6	152.7	152.4	151.8	151.8	152.5	153.5	154.3	154.7	154.1	152.8	151.0	149.1	147.2
27,5°	153.8	154.4	154.7	154.3	153.6	153.6	154.1	154.9	155.5	155.5	154.3	152.3	150.0	148.0	146.5
30,0°	156.3	157.0	157.4	156.8	155.7	155.5	155.7	156.0	156.0	155.2	153.4	151.2	149.2	147.9	147.1
32,5°	158.1	158.9	159.8	158.7	157.2	156.8	156.8	156.5	155.9	154.8	153.4	151.9	150.7	149.5	148.5
35,0°	160.7	161.8	162.6	162.2	160.9	160.1	159.4	158.7	158.1	157.0	155.7	154.5	153.2	152.0	151.0
37,5°	165.7	166.1	166.2	165.4	165.0	164.2	162.8	161.5	160.7	160.4	159.8	158.2	156.6	154.8	153.7
40,0°	166.6	168.0	168.8	167.7	167.3	166.7	165.5	164.1	163.2	162.3	161.4	160.3	159.5	159.1	159.4
42,5°	170.0	170.9	171.8	172.1	171.9	171.0	169.4	168.2	166.9	166.4	165.8	167.1	170.6	177.0	183.4
45,0°	172.8	175.4	177.0	177.0	176.3	174.8	173.5	173.2	174.0	177.6	181.1	184.0	186.0	187.8	186.7
47,5°	185.7	187.3	190.2	192.0	190.4	188.4	189.3	191.3	193.7	195.3	194.9	193.8	191.8	189.0	185.1
50,0°	212.4	217.2	220.2	221.6	222.5	223.0	223.3	222.1	219.2	214.6	208.3	202.9	198.2	194.4	191.1
52,5°	247.1	249.7	251.8	252.7	252.4	251.7	249.9	246.8	241.4	234.4	227.7	220.9	214.7	212.4	214.2
55,0°	297.3	297.7	296.4	295.8	295.4	294.0	291.1	286.7	281.1	274.7	268.6	263.1	262.8	276.5	308.0
57,5°	350.8	343.8	339.4	337.4	336.8	335.2	333.3	332.0	332.2	335.9	345.9	367.3	403.6	458.5	522.3
60,0°	400.7	393.9	388.9	388.3	391.7	393.1	394.0	398.8	409.1	433.6	481.3	545.9	610.9	689.2	790.7
62,5°	448.1	436.0	433.8	435.8	444.3	452.1	463.5	487.0	523.4	578.3	647.3	725.1	813.3	924.2	1055.4
65,0°	472.5	462.3	461.7	467.0	482.8	501.3	531.4	575.9	629.5	700.3	778.1	870.7	989.9	1101.5	1157.9
67,5°	484.2	471.1	471.3	481.5	504.1	534.5	585.0	642.0	703.7	780.6	869.3	953.0	995.9	986.1	943.8
70,0°	464.4	449.7	450.7	467.4	493.7	530.1	578.7	634.7	700.5	767.2	798.1	784.8	735.5	664.7	573.7
72,5°	392.8	388.4	393.0	413.7	440.2	469.5	503.0	541.4	565.4	566.1	534.9	483.8	414.8	333.4	252.8
75,0°	312.1	307.6	313.3	327.7	348.5	372.0	389.6	388.5	368.3	332.7	294.3	244.7	190.7	137.0	105.3
77,5°	189.9	195.2	198.5	206.5	221.1	230.8	229.7	213.5	188.8	161.7	132.1	99.8	74.0	60.2	51.1
80,0°	70.3	62.4	59.0	57.6	57.7	62.9	73.3	71.0	58.9	47.0	36.3	30.1	27.5	25.5	23.4
82,5°	14.9	14.1	13.5	13.4	13.9	14.7	15.6	15.7	14.3	11.7	10.5	10.4	10.5	10.5	10.1
85,0°	4.1	4.1	4.0	4.1	4.1	4.1	4.2	4.2	4.1	4.1	4.1	4.0	4.0	3.9	3.8
87,5°	2.1	2.1	2.1	2.2	2.2	2.2	2.1	2.1	2.1	2.0	1.9	1.9	1.9	1.8	1.8
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 21 micro LED	Order number: 5XE1P41D08CB EAN: 4058352740743	LP number 59337_409
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C- planes	37,5° 142,5°	40,0° 140,0°	42,5° 137,5°	45,0° 135,0°	47,5° 132,5°	50,0° 130,0°	52,5° 127,5°	55,0° 125,0°	57,5° 122,5°	60,0° 120,0°	62,5° 117,5°	65,0° 115,0°	67,5° 112,5°	70,0° 110,0°	72,5° 107,5°
γ	Luminous intensity in cd/klm														
0,0°	143.3	143.3	143.3	143.3	143.3	143.3	143.3	143.3	143.3	143.3	143.3	143.3	143.3	143.3	143.3
2,5°	144.1	144.2	144.3	144.4	144.4	144.6	144.8	144.9	145.0	145.1	145.1	145.2	145.2	145.2	145.3
5,0°	144.5	144.7	144.8	144.9	144.9	145.1	145.2	145.4	145.6	145.6	145.7	145.8	145.9	146.0	146.1
7,5°	144.7	144.9	145.1	145.2	145.4	145.6	145.8	146.1	146.2	146.5	146.7	146.8	146.9	147.0	147.1
10,0°	145.2	145.5	145.7	145.9	146.1	146.2	146.3	146.5	146.6	146.7	146.7	146.7	146.6	146.6	146.5
12,5°	145.7	145.9	146.1	146.1	146.1	146.0	146.0	145.9	145.6	145.4	145.2	145.0	144.8	144.7	144.6
15,0°	146.1	145.9	145.6	145.1	144.7	144.3	144.0	143.8	143.5	143.3	143.0	142.7	142.5	142.4	142.3
17,5°	145.3	144.7	144.1	143.4	142.7	142.2	141.7	141.5	141.3	141.2	141.2	141.0	141.0	140.9	141.0
20,0°	144.5	143.3	142.3	141.7	141.2	140.9	140.5	140.5	140.3	140.4	140.3	140.3	140.3	140.4	140.3
22,5°	144.7	143.2	142.2	141.4	140.9	140.6	140.5	140.3	140.1	140.1	140.1	140.1	140.1	140.0	140.0
25,0°	145.3	143.8	142.6	141.9	141.4	141.1	140.9	140.7	140.4	140.1	139.9	139.6	139.2	139.0	138.7
27,5°	145.4	144.7	144.0	143.4	142.6	142.1	141.4	140.8	140.1	139.5	138.8	138.3	138.0	137.7	137.4
30,0°	146.6	146.3	146.1	145.6	144.4	143.1	141.8	140.7	139.7	138.9	138.3	137.6	137.1	136.7	136.2
32,5°	147.9	148.3	149.4	149.2	147.7	145.3	143.3	141.7	140.4	139.2	138.3	137.2	136.3	135.5	134.8
35,0°	150.4	150.2	150.8	151.6	149.9	147.1	144.6	142.5	140.6	139.0	137.8	136.6	135.8	134.9	134.1
37,5°	152.8	151.9	150.7	149.7	150.1	149.1	146.8	143.8	141.6	139.8	138.4	136.9	135.7	134.7	134.1
40,0°	161.0	164.5	168.6	171.3	172.7	172.2	170.1	166.1	160.9	154.8	148.7	143.6	140.7	139.7	140.2
42,5°	186.8	187.3	186.7	184.0	179.0	173.8	170.0	166.2	161.1	157.4	154.7	152.9	152.7	153.8	155.1
45,0°	182.8	178.9	174.1	169.8	166.6	164.1	163.1	163.3	163.6	164.9	166.2	167.6	169.7	172.0	174.0
47,5°	180.0	176.2	173.4	171.2	170.1	170.8	172.0	175.4	179.8	184.3	187.4	189.6	191.8	193.5	194.1
50,0°	187.5	185.2	183.9	184.0	187.3	192.4	199.0	205.3	210.0	214.2	216.3	214.8	212.0	209.8	207.2
52,5°	218.8	227.2	239.6	251.9	261.3	267.0	266.2	261.5	253.9	247.3	244.9	235.9	226.3	216.2	206.7
55,0°	351.2	391.6	419.1	432.1	429.9	408.9	375.3	339.6	313.6	292.8	274.7	252.0	228.2	207.5	190.9
57,5°	595.6	660.1	690.6	669.0	605.5	526.5	457.2	401.8	358.6	321.1	285.3	254.5	229.7	207.0	188.8
60,0°	897.1	959.8	952.8	864.4	739.0	609.8	497.0	406.8	334.3	285.2	249.3	216.0	196.1	183.8	174.5
62,5°	1147.2	1145.6	1075.2	953.7	783.7	604.3	437.1	316.8	238.8	187.0	157.2	140.6	129.3	119.9	112.9
65,0°	1140.2	1062.0	943.2	776.3	584.1	406.2	271.7	178.5	129.0	102.9	90.7	82.1	76.9	71.7	67.6
67,5°	852.9	715.2	554.7	398.3	252.6	153.7	106.1	81.9	70.1	64.3	61.5	59.7	59.3	58.8	56.0
70,0°	460.6	337.8	231.0	155.4	103.2	75.1	62.5	55.5	51.5	49.6	48.1	46.9	45.9	46.1	46.2
72,5°	182.3	140.9	106.6	78.2	58.1	47.0	41.2	38.6	37.0	36.0	35.6	34.2	33.6	32.9	27.9
75,0°	85.2	71.5	56.9	44.0	35.4	29.8	27.3	26.0	25.1	24.5	24.2	23.4	22.1	19.8	19.4
77,5°	44.0	38.2	31.8	25.6	21.3	19.0	18.3	17.5	16.9	16.5	16.3	15.8	15.2	14.8	14.4
80,0°	21.2	19.3	16.6	14.1	12.4	11.8	11.6	11.4	11.0	10.9	10.7	10.4	10.1	9.9	9.7
82,5°	9.4	8.9	8.3	7.5	6.9	6.6	6.7	6.7	6.6	6.4	6.3	6.2	6.0	5.8	5.8
85,0°	3.6	3.6	3.5	3.3	3.2	3.2	3.2	3.1	3.0	2.9	2.8	2.8	2.8	2.6	2.6
87,5°	1.7	1.6	1.6	1.5	1.5	1.4	1.3	1.3	1.3	1.1	1.1	1.1	1.1	1.0	0.9
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 21 micro LED	Order number: 5XE1P41D08CB EAN: 4058352740743	LP number 59337_409
Table of values for luminous intensities		Maximum luminous intensity

siteco

C- planes	75,0° 105,0°	77,5° 102,5°	80,0° 100,0°	82,5° 97,5°	85,0° 95,0°	87,5° 92,5°	90,0°	182,5° 357,5°	185,0° 355,0°	187,5° 352,5°	190,0° 350,0°	192,5° 347,5°	195,0° 345,0°	197,5° 342,5°	200,0° 340,0°
γ	Luminous intensity in cd/klm														
0,0°	143.3	143.3	143.3	143.3	143.3	143.3	143.3	143.3	143.3	143.3	143.3	143.3	143.3	143.3	143.3
2,5°	145.3	145.4	145.4	145.5	145.6	145.6	145.6	142.6	142.5	142.3	142.2	142.2	142.1	142.1	142.1
5,0°	146.1	146.2	146.3	146.4	146.4	146.5	146.5	142.6	142.3	142.0	141.8	141.7	141.5	141.4	141.3
7,5°	147.2	147.2	147.4	147.4	147.4	147.4	147.4	142.5	142.2	141.9	141.5	141.3	141.0	140.9	140.6
10,0°	146.5	146.6	146.6	146.5	146.5	146.5	146.5	142.6	142.2	141.8	141.4	141.0	140.9	140.5	140.2
12,5°	144.4	144.5	144.4	144.4	144.3	144.3	144.2	142.9	142.4	142.0	141.5	141.1	140.7	140.4	139.9
15,0°	142.2	142.2	142.3	142.3	142.3	142.3	142.2	143.8	143.3	142.8	142.3	141.9	141.5	141.2	140.7
17,5°	141.1	141.2	141.3	141.4	141.4	141.4	141.4	145.2	144.8	144.3	143.6	143.0	142.4	141.8	140.8
20,0°	140.4	140.5	140.5	140.7	140.8	140.8	140.8	147.3	146.5	145.6	144.8	143.9	143.0	141.8	140.5
22,5°	139.9	139.8	139.7	139.7	139.6	139.7	139.6	149.4	148.7	147.6	146.5	145.5	144.1	142.5	140.9
25,0°	138.4	138.1	138.0	137.9	137.9	137.9	137.9	151.2	150.2	149.3	148.4	147.4	145.6	143.9	142.0
27,5°	137.1	136.8	136.6	136.5	136.6	136.5	136.6	152.7	151.8	150.9	149.9	148.7	147.0	145.2	143.3
30,0°	135.8	135.5	135.2	135.0	134.9	134.9	134.9	155.2	153.9	152.7	151.4	149.7	147.9	146.1	144.4
32,5°	134.2	133.8	133.5	133.2	133.0	132.9	133.0	156.7	155.1	153.8	152.3	150.5	148.7	147.0	145.0
35,0°	133.5	133.0	132.6	132.3	132.1	131.9	131.7	159.5	158.1	156.8	154.7	152.5	150.7	148.8	146.6
37,5°	134.1	134.6	135.3	135.8	135.6	135.3	135.3	164.1	162.4	160.4	157.6	155.1	152.7	150.7	148.2
40,0°	141.5	143.4	145.4	147.7	148.3	148.1	148.2	165.1	164.0	162.6	160.2	157.7	155.5	153.2	150.2
42,5°	156.6	158.9	161.5	164.4	166.1	166.3	166.6	167.6	166.7	164.7	162.6	160.7	158.1	155.4	152.1
45,0°	175.6	177.6	179.9	182.7	184.9	185.8	186.2	171.1	169.4	167.5	165.8	163.4	161.1	158.2	154.7
47,5°	193.8	193.5	193.6	194.5	196.0	196.2	196.3	180.0	178.3	175.0	171.8	168.7	165.6	162.4	158.6
50,0°	204.0	200.6	199.2	198.4	196.3	193.5	192.8	212.1	205.3	200.3	195.6	190.4	185.6	180.4	173.7
52,5°	197.6	189.8	183.6	178.6	174.9	172.1	170.8	243.5	242.7	237.2	226.1	212.7	202.8	194.8	186.6
55,0°	177.1	164.9	154.2	146.9	142.0	137.7	136.4	306.3	307.5	309.4	296.7	269.6	235.8	209.4	194.7
57,5°	176.5	166.2	159.0	155.0	152.9	149.8	148.6	362.1	379.4	390.6	382.5	352.8	300.9	249.5	216.4
60,0°	167.1	158.5	152.4	147.8	145.2	141.9	140.3	421.2	444.2	465.8	465.4	432.2	370.1	303.7	255.1
62,5°	107.3	100.2	95.5	91.5	89.0	86.4	85.0	467.6	500.7	531.6	543.3	518.0	456.8	379.0	305.5
65,0°	64.9	61.8	59.7	58.1	57.6	55.5	54.5	498.8	534.5	570.4	594.8	578.8	528.7	445.1	355.5
67,5°	53.4	51.7	50.7	49.7	48.7	47.1	47.2	511.9	544.5	577.9	603.6	591.4	551.6	488.4	410.8
70,0°	43.2	41.3	40.3	39.7	39.7	39.7	39.6	483.2	514.9	547.5	567.8	560.5	538.9	500.0	449.0
72,5°	25.2	23.6	23.4	23.5	30.6	32.6	28.2	418.6	437.7	467.2	483.2	493.6	490.6	479.8	460.1
75,0°	19.3	18.6	18.2	18.1	30.1	24.0	20.9	317.6	333.1	354.8	376.5	394.0	408.6	419.8	423.9
77,5°	13.9	13.6	13.2	13.1	14.9	14.6	14.3	205.9	210.9	224.6	243.3	263.8	286.8	308.4	326.0
80,0°	9.3	8.9	8.7	8.6	8.8	8.9	9.2	74.8	83.6	95.3	110.3	128.9	151.2	174.9	196.6
82,5°	5.5	5.2	5.0	4.9	4.9	5.3	5.5	17.3	18.5	21.3	25.4	31.0	39.7	52.1	68.0
85,0°	2.4	2.4	2.4	2.3	2.4	2.3	2.3	3.8	4.0	4.0	3.9	3.9	3.8	3.8	3.8
87,5°	0.9	0.9	0.8	0.8	0.8	0.8	0.8	2.1	2.1	2.1	2.0	2.0	2.0	2.0	1.9
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 21 micro LED	Order number: 5XE1P41D08CB EAN: 4058352740743	LP number 59337_409
Table of values for luminous intensities		Maximum luminous intensity

siteco

C- planes	202,5° 337,5°	205,0° 335,0°	207,5° 332,5°	210,0° 330,0°	212,5° 327,5°	215,0° 325,0°	217,5° 322,5°	220,0° 320,0°	222,5° 317,5°	225,0° 315,0°	227,5° 312,5°	230,0° 310,0°	232,5° 307,5°	235,0° 305,0°	237,5° 302,5°
γ	Luminous intensity in cd/klm														
0,0°	143.3	143.3	143.3	143.3	143.3	143.3	143.3	143.3	143.3	143.3	143.3	143.3	143.3	143.3	143.3
2,5°	142.0	141.9	141.9	141.9	141.8	141.8	141.9	141.8	141.8	141.8	141.8	141.8	141.8	141.7	141.8
5,0°	141.2	140.9	140.9	140.9	140.8	140.7	140.6	140.4	140.3	140.2	140.1	140.1	140.0	139.8	139.9
7,5°	140.4	140.1	140.0	139.7	139.6	139.3	139.2	139.0	138.8	138.7	138.5	138.4	138.3	138.1	137.9
10,0°	139.9	139.6	139.2	139.0	138.8	138.4	138.1	137.7	137.2	136.9	136.4	136.0	135.7	135.3	134.9
12,5°	139.6	139.3	139.0	138.7	138.1	137.6	137.1	136.4	135.9	135.4	134.9	134.4	133.8	133.2	132.8
15,0°	140.2	139.6	138.8	138.0	137.3	136.6	135.9	135.1	134.3	133.6	132.8	131.9	131.1	130.4	129.8
17,5°	139.7	138.5	137.5	136.4	135.4	134.6	133.9	133.2	132.3	131.4	130.6	129.8	129.0	128.3	127.5
20,0°	139.1	137.8	136.6	135.4	134.4	133.3	132.3	131.4	130.4	129.4	128.5	127.6	126.8	125.9	125.3
22,5°	139.3	137.8	136.4	135.2	133.8	132.4	131.1	129.8	128.5	127.4	126.3	125.4	124.4	123.6	123.0
25,0°	140.1	138.4	136.7	134.9	133.2	131.5	129.9	128.5	126.9	125.5	124.5	123.3	122.4	121.4	120.6
27,5°	141.3	139.2	137.1	134.9	132.8	131.0	129.1	127.2	125.6	124.0	122.8	121.6	120.3	119.1	118.2
30,0°	142.2	140.0	137.6	135.3	132.9	130.7	128.7	126.7	124.8	122.9	121.3	119.9	118.3	116.9	115.6
32,5°	142.9	140.5	138.3	135.8	133.2	130.8	128.5	126.2	123.9	121.9	119.9	118.2	116.5	114.8	113.1
35,0°	144.0	141.3	138.6	135.9	133.3	131.0	128.2	125.6	122.9	120.5	118.2	116.0	114.1	112.2	110.5
37,5°	145.2	142.2	139.2	136.3	133.5	130.3	127.4	124.7	121.8	118.7	116.0	113.6	111.4	109.5	107.9
40,0°	146.9	143.5	140.1	136.9	133.5	129.9	126.4	123.1	120.3	117.3	114.2	111.2	108.6	106.5	104.9
42,5°	148.3	144.3	140.5	137.2	133.5	129.6	125.7	122.1	118.7	115.6	112.2	109.2	106.0	103.3	101.0
45,0°	150.4	146.1	141.8	137.8	134.0	130.3	126.3	122.5	118.4	114.9	111.1	107.4	103.6	99.7	96.4
47,5°	154.1	149.6	145.6	141.5	137.5	132.9	128.8	124.5	120.0	115.9	112.0	107.6	103.4	99.2	94.9
50,0°	166.8	160.9	155.2	149.5	143.5	137.9	131.6	126.4	122.1	117.8	113.2	108.3	104.2	100.6	97.6
52,5°	179.8	174.5	170.1	164.1	156.2	147.8	139.1	130.8	123.7	117.4	111.7	105.9	101.2	98.0	96.6
55,0°	185.2	177.8	170.1	162.7	154.9	147.7	140.2	134.0	127.2	119.1	111.1	103.6	97.7	94.2	93.3
57,5°	199.9	189.5	178.3	167.1	155.5	144.5	134.5	125.1	116.9	109.6	103.4	97.8	92.4	89.1	88.8
60,0°	220.3	197.3	182.2	170.4	157.7	146.8	134.4	121.2	108.5	98.4	90.5	84.7	81.8	81.5	82.9
62,5°	252.5	213.6	190.4	175.7	159.1	144.8	128.9	112.2	98.3	87.7	81.0	76.8	75.3	76.6	78.9
65,0°	290.5	245.2	206.5	177.3	153.7	132.3	113.9	98.3	86.6	78.9	74.8	72.4	71.4	72.1	74.4
67,5°	339.6	279.5	227.5	177.0	142.6	117.7	98.8	85.5	76.4	71.1	68.2	66.4	65.4	65.9	67.6
70,0°	393.3	334.0	256.5	185.8	133.6	105.7	86.3	74.3	67.3	63.1	60.3	58.7	58.0	57.8	59.4
72,5°	430.2	379.5	299.1	206.5	133.5	92.5	71.9	61.6	56.0	52.6	50.3	48.5	47.7	47.8	49.6
75,0°	415.5	386.9	326.1	231.4	141.2	86.0	60.7	50.0	44.1	40.5	38.4	37.2	37.1	37.4	38.3
77,5°	334.1	328.0	299.2	241.7	154.5	82.0	48.4	36.8	31.1	28.1	26.7	25.5	25.2	25.7	26.4
80,0°	211.1	214.2	200.9	168.0	117.3	62.4	29.3	20.8	17.4	15.4	14.2	13.9	13.9	14.3	13.9
82,5°	78.3	80.0	78.5	71.8	58.2	35.0	15.2	8.8	7.4	6.4	5.7	5.3	5.4	5.7	5.6
85,0°	3.8	3.8	4.0	4.1	4.3	4.2	3.4	2.7	2.4	2.3	2.1	2.0	1.9	1.8	1.7
87,5°	1.9	1.8	1.8	1.6	1.6	1.5	1.5	1.3	1.3	1.3	1.1	1.1	1.1	1.1	1.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 21 micro LED	Order number: 5XE1P41D08CB EAN: 4058352740743	LP number 59337_409
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C- planes	240,0° 300,0°	242,5° 297,5°	245,0° 295,0°	247,5° 292,5°	250,0° 290,0°	252,5° 287,5°	255,0° 285,0°	257,5° 282,5°	260,0° 280,0°	262,5° 277,5°	265,0° 275,0°	267,5° 272,5°	270,0°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm													Luminous flux in lm/klm	
0,0°	143.3	143.3	143.3	143.3	143.3	143.3	143.3	143.3	143.3	143.3	143.3	143.3	143.3	0.2	0.2
2,5°	141.8	141.8	141.8	141.8	141.8	141.9	141.8	141.8	141.8	141.8	141.8	141.9	141.9	1.7	1.9
5,0°	139.8	139.7	139.8	139.7	139.7	139.6	139.6	139.7	139.6	139.6	139.7	139.7	139.6	3.4	5.3
7,5°	137.7	137.5	137.4	137.2	137.1	137.0	136.8	136.7	136.7	136.6	136.6	136.6	136.6	5.1	10.4
10,0°	134.7	134.5	134.1	133.9	133.6	133.5	133.3	133.2	133.2	133.2	133.1	133.1	133.2	6.7	17.1
12,5°	132.3	131.9	131.5	131.1	130.8	130.5	130.2	130.0	129.9	129.8	129.8	129.7	129.8	8.3	25.5
15,0°	129.2	128.7	128.1	127.7	127.4	127.2	127.0	126.9	127.0	127.0	127.1	127.2	127.2	9.9	35.3
17,5°	126.8	126.2	125.5	125.1	124.6	124.3	124.2	124.0	124.0	123.9	124.0	123.9	123.9	11.4	46.7
20,0°	124.7	124.2	123.5	122.9	122.3	121.8	121.4	121.1	120.9	120.8	120.8	120.8	120.8	12.9	59.6
22,5°	122.4	121.8	121.2	120.6	119.8	119.1	118.5	118.1	117.8	117.6	117.6	117.5	117.4	14.4	74.0
25,0°	119.7	119.1	118.3	117.7	116.9	116.1	115.6	115.1	114.5	114.3	114.2	114.1	114.2	15.9	89.9
27,5°	117.0	116.1	115.3	114.7	113.9	113.2	112.5	111.8	111.1	110.6	110.3	110.1	110.1	17.3	107.2
30,0°	114.3	113.3	112.4	111.5	110.7	110.0	109.2	108.5	107.8	107.0	106.6	106.5	106.4	18.6	125.8
32,5°	111.8	110.6	109.5	108.5	107.6	106.7	105.9	105.2	104.4	103.6	103.1	102.7	102.7	20.0	145.8
35,0°	109.1	107.8	106.6	105.6	104.4	103.3	102.3	101.5	100.6	99.6	98.8	98.2	98.1	21.4	167.2
37,5°	106.5	105.1	103.7	102.4	101.0	99.3	98.0	96.9	95.9	94.8	93.8	93.0	92.8	22.8	190.0
40,0°	103.2	101.4	99.7	98.0	96.0	93.8	92.0	90.9	89.8	88.6	87.6	86.9	86.8	24.7	214.6
42,5°	98.6	96.1	93.4	90.9	88.6	86.1	84.7	83.9	82.1	80.4	79.4	78.7	78.7	26.6	241.3
45,0°	92.8	89.4	86.2	83.0	80.4	77.9	76.4	75.7	74.4	73.1	72.5	71.9	71.7	28.4	269.7
47,5°	90.8	87.5	84.4	82.0	80.0	78.3	77.1	77.0	76.7	76.5	76.6	76.5	76.4	31.1	300.7
50,0°	95.5	94.6	94.8	96.3	98.8	101.6	104.9	109.2	112.6	115.5	117.9	119.1	119.4	35.8	336.5
52,5°	97.6	100.0	104.4	110.6	118.5	126.5	134.5	142.9	149.7	155.3	159.0	161.2	161.7	41.6	378.2
55,0°	96.1	101.2	108.2	117.3	128.1	139.3	149.5	159.6	168.4	174.7	179.0	181.7	182.0	50.3	428.5
57,5°	92.0	97.7	105.7	115.2	125.6	137.4	147.7	156.0	164.1	168.5	171.3	173.0	173.5	62.1	490.5
60,0°	86.4	92.0	99.3	107.9	116.7	125.7	134.1	140.1	144.4	147.1	148.2	148.8	148.9	73.7	564.2
62,5°	82.3	86.6	92.5	98.5	103.8	108.3	112.0	113.8	113.3	112.8	111.5	109.6	109.0	81.0	645.2
65,0°	77.0	80.1	84.5	88.9	92.5	94.7	96.5	96.0	94.6	92.1	89.7	87.9	86.8	81.9	727.1
67,5°	71.0	74.2	78.2	81.7	83.6	84.2	84.2	82.0	79.9	77.4	74.4	72.9	71.2	75.6	802.6
70,0°	62.4	65.9	69.3	72.3	71.9	69.4	67.1	62.8	60.2	56.1	54.8	52.6	50.9	64.8	867.5
72,5°	51.7	55.1	56.3	57.8	55.6	52.7	49.5	43.5	40.9	37.7	40.4	36.4	33.9	51.4	918.8
75,0°	40.3	40.8	40.7	39.5	38.9	34.0	24.1	14.9	12.9	12.3	18.1	12.0	11.0	38.4	957.2
77,5°	26.4	26.6	26.8	23.3	15.7	8.2	7.0	6.6	6.4	5.6	5.3	4.7	4.7	25.3	982.6
80,0°	14.0	13.2	11.4	6.5	4.5	4.0	3.4	3.2	3.0	2.4	1.9	1.7	1.8	12.1	994.7
82,5°	5.4	4.7	3.5	2.7	2.4	2.1	1.9	1.7	1.5	1.2	1.1	1.1	1.0	4.2	998.8
85,0°	1.5	1.5	1.4	1.2	1.2	1.1	1.0	0.9	0.9	0.7	0.7	0.7	0.6	0.8	999.6
87,5°	1.0	1.0	0.9	0.8	0.8	0.8	0.7	0.6	0.6	0.6	0.6	0.6	0.6	0.4	1000.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

office	industry	traffic	retail	public	sports
--------	----------	---------	--------	--------	--------

Photometric test report

Family Streetlight 21 micro LED	Order number: 5XE1P41D08CB EAN: 4058352740743	LP number 59337_409
Dimming levels table		environmental temperature: 25°C
		sit eco

Luminous flux [%]	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]start of lifetime	Power consumption [W]end of lifetime	Power consumption [W]average
100	254	254	2930	19.4	19.9	19.6
95	241	252	2780	18.2	18.8	18.5
90	229	250	2642	17.2	17.7	17.4
85	216	248	2492	16.2	16.7	16.4
80	203	246	2342	15.1	15.6	15.4
75	190	243	2192	14.2	14.6	14.4
70	178	241	2053	13.2	13.6	13.4
65	165	238	1903	12.3	12.6	12.4
60	152	235	1753	11.3	11.6	11.4
55	140	232	1615	10.4	10.7	10.6
50	127	229	1465	9.5	9.8	9.6
45	114	225	1315	8.6	8.8	8.7
40	102	221	1177	7.8	8.0	7.9
35	89	216	1027	6.9	7.1	7.0
30	76	210	877	6.1	6.3	6.2
25	63	203	727	5.3	5.5	5.4
20	51	195	588	4.5	4.6	4.6
17	42	188	484	4.0	4.1	4.0

Dimming levels table		environmental temperature: 5°C				
Luminous flux [%]	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]start of lifetime	Power consumption [W]end of lifetime	Power consumption [W]average
100	254	254	2930	19.2	19.8	19.5
95	241	252	2780	18.1	18.7	18.4
90	229	250	2642	17.2	17.7	17.4
85	216	248	2492	16.1	16.6	16.4
80	203	246	2342	15.2	15.6	15.4
75	191	244	2203	14.2	14.6	14.4
70	178	241	2053	13.2	13.7	13.4
65	165	238	1903	12.3	12.6	12.4
60	152	235	1753	11.3	11.6	11.4
55	140	232	1615	10.4	10.7	10.6
50	127	229	1465	9.5	9.8	9.6
45	114	225	1315	8.6	8.9	8.8
40	102	221	1177	7.8	8.1	8.0
35	89	216	1027	6.9	7.1	7.0
30	76	210	877	6.1	6.3	6.2
25	64	204	738	5.4	5.6	5.5
20	51	195	588	4.6	4.7	4.6
17	42	188	484	4.0	4.1	4.0

Photometric test report

Family Streetlight 21 micro LED	Order number: 5XE1P41D08CB EAN: 4058352740743	LP number 59337_409
Dimming levels table		environmental temperature: 15°C
		siteco

Luminous flux [%]	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]start of lifetime	Power consumption [W]end of lifetime	Power consumption [W]average
100	254	254	2930	19.3	19.8	19.6
95	241	252	2780	18.1	18.7	18.4
90	229	250	2642	17.2	17.7	17.4
85	216	248	2492	16.1	16.6	16.4
80	203	246	2342	15.1	15.6	15.4
75	191	244	2203	14.2	14.6	14.4
70	178	241	2053	13.2	13.6	13.4
65	165	238	1903	12.2	12.6	12.4
60	152	235	1753	11.3	11.6	11.4
55	140	232	1615	10.4	10.7	10.6
50	127	229	1465	9.5	9.8	9.6
45	114	225	1315	8.6	8.8	8.7
40	102	221	1177	7.8	8.0	7.9
35	89	216	1027	6.9	7.1	7.0
30	76	210	877	6.2	6.3	6.2
25	64	204	738	5.3	5.5	5.4
20	51	195	588	4.6	4.7	4.6
17	42	188	484	4.1	4.2	4.2

Photometric test report

Family Streetlight 21 micro LED	Order number: 5XE1P41D08CB EAN: 4058352740743	LP number 59337_409
Luminousfluxs table		siteco

Temperature °C	Luminous flux lm	Power consumption W
25.0	2930.0	19.4
5.0	2930.0	19.2
15.0	2930.0	19.3