

Photometric test report

Family
Streetlight 21 micro easy LED

Order number: 5XE5H47N08CB
EAN: 4058352897188

LP number
59066_814



Version post-top or side-entry mounting, NEMA 7 pin (DALI)
Optic direct, asymmetric A520002
Cover toughened safety glass
Lamps LED 4000 K | CRI ≥ 70
Controlgear ECG-DALI Plus
Rated values Net luminous flux = 2340 lm
 Power consumption = 15.8 W
 Luminous efficacy = 148.1 lm/W

serial
documentation
16.06.2023

siteco

Luminous intensity in cd/klm


C180-0

C215-35

C217.5-37.5

C270-90

Imax: 990 cd/klm

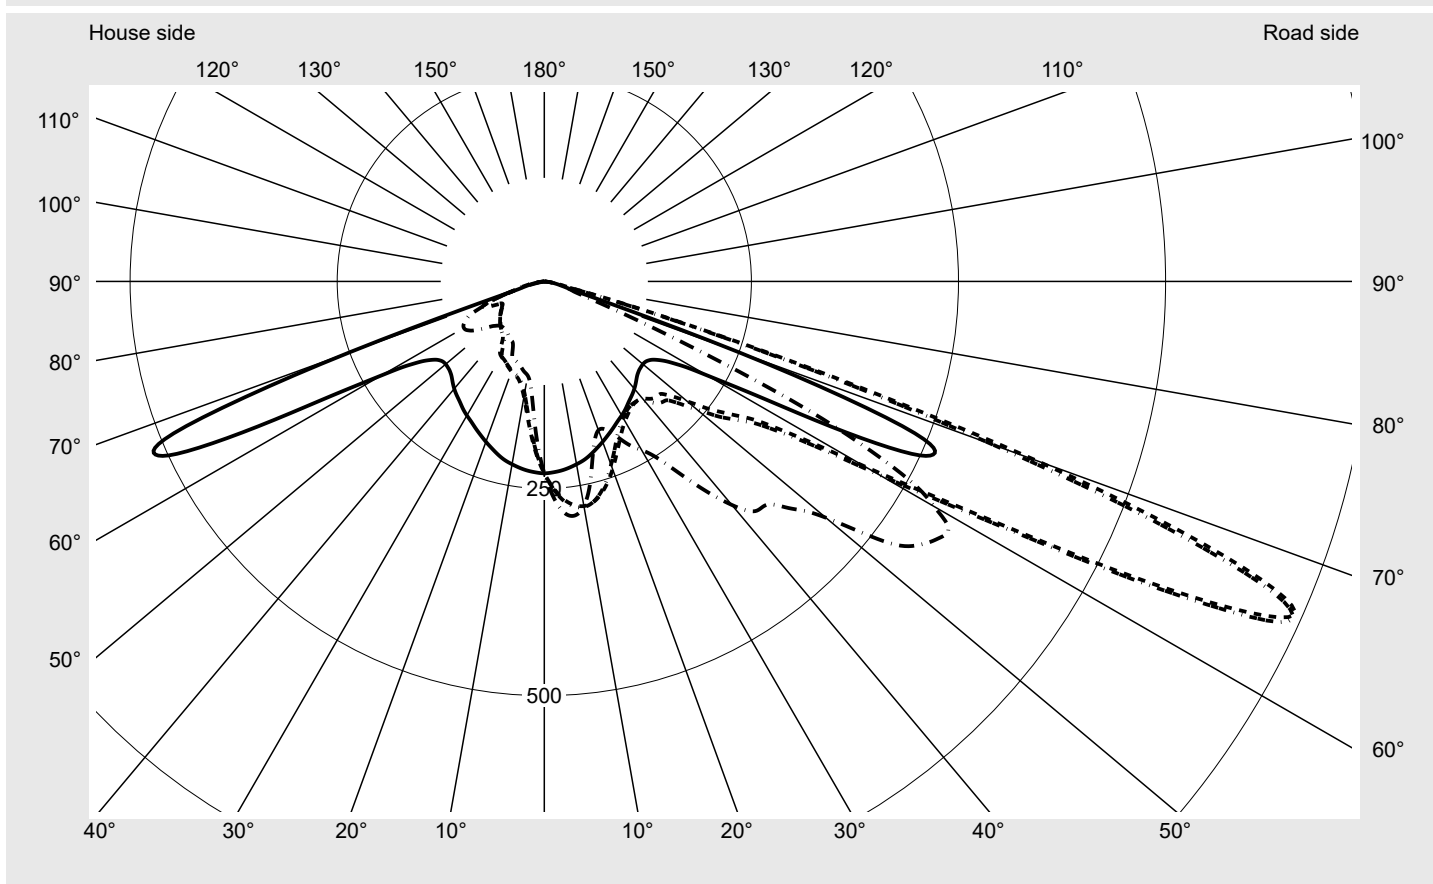

Luminaire output ratios

Eta	100.0%
Eta 0° - 90°	100.0%
Eta 90° - 180°	0.0%

Luminous intensity class acc. to EN13201-2

Class:	G3
Imax 70°	685.4
Imax 80°	32.5
Imax 90°	0.0
Imax >90°	0.0
Imax >95°	0.0

Measurement conditions

DIN EN 13032 and DIN 5032

Photometric test report

Family
Streetlight 21 micro easy LED

Order number: **5XE5H47N08CB**
EAN: **4058352897188**

LP number
59066_814

Envelope curve in cd/klm


KMK 66°

KMK 65°

KMK 64°

KMK 63°

siteco

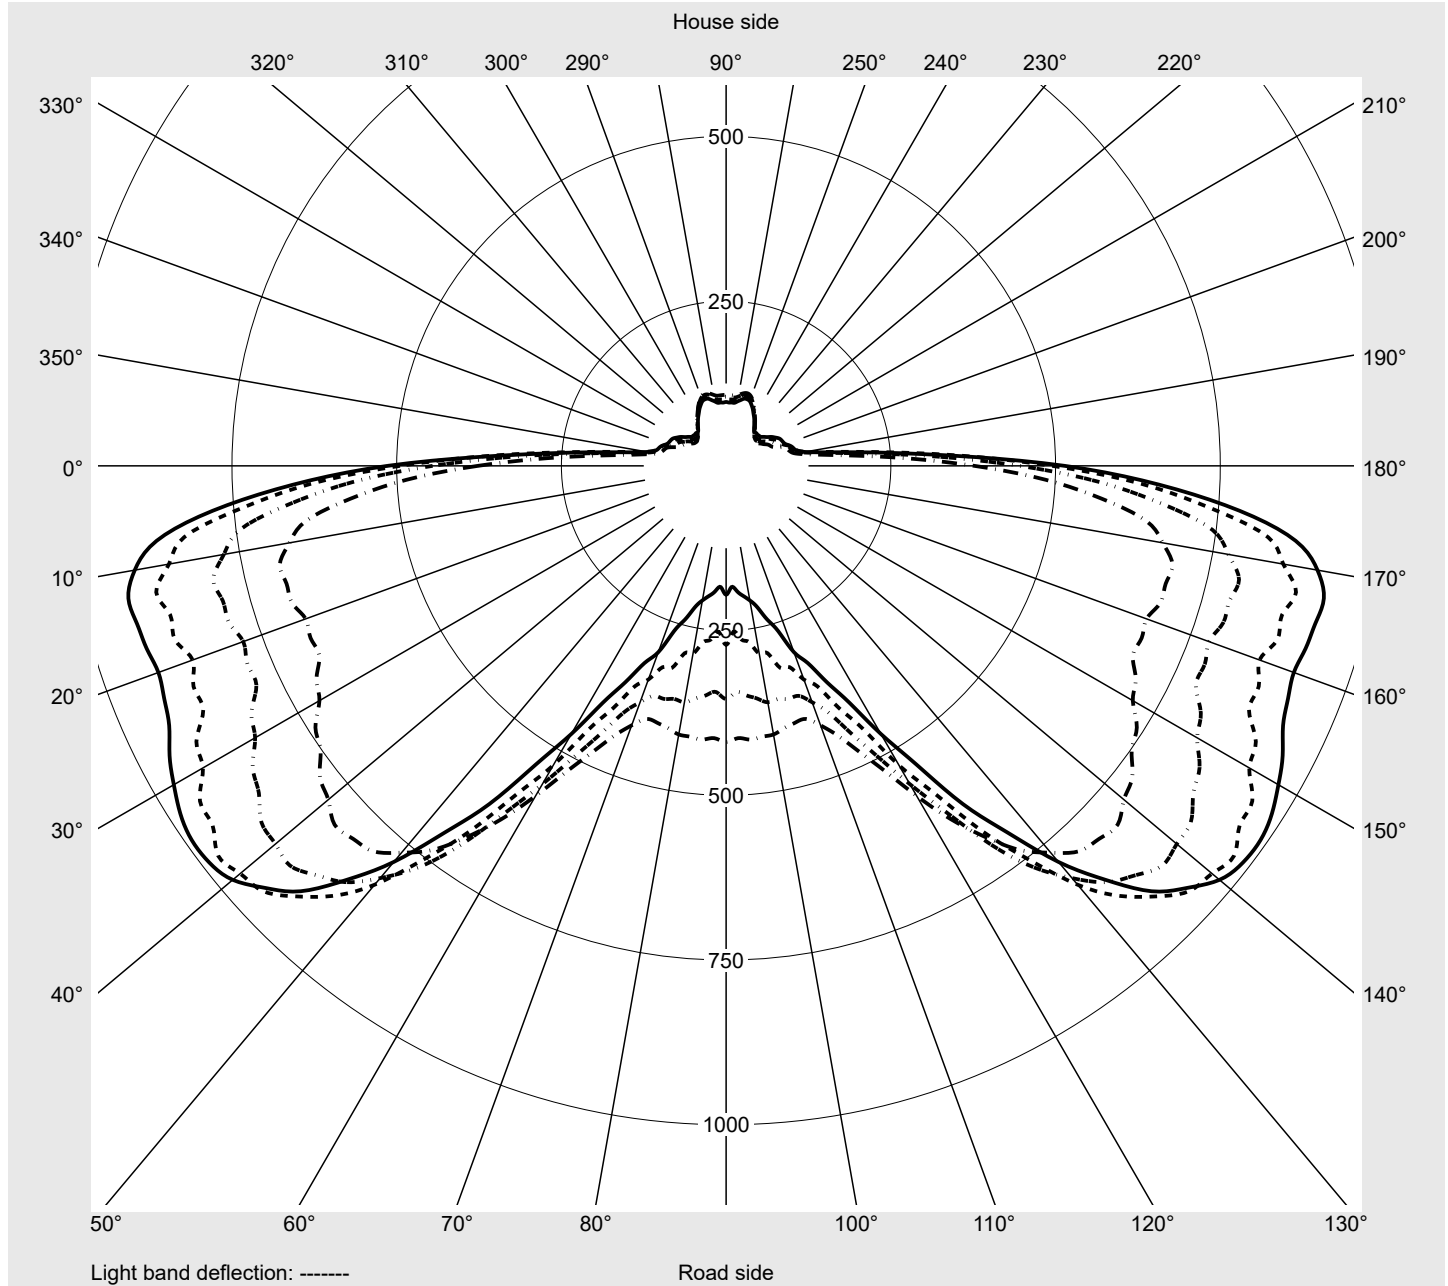

Photometric test report

Family Streetlight 21 micro easy LED	Order number: 5XE5H47N08CB EAN: 4058352897188	LP number 59066_814
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C- planes	0,0° 180,0°	2,5° 177,5°	5,0° 175,0°	7,5° 172,5°	10,0° 170,0°	12,5° 167,5°	15,0° 165,0°	17,5° 162,5°	20,0° 160,0°	22,5° 157,5°	25,0° 155,0°	27,5° 152,5°	30,0° 150,0°	32,5° 147,5°	35,0° 145,0°
γ	Luminous intensity in cd/klm														
0,0°	231.6	231.6	231.6	231.6	231.6	231.6	231.6	231.6	231.6	231.6	231.6	231.6	231.6	231.6	231.6
2,5°	230.8	232.1	233.5	235.0	236.4	238.0	239.2	240.8	242.2	243.7	244.7	246.0	247.0	248.4	249.3
5,0°	229.3	232.1	235.0	237.8	240.5	243.5	246.0	248.8	251.2	253.8	255.7	258.0	259.7	261.9	263.5
7,5°	227.0	231.2	235.4	239.5	243.3	247.2	250.8	254.3	257.4	260.6	263.2	265.8	268.0	270.2	272.1
10,0°	224.1	229.7	235.1	240.2	244.8	249.6	253.9	257.8	261.5	264.7	267.4	269.7	272.0	273.9	275.3
12,5°	220.8	227.4	233.9	239.8	245.2	250.5	255.1	259.2	262.7	265.7	268.2	270.0	271.5	272.2	272.9
15,0°	216.3	223.7	231.1	237.8	243.7	249.2	254.1	258.2	261.5	263.8	265.7	266.4	266.8	266.1	265.4
17,5°	211.1	219.7	227.9	235.1	241.3	247.0	251.9	255.6	258.4	259.9	260.5	260.0	258.9	256.8	254.3
20,0°	206.0	215.3	224.3	232.1	238.6	244.3	249.2	252.2	254.3	254.4	254.0	251.4	249.2	244.8	241.1
22,5°	200.8	211.2	221.0	229.4	236.2	241.9	246.2	248.6	249.4	248.2	246.1	242.2	237.9	232.5	227.1
25,0°	195.8	207.2	218.1	226.9	234.0	239.6	243.3	244.7	244.4	241.7	238.3	232.4	227.1	220.2	214.2
27,5°	190.9	203.6	215.3	225.0	232.4	237.9	240.9	241.5	239.8	235.9	230.6	223.8	216.8	209.7	203.2
30,0°	186.8	200.6	213.2	223.7	231.5	237.0	239.4	238.8	235.9	230.4	223.9	216.1	208.4	201.0	194.9
32,5°	182.5	197.3	211.0	222.2	230.5	235.8	237.5	236.0	232.1	225.4	217.9	209.1	201.4	194.1	188.7
35,0°	177.6	193.9	208.6	220.8	229.5	234.6	235.6	233.2	228.2	220.8	212.4	203.4	195.6	189.1	184.4
37,5°	173.5	191.2	207.1	220.1	228.6	233.4	234.1	231.1	225.0	216.7	207.7	198.7	191.0	185.4	182.5
40,0°	169.1	188.4	205.3	218.3	227.6	232.7	233.2	229.4	222.7	214.0	204.7	196.0	189.0	185.2	184.7
42,5°	164.0	184.7	202.5	217.7	227.6	233.1	233.4	229.1	221.7	212.6	203.4	195.4	190.3	189.1	192.0
45,0°	159.1	180.8	200.1	216.8	227.3	232.5	231.9	226.5	218.1	208.1	198.9	191.2	187.9	188.7	194.7
46,0°	157.8	179.9	200.1	217.5	228.1	233.2	232.3	226.3	217.0	206.6	197.0	189.7	186.7	188.6	195.5
47,0°	156.7	179.5	200.9	218.9	230.0	235.2	233.9	227.5	217.7	206.9	197.3	190.6	188.6	192.0	200.3
48,0°	156.1	179.8	202.1	221.0	232.4	237.9	236.5	229.8	219.7	209.2	199.4	193.6	192.4	197.4	207.1
49,0°	155.6	180.5	204.0	224.2	235.9	242.0	239.9	233.7	223.2	212.9	202.9	198.6	198.0	205.1	215.2
50,0°	155.4	181.5	206.6	227.9	240.4	246.6	244.9	238.4	227.9	217.4	208.6	204.7	205.9	213.5	225.4
51,0°	155.6	183.4	210.0	232.5	245.5	252.1	250.6	244.1	233.8	223.6	215.5	212.7	215.0	223.6	236.0
52,0°	156.5	186.4	214.6	238.5	252.7	259.8	258.3	251.4	241.1	231.7	224.6	222.9	226.3	235.7	248.7
53,0°	158.2	190.2	220.0	245.5	260.8	268.3	266.7	259.9	249.5	240.4	233.8	233.0	237.2	247.0	259.7
54,0°	160.8	195.0	227.2	254.3	270.6	278.7	276.8	269.9	259.3	250.3	244.2	244.0	248.1	257.9	270.2
55,0°	165.0	202.0	236.7	266.3	283.7	292.2	290.2	283.0	272.0	262.5	256.4	256.1	260.8	270.5	281.8
56,0°	170.4	210.7	248.2	280.4	298.7	307.9	305.3	298.2	286.1	276.2	269.4	269.7	273.9	283.6	294.0
57,0°	177.7	223.0	262.3	299.8	316.8	329.5	324.0	318.7	302.6	295.2	285.9	289.1	290.8	303.2	311.4
58,0°	188.5	238.1	282.9	322.2	342.1	354.2	349.7	342.4	327.5	318.8	311.1	314.1	318.0	331.0	340.5
59,0°	202.8	259.2	308.4	353.4	373.8	388.0	382.3	376.1	359.5	353.2	345.2	351.7	355.6	371.7	381.9
60,0°	226.7	292.6	348.5	400.9	422.6	439.3	432.7	428.0	410.5	408.2	401.1	412.1	417.2	437.5	446.9
61,0°	258.9	337.3	402.8	461.1	485.1	504.4	496.9	495.0	478.9	479.9	474.0	489.2	495.1	517.8	526.5
62,0°	305.9	397.9	474.0	538.2	566.1	585.7	580.0	579.3	566.8	569.4	566.9	583.1	592.2	615.2	626.6
63,0°	376.8	485.7	572.4	643.8	673.0	693.9	690.7	691.1	679.0	682.7	681.2	701.0	712.7	739.1	751.5
64,0°	445.5	568.1	665.1	744.5	774.1	797.4	790.9	791.3	779.9	786.4	786.6	812.3	825.4	852.0	865.8
65,0°	495.0	632.1	738.6	829.7	858.7	886.0	873.6	877.2	861.5	875.0	875.6	906.4	916.8	946.9	951.5
66,0°	513.8	658.5	782.3	871.9	911.4	929.3	925.7	922.2	917.0	923.1	932.7	952.3	967.9	982.2	990.2
67,0°	508.5	661.1	795.9	889.2	934.5	951.1	947.5	940.1	933.8	932.2	938.8	945.2	958.1	960.7	964.9
68,0°	466.0	617.4	764.5	863.0	925.7	939.0	938.7	922.0	913.7	896.4	897.6	890.7	899.1	886.6	886.2
69,0°	371.7	497.6	641.9	733.7	818.0	835.7	853.6	833.8	831.3	805.0	808.8	792.2	799.4	776.0	771.5
70,0°	249.4	329.2	462.6	512.5	616.1	619.2	684.6	658.9	685.4	649.9	668.6	640.4	659.0	623.9	631.0
71,0°	120.6	165.3	231.1	264.3	329.8	356.3	414.7	435.7	481.5	475.9	492.1	480.1	491.4	471.4	468.5
72,0°	57.4	71.1	94.1	106.4	137.1	155.7	195.8	224.8	285.6	304.7	329.0	324.3	338.2	325.6	326.9

Photometric test report

Family Streetlight 21 micro easy LED	Order number: 5XE5H47N08CB EAN: 4058352897188	LP number 59066_814
Table of values for luminous intensities		Maximum luminous intensity

siteco

C-planes	37,5° 142,5°	40,0° 140,0°	42,5° 137,5°	45,0° 135,0°	47,5° 132,5°	50,0° 130,0°	52,5° 127,5°	55,0° 125,0°	57,5° 122,5°	60,0° 120,0°	62,5° 117,5°	65,0° 115,0°	67,5° 112,5°	70,0° 110,0°	72,5° 107,5°
γ	Luminous intensity in cd/klm														
0,0°	231.6	231.6	231.6	231.6	231.6	231.6	231.6	231.6	231.6	231.6	231.6	231.6	231.6	231.6	231.6
2,5°	250.6	251.2	252.4	253.0	254.3	254.8	255.7	256.1	257.0	257.4	258.3	258.7	259.6	259.8	260.5
5,0°	265.5	266.7	268.4	269.4	271.0	271.9	273.4	273.9	275.2	275.7	277.0	277.3	278.4	278.6	279.4
7,5°	273.9	275.4	276.8	277.9	279.1	280.0	280.8	281.5	282.1	282.5	283.0	283.5	283.7	284.0	284.2
10,0°	276.5	277.5	278.1	278.5	278.5	278.7	278.5	278.5	277.9	277.8	277.1	277.1	276.5	276.5	275.8
12,5°	272.7	272.7	271.5	271.0	269.2	268.5	266.3	265.5	262.9	262.2	259.5	259.0	256.6	256.4	254.1
15,0°	263.6	262.1	259.2	257.0	253.5	250.9	247.5	245.1	241.5	239.2	235.9	234.3	231.3	230.0	227.6
17,5°	250.9	247.5	243.2	239.5	235.1	231.3	227.1	223.6	219.8	216.9	213.7	211.6	209.1	207.4	205.7
20,0°	235.6	231.8	225.5	221.6	215.9	212.5	207.7	205.2	201.3	199.5	196.7	195.5	193.5	193.1	191.7
22,5°	221.1	215.7	209.8	205.4	200.9	197.8	194.8	192.9	191.1	190.2	189.4	189.2	189.2	189.4	189.8
25,0°	207.5	202.8	197.5	194.4	191.1	189.7	188.6	188.6	189.4	190.0	191.6	192.5	194.4	195.2	197.3
27,5°	197.7	193.5	190.0	188.3	187.7	188.4	190.0	192.4	195.5	198.5	201.5	203.9	206.2	207.7	209.5
30,0°	190.2	187.3	185.7	186.1	188.0	191.3	195.8	200.9	206.5	211.1	215.5	217.9	220.1	221.0	222.6
32,5°	185.1	183.8	184.2	186.7	191.2	197.3	204.6	211.8	219.6	225.3	230.7	233.3	235.9	236.5	238.9
35,0°	182.5	182.9	185.7	190.5	197.4	205.9	215.5	224.8	234.4	242.3	249.2	253.7	257.2	259.8	263.6
37,5°	182.7	185.8	191.6	199.1	209.1	220.7	233.2	245.6	258.3	268.5	277.7	283.9	289.9	294.3	299.7
40,0°	187.9	194.3	203.9	215.0	229.1	243.5	259.2	274.0	289.7	301.3	312.2	318.8	325.4	328.9	334.1
42,5°	199.3	210.1	224.3	239.2	256.1	273.1	289.7	304.7	319.3	330.8	340.2	346.9	351.7	354.8	358.5
45,0°	204.5	217.9	233.2	249.0	265.0	280.5	294.0	306.4	317.4	327.0	334.8	340.6	344.7	348.4	352.6
46,0°	206.5	220.9	237.3	253.7	269.6	284.3	296.6	307.8	317.5	325.9	333.1	338.9	343.3	347.8	353.1
47,0°	212.7	228.1	245.0	261.0	276.5	289.8	301.0	310.7	319.2	326.6	334.2	340.8	346.4	352.1	358.9
48,0°	220.9	236.3	253.2	268.7	283.5	295.6	305.5	313.6	321.4	328.4	336.6	344.1	351.5	358.4	366.8
49,0°	230.7	245.4	262.5	276.7	290.9	301.0	310.1	316.8	324.1	330.9	339.9	348.5	358.2	365.9	376.3
50,0°	240.7	256.0	271.5	285.4	297.9	307.1	314.6	320.4	327.1	334.5	344.0	354.1	364.5	374.0	385.5
51,0°	251.4	266.4	281.1	293.5	304.7	312.7	318.9	324.1	330.5	338.5	348.6	359.7	371.7	383.2	397.5
52,0°	263.7	277.7	290.8	301.8	311.4	318.2	323.3	328.0	334.7	343.1	354.5	367.8	383.9	399.7	418.6
53,0°	273.9	286.9	298.6	308.1	316.2	322.1	326.7	331.5	338.9	349.1	364.7	382.0	402.7	421.5	442.5
54,0°	283.5	295.3	306.0	314.2	320.6	325.7	330.5	336.3	347.4	362.2	382.9	403.3	427.0	448.0	468.4
55,0°	293.9	304.3	313.9	320.8	327.0	332.2	339.4	350.0	367.8	386.9	411.5	433.6	455.3	472.0	486.9
56,0°	305.8	315.2	324.4	330.5	338.2	345.8	359.1	374.9	398.3	418.2	442.5	458.6	472.7	484.1	495.5
57,0°	326.3	332.2	344.5	348.0	361.4	371.7	397.0	411.3	439.6	451.4	468.8	475.4	484.0	490.3	499.6
58,0°	355.1	362.7	375.0	381.7	400.5	418.3	444.6	461.3	478.0	482.6	488.9	489.6	490.8	493.8	501.5
59,0°	399.4	405.6	421.8	431.9	458.5	477.3	502.4	507.9	514.5	509.9	507.2	500.1	495.8	495.0	499.9
60,0°	466.4	472.7	495.5	509.7	542.1	553.6	566.0	559.6	554.3	538.4	524.6	508.9	496.8	490.4	488.2
61,0°	548.8	556.9	585.1	600.9	627.0	625.8	625.2	606.8	588.1	560.5	536.1	511.6	489.7	475.0	464.7
62,0°	648.8	661.9	690.0	699.6	708.4	696.2	680.6	650.3	616.5	577.3	539.0	501.5	470.3	452.2	441.2
63,0°	776.9	788.2	806.0	800.6	793.3	766.4	735.4	688.6	636.5	578.4	522.3	479.1	443.2	419.1	402.8
64,0°	888.9	892.8	897.9	878.6	856.9	816.8	768.4	702.3	624.6	557.9	497.0	447.2	404.8	381.9	366.0
65,0°	971.8	962.7	954.7	924.1	885.4	829.8	752.1	676.0	590.1	524.8	450.2	405.9	362.2	345.2	320.4
66,0°	988.9	977.5	948.3	913.1	852.2	784.8	701.4	626.6	537.4	470.0	405.4	362.7	324.0	301.0	263.1
67,0°	949.7	932.5	888.7	849.7	775.5	711.3	627.4	556.9	475.6	420.4	360.1	318.1	277.7	257.2	212.6
68,0°	855.2	831.2	772.5	730.8	655.3	598.9	524.2	472.3	406.6	355.2	298.2	265.8	236.2	218.4	168.6
69,0°	731.2	703.7	643.1	604.5	535.5	491.5	437.0	393.4	330.4	293.0	253.4	228.5	201.7	185.0	134.8
70,0°	577.9	565.0	499.2	476.7	415.0	393.7	332.9	307.3	263.9	243.4	207.5	190.7	164.7	152.0	105.1
71,0°	434.8	414.3	373.8	351.6	310.3	282.6	253.4	237.7	210.9	192.0	167.9	152.1	133.3	121.0	84.2
72,0°	303.8	292.7	265.7	246.0	214.4	207.7	189.9	180.5	162.0	149.7	132.0	120.1	105.5	96.4	69.2

Photometric test report

Family Streetlight 21 micro easy LED	Order number: 5XE5H47N08CB EAN: 4058352897188	LP number 59066_814
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C- planes	75,0° 105,0°	77,5° 102,5°	80,0° 100,0°	82,5° 97,5°	85,0° 95,0°	87,5° 92,5°	90,0°	182,5° 357,5°	185,0° 355,0°	187,5° 352,5°	190,0° 350,0°	192,5° 347,5°	195,0° 345,0°	197,5° 342,5°	200,0° 340,0°
γ	Luminous intensity in cd/klm														
0,0°	231.6	231.6	231.6	231.6	231.6	231.6	231.6	231.6	231.6	231.6	231.6	231.6	231.6	231.6	231.6
2,5°	260.4	260.9	260.8	261.4	261.2	261.6	261.3	229.1	227.6	225.9	224.4	222.7	221.6	219.9	218.8
5,0°	279.4	280.0	280.0	280.6	280.5	281.0	280.5	225.9	222.7	219.1	216.1	212.4	209.6	205.9	203.2
7,5°	284.2	284.2	284.5	284.5	284.7	284.7	284.9	221.9	216.9	211.7	206.8	201.5	196.9	191.7	187.1
10,0°	275.8	275.1	275.4	274.9	275.4	274.9	275.3	217.6	211.1	204.2	197.7	190.9	184.8	178.2	172.3
12,5°	254.3	252.3	253.2	251.7	253.1	251.8	253.1	212.7	204.8	196.5	188.9	180.5	173.5	165.6	159.3
15,0°	227.1	225.2	225.0	223.7	224.2	223.3	224.0	206.7	197.4	188.0	179.0	169.8	162.0	153.9	147.0
17,5°	204.7	203.5	203.0	202.2	202.2	201.8	202.0	200.6	190.0	179.6	169.5	159.8	151.4	143.4	136.9
20,0°	191.7	191.0	191.2	190.6	191.0	190.7	191.1	193.9	182.7	170.6	160.5	149.8	141.9	134.0	128.7
22,5°	190.2	191.0	191.7	192.5	193.0	193.5	193.6	187.7	175.0	162.5	151.4	141.0	133.0	126.4	121.7
25,0°	198.2	200.7	201.9	204.3	204.9	206.9	206.2	181.4	167.9	154.6	143.4	133.2	126.1	120.0	116.6
27,5°	211.3	214.1	217.1	219.8	221.7	222.7	222.7	175.7	161.0	147.6	136.1	126.7	120.0	115.4	112.9
30,0°	224.3	227.9	232.0	235.6	236.6	235.9	235.1	170.3	154.9	141.0	129.6	120.7	114.9	111.3	109.6
32,5°	240.8	246.6	251.4	255.8	254.7	253.5	252.0	164.7	148.5	134.3	123.3	115.0	110.3	107.5	106.2
35,0°	268.7	276.4	281.5	283.5	282.0	281.5	281.2	158.8	141.7	127.7	117.1	110.0	106.1	104.1	103.1
37,5°	304.7	311.0	314.1	315.7	315.8	317.2	317.5	153.0	135.2	121.2	111.2	105.0	102.3	100.8	100.0
40,0°	337.5	343.5	346.4	349.2	349.3	351.9	352.2	147.2	128.9	114.9	105.8	100.6	98.7	97.6	97.0
42,5°	362.4	367.0	370.2	372.4	373.5	375.5	376.2	140.9	122.3	108.9	100.8	96.8	95.4	94.4	93.6
45,0°	358.7	364.3	369.8	373.7	376.8	380.1	381.0	135.0	115.9	103.1	96.1	93.3	92.2	91.3	90.5
46,0°	360.7	368.3	375.1	380.1	383.5	387.2	388.4	133.0	113.9	101.2	94.6	92.0	91.1	90.0	89.3
47,0°	367.5	377.2	385.0	391.0	395.0	399.0	400.4	131.3	111.8	99.2	93.1	90.7	89.6	88.7	88.0
48,0°	375.6	387.1	395.5	402.4	406.0	410.7	411.8	129.8	110.0	97.6	91.9	89.5	88.6	87.5	86.9
49,0°	384.8	397.9	406.2	414.8	418.0	424.4	424.5	128.3	108.4	96.0	90.6	88.2	87.5	86.4	85.7
50,0°	396.0	410.0	420.8	430.9	436.2	442.8	443.7	127.4	106.8	94.6	89.3	87.2	86.4	85.4	84.6
51,0°	411.8	428.8	442.2	454.1	461.0	467.8	469.2	126.7	105.6	93.4	88.2	86.2	85.4	84.4	83.6
52,0°	435.8	454.7	468.9	482.4	489.8	498.2	499.3	126.4	104.5	92.2	87.3	85.4	84.6	83.6	82.4
53,0°	461.4	482.3	496.6	509.6	517.3	524.9	526.7	126.5	103.7	91.4	86.4	84.7	83.7	83.0	81.2
54,0°	486.3	504.2	516.5	527.8	535.2	541.5	543.7	127.4	103.5	90.7	85.9	84.1	83.1	82.4	79.9
55,0°	502.0	517.7	528.8	538.1	545.5	551.4	553.9	128.9	103.6	90.2	85.3	83.5	82.5	81.7	78.4
56,0°	509.0	524.3	535.7	545.5	553.6	559.9	562.2	131.6	104.4	90.1	85.0	83.0	82.2	81.4	76.7
57,0°	513.0	530.3	542.0	552.3	560.1	566.9	568.6	135.6	106.0	90.7	85.1	83.0	82.1	81.0	75.1
58,0°	516.1	532.7	545.9	556.0	564.9	570.9	573.3	141.7	109.0	92.0	85.5	83.4	82.3	81.1	73.4
59,0°	513.9	528.3	541.3	549.1	558.4	562.3	566.7	150.7	113.6	94.1	86.6	84.0	82.9	81.4	72.4
60,0°	498.1	506.1	517.8	523.8	534.2	538.2	543.3	166.2	121.4	98.4	88.8	85.7	84.6	82.5	72.4
61,0°	471.3	480.1	492.8	500.0	510.2	512.5	518.2	187.6	133.2	104.9	92.4	88.3	86.8	84.4	73.8
62,0°	444.4	449.1	458.1	462.5	469.4	469.7	475.2	219.1	151.6	114.8	98.2	92.8	90.7	87.5	77.2
63,0°	403.7	407.6	414.0	414.7	417.1	413.7	419.1	270.0	182.5	132.1	107.6	99.9	96.7	92.7	82.9
64,0°	366.1	362.5	364.3	356.0	349.6	343.7	353.8	321.3	216.4	151.0	117.3	106.4	102.2	97.8	88.9
65,0°	317.4	291.4	289.3	270.1	264.4	252.1	271.8	355.7	238.4	162.6	123.2	109.7	105.4	101.0	93.7
66,0°	241.7	220.2	207.4	199.1	191.1	184.2	195.6	348.6	231.5	157.6	121.4	108.9	105.4	101.7	96.3
67,0°	175.0	157.4	148.3	141.7	137.2	131.1	138.8	316.8	193.3	134.1	110.9	102.8	101.1	98.3	95.2
68,0°	117.8	104.2	99.6	95.9	93.4	89.4	95.1	258.3	142.7	99.1	89.6	86.6	89.3	87.2	87.0
69,0°	82.1	70.5	67.8	64.9	63.7	62.0	65.3	185.3	97.0	71.2	68.1	67.2	71.2	71.7	73.1
70,0°	58.7	49.5	49.0	46.5	46.8	44.7	48.0	111.0	62.7	49.7	50.0	48.0	52.3	52.4	56.6
71,0°	45.2	40.1	39.7	39.0	38.8	38.4	38.6	60.9	42.5	38.9	38.8	38.7	39.9	40.3	42.3
72,0°	40.2	36.8	36.7	35.7	35.4	34.9	35.2	39.6	35.4	33.9	34.1	34.4	35.0	34.9	35.7

Photometric test report

Family Streetlight 21 micro easy LED	Order number: 5XE5H47N08CB EAN: 4058352897188	LP number 59066_814
Table of values for luminous intensities		Maximum luminous intensity

siteco

C- planes	202,5° 337,5°	205,0° 335,0°	207,5° 332,5°	210,0° 330,0°	212,5° 327,5°	215,0° 325,0°	217,5° 322,5°	220,0° 320,0°	222,5° 317,5°	225,0° 315,0°	227,5° 312,5°	230,0° 310,0°	232,5° 307,5°	235,0° 305,0°	237,5° 302,5°
γ	Luminous intensity in cd/klm														
0,0°	231.6	231.6	231.6	231.6	231.6	231.6	231.6	231.6	231.6	231.6	231.6	231.6	231.6	231.6	231.6
2,5°	216.9	215.6	213.9	212.7	211.1	210.0	208.2	207.3	205.6	204.8	203.2	202.6	201.1	200.6	199.2
5,0°	199.3	196.5	192.8	190.4	186.8	184.7	181.1	179.2	176.0	174.3	171.1	169.9	167.1	165.9	163.4
7,5°	182.0	177.4	172.5	168.6	164.1	160.5	156.4	153.4	149.9	147.3	144.2	142.3	139.5	138.1	135.8
10,0°	165.9	160.5	154.8	150.1	145.3	141.4	137.3	134.5	131.1	128.9	126.3	124.6	122.8	121.6	120.0
12,5°	152.1	146.7	140.8	136.6	132.2	129.1	125.7	123.6	121.2	119.7	118.1	117.3	116.2	115.7	114.9
15,0°	140.4	135.2	130.6	127.1	123.8	121.6	119.7	118.5	117.5	116.7	115.8	114.9	114.1	113.3	112.5
17,5°	131.4	127.0	123.6	121.2	119.5	118.4	117.4	116.6	115.6	114.7	113.6	112.7	111.7	110.7	109.8
20,0°	123.7	120.9	118.4	117.4	116.5	115.8	114.7	113.9	112.8	112.1	110.9	110.2	109.2	108.4	107.5
22,5°	118.1	116.4	115.2	114.3	113.3	112.5	111.6	110.8	110.0	109.3	108.4	107.8	107.1	106.5	105.8
25,0°	114.4	113.2	112.0	111.3	110.1	109.4	108.6	108.0	107.1	106.8	106.2	105.8	105.2	104.9	104.2
27,5°	111.3	110.3	109.3	108.3	107.4	106.5	105.9	105.2	104.1	103.2	102.2	101.1	99.8	97.6	93.5
30,0°	108.2	107.5	106.3	105.5	104.8	104.2	102.6	99.3	96.3	94.4	92.4	90.9	88.8	87.0	86.2
32,5°	105.1	104.4	103.5	102.8	101.7	99.5	92.6	88.5	86.7	86.2	85.5	85.3	85.1	85.3	85.3
35,0°	102.2	101.2	99.9	98.0	95.0	88.5	84.3	84.0	83.7	83.7	83.8	84.0	84.1	83.8	83.3
37,5°	99.1	96.1	91.9	88.5	84.8	82.2	81.9	82.0	82.1	82.2	82.2	81.9	81.5	81.2	80.9
40,0°	95.6	87.2	82.1	80.5	79.7	79.7	79.8	80.2	80.3	80.1	79.7	79.5	79.1	78.9	78.5
42,5°	90.5	79.2	77.1	77.0	76.9	77.3	77.6	77.8	77.7	77.7	77.5	77.5	77.3	77.2	77.1
45,0°	85.6	74.9	74.0	74.0	74.3	74.7	75.0	75.3	75.4	75.7	75.9	76.0	76.0	76.0	76.2
46,0°	83.7	73.6	72.8	73.0	73.3	73.7	73.9	74.4	74.6	75.0	75.3	75.6	75.7	75.7	76.0
47,0°	81.8	72.1	71.7	71.9	72.1	72.5	72.8	73.3	73.7	74.3	74.6	75.0	75.2	75.6	75.8
48,0°	79.9	70.8	70.5	70.8	71.0	71.4	71.9	72.4	73.0	73.6	74.1	74.6	75.0	75.3	75.9
49,0°	77.8	69.7	69.4	69.8	69.8	70.5	70.7	71.4	72.0	72.8	73.4	74.1	74.7	75.3	75.9
50,0°	75.8	68.2	68.2	68.6	68.6	69.3	69.5	70.4	71.1	71.9	72.7	73.6	74.4	75.1	75.9
51,0°	73.8	66.9	67.1	67.4	67.5	68.1	68.6	69.4	70.2	71.2	72.1	73.1	73.9	75.0	76.0
52,0°	71.7	65.6	65.9	66.2	66.3	66.8	67.5	68.4	69.2	70.2	71.3	72.5	73.7	74.7	76.2
53,0°	69.7	64.5	64.7	65.0	65.2	65.8	66.5	67.4	68.4	69.5	70.6	71.9	73.4	74.7	76.4
54,0°	67.8	63.4	63.5	63.7	64.0	64.7	65.5	66.5	67.5	68.7	70.0	71.4	73.2	74.9	76.9
55,0°	65.8	62.1	62.2	62.4	62.7	63.5	64.2	65.3	66.5	67.8	69.2	71.0	73.0	75.0	77.3
56,0°	63.9	60.9	60.9	61.1	61.5	62.3	63.1	64.3	65.5	67.1	68.6	70.5	72.8	75.3	78.2
57,0°	62.0	59.8	59.6	60.0	60.3	61.3	61.8	63.3	64.3	66.1	67.9	70.1	72.6	75.4	78.9
58,0°	60.8	58.8	58.5	58.7	59.1	60.0	60.8	62.1	63.5	65.3	67.3	69.8	72.5	75.9	79.7
59,0°	60.1	58.3	57.8	57.6	57.9	58.7	59.6	61.0	62.6	64.3	66.6	69.3	72.5	76.2	80.4
60,0°	60.7	58.9	57.8	57.1	57.1	57.6	58.4	59.8	61.4	63.5	65.9	68.9	72.4	76.5	81.2
61,0°	63.4	61.1	59.5	57.7	57.0	57.0	57.5	58.7	60.3	62.6	65.3	68.5	72.3	76.6	81.6
62,0°	68.4	65.8	63.3	60.3	58.5	57.2	57.1	57.9	59.5	61.7	64.6	68.0	72.0	76.6	81.8
63,0°	75.8	73.2	70.4	65.9	62.8	59.6	58.3	57.8	59.0	60.9	63.7	67.5	71.7	76.5	82.0
64,0°	83.7	81.1	78.3	73.2	69.2	64.2	61.4	59.5	59.7	60.9	63.3	66.8	71.2	76.2	81.5
65,0°	90.3	88.1	86.0	80.4	76.5	70.1	66.8	63.0	62.7	62.6	64.2	66.3	70.5	75.6	80.8
66,0°	93.8	92.5	90.3	86.0	81.7	76.2	72.3	68.6	67.8	67.2	67.5	66.8	69.7	74.5	79.6
67,0°	93.7	93.4	91.5	88.1	84.0	79.2	76.0	73.6	73.6	73.8	73.9	69.4	69.4	73.2	78.0
68,0°	86.4	88.2	87.5	86.2	82.7	79.6	77.3	76.9	79.8	82.3	83.4	75.7	70.4	71.5	75.7
69,0°	73.6	76.6	77.2	78.6	76.4	75.6	74.9	77.8	84.4	89.9	91.4	82.7	73.1	70.4	73.0
70,0°	56.5	61.7	62.4	66.5	65.0	67.1	67.6	74.9	85.5	94.5	94.6	86.4	76.3	69.7	69.5
71,0°	43.3	46.4	48.7	52.5	53.6	55.7	57.8	66.7	80.5	91.6	90.7	83.8	75.0	68.7	65.8
72,0°	36.3	38.0	39.6	42.3	43.9	45.8	47.4	55.3	68.1	79.7	80.4	76.2	69.1	64.5	61.1

Photometric test report

Family Streetlight 21 micro easy LED	Order number: 5XE5H47N08CB EAN: 4058352897188	LP number 59066_814
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	240,0° 300,0°	242,5° 297,5°	245,0° 295,0°	247,5° 292,5°	250,0° 290,0°	252,5° 287,5°	255,0° 285,0°	257,5° 282,5°	260,0° 280,0°	262,5° 277,5°	265,0° 275,0°	267,5° 272,5°	270,0°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm													Luminous flux in lm/klm	
0,0°	231.6	231.6	231.6	231.6	231.6	231.6	231.6	231.6	231.6	231.6	231.6	231.6	231.6	0.3	0.3
2,5°	199.0	197.7	197.6	196.3	196.2	195.2	195.4	194.4	194.6	193.9	194.4	193.7	194.2	2.7	3.1
5,0°	162.6	160.2	159.8	157.6	157.4	155.7	155.7	154.3	154.3	153.4	153.9	152.8	153.7	5.3	8.4
7,5°	134.6	132.8	132.0	130.5	129.8	128.7	128.4	127.4	127.4	126.7	126.8	126.3	126.5	7.7	16.1
10,0°	119.2	118.1	117.7	116.8	116.6	116.1	115.9	115.7	115.5	115.3	115.3	115.2	115.4	9.8	25.9
12,5°	114.6	113.9	113.6	113.1	112.9	112.4	112.3	111.9	111.9	111.6	111.7	111.5	111.6	11.7	37.6
15,0°	111.8	110.9	110.3	109.5	109.3	108.7	108.4	107.9	107.7	107.5	107.4	107.3	107.4	13.3	50.9
17,5°	108.9	108.0	107.3	106.5	106.0	105.5	105.1	104.7	104.5	104.3	104.2	103.9	103.9	14.7	65.6
20,0°	106.8	105.8	105.1	104.4	103.9	103.4	103.1	102.6	102.5	102.2	102.1	101.9	101.9	16.0	81.5
22,5°	105.1	104.5	103.9	103.0	102.1	101.3	100.9	100.6	100.7	100.6	100.8	100.6	100.8	17.3	98.8
25,0°	103.1	99.7	96.7	92.5	91.6	90.1	90.5	89.5	90.2	89.3	90.1	89.2	90.1	18.6	117.5
27,5°	89.9	87.4	86.2	85.4	84.8	84.3	83.8	83.5	83.3	83.0	82.8	82.8	82.8	20.1	137.6
30,0°	85.9	85.5	85.4	84.9	84.6	84.1	83.5	83.0	82.5	82.2	81.8	81.6	81.6	21.7	159.3
32,5°	85.2	84.7	84.1	83.3	82.5	81.8	81.3	80.5	80.3	79.8	79.7	79.4	79.4	23.4	182.7
35,0°	82.8	82.3	81.8	81.1	80.4	79.6	79.0	78.4	77.9	77.6	77.2	77.0	76.9	25.4	208.1
37,5°	80.6	80.0	79.6	79.1	78.6	78.0	77.6	77.0	76.7	76.2	75.9	75.6	75.4	27.8	235.9
40,0°	78.4	78.3	78.0	77.6	77.3	77.1	76.9	76.5	76.0	75.6	75.2	74.7	74.7	30.5	266.3
42,5°	77.0	76.9	76.9	76.8	76.9	76.9	76.9	76.8	76.4	75.9	75.3	74.7	74.6	33.2	299.5
45,0°	76.4	76.6	76.9	77.1	77.3	77.6	77.8	77.9	77.7	77.1	76.6	75.9	75.7	24.0	323.5
46,0°	76.4	76.7	77.1	77.3	77.8	78.0	78.5	78.6	78.5	78.0	77.6	77.0	76.9	14.1	337.5
47,0°	76.4	76.9	77.5	78.0	78.5	79.0	79.5	79.8	79.8	79.5	79.0	78.5	78.3	14.5	352.0
48,0°	76.4	77.1	77.8	78.6	79.5	80.2	80.8	81.0	81.1	81.0	80.5	80.3	80.2	14.9	366.9
49,0°	76.6	77.5	78.4	79.6	80.5	81.7	82.3	83.0	82.9	83.0	82.5	82.5	82.1	15.4	382.3
50,0°	76.9	77.9	79.2	80.7	82.1	83.6	84.7	85.4	85.4	85.4	85.1	85.1	84.9	15.9	398.2
51,0°	77.2	78.5	80.2	82.1	84.0	85.9	87.2	88.1	88.2	88.2	88.0	88.2	88.0	16.6	414.7
52,0°	77.7	79.5	81.7	84.2	86.6	89.0	90.7	91.8	91.6	91.6	91.6	91.9	91.8	17.3	432.1
53,0°	78.4	80.7	83.4	86.3	89.3	92.2	94.3	95.2	95.1	95.1	95.2	95.6	95.6	18.1	450.2
54,0°	79.2	82.0	85.3	88.9	92.6	95.9	97.9	98.7	98.5	98.5	98.7	99.2	99.1	18.9	469.1
55,0°	80.2	83.7	87.6	92.1	96.3	100.0	102.2	102.6	102.2	102.1	102.3	102.9	102.9	19.8	488.9
56,0°	81.4	85.3	89.9	95.2	99.8	103.9	105.8	106.2	105.2	105.1	105.4	106.1	106.2	20.7	509.7
57,0°	82.7	87.2	92.2	98.3	103.1	107.7	109.2	109.4	108.0	107.7	107.9	108.7	108.6	21.8	531.5
58,0°	84.0	88.8	94.7	101.0	106.3	110.7	112.2	111.9	110.3	109.6	109.7	110.5	110.7	23.1	554.6
59,0°	85.1	90.5	96.6	103.4	108.9	113.2	114.5	113.8	111.8	110.8	110.9	111.6	111.9	24.7	579.3
60,0°	86.2	91.9	98.4	105.2	110.9	115.1	116.0	114.8	112.6	111.3	111.3	112.0	112.1	26.6	605.9
61,0°	86.9	92.7	99.5	106.2	112.1	115.8	116.5	114.8	112.3	110.9	110.9	111.4	111.6	28.9	634.8
62,0°	87.4	93.4	99.9	106.7	112.3	115.7	116.0	114.1	111.3	109.5	109.6	110.1	110.2	31.5	666.3
63,0°	87.5	93.4	99.9	106.2	111.5	114.5	114.5	112.2	109.4	107.4	107.4	107.6	107.9	34.6	700.8
64,0°	87.0	93.0	99.2	105.1	110.1	112.5	112.2	109.7	106.8	104.7	104.5	104.8	105.0	37.2	738.0
65,0°	86.3	91.8	97.8	103.0	107.9	109.4	109.3	106.2	103.5	100.9	101.1	100.9	101.7	38.6	776.6
66,0°	84.9	89.9	95.6	100.4	104.7	106.0	105.5	102.3	99.3	96.5	96.5	96.1	97.0	38.4	815.0
67,0°	82.9	87.5	92.7	97.1	101.1	101.6	100.6	96.3	92.6	88.2	87.9	86.7	87.7	36.9	852.0
68,0°	80.3	84.3	88.9	92.2	94.8	93.1	90.9	86.7	84.1	80.5	80.2	79.6	80.2	33.8	885.8
69,0°	77.1	80.4	83.8	84.6	86.9	85.4	84.3	80.8	77.6	74.7	74.5	73.7	74.3	29.4	915.2
70,0°	73.1	74.4	77.1	78.2	79.8	78.6	77.5	71.9	69.9	65.3	65.4	63.4	64.6	23.5	938.6
71,0°	67.4	68.7	70.6	71.4	71.9	69.3	67.3	63.6	61.4	57.9	57.4	57.0	57.5	17.0	955.6
72,0°	61.8	62.6	63.5	63.4	63.5	62.4	60.1	57.0	54.0	50.6	50.0	49.2	50.1	11.7	967.4

Photometric test report

Family Streetlight 21 micro easy LED	Order number: 5XE5H47N08CB EAN: 4058352897188	LP number 59066_814
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C- planes	0,0° 180,0°	2,5° 177,5°	5,0° 175,0°	7,5° 172,5°	10,0° 170,0°	12,5° 167,5°	15,0° 165,0°	17,5° 162,5°	20,0° 160,0°	22,5° 157,5°	25,0° 155,0°	27,5° 152,5°	30,0° 150,0°	32,5° 147,5°	35,0° 145,0°
γ	Luminous intensity in cd/klm														
73,0°	35.2	38.4	44.0	47.9	56.3	63.4	78.3	94.3	136.6	163.2	187.0	188.9	200.9	197.3	202.2
74,0°	29.0	30.2	32.5	33.7	36.7	38.2	42.7	47.1	67.2	83.1	102.3	104.2	116.8	114.8	121.0
75,0°	25.0	25.4	26.8	27.6	29.1	29.4	31.0	31.7	38.9	45.5	55.5	56.9	63.5	63.0	66.6
76,0°	21.4	21.6	22.5	22.8	23.9	24.0	25.1	25.1	27.1	28.9	31.9	32.2	35.2	35.1	36.0
77,0°	18.6	18.6	19.3	19.2	20.1	20.2	20.9	21.1	22.2	22.6	24.0	24.1	25.4	25.3	25.9
78,0°	16.2	15.8	16.3	15.8	16.8	16.7	17.5	17.4	18.4	18.6	19.7	19.5	20.5	20.2	21.4
79,0°	13.6	13.4	13.5	13.1	13.6	13.7	14.3	14.4	15.1	15.3	16.1	16.2	16.7	16.8	17.5
80,0°	11.4	10.9	11.0	10.6	11.0	11.1	11.6	11.7	12.3	12.5	13.2	13.2	13.7	13.8	14.5
81,0°	8.8	8.2	8.4	8.2	8.4	8.5	9.0	9.1	9.6	9.8	10.3	10.3	10.8	11.1	11.6
82,0°	6.5	6.1	6.1	6.1	6.4	6.4	6.7	6.9	7.3	7.3	7.8	7.9	8.4	8.6	9.0
83,0°	4.6	4.3	4.4	4.4	4.6	4.6	5.0	5.0	5.3	5.4	5.8	5.9	6.1	6.3	6.7
84,0°	3.0	2.7	3.0	2.7	3.0	3.0	3.2	3.2	3.4	3.5	3.9	3.9	4.3	4.4	4.7
85,0°	1.9	1.9	1.9	1.9	2.0	1.9	2.0	2.0	2.2	2.2	2.5	2.5	2.7	2.7	3.0
86,0°	1.4	1.3	1.4	1.3	1.3	1.2	1.3	1.2	1.4	1.3	1.4	1.3	1.5	1.5	1.8
87,0°	1.1	1.1	1.1	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9
88,0°	0.9	0.9	0.9	0.9	0.9	0.9	0.8	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7
89,0°	0.9	0.9	0.9	0.9	0.9	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family
Streetlight 21 micro easy LED

Order number: 5XE5H47N08CB
EAN: 4058352897188

LP number
59066_814

siteco

C- planes	37,5° 142,5°	40,0° 140,0°	42,5° 137,5°	45,0° 135,0°	47,5° 132,5°	50,0° 130,0°	52,5° 127,5°	55,0° 125,0°	57,5° 122,5°	60,0° 120,0°	62,5° 117,5°	65,0° 115,0°	67,5° 112,5°	70,0° 110,0°	72,5° 107,5°
γ	Luminous intensity in cd/klm														
73,0°	190.7	183.9	152.7	136.4	133.9	142.5	133.0	128.1	117.1	109.9	98.2	90.8	80.7	74.3	56.2
74,0°	109.9	98.2	75.3	71.3	84.6	97.3	90.8	89.9	82.8	80.3	71.4	67.9	60.4	56.5	43.6
75,0°	55.6	48.5	42.3	44.5	56.6	64.5	60.4	60.8	56.4	55.5	49.2	46.5	42.5	41.7	35.7
76,0°	31.8	31.5	30.6	31.9	37.0	40.7	38.8	39.4	36.7	36.8	34.1	33.6	32.3	32.5	29.7
77,0°	25.2	25.7	25.5	26.0	27.6	29.3	28.3	28.9	27.8	28.1	26.8	27.4	27.2	27.6	25.7
78,0°	20.8	21.8	21.6	22.5	22.5	23.8	22.8	23.4	22.4	23.5	24.4	26.3	27.6	25.5	22.8
79,0°	17.4	18.1	18.3	18.8	18.9	19.5	19.2	19.3	19.7	22.2	26.1	30.2	30.9	26.0	21.1
80,0°	14.4	15.0	15.3	15.7	15.7	16.2	16.1	16.4	17.5	21.5	27.2	32.5	31.5	25.4	18.8
81,0°	11.6	11.8	12.1	12.5	12.5	13.0	13.0	13.2	14.4	18.4	23.7	28.5	27.2	22.0	15.6
82,0°	9.1	9.6	9.7	10.1	10.2	10.4	10.2	10.4	11.0	14.0	18.2	22.0	20.7	17.1	12.4
83,0°	6.9	7.3	7.3	7.7	7.6	7.9	7.8	8.0	8.3	10.1	12.2	14.5	13.8	12.5	9.3
84,0°	4.6	5.1	5.1	5.3	5.3	5.7	5.6	5.8	5.7	6.4	7.3	8.9	8.6	8.4	6.5
85,0°	3.1	3.3	3.2	3.5	3.5	3.7	3.7	3.9	3.8	4.3	4.4	5.1	5.1	5.0	4.0
86,0°	1.7	2.0	1.8	2.1	2.0	2.2	2.0	2.5	2.2	2.5	2.2	2.6	2.2	2.6	2.1
87,0°	0.9	0.9	0.9	1.1	1.1	1.2	1.2	1.3	1.2	1.3	1.2	1.3	1.2	1.3	1.2
88,0°	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.9	0.8	0.9	0.9
89,0°	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family
Streetlight 21 micro easy LED

Order number: 5XE5H47N08CB
EAN: 4058352897188

LP number
59066_814

siteco

C- planes	75,0° 105,0°	77,5° 102,5°	80,0° 100,0°	82,5° 97,5°	85,0° 95,0°	87,5° 92,5°	90,0°	182,5° 357,5°	185,0° 355,0°	187,5° 352,5°	190,0° 350,0°	192,5° 347,5°	195,0° 345,0°	197,5° 342,5°	200,0° 340,0°
γ	Luminous intensity in cd/klm														
73,0°	36.5	33.7	33.2	32.3	32.0	31.6	31.9	31.5	31.1	30.6	30.7	31.1	31.7	31.6	31.8
74,0°	33.0	30.9	30.5	29.4	29.3	28.7	29.6	27.3	27.8	27.4	27.8	28.0	28.7	28.4	28.9
75,0°	30.2	28.1	27.6	26.1	26.1	25.4	26.3	24.1	25.0	24.6	25.0	25.2	25.5	25.4	25.9
76,0°	27.1	24.6	23.7	22.6	22.4	22.0	22.5	21.3	22.0	21.5	21.9	21.9	22.2	22.5	22.8
77,0°	24.1	21.4	20.7	19.7	19.5	19.0	19.6	18.7	19.2	18.6	18.9	19.3	19.2	19.5	20.1
78,0°	21.3	18.4	18.0	16.8	16.7	16.3	16.8	16.3	16.7	15.7	16.3	16.3	16.4	16.6	17.4
79,0°	18.6	16.1	15.3	14.4	14.1	14.0	14.4	14.5	14.5	13.1	13.4	13.5	13.5	14.1	14.5
80,0°	15.8	13.7	12.8	12.1	11.8	11.9	12.1	12.4	12.1	10.6	10.9	11.0	11.1	11.6	12.1
81,0°	12.8	11.2	10.4	9.7	9.5	9.3	9.7	9.7	9.1	7.9	8.3	8.5	8.8	9.1	9.6
82,0°	10.3	9.1	8.3	7.7	7.5	7.3	7.6	7.1	6.6	5.9	6.1	6.4	6.7	7.0	7.3
83,0°	7.9	6.9	6.3	5.7	5.6	5.4	5.7	5.0	4.4	4.3	4.5	4.6	4.8	5.1	5.3
84,0°	5.7	4.7	4.4	3.9	3.8	3.7	4.0	3.0	2.8	2.8	3.0	3.1	3.2	3.3	3.4
85,0°	3.8	3.1	2.8	2.6	2.6	2.4	2.6	1.9	1.9	1.9	2.0	2.0	2.1	2.1	2.2
86,0°	2.1	1.9	1.8	1.4	1.7	1.4	1.7	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4
87,0°	1.2	1.2	0.9	0.9	0.9	0.9	0.9	0.9	1.1	1.2	1.2	1.2	1.2	1.2	1.2
88,0°	0.9	0.9	0.8	0.7	0.8	0.7	0.7	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9
89,0°	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 21 micro easy LED	Order number: 5XE5H47N08CB EAN: 4058352897188	LP number 59066_814 siteco
---	--	--------------------------------------

C- planes	202,5° 337,5°	205,0° 335,0°	207,5° 332,5°	210,0° 330,0°	212,5° 327,5°	215,0° 325,0°	217,5° 322,5°	220,0° 320,0°	222,5° 317,5°	225,0° 315,0°	227,5° 312,5°	230,0° 310,0°	232,5° 307,5°	235,0° 305,0°	237,5° 302,5°
γ	Luminous intensity in cd/klm														
73,0°	32.4	33.6	34.6	36.5	37.7	38.8	39.5	43.3	51.1	60.7	64.6	64.9	59.5	56.5	55.0
74,0°	29.3	30.5	31.3	32.8	33.8	35.2	35.6	37.3	39.9	46.0	50.4	52.9	50.3	49.4	49.0
75,0°	26.3	27.3	28.1	29.6	30.5	31.9	32.4	33.7	34.9	37.7	40.0	42.8	42.6	43.5	43.4
76,0°	23.1	24.0	24.7	26.1	26.8	28.1	28.6	29.8	30.6	32.3	33.7	35.6	36.5	37.7	38.2
77,0°	20.1	21.2	21.9	23.1	23.7	24.7	25.2	26.3	26.8	28.5	29.7	31.2	31.8	33.2	33.2
78,0°	17.3	18.4	18.7	20.1	20.1	21.3	21.2	22.6	22.9	24.7	25.1	26.8	27.1	28.5	28.0
79,0°	14.8	15.6	16.1	16.8	16.9	17.6	18.0	19.0	19.5	20.7	21.3	22.6	22.9	23.7	23.8
80,0°	12.4	13.1	13.6	13.8	13.8	14.3	14.8	15.7	16.2	17.1	17.7	18.7	18.9	19.6	19.6
81,0°	9.8	10.3	10.5	10.8	10.9	11.2	11.5	12.2	12.5	13.2	13.7	14.5	14.7	15.4	15.3
82,0°	7.6	7.9	8.0	8.4	8.4	8.6	8.8	9.1	9.3	10.1	10.6	11.2	11.6	11.9	11.8
83,0°	5.4	5.8	5.8	6.0	6.0	6.3	6.3	6.6	6.7	7.3	7.6	8.0	8.3	8.6	8.8
84,0°	3.4	3.8	3.8	3.9	3.9	4.1	4.1	4.4	4.4	4.7	4.8	5.2	5.2	5.7	5.7
85,0°	2.2	2.4	2.4	2.5	2.5	2.6	2.5	2.7	2.6	2.8	2.8	3.2	3.1	3.4	3.3
86,0°	1.4	1.5	1.4	1.5	1.4	1.7	1.4	1.7	1.5	1.7	1.7	1.9	1.7	1.9	1.7
87,0°	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2
88,0°	0.9	0.9	0.9	0.9	0.9	0.9	1.1	1.1	0.9	1.1	1.1	0.9	0.9	0.9	0.9
89,0°	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

C- planes	240,0° 300,0°	242,5° 297,5°	245,0° 295,0°	247,5° 292,5°	250,0° 290,0°	252,5° 287,5°	255,0° 285,0°	257,5° 282,5°	260,0° 280,0°	262,5° 277,5°	265,0° 275,0°	267,5° 272,5°	270,0°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm													Luminous flux in lm/klm	
73,0°	55.3	55.3	56.5	56.4	56.6	53.7	51.4	47.7	44.6	42.3	41.2	41.2	41.9	7.8	975.2
74,0°	49.5	49.9	50.6	49.8	48.8	47.2	45.1	40.9	38.7	34.9	34.3	33.3	34.3	5.5	980.7
75,0°	44.6	44.5	44.7	43.5	43.0	40.6	37.0	34.1	31.5	28.9	27.7	27.1	27.9	4.0	984.7
76,0°	38.9	38.4	38.7	36.8	36.7	33.0	30.7	26.5	23.7	21.1	19.9	19.0	19.6	3.1	987.8
77,0°	33.7	33.5	32.9	32.2	29.8	27.3	24.6	20.8	18.0	15.0	13.6	12.3	12.5	2.6	990.3
78,0°	29.2	27.7	28.4	25.8	25.0	21.2	19.0	14.5	12.5	9.3	8.2	6.7	7.1	2.2	992.5
79,0°	24.0	23.3	23.3	21.3	19.6	16.7	14.1	10.8	8.0	5.7	3.9	3.0	3.1	1.8	994.3
80,0°	19.5	19.5	18.7	17.4	15.8	13.1	10.3	7.9	5.9	3.8	2.4	1.9	1.9	1.6	995.9
81,0°	15.8	15.3	14.9	13.4	11.8	9.6	7.9	5.9	4.0	2.8	1.7	1.4	1.4	1.2	997.1
82,0°	12.1	11.7	11.4	10.3	8.9	7.2	5.8	4.5	3.1	2.1	1.4	1.2	1.2	1.0	998.1
83,0°	8.8	8.6	8.4	7.6	6.6	5.3	4.4	3.3	2.4	1.4	1.2	1.2	1.2	0.7	998.8
84,0°	6.0	5.7	5.7	5.0	4.5	3.5	3.1	2.4	1.9	1.2	1.2	0.9	0.9	0.5	999.2
85,0°	3.5	3.5	3.7	3.1	2.8	2.4	2.1	1.7	1.4	1.2	0.9	0.9	0.9	0.3	999.5
86,0°	1.9	1.7	1.8	1.4	1.7	1.4	1.4	1.2	1.2	0.9	0.9	0.9	0.9	0.2	999.7
87,0°	1.2	1.2	1.2	1.2	1.1	0.9	1.1	0.9	0.9	0.9	0.9	0.9	0.9	0.1	999.8
88,0°	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.1	999.9
89,0°	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.1	1000.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

office	industry	traffic	retail	public	sports
--------	----------	---------	--------	--------	--------

Photometric test report

Family Streetlight 21 micro easy LED	Order number: 5XE5H47N08CB EAN: 4058352897188	LP number 59066_814
Dimming levels table environmental temperature: 25°C		siteco

Luminous flux [%]	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]start of lifetime	Power consumption [W]end of lifetime	Power consumption [W]average
100	254	254	2340	15.8	15.9	15.8
95	240	252	2222	15.0	15.2	15.1
90	226	250	2102	14.1	14.3	14.2
85	213	248	1991	13.5	13.6	13.6
80	199	245	1869	12.7	12.9	12.8
75	186	243	1755	11.9	12.1	12.0
70	173	240	1640	11.2	11.3	11.2
65	160	237	1525	10.5	10.6	10.6
60	147	234	1408	9.8	9.9	9.9
55	134	231	1291	9.1	9.2	9.1
50	121	227	1172	8.4	8.5	8.4
45	108	223	1052	7.7	7.8	7.8
40	95	218	932	7.0	7.1	7.0
35	83	213	819	6.3	6.4	6.4
30	71	207	706	5.7	5.7	5.7
26	60	201	602	5.1	5.1	5.1

Dimming levels table environmental temperature: 5°C	
--	--

Luminous flux [%]	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]start of lifetime	Power consumption [W]end of lifetime	Power consumption [W]average
100	254	254	2370	16.0	16.2	16.1
95	240	252	2250	15.2	15.4	15.3
90	227	250	2137	14.5	14.6	14.6
85	213	248	2015	13.7	13.8	13.8
80	200	245	1900	13.0	13.1	13.0
75	186	243	1776	12.1	12.3	12.2
70	173	240	1660	11.4	11.5	11.4
65	160	237	1542	10.7	10.8	10.8
60	147	234	1424	9.9	10.1	10.0
55	134	231	1305	9.2	9.3	9.2
50	121	227	1185	8.5	8.6	8.6
45	108	223	1064	7.8	7.9	7.8
40	96	218	950	7.1	7.2	7.2
35	83	213	827	6.4	6.5	6.4
30	71	207	713	5.8	5.8	5.8
26	60	201	608	5.2	5.2	5.2

Photometric test report

Family Streetlight 21 micro easy LED	Order number: 5XE5H47N08CB EAN: 4058352897188	LP number 59066_814
Dimming levels table		environmental temperature: 15°C
		siteco

Luminous flux [%]	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]start of lifetime	Power consumption [W]end of lifetime	Power consumption [W]average
100	254	254	2360	15.9	16.0	16.0
95	240	252	2241	15.1	15.3	15.2
90	226	250	2120	14.2	14.4	14.3
85	213	248	2007	13.6	13.7	13.6
80	199	245	1884	12.8	13.0	12.9
75	186	243	1769	12.0	12.2	12.1
70	173	240	1654	11.3	11.4	11.4
65	160	237	1537	10.6	10.7	10.6
60	147	234	1419	9.9	10.0	10.0
55	134	231	1300	9.2	9.3	9.2
50	121	227	1181	8.4	8.5	8.4
45	108	223	1060	7.7	7.8	7.8
40	96	218	948	7.1	7.1	7.1
35	83	213	825	6.4	6.4	6.4
30	71	207	711	5.8	5.8	5.8
26	60	201	606	5.1	5.2	5.2

Photometric test report

Family Streetlight 21 micro easy LED	Order number: 5XE5H47N08CB EAN: 4058352897188	LP number 59066_814
Luminousfluxs table		siteco

Temperature °C	Luminous flux lm	Power consumption W
25.0	2340.0	15.8
5.0	2370.0	16.0
15.0	2360.0	15.9