


Photometric test report

Family Streetlight 21 mini easy LED	Order number: 5XE6H37N08GB EAN: 4058352897652	LP number 59066_830
	Version post-top or side-entry mounting, NEMA 7 pin (DALI)	serial documentation 16.06.2023
	Optic direct, asymmetric A520002	
	Cover toughened safety glass	
	Lamps LED 3000 K CRI ≥ 70	
	Controlgear ECG-DALI Plus	
Rated values	Net luminous flux = 5840 lm Power consumption = 40.4 W Luminous efficacy = 144.6 lm/W	

Luminous intensity in cd/klm C180-0 C215-35 C217,5-37,5 C270-90 **Imax: 990 cd/klm**

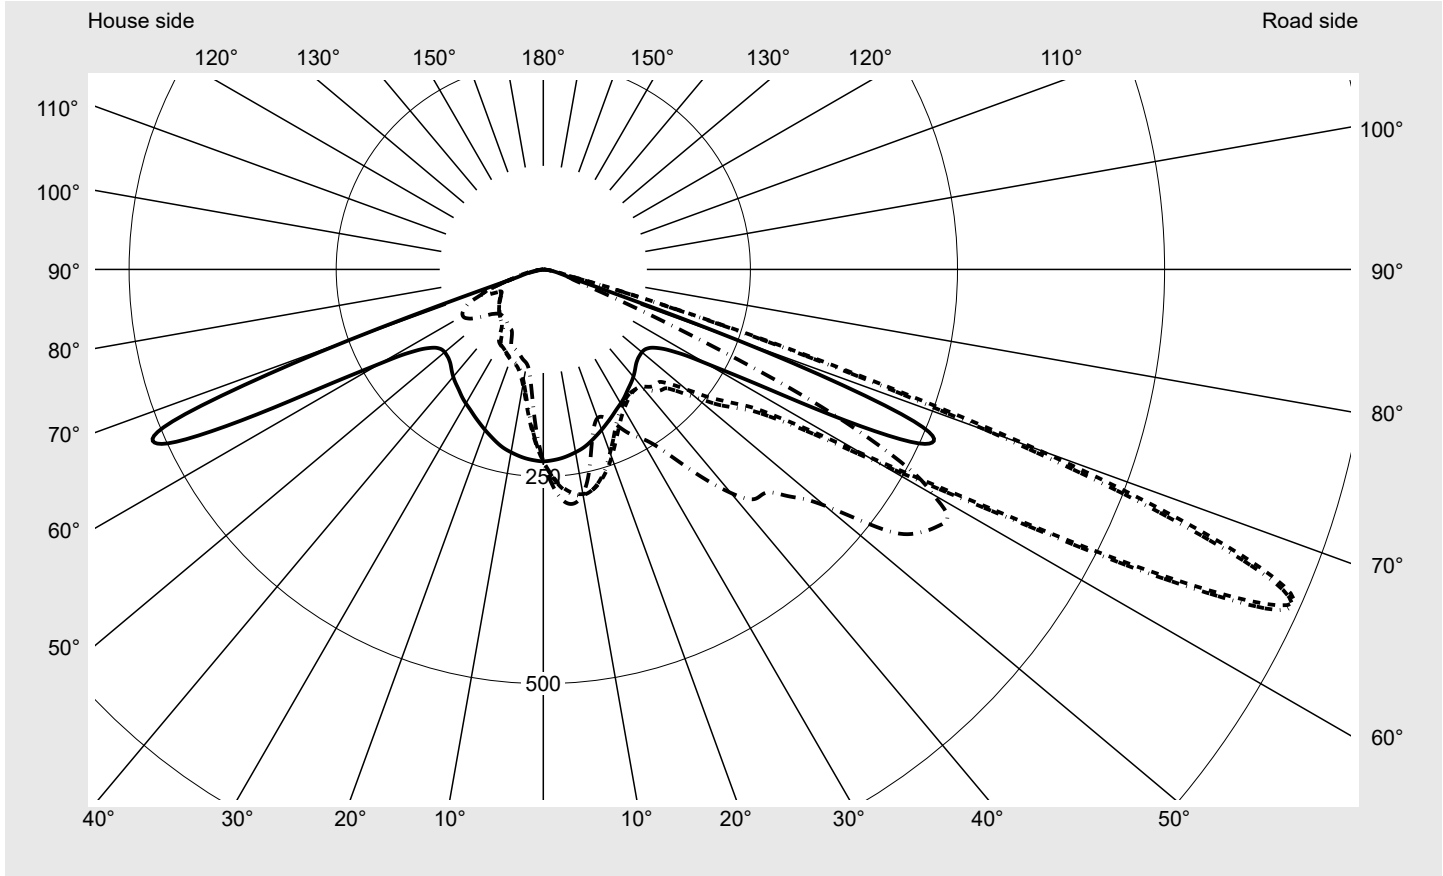

Luminaire output ratios	
Eta	100.0%
Eta 0° - 90°	100.0%
Eta 90° - 180°	0.0%


Luminous intensity class acc. to EN13201-2	
Class:	G3
Imax 70°	685.4
Imax 80°	32.5
Imax 90°	0.0
Imax >90°	0.0
Imax >95°	0.0

Measurement conditions
DIN EN 13032 and DIN 5032

Photometric test report

Family Streetlight 21 mini easy LED	Order number: 5XE6H37N08GB EAN: 4058352897652	LP number 59066_830
---	--	--------------------------------------

Envelope curve in cd/klm **KMK 66°** **KMK 65°** **KMK 64°** **KMK 63°** **siteco**

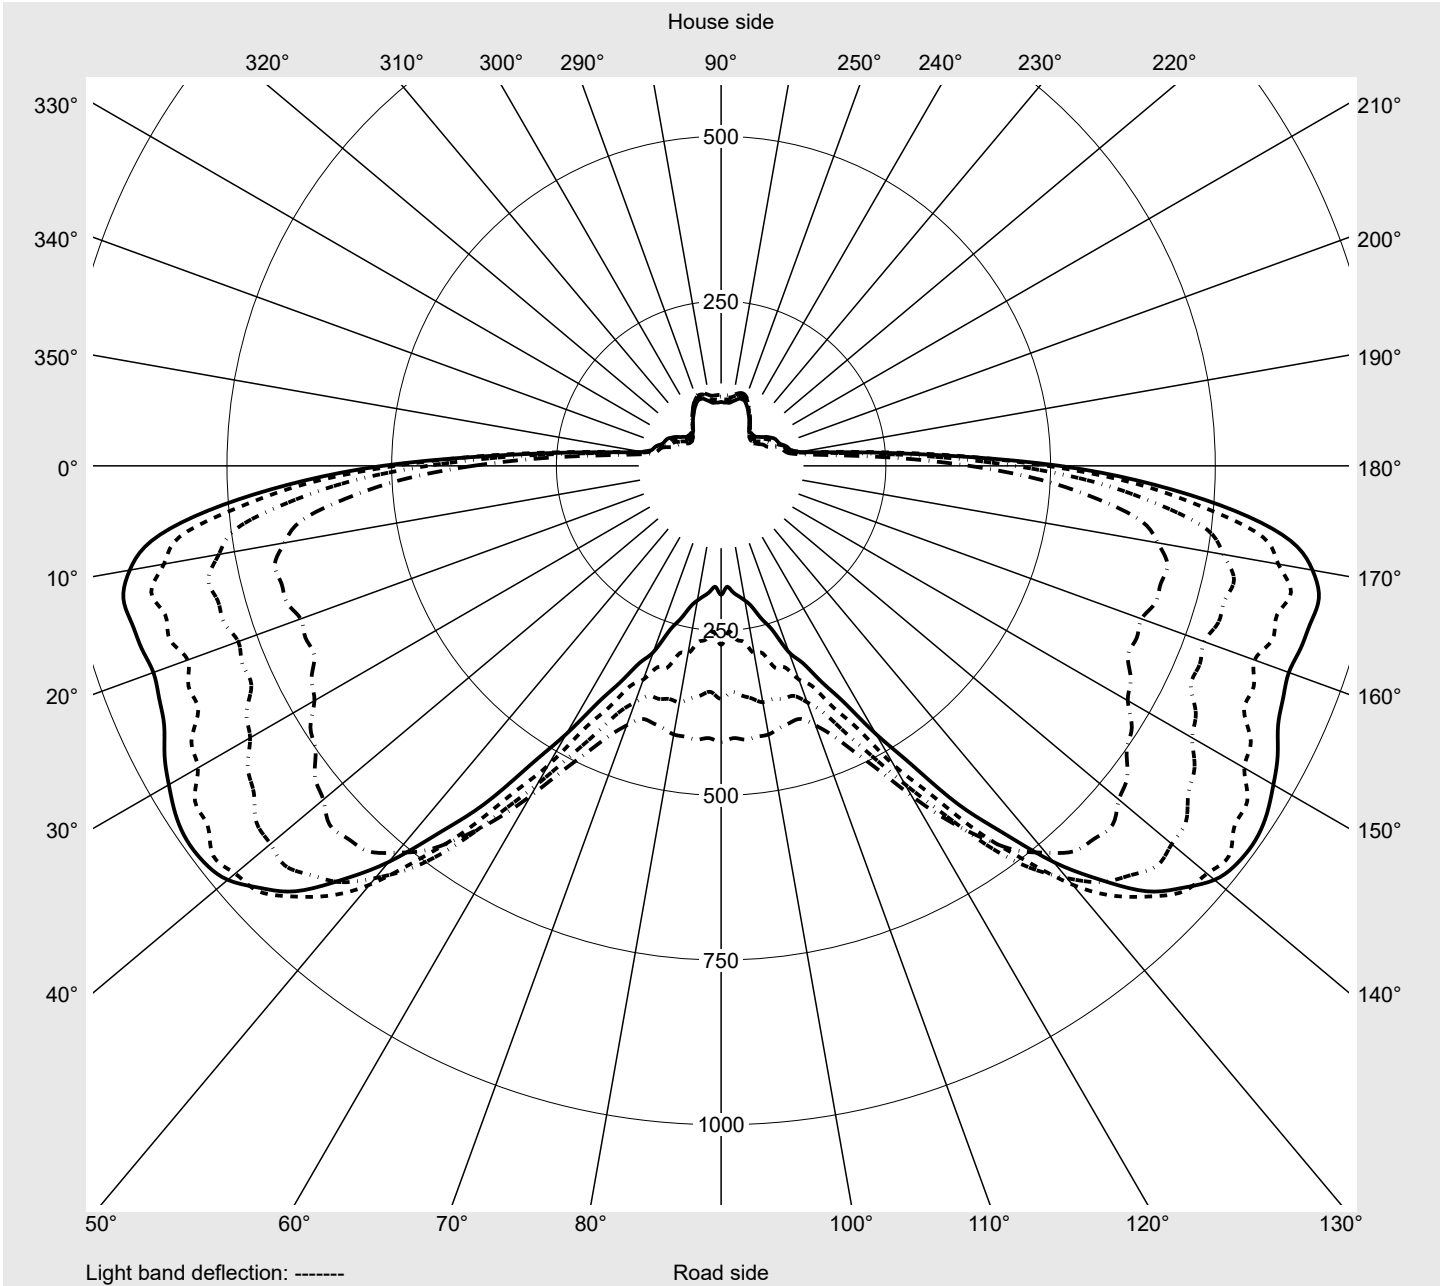

Photometric test report

Family Streetlight 21 mini easy LED	Order number: 5XE6H37N08GB EAN: 4058352897652	LP number 59066_830
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	0,0° 180,0°	2,5° 177,5°	5,0° 175,0°	7,5° 172,5°	10,0° 170,0°	12,5° 167,5°	15,0° 165,0°	17,5° 162,5°	20,0° 160,0°	22,5° 157,5°	25,0° 155,0°	27,5° 152,5°	30,0° 150,0°	32,5° 147,5°	35,0° 145,0°
γ	Luminous intensity in cd/klm														
0,0°	231.6	231.6	231.6	231.6	231.6	231.6	231.6	231.6	231.6	231.6	231.6	231.6	231.6	231.6	231.6
2,5°	230.8	232.1	233.5	235.0	236.4	238.0	239.2	240.8	242.2	243.7	244.7	246.0	247.0	248.4	249.3
5,0°	229.3	232.1	235.0	237.8	240.5	243.5	246.0	248.8	251.2	253.8	255.7	258.0	259.7	261.9	263.5
7,5°	227.0	231.2	235.4	239.5	243.3	247.2	250.8	254.3	257.4	260.6	263.2	265.8	268.0	270.2	272.1
10,0°	224.1	229.7	235.1	240.2	244.8	249.6	253.9	257.8	261.5	264.7	267.4	269.7	272.0	273.9	275.3
12,5°	220.8	227.4	233.9	239.8	245.2	250.5	255.1	259.2	262.7	265.7	268.2	270.0	271.5	272.2	272.9
15,0°	216.3	223.7	231.1	237.8	243.7	249.2	254.1	258.2	261.5	263.8	265.7	266.4	266.8	266.1	265.4
17,5°	211.1	219.7	227.9	235.1	241.3	247.0	251.9	255.6	258.4	259.9	260.5	260.0	258.9	256.8	254.3
20,0°	206.0	215.3	224.3	232.1	238.6	244.3	249.2	252.2	254.3	254.4	254.0	251.4	249.2	244.8	241.1
22,5°	200.8	211.2	221.0	229.4	236.2	241.9	246.2	248.6	249.4	248.2	246.1	242.2	237.9	232.5	227.1
25,0°	195.8	207.2	218.1	226.9	234.0	239.6	243.3	244.7	244.4	241.7	238.3	232.4	227.1	220.2	214.2
27,5°	190.9	203.6	215.3	225.0	232.4	237.9	240.9	241.5	239.8	235.9	230.6	223.8	216.8	209.7	203.2
30,0°	186.8	200.6	213.2	223.7	231.5	237.0	239.4	238.8	235.9	230.4	223.9	216.1	208.4	201.0	194.9
32,5°	182.5	197.3	211.0	222.2	230.5	235.8	237.5	236.0	232.1	225.4	217.9	209.1	201.4	194.1	188.7
35,0°	177.6	193.9	208.6	220.8	229.5	234.6	235.6	233.2	228.2	220.8	212.4	203.4	195.6	189.1	184.4
37,5°	173.5	191.2	207.1	220.1	228.6	233.4	234.1	231.1	225.0	216.7	207.7	198.7	191.0	185.4	182.5
40,0°	169.1	188.4	205.3	218.3	227.6	232.7	233.2	229.4	222.7	214.0	204.7	196.0	189.0	185.2	184.7
42,5°	164.0	184.7	202.5	217.7	227.6	233.1	233.4	229.1	221.7	212.6	203.4	195.4	190.3	189.1	192.0
45,0°	159.1	180.8	200.1	216.8	227.3	232.5	231.9	226.5	218.1	208.1	198.9	191.2	187.9	188.7	194.7
46,0°	157.8	179.9	200.1	217.5	228.1	233.2	232.3	226.3	217.0	206.6	197.0	189.7	186.7	188.6	195.5
47,0°	156.7	179.5	200.9	218.9	230.0	235.2	233.9	227.5	217.7	206.9	197.3	190.6	188.6	192.0	200.3
48,0°	156.1	179.8	202.1	221.0	232.4	237.9	236.5	229.8	219.7	209.2	199.4	193.6	192.4	197.4	207.1
49,0°	155.6	180.5	204.0	224.2	235.9	242.0	239.9	233.7	223.2	212.9	202.9	198.6	198.0	205.1	215.2
50,0°	155.4	181.5	206.6	227.9	240.4	246.6	244.9	238.4	227.9	217.4	208.6	204.7	205.9	213.5	225.4
51,0°	155.6	183.4	210.0	232.5	245.5	252.1	250.6	244.1	233.8	223.6	215.5	212.7	215.0	223.6	236.0
52,0°	156.5	186.4	214.6	238.5	252.7	259.8	258.3	251.4	241.1	231.7	224.6	222.9	226.3	235.7	248.7
53,0°	158.2	190.2	220.0	245.5	260.8	268.3	266.7	259.9	249.5	240.4	233.8	233.0	237.2	247.0	259.7
54,0°	160.8	195.0	227.2	254.3	270.6	278.7	276.8	269.9	259.3	250.3	244.2	244.0	248.1	257.9	270.2
55,0°	165.0	202.0	236.7	266.3	283.7	292.2	290.2	283.0	272.0	262.5	256.4	256.1	260.8	270.5	281.8
56,0°	170.4	210.7	248.2	280.4	298.7	307.9	305.3	298.2	286.1	276.2	269.4	269.7	273.9	283.6	294.0
57,0°	177.7	223.0	262.3	299.8	316.8	329.5	324.0	318.7	302.6	295.2	285.9	289.1	290.8	303.2	311.4
58,0°	188.5	238.1	282.9	322.2	342.1	354.2	349.7	342.4	327.5	318.8	311.1	314.1	318.0	331.0	340.5
59,0°	202.8	259.2	308.4	353.4	373.8	388.0	382.3	376.1	359.5	353.2	345.2	351.7	355.6	371.7	381.9
60,0°	226.7	292.6	348.5	400.9	422.6	439.3	432.7	428.0	410.5	408.2	401.1	412.1	417.2	437.5	446.9
61,0°	258.9	337.3	402.8	461.1	485.1	504.4	496.9	495.0	478.9	479.9	474.0	489.2	495.1	517.8	526.5
62,0°	305.9	397.9	474.0	538.2	566.1	585.7	580.0	579.3	566.8	569.4	566.9	583.1	592.2	615.2	626.6
63,0°	376.8	485.7	572.4	643.8	673.0	693.9	690.7	691.1	679.0	682.7	681.2	701.0	712.7	739.1	751.5
64,0°	445.5	568.1	665.1	744.5	774.1	797.4	790.9	791.3	779.9	786.4	786.6	812.3	825.4	852.0	865.8
65,0°	495.0	632.1	738.6	829.7	858.7	886.0	873.6	877.2	861.5	875.0	875.6	906.4	916.8	946.9	951.5
66,0°	513.8	658.5	782.3	871.9	911.4	929.3	925.7	922.2	917.0	923.1	932.7	952.3	967.9	982.2	990.2
67,0°	508.5	661.1	795.9	889.2	934.5	951.1	947.5	940.1	933.8	932.2	938.8	945.2	958.1	960.7	964.9
68,0°	466.0	617.4	764.5	863.0	925.7	939.0	938.7	922.0	913.7	896.4	897.6	890.7	899.1	886.6	886.2
69,0°	371.7	497.6	641.9	733.7	818.0	835.7	853.6	833.8	831.3	805.0	808.8	792.2	799.4	776.0	771.5
70,0°	249.4	329.2	462.6	512.5	616.1	619.2	684.6	658.9	685.4	649.9	668.6	640.4	659.0	623.9	631.0
71,0°	120.6	165.3	231.1	264.3	329.8	356.3	414.7	435.7	481.5	475.9	492.1	480.1	491.4	471.4	468.5
72,0°	57.4	71.1	94.1	106.4	137.1	155.7	195.8	224.8	285.6	304.7	329.0	324.3	338.2	325.6	326.9

Photometric test report

Family Streetlight 21 mini easy LED	Order number: 5XE6H37N08GB EAN: 4058352897652	LP number 59066_830
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	37,5° 142,5°	40,0° 140,0°	42,5° 137,5°	45,0° 135,0°	47,5° 132,5°	50,0° 130,0°	52,5° 127,5°	55,0° 125,0°	57,5° 122,5°	60,0° 120,0°	62,5° 117,5°	65,0° 115,0°	67,5° 112,5°	70,0° 110,0°	72,5° 107,5°
γ	Luminous intensity in cd/klm														
0,0°	231.6	231.6	231.6	231.6	231.6	231.6	231.6	231.6	231.6	231.6	231.6	231.6	231.6	231.6	231.6
2,5°	250.6	251.2	252.4	253.0	254.3	254.8	255.7	256.1	257.0	257.4	258.3	258.7	259.6	259.8	260.5
5,0°	265.5	266.7	268.4	269.4	271.0	271.9	273.4	273.9	275.2	275.7	277.0	277.3	278.4	278.6	279.4
7,5°	273.9	275.4	276.8	277.9	279.1	280.0	280.8	281.5	282.1	282.5	283.0	283.5	283.7	284.0	284.2
10,0°	276.5	277.5	278.1	278.5	278.5	278.7	278.5	278.5	277.9	277.8	277.1	277.1	276.5	276.5	275.8
12,5°	272.7	272.7	271.5	271.0	269.2	268.5	266.3	265.5	262.9	262.2	259.5	259.0	256.6	256.4	254.1
15,0°	263.6	262.1	259.2	257.0	253.5	250.9	247.5	245.1	241.5	239.2	235.9	234.3	231.3	230.0	227.6
17,5°	250.9	247.5	243.2	239.5	235.1	231.3	227.1	223.6	219.8	216.9	213.7	211.6	209.1	207.4	205.7
20,0°	235.6	231.8	225.5	221.6	215.9	212.5	207.7	205.2	201.3	199.5	196.7	195.5	193.5	193.1	191.7
22,5°	221.1	215.7	209.8	205.4	200.9	197.8	194.8	192.9	191.1	190.2	189.4	189.2	189.2	189.4	189.8
25,0°	207.5	202.8	197.5	194.4	191.1	189.7	188.6	188.6	189.4	190.0	191.6	192.5	194.4	195.2	197.3
27,5°	197.7	193.5	190.0	188.3	187.7	188.4	190.0	192.4	195.5	198.5	201.5	203.9	206.2	207.7	209.5
30,0°	190.2	187.3	185.7	186.1	188.0	191.3	195.8	200.9	206.5	211.1	215.5	217.9	220.1	221.0	222.6
32,5°	185.1	183.8	184.2	186.7	191.2	197.3	204.6	211.8	219.6	225.3	230.7	233.3	235.9	236.5	238.9
35,0°	182.5	182.9	185.7	190.5	197.4	205.9	215.5	224.8	234.4	242.3	249.2	253.7	257.2	259.8	263.6
37,5°	182.7	185.8	191.6	199.1	209.1	220.7	233.2	245.6	258.3	268.5	277.7	283.9	289.9	294.3	299.7
40,0°	187.9	194.3	203.9	215.0	229.1	243.5	259.2	274.0	289.7	301.3	312.2	318.8	325.4	328.9	334.1
42,5°	199.3	210.1	224.3	239.2	256.1	273.1	289.7	304.7	319.3	330.8	340.2	346.9	351.7	354.8	358.5
45,0°	204.5	217.9	233.2	249.0	265.0	280.5	294.0	306.4	317.4	327.0	334.8	340.6	344.7	348.4	352.6
46,0°	206.5	220.9	237.3	253.7	269.6	284.3	296.6	307.8	317.5	325.9	333.1	338.9	343.3	347.8	353.1
47,0°	212.7	228.1	245.0	261.0	276.5	289.8	301.0	310.7	319.2	326.6	334.2	340.8	346.4	352.1	358.9
48,0°	220.9	236.3	253.2	268.7	283.5	295.6	305.5	313.6	321.4	328.4	336.6	344.1	351.5	358.4	366.8
49,0°	230.7	245.4	262.5	276.7	290.9	301.0	310.1	316.8	324.1	330.9	339.9	348.5	358.2	365.9	376.3
50,0°	240.7	256.0	271.5	285.4	297.9	307.1	314.6	320.4	327.1	334.5	344.0	354.1	364.5	374.0	385.5
51,0°	251.4	266.4	281.1	293.5	304.7	312.7	318.9	324.1	330.5	338.5	348.6	359.7	371.7	383.2	397.5
52,0°	263.7	277.7	290.8	301.8	311.4	318.2	323.3	328.0	334.7	343.1	354.5	367.8	383.9	399.7	418.6
53,0°	273.9	286.9	298.6	308.1	316.2	322.1	326.7	331.5	338.9	349.1	364.7	382.0	402.7	421.5	442.5
54,0°	283.5	295.3	306.0	314.2	320.6	325.7	330.5	336.3	347.4	362.2	382.9	403.3	427.0	448.0	468.4
55,0°	293.9	304.3	313.9	320.8	327.0	332.2	339.4	350.0	367.8	386.9	411.5	433.6	455.3	472.0	486.9
56,0°	305.8	315.2	324.4	330.5	338.2	345.8	359.1	374.9	398.3	418.2	442.5	458.6	472.7	484.1	495.5
57,0°	326.3	332.2	344.5	348.0	361.4	371.7	397.0	411.3	439.6	451.4	468.8	475.4	484.0	490.3	499.6
58,0°	355.1	362.7	375.0	381.7	400.5	418.3	444.6	461.3	478.0	482.6	488.9	489.6	490.8	493.8	501.5
59,0°	399.4	405.6	421.8	431.9	458.5	477.3	502.4	507.9	514.5	509.9	507.2	500.1	495.8	495.0	499.9
60,0°	466.4	472.7	495.5	509.7	542.1	553.6	566.0	559.6	554.3	538.4	524.6	508.9	496.8	490.4	488.2
61,0°	548.8	556.9	585.1	600.9	627.0	625.8	625.2	606.8	588.1	560.5	536.1	511.6	489.7	475.0	464.7
62,0°	648.8	661.9	690.0	699.6	708.4	696.2	680.6	650.3	616.5	577.3	539.0	501.5	470.3	452.2	441.2
63,0°	776.9	788.2	806.0	800.6	793.3	766.4	735.4	688.6	636.5	578.4	522.3	479.1	443.2	419.1	402.8
64,0°	888.9	892.8	897.9	878.6	856.9	816.8	768.4	702.3	624.6	557.9	497.0	447.2	404.8	381.9	366.0
65,0°	971.8	962.7	954.7	924.1	885.4	829.8	752.1	676.0	590.1	524.8	450.2	405.9	362.2	345.2	320.4
66,0°	988.9	977.5	948.3	913.1	852.2	784.8	701.4	626.6	537.4	470.0	405.4	362.7	324.0	301.0	263.1
67,0°	949.7	932.5	888.7	849.7	775.5	711.3	627.4	556.9	475.6	420.4	360.1	318.1	277.7	257.2	212.6
68,0°	855.2	831.2	772.5	730.8	655.3	598.9	524.2	472.3	406.6	355.2	298.2	265.8	236.2	218.4	168.6
69,0°	731.2	703.7	643.1	604.5	535.5	491.5	437.0	393.4	330.4	293.0	253.4	228.5	201.7	185.0	134.8
70,0°	577.9	565.0	499.2	476.7	415.0	393.7	332.9	307.3	263.9	243.4	207.5	190.7	164.7	152.0	105.1
71,0°	434.8	414.3	373.8	351.6	310.3	282.6	253.4	237.7	210.9	192.0	167.9	152.1	133.3	121.0	84.2
72,0°	303.8	292.7	265.7	246.0	214.4	207.7	189.9	180.5	162.0	149.7	132.0	120.1	105.5	96.4	69.2

Photometric test report

Family Streetlight 21 mini easy LED	Order number: 5XE6H37N08GB EAN: 4058352897652	LP number 59066_830
Table of values for luminous intensities		Maximum luminous intensity
siteco		

C-planes	75,0° 105,0°	77,5° 102,5°	80,0° 100,0°	82,5° 97,5°	85,0° 95,0°	87,5° 92,5°	90,0°	182,5° 357,5°	185,0° 355,0°	187,5° 352,5°	190,0° 350,0°	192,5° 347,5°	195,0° 345,0°	197,5° 342,5°	200,0° 340,0°
γ	Luminous intensity in cd/klm														
0,0°	231.6	231.6	231.6	231.6	231.6	231.6	231.6	231.6	231.6	231.6	231.6	231.6	231.6	231.6	231.6
2,5°	260.4	260.9	260.8	261.4	261.2	261.6	261.3	229.1	227.6	225.9	224.4	222.7	221.6	219.9	218.8
5,0°	279.4	280.0	280.0	280.6	280.5	281.0	280.5	225.9	222.7	219.1	216.1	212.4	209.6	205.9	203.2
7,5°	284.2	284.2	284.5	284.5	284.7	284.7	284.9	221.9	216.9	211.7	206.8	201.5	196.9	191.7	187.1
10,0°	275.8	275.1	275.4	274.9	275.4	274.9	275.3	217.6	211.1	204.2	197.7	190.9	184.8	178.2	172.3
12,5°	254.3	252.3	253.2	251.7	253.1	251.8	253.1	212.7	204.8	196.5	188.9	180.5	173.5	165.6	159.3
15,0°	227.1	225.2	225.0	223.7	224.2	223.3	224.0	206.7	197.4	188.0	179.0	169.8	162.0	153.9	147.0
17,5°	204.7	203.5	203.0	202.2	202.2	201.8	202.0	200.6	190.0	179.6	169.5	159.8	151.4	143.4	136.9
20,0°	191.7	191.0	191.2	190.6	191.0	190.7	191.1	193.9	182.7	170.6	160.5	149.8	141.9	134.0	128.7
22,5°	190.2	191.0	191.7	192.5	193.0	193.5	193.6	187.7	175.0	162.5	151.4	141.0	133.0	126.4	121.7
25,0°	198.2	200.7	201.9	204.3	204.9	206.9	206.2	181.4	167.9	154.6	143.4	133.2	126.1	120.0	116.6
27,5°	211.3	214.1	217.1	219.8	221.7	222.7	222.7	175.7	161.0	147.6	136.1	126.7	120.0	115.4	112.9
30,0°	224.3	227.9	232.0	235.6	236.6	235.9	235.1	170.3	154.9	141.0	129.6	120.7	114.9	111.3	109.6
32,5°	240.8	246.6	251.4	255.8	254.7	253.5	252.0	164.7	148.5	134.3	123.3	115.0	110.3	107.5	106.2
35,0°	268.7	276.4	281.5	283.5	282.0	281.5	281.2	158.8	141.7	127.7	117.1	110.0	106.1	104.1	103.1
37,5°	304.7	311.0	314.1	315.7	315.8	317.2	317.5	153.0	135.2	121.2	111.2	105.0	102.3	100.8	100.0
40,0°	337.5	343.5	346.4	349.2	349.3	351.9	352.2	147.2	128.9	114.9	105.8	100.6	98.7	97.6	97.0
42,5°	362.4	367.0	370.2	372.4	373.5	375.5	376.2	140.9	122.3	108.9	100.8	96.8	95.4	94.4	93.6
45,0°	358.7	364.3	369.8	373.7	376.8	380.1	381.0	135.0	115.9	103.1	96.1	93.3	92.2	91.3	90.5
46,0°	360.7	368.3	375.1	380.1	383.5	387.2	388.4	133.0	113.9	101.2	94.6	92.0	91.1	90.0	89.3
47,0°	367.5	377.2	385.0	391.0	395.0	399.0	400.4	131.3	111.8	99.2	93.1	90.7	89.6	88.7	88.0
48,0°	375.6	387.1	395.5	402.4	406.0	410.7	411.8	129.8	110.0	97.6	91.9	89.5	88.6	87.5	86.9
49,0°	384.8	397.9	406.2	414.8	418.0	424.4	424.5	128.3	108.4	96.0	90.6	88.2	87.5	86.4	85.7
50,0°	396.0	410.0	420.8	430.9	436.2	442.8	443.7	127.4	106.8	94.6	89.3	87.2	86.4	85.4	84.6
51,0°	411.8	428.8	442.2	454.1	461.0	467.8	469.2	126.7	105.6	93.4	88.2	86.2	85.4	84.4	83.6
52,0°	435.8	454.7	468.9	482.4	489.8	498.2	499.3	126.4	104.5	92.2	87.3	85.4	84.6	83.6	82.4
53,0°	461.4	482.3	496.6	509.6	517.3	524.9	526.7	126.5	103.7	91.4	86.4	84.7	83.7	83.0	81.2
54,0°	486.3	504.2	516.5	527.8	535.2	541.5	543.7	127.4	103.5	90.7	85.9	84.1	83.1	82.4	79.9
55,0°	502.0	517.7	528.8	538.1	545.5	551.4	553.9	128.9	103.6	90.2	85.3	83.5	82.5	81.7	78.4
56,0°	509.0	524.3	535.7	545.5	553.6	559.9	562.2	131.6	104.4	90.1	85.0	83.0	82.2	81.4	76.7
57,0°	513.0	530.3	542.0	552.3	560.1	566.9	568.6	135.6	106.0	90.7	85.1	83.0	82.1	81.0	75.1
58,0°	516.1	532.7	545.9	556.0	564.9	570.9	573.3	141.7	109.0	92.0	85.5	83.4	82.3	81.1	73.4
59,0°	513.9	528.3	541.3	549.1	558.4	562.3	566.7	150.7	113.6	94.1	86.6	84.0	82.9	81.4	72.4
60,0°	498.1	506.1	517.8	523.8	534.2	538.2	543.3	166.2	121.4	98.4	88.8	85.7	84.6	82.5	72.4
61,0°	471.3	480.1	492.8	500.0	510.2	512.5	518.2	187.6	133.2	104.9	92.4	88.3	86.8	84.4	73.8
62,0°	444.4	449.1	458.1	462.5	469.4	469.7	475.2	219.1	151.6	114.8	98.2	92.8	90.7	87.5	77.2
63,0°	403.7	407.6	414.0	414.7	417.1	413.7	419.1	270.0	182.5	132.1	107.6	99.9	96.7	92.7	82.9
64,0°	366.1	362.5	364.3	356.0	349.6	343.7	353.8	321.3	216.4	151.0	117.3	106.4	102.2	97.8	88.9
65,0°	317.4	291.4	289.3	270.1	264.4	252.1	271.8	355.7	238.4	162.6	123.2	109.7	105.4	101.0	93.7
66,0°	241.7	220.2	207.4	199.1	191.1	184.2	195.6	348.6	231.5	157.6	121.4	108.9	105.4	101.7	96.3
67,0°	175.0	157.4	148.3	141.7	137.2	131.1	138.8	316.8	193.3	134.1	110.9	102.8	101.1	98.3	95.2
68,0°	117.8	104.2	99.6	95.9	93.4	89.4	95.1	258.3	142.7	99.1	89.6	86.6	89.3	87.2	87.0
69,0°	82.1	70.5	67.8	64.9	63.7	62.0	65.3	185.3	97.0	71.2	68.1	67.2	71.2	71.7	73.1
70,0°	58.7	49.5	49.0	46.5	46.8	44.7	48.0	111.0	62.7	49.7	50.0	48.0	52.3	52.4	56.6
71,0°	45.2	40.1	39.7	39.0	38.8	38.4	38.6	60.9	42.5	38.9	38.8	38.7	39.9	40.3	42.3
72,0°	40.2	36.8	36.7	35.7	35.4	34.9	35.2	39.6	35.4	33.9	34.1	34.4	35.0	34.9	35.7

Photometric test report

Family Streetlight 21 mini easy LED	Order number: 5XE6H37N08GB EAN: 4058352897652	LP number 59066_830
Table of values for luminous intensities		Maximum luminous intensity



C-planes	202,5° 337,5°	205,0° 335,0°	207,5° 332,5°	210,0° 330,0°	212,5° 327,5°	215,0° 325,0°	217,5° 322,5°	220,0° 320,0°	222,5° 317,5°	225,0° 315,0°	227,5° 312,5°	230,0° 310,0°	232,5° 307,5°	235,0° 305,0°	237,5° 302,5°
γ	Luminous intensity in cd/klm														
0,0°	231.6	231.6	231.6	231.6	231.6	231.6	231.6	231.6	231.6	231.6	231.6	231.6	231.6	231.6	231.6
2,5°	216.9	215.6	213.9	212.7	211.1	210.0	208.2	207.3	205.6	204.8	203.2	202.6	201.1	200.6	199.2
5,0°	199.3	196.5	192.8	190.4	186.8	184.7	181.1	179.2	176.0	174.3	171.1	169.9	167.1	165.9	163.4
7,5°	182.0	177.4	172.5	168.6	164.1	160.5	156.4	153.4	149.9	147.3	144.2	142.3	139.5	138.1	135.8
10,0°	165.9	160.5	154.8	150.1	145.3	141.4	137.3	134.5	131.1	128.9	126.3	124.6	122.8	121.6	120.0
12,5°	152.1	146.7	140.8	136.6	132.2	129.1	125.7	123.6	121.2	119.7	118.1	117.3	116.2	115.7	114.9
15,0°	140.4	135.2	130.6	127.1	123.8	121.6	119.7	118.5	117.5	116.7	115.8	114.9	114.1	113.3	112.5
17,5°	131.4	127.0	123.6	121.2	119.5	118.4	117.4	116.6	115.6	114.7	113.6	112.7	111.7	110.7	109.8
20,0°	123.7	120.9	118.4	117.4	116.5	115.8	114.7	113.9	112.8	112.1	110.9	110.2	109.2	108.4	107.5
22,5°	118.1	116.4	115.2	114.3	113.3	112.5	111.6	110.8	110.0	109.3	108.4	107.8	107.1	106.5	105.8
25,0°	114.4	113.2	112.0	111.3	110.1	109.4	108.6	108.0	107.1	106.8	106.2	105.8	105.2	104.9	104.2
27,5°	111.3	110.3	109.3	108.3	107.4	106.5	105.9	105.2	104.1	103.2	102.2	101.1	99.8	97.6	93.5
30,0°	108.2	107.5	106.3	105.5	104.8	104.2	102.6	99.3	96.3	94.4	92.4	90.9	88.8	87.0	86.2
32,5°	105.1	104.4	103.5	102.8	101.7	99.5	92.6	88.5	86.7	86.2	85.5	85.3	85.1	85.3	85.3
35,0°	102.2	101.2	99.9	98.0	95.0	88.5	84.3	84.0	83.7	83.7	83.8	84.0	84.1	83.8	83.3
37,5°	99.1	96.1	91.9	88.5	84.8	82.2	81.9	82.0	82.1	82.2	82.2	81.9	81.5	81.2	80.9
40,0°	95.6	87.2	82.1	80.5	79.7	79.7	79.8	80.2	80.3	80.1	79.7	79.5	79.1	78.9	78.5
42,5°	90.5	79.2	77.1	77.0	76.9	77.3	77.6	77.8	77.7	77.7	77.5	77.5	77.3	77.2	77.1
45,0°	85.6	74.9	74.0	74.0	74.3	74.7	75.0	75.3	75.4	75.7	75.9	76.0	76.0	76.0	76.2
46,0°	83.7	73.6	72.8	73.0	73.3	73.7	73.9	74.4	74.6	75.0	75.3	75.6	75.7	75.7	76.0
47,0°	81.8	72.1	71.7	71.9	72.1	72.5	72.8	73.3	73.7	74.3	74.6	75.0	75.2	75.6	75.8
48,0°	79.9	70.8	70.5	70.8	71.0	71.4	71.9	72.4	73.0	73.6	74.1	74.6	75.0	75.3	75.9
49,0°	77.8	69.7	69.4	69.8	69.8	70.5	70.7	71.4	72.0	72.8	73.4	74.1	74.7	75.3	75.9
50,0°	75.8	68.2	68.2	68.6	68.6	69.3	69.5	70.4	71.1	71.9	72.7	73.6	74.4	75.1	75.9
51,0°	73.8	66.9	67.1	67.4	67.5	68.1	68.6	69.4	70.2	71.2	72.1	73.1	73.9	75.0	76.0
52,0°	71.7	65.6	65.9	66.2	66.3	66.8	67.5	68.4	69.2	70.2	71.3	72.5	73.7	74.7	76.2
53,0°	69.7	64.5	64.7	65.0	65.2	65.8	66.5	67.4	68.4	69.5	70.6	71.9	73.4	74.7	76.4
54,0°	67.8	63.4	63.5	63.7	64.0	64.7	65.5	66.5	67.5	68.7	70.0	71.4	73.2	74.9	76.9
55,0°	65.8	62.1	62.2	62.4	62.7	63.5	64.2	65.3	66.5	67.8	69.2	71.0	73.0	75.0	77.3
56,0°	63.9	60.9	60.9	61.1	61.5	62.3	63.1	64.3	65.5	67.1	68.6	70.5	72.8	75.3	78.2
57,0°	62.0	59.8	59.6	60.0	60.3	61.3	61.8	63.3	64.3	66.1	67.9	70.1	72.6	75.4	78.9
58,0°	60.8	58.8	58.5	58.7	59.1	60.0	60.8	62.1	63.5	65.3	67.3	69.8	72.5	75.9	79.7
59,0°	60.1	58.3	57.8	57.6	57.9	58.7	59.6	61.0	62.6	64.3	66.6	69.3	72.5	76.2	80.4
60,0°	60.7	58.9	57.8	57.1	57.1	57.6	58.4	59.8	61.4	63.5	65.9	68.9	72.4	76.5	81.2
61,0°	63.4	61.1	59.5	57.7	57.0	57.0	57.5	58.7	60.3	62.6	65.3	68.5	72.3	76.6	81.6
62,0°	68.4	65.8	63.3	60.3	58.5	57.2	57.1	57.9	59.5	61.7	64.6	68.0	72.0	76.6	81.8
63,0°	75.8	73.2	70.4	65.9	62.8	59.6	58.3	57.8	59.0	60.9	63.7	67.5	71.7	76.5	82.0
64,0°	83.7	81.1	78.3	73.2	69.2	64.2	61.4	59.5	59.7	60.9	63.3	66.8	71.2	76.2	81.5
65,0°	90.3	88.1	86.0	80.4	76.5	70.1	66.8	63.0	62.7	62.6	64.2	66.3	70.5	75.6	80.8
66,0°	93.8	92.5	90.3	86.0	81.7	76.2	72.3	68.6	67.8	67.2	67.5	66.8	69.7	74.5	79.6
67,0°	93.7	93.4	91.5	88.1	84.0	79.2	76.0	73.6	73.6	73.8	73.9	69.4	69.4	73.2	78.0
68,0°	86.4	88.2	87.5	86.2	82.7	79.6	77.3	76.9	79.8	82.3	83.4	75.7	70.4	71.5	75.7
69,0°	73.6	76.6	77.2	78.6	76.4	75.6	74.9	77.8	84.4	89.9	91.4	82.7	73.1	70.4	73.0
70,0°	56.5	61.7	62.4	66.5	65.0	67.1	67.6	74.9	85.5	94.5	94.6	86.4	76.3	69.7	69.5
71,0°	43.3	46.4	48.7	52.5	53.6	55.7	57.8	66.7	80.5	91.6	90.7	83.8	75.0	68.7	65.8
72,0°	36.3	38.0	39.6	42.3	43.9	45.8	47.4	55.3	68.1	79.7	80.4	76.2	69.1	64.5	61.1

Photometric test report

Family Streetlight 21 mini easy LED	Order number: 5XE6H37N08GB EAN: 4058352897652	LP number 59066_830
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	240,0° 300,0°	242,5° 297,5°	245,0° 295,0°	247,5° 292,5°	250,0° 290,0°	252,5° 287,5°	255,0° 285,0°	257,5° 282,5°	260,0° 280,0°	262,5° 277,5°	265,0° 275,0°	267,5° 272,5°	270,0°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm													Luminous flux in lm/klm	
0,0°	231.6	231.6	231.6	231.6	231.6	231.6	231.6	231.6	231.6	231.6	231.6	231.6	231.6	0.3	0.3
2,5°	199.0	197.7	197.6	196.3	196.2	195.2	195.4	194.4	194.6	193.9	194.4	193.7	194.2	2.7	3.1
5,0°	162.6	160.2	159.8	157.6	157.4	155.7	155.7	154.3	154.3	153.4	153.9	152.8	153.7	5.3	8.4
7,5°	134.6	132.8	132.0	130.5	129.8	128.7	128.4	127.4	127.4	126.7	126.8	126.3	126.5	7.7	16.1
10,0°	119.2	118.1	117.7	116.8	116.6	116.1	115.9	115.7	115.5	115.3	115.3	115.2	115.4	9.8	25.9
12,5°	114.6	113.9	113.6	113.1	112.9	112.4	112.3	111.9	111.9	111.6	111.7	111.5	111.6	11.7	37.6
15,0°	111.8	110.9	110.3	109.5	109.3	108.7	108.4	107.9	107.7	107.5	107.4	107.3	107.4	13.3	50.9
17,5°	108.9	108.0	107.3	106.5	106.0	105.5	105.1	104.7	104.5	104.3	104.2	103.9	103.9	14.7	65.6
20,0°	106.8	105.8	105.1	104.4	103.9	103.4	103.1	102.6	102.5	102.2	102.1	101.9	101.9	16.0	81.5
22,5°	105.1	104.5	103.9	103.0	102.1	101.3	100.9	100.6	100.7	100.6	100.8	100.6	100.8	17.3	98.8
25,0°	103.1	99.7	96.7	92.5	91.6	90.1	90.5	89.5	90.2	89.3	90.1	89.2	90.1	18.6	117.5
27,5°	89.9	87.4	86.2	85.4	84.8	84.3	83.8	83.5	83.3	83.0	82.8	82.8	82.8	20.1	137.6
30,0°	85.9	85.5	85.4	84.9	84.6	84.1	83.5	83.0	82.5	82.2	81.8	81.6	81.6	21.7	159.3
32,5°	85.2	84.7	84.1	83.3	82.5	81.8	81.3	80.5	80.3	79.8	79.7	79.4	79.4	23.4	182.7
35,0°	82.8	82.3	81.8	81.1	80.4	79.6	79.0	78.4	77.9	77.6	77.2	77.0	76.9	25.4	208.1
37,5°	80.6	80.0	79.6	79.1	78.6	78.0	77.6	77.0	76.7	76.2	75.9	75.6	75.4	27.8	235.9
40,0°	78.4	78.3	78.0	77.6	77.3	77.1	76.9	76.5	76.0	75.6	75.2	74.7	74.7	30.5	266.3
42,5°	77.0	76.9	76.9	76.8	76.9	76.9	76.9	76.8	76.4	75.9	75.3	74.7	74.6	33.2	299.5
45,0°	76.4	76.6	76.9	77.1	77.3	77.6	77.8	77.9	77.7	77.1	76.6	75.9	75.7	24.0	323.5
46,0°	76.4	76.7	77.1	77.3	77.8	78.0	78.5	78.6	78.5	78.0	77.6	77.0	76.9	14.1	337.5
47,0°	76.4	76.9	77.5	78.0	78.5	79.0	79.5	79.8	79.8	79.5	79.0	78.5	78.3	14.5	352.0
48,0°	76.4	77.1	77.8	78.6	79.5	80.2	80.8	81.0	81.1	81.0	80.5	80.3	80.2	14.9	366.9
49,0°	76.6	77.5	78.4	79.6	80.5	81.7	82.3	83.0	82.9	83.0	82.5	82.5	82.1	15.4	382.3
50,0°	76.9	77.9	79.2	80.7	82.1	83.6	84.7	85.4	85.4	85.4	85.1	85.1	84.9	15.9	398.2
51,0°	77.2	78.5	80.2	82.1	84.0	85.9	87.2	88.1	88.2	88.2	88.0	88.2	88.0	16.6	414.7
52,0°	77.7	79.5	81.7	84.2	86.6	89.0	90.7	91.8	91.6	91.6	91.6	91.9	91.8	17.3	432.1
53,0°	78.4	80.7	83.4	86.3	89.3	92.2	94.3	95.2	95.1	95.1	95.2	95.6	95.6	18.1	450.2
54,0°	79.2	82.0	85.3	88.9	92.6	95.9	97.9	98.7	98.5	98.5	98.7	99.2	99.1	18.9	469.1
55,0°	80.2	83.7	87.6	92.1	96.3	100.0	102.2	102.6	102.2	102.1	102.3	102.9	102.9	19.8	488.9
56,0°	81.4	85.3	89.9	95.2	99.8	103.9	105.8	106.2	105.2	105.1	105.4	106.1	106.2	20.7	509.7
57,0°	82.7	87.2	92.2	98.3	103.1	107.7	109.2	109.4	108.0	107.7	107.9	108.7	108.6	21.8	531.5
58,0°	84.0	88.8	94.7	101.0	106.3	110.7	112.2	111.9	110.3	109.6	109.7	110.5	110.7	23.1	554.6
59,0°	85.1	90.5	96.6	103.4	108.9	113.2	114.5	113.8	111.8	110.8	110.9	111.6	111.9	24.7	579.3
60,0°	86.2	91.9	98.4	105.2	110.9	115.1	116.0	114.8	112.6	111.3	111.3	112.0	112.1	26.6	605.9
61,0°	86.9	92.7	99.5	106.2	112.1	115.8	116.5	114.8	112.3	110.9	110.9	111.4	111.6	28.9	634.8
62,0°	87.4	93.4	99.9	106.7	112.3	115.7	116.0	114.1	111.3	109.5	109.6	110.1	110.2	31.5	666.3
63,0°	87.5	93.4	99.9	106.2	111.5	114.5	114.5	112.2	109.4	107.4	107.4	107.6	107.9	34.6	700.8
64,0°	87.0	93.0	99.2	105.1	110.1	112.5	112.2	109.7	106.8	104.7	104.5	104.8	105.0	37.2	738.0
65,0°	86.3	91.8	97.8	103.0	107.9	109.4	109.3	106.2	103.5	100.9	101.1	100.9	101.7	38.6	776.6
66,0°	84.9	89.9	95.6	100.4	104.7	106.0	105.5	102.3	99.3	96.5	96.5	96.1	97.0	38.4	815.0
67,0°	82.9	87.5	92.7	97.1	101.1	101.6	100.6	96.3	92.6	88.2	87.9	86.7	87.7	36.9	852.0
68,0°	80.3	84.3	88.9	92.2	94.8	93.1	90.9	86.7	84.1	80.5	80.2	79.6	80.2	33.8	885.8
69,0°	77.1	80.4	83.8	84.6	86.9	85.4	84.3	80.8	77.6	74.7	74.5	73.7	74.3	29.4	915.2
70,0°	73.1	74.4	77.1	78.2	79.8	78.6	77.5	71.9	69.9	65.3	65.4	63.4	64.6	23.5	938.6
71,0°	67.4	68.7	70.6	71.4	71.9	69.3	67.3	63.6	61.4	57.9	57.4	57.0	57.5	17.0	955.6
72,0°	61.8	62.6	63.5	63.4	63.5	62.4	60.1	57.0	54.0	50.6	50.0	49.2	50.1	11.7	967.4

Photometric test report

Family Streetlight 21 mini easy LED	Order number: 5XE6H37N08GB EAN: 4058352897652	LP number 59066_830
---	--	--------------------------------------

siteco

Table of values for luminous intensities Maximum luminous intensity

C-planes	0,0° 180,0°	2,5° 177,5°	5,0° 175,0°	7,5° 172,5°	10,0° 170,0°	12,5° 167,5°	15,0° 165,0°	17,5° 162,5°	20,0° 160,0°	22,5° 157,5°	25,0° 155,0°	27,5° 152,5°	30,0° 150,0°	32,5° 147,5°	35,0° 145,0°
γ	Luminous intensity in cd/klm														
73,0°	35.2	38.4	44.0	47.9	56.3	63.4	78.3	94.3	136.6	163.2	187.0	188.9	200.9	197.3	202.2
74,0°	29.0	30.2	32.5	33.7	36.7	38.2	42.7	47.1	67.2	83.1	102.3	104.2	116.8	114.8	121.0
75,0°	25.0	25.4	26.8	27.6	29.1	29.4	31.0	31.7	38.9	45.5	55.5	56.9	63.5	63.0	66.6
76,0°	21.4	21.6	22.5	22.8	23.9	24.0	25.1	25.1	27.1	28.9	31.9	32.2	35.2	35.1	36.0
77,0°	18.6	18.6	19.3	19.2	20.1	20.2	20.9	21.1	22.2	22.6	24.0	24.1	25.4	25.3	25.9
78,0°	16.2	15.8	16.3	15.8	16.8	16.7	17.5	17.4	18.4	18.6	19.7	19.5	20.5	20.2	21.4
79,0°	13.6	13.4	13.5	13.1	13.6	13.7	14.3	14.4	15.1	15.3	16.1	16.2	16.7	16.8	17.5
80,0°	11.4	10.9	11.0	10.6	11.0	11.1	11.6	11.7	12.3	12.5	13.2	13.2	13.7	13.8	14.5
81,0°	8.8	8.2	8.4	8.2	8.4	8.5	9.0	9.1	9.6	9.8	10.3	10.3	10.8	11.1	11.6
82,0°	6.5	6.1	6.1	6.1	6.4	6.4	6.7	6.9	7.3	7.3	7.8	7.9	8.4	8.6	9.0
83,0°	4.6	4.3	4.4	4.4	4.6	4.6	5.0	5.0	5.3	5.4	5.8	5.9	6.1	6.3	6.7
84,0°	3.0	2.7	3.0	2.7	3.0	3.0	3.2	3.2	3.4	3.5	3.9	3.9	4.3	4.4	4.7
85,0°	1.9	1.9	1.9	1.9	2.0	1.9	2.0	2.0	2.2	2.2	2.5	2.5	2.7	2.7	3.0
86,0°	1.4	1.3	1.4	1.3	1.3	1.2	1.3	1.2	1.4	1.3	1.4	1.3	1.5	1.5	1.8
87,0°	1.1	1.1	1.1	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9
88,0°	0.9	0.9	0.9	0.9	0.9	0.9	0.8	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7
89,0°	0.9	0.9	0.9	0.9	0.9	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 21 mini easy LED	Order number: 5XE6H37N08GB EAN: 4058352897652	LP number 59066_830
--	--	--------------------------------------

siteco

C-planes	37,5° 142,5°	40,0° 140,0°	42,5° 137,5°	45,0° 135,0°	47,5° 132,5°	50,0° 130,0°	52,5° 127,5°	55,0° 125,0°	57,5° 122,5°	60,0° 120,0°	62,5° 117,5°	65,0° 115,0°	67,5° 112,5°	70,0° 110,0°	72,5° 107,5°
γ	Luminous intensity in cd/klm														
73,0°	190.7	183.9	152.7	136.4	133.9	142.5	133.0	128.1	117.1	109.9	98.2	90.8	80.7	74.3	56.2
74,0°	109.9	98.2	75.3	71.3	84.6	97.3	90.8	89.9	82.8	80.3	71.4	67.9	60.4	56.5	43.6
75,0°	55.6	48.5	42.3	44.5	56.6	64.5	60.4	60.8	56.4	55.5	49.2	46.5	42.5	41.7	35.7
76,0°	31.8	31.5	30.6	31.9	37.0	40.7	38.8	39.4	36.7	36.8	34.1	33.6	32.3	32.5	29.7
77,0°	25.2	25.7	25.5	26.0	27.6	29.3	28.3	28.9	27.8	28.1	26.8	27.4	27.2	27.6	25.7
78,0°	20.8	21.8	21.6	22.5	22.5	23.8	22.8	23.4	22.4	23.5	24.4	26.3	27.6	25.5	22.8
79,0°	17.4	18.1	18.3	18.8	18.9	19.5	19.2	19.3	19.7	22.2	26.1	30.2	30.9	26.0	21.1
80,0°	14.4	15.0	15.3	15.7	15.7	16.2	16.1	16.4	17.5	21.5	27.2	32.5	31.5	25.4	18.8
81,0°	11.6	11.8	12.1	12.5	12.5	13.0	13.0	13.2	14.4	18.4	23.7	28.5	27.2	22.0	15.6
82,0°	9.1	9.6	9.7	10.1	10.2	10.4	10.2	10.4	11.0	14.0	18.2	22.0	20.7	17.1	12.4
83,0°	6.9	7.3	7.3	7.7	7.6	7.9	7.8	8.0	8.3	10.1	12.2	14.5	13.8	12.5	9.3
84,0°	4.6	5.1	5.1	5.3	5.3	5.7	5.6	5.8	5.7	6.4	7.3	8.9	8.6	8.4	6.5
85,0°	3.1	3.3	3.2	3.5	3.5	3.7	3.7	3.9	3.8	4.3	4.4	5.1	5.1	5.0	4.0
86,0°	1.7	2.0	1.8	2.1	2.0	2.2	2.0	2.5	2.2	2.5	2.2	2.6	2.2	2.6	2.1
87,0°	0.9	0.9	0.9	1.1	1.1	1.2	1.2	1.3	1.2	1.3	1.2	1.3	1.2	1.3	1.2
88,0°	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.9	0.8	0.9	0.9
89,0°	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 21 mini easy LED	Order number: 5XE6H37N08GB EAN: 4058352897652	LP number 59066_830
		siteco

C-planes	75,0° 105,0°	77,5° 102,5°	80,0° 100,0°	82,5° 97,5°	85,0° 95,0°	87,5° 92,5°	90,0°	182,5° 357,5°	185,0° 355,0°	187,5° 352,5°	190,0° 350,0°	192,5° 347,5°	195,0° 345,0°	197,5° 342,5°	200,0° 340,0°
γ	Luminous intensity in cd/klm														
73,0°	36.5	33.7	33.2	32.3	32.0	31.6	31.9	31.5	31.1	30.6	30.7	31.1	31.7	31.6	31.8
74,0°	33.0	30.9	30.5	29.4	29.3	28.7	29.6	27.3	27.8	27.4	27.8	28.0	28.7	28.4	28.9
75,0°	30.2	28.1	27.6	26.1	26.1	25.4	26.3	24.1	25.0	24.6	25.0	25.2	25.5	25.4	25.9
76,0°	27.1	24.6	23.7	22.6	22.4	22.0	22.5	21.3	22.0	21.5	21.9	21.9	22.2	22.5	22.8
77,0°	24.1	21.4	20.7	19.7	19.5	19.0	19.6	18.7	19.2	18.6	18.9	19.3	19.2	19.5	20.1
78,0°	21.3	18.4	18.0	16.8	16.7	16.3	16.8	16.3	16.7	15.7	16.3	16.3	16.4	16.6	17.4
79,0°	18.6	16.1	15.3	14.4	14.1	14.0	14.4	14.5	14.5	13.1	13.4	13.5	13.5	14.1	14.5
80,0°	15.8	13.7	12.8	12.1	11.8	11.9	12.1	12.4	12.1	10.6	10.9	11.0	11.1	11.6	12.1
81,0°	12.8	11.2	10.4	9.7	9.5	9.3	9.7	9.7	9.1	7.9	8.3	8.5	8.8	9.1	9.6
82,0°	10.3	9.1	8.3	7.7	7.5	7.3	7.6	7.1	6.6	5.9	6.1	6.4	6.7	7.0	7.3
83,0°	7.9	6.9	6.3	5.7	5.6	5.4	5.7	5.0	4.4	4.3	4.5	4.6	4.8	5.1	5.3
84,0°	5.7	4.7	4.4	3.9	3.8	3.7	4.0	3.0	2.8	2.8	3.0	3.1	3.2	3.3	3.4
85,0°	3.8	3.1	2.8	2.6	2.6	2.4	2.6	1.9	1.9	1.9	2.0	2.0	2.1	2.1	2.2
86,0°	2.1	1.9	1.8	1.4	1.7	1.4	1.7	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4
87,0°	1.2	1.2	0.9	0.9	0.9	0.9	0.9	0.9	1.1	1.2	1.2	1.2	1.2	1.2	1.2
88,0°	0.9	0.9	0.8	0.7	0.8	0.7	0.7	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9
89,0°	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 21 mini easy LED	Order number: 5XE6H37N08GB EAN: 4058352897652	LP number 59066_830
		siteco

C-planes	202,5° 337,5°	205,0° 335,0°	207,5° 332,5°	210,0° 330,0°	212,5° 327,5°	215,0° 325,0°	217,5° 322,5°	220,0° 320,0°	222,5° 317,5°	225,0° 315,0°	227,5° 312,5°	230,0° 310,0°	232,5° 307,5°	235,0° 305,0°	237,5° 302,5°
γ	Luminous intensity in cd/klm														
73,0°	32.4	33.6	34.6	36.5	37.7	38.8	39.5	43.3	51.1	60.7	64.6	64.9	59.5	56.5	55.0
74,0°	29.3	30.5	31.3	32.8	33.8	35.2	35.6	37.3	39.9	46.0	50.4	52.9	50.3	49.4	49.0
75,0°	26.3	27.3	28.1	29.6	30.5	31.9	32.4	33.7	34.9	37.7	40.0	42.8	42.6	43.5	43.4
76,0°	23.1	24.0	24.7	26.1	26.8	28.1	28.6	29.8	30.6	32.3	33.7	35.6	36.5	37.7	38.2
77,0°	20.1	21.2	21.9	23.1	23.7	24.7	25.2	26.3	26.8	28.5	29.7	31.2	31.8	33.2	33.2
78,0°	17.3	18.4	18.7	20.1	20.1	21.3	21.2	22.6	22.9	24.7	25.1	26.8	27.1	28.5	28.0
79,0°	14.8	15.6	16.1	16.8	16.9	17.6	18.0	19.0	19.5	20.7	21.3	22.6	22.9	23.7	23.8
80,0°	12.4	13.1	13.6	13.8	13.8	14.3	14.8	15.7	16.2	17.1	17.7	18.7	18.9	19.6	19.6
81,0°	9.8	10.3	10.5	10.8	10.9	11.2	11.5	12.2	12.5	13.2	13.7	14.5	14.7	15.4	15.3
82,0°	7.6	7.9	8.0	8.4	8.4	8.6	8.8	9.1	9.3	10.1	10.6	11.2	11.6	11.9	11.8
83,0°	5.4	5.8	5.8	6.0	6.0	6.3	6.3	6.6	6.7	7.3	7.6	8.0	8.3	8.6	8.8
84,0°	3.4	3.8	3.8	3.9	3.9	4.1	4.1	4.4	4.4	4.7	4.8	5.2	5.2	5.7	5.7
85,0°	2.2	2.4	2.4	2.5	2.5	2.6	2.5	2.7	2.6	2.8	2.8	3.2	3.1	3.4	3.3
86,0°	1.4	1.5	1.4	1.5	1.4	1.7	1.4	1.7	1.5	1.7	1.7	1.9	1.7	1.9	1.7
87,0°	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2
88,0°	0.9	0.9	0.9	0.9	0.9	0.9	1.1	1.1	0.9	1.1	1.1	0.9	0.9	0.9	0.9
89,0°	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

C-planes	240,0° 300,0°	242,5° 297,5°	245,0° 295,0°	247,5° 292,5°	250,0° 290,0°	252,5° 287,5°	255,0° 285,0°	257,5° 282,5°	260,0° 280,0°	262,5° 277,5°	265,0° 275,0°	267,5° 272,5°	270,0°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm													Luminous flux in lm/klm	
73,0°	55.3	55.3	56.5	56.4	56.6	53.7	51.4	47.7	44.6	42.3	41.2	41.2	41.9	7.8	975.2
74,0°	49.5	49.9	50.6	49.8	48.8	47.2	45.1	40.9	38.7	34.9	34.3	33.3	34.3	5.5	980.7
75,0°	44.6	44.5	44.7	43.5	43.0	40.6	37.0	34.1	31.5	28.9	27.7	27.1	27.9	4.0	984.7
76,0°	38.9	38.4	38.7	36.8	36.7	33.0	30.7	26.5	23.7	21.1	19.9	19.0	19.6	3.1	987.8
77,0°	33.7	33.5	32.9	32.2	29.8	27.3	24.6	20.8	18.0	15.0	13.6	12.3	12.5	2.6	990.3
78,0°	29.2	27.7	28.4	25.8	25.0	21.2	19.0	14.5	12.5	9.3	8.2	6.7	7.1	2.2	992.5
79,0°	24.0	23.3	23.3	21.3	19.6	16.7	14.1	10.8	8.0	5.7	3.9	3.0	3.1	1.8	994.3
80,0°	19.5	19.5	18.7	17.4	15.8	13.1	10.3	7.9	5.9	3.8	2.4	1.9	1.9	1.6	995.9
81,0°	15.8	15.3	14.9	13.4	11.8	9.6	7.9	5.9	4.0	2.8	1.7	1.4	1.4	1.2	997.1
82,0°	12.1	11.7	11.4	10.3	8.9	7.2	5.8	4.5	3.1	2.1	1.4	1.2	1.2	1.0	998.1
83,0°	8.8	8.6	8.4	7.6	6.6	5.3	4.4	3.3	2.4	1.4	1.2	1.2	1.2	0.7	998.8
84,0°	6.0	5.7	5.7	5.0	4.5	3.5	3.1	2.4	1.9	1.2	1.2	0.9	0.9	0.5	999.2
85,0°	3.5	3.5	3.7	3.1	2.8	2.4	2.1	1.7	1.4	1.2	0.9	0.9	0.9	0.3	999.5
86,0°	1.9	1.7	1.8	1.4	1.7	1.4	1.4	1.2	1.2	0.9	0.9	0.9	0.9	0.2	999.7
87,0°	1.2	1.2	1.2	1.2	1.1	0.9	1.1	0.9	0.9	0.9	0.9	0.9	0.9	0.1	999.8
88,0°	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.1	999.9
89,0°	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.1	1000.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family Streetlight 21 mini easy LED	Order number: 5XE6H37N08GB EAN: 4058352897652	LP number 59066_830
Dimming levels table		siteco
environmental temperature: 25°C		

Luminous flux [%]	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]start of lifetime	Power consumption [W]end of lifetime	Power consumption [W]average
100	254	254	5840	40.4	41.1	40.8
95	240	252	5557	38.1	38.8	38.4
90	225	250	5251	35.8	36.4	36.1
85	211	247	4959	33.5	34.1	33.8
80	197	245	4663	31.3	31.9	31.6
75	184	242	4386	29.3	29.8	29.6
70	170	239	4082	27.1	27.5	27.3
65	157	236	3795	25.1	25.5	25.3
60	144	233	3505	23.2	23.5	23.4
55	131	230	3212	21.2	21.5	21.4
50	118	226	2915	19.2	19.5	19.4
45	106	222	2637	17.4	17.6	17.5
40	93	217	2333	15.4	15.6	15.5
35	81	212	2048	13.6	13.8	13.7
30	69	206	1760	11.8	12.0	11.9
25	57	199	1467	10.1	10.2	10.1
20	45	191	1172	8.3	8.4	8.4
15	33	179	874	6.6	6.7	6.6
11	23	166	622	5.2	5.2	5.2

Dimming levels table

environmental temperature: 5°C

Luminous flux [%]	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]start of lifetime	Power consumption [W]end of lifetime	Power consumption [W]average
100	254	254	5960	40.9	41.6	41.2
95	240	252	5668	38.6	39.3	39.0
90	226	250	5371	36.4	37.0	36.7
85	212	247	5071	34.2	34.8	34.5
80	198	245	4767	31.9	32.5	32.2
75	184	242	4459	29.8	30.2	30.0
70	171	240	4170	27.7	28.1	27.9
65	158	237	3877	25.7	26.0	25.8
60	145	233	3581	23.6	24.0	23.8
55	132	230	3282	21.6	21.9	21.8
50	119	226	2979	19.6	19.9	19.8
45	106	222	2672	17.6	17.8	17.7
40	94	218	2386	15.8	16.1	16.0
35	82	213	2096	13.9	14.2	14.0
30	69	206	1779	12.0	12.2	12.1
25	57	199	1484	10.2	10.3	10.2
20	45	191	1185	8.5	8.6	8.6
15	33	179	883	6.7	6.8	6.8
11	23	166	629	5.3	5.3	5.3

Photometric test report

Family Streetlight 21 mini easy LED	Order number: 5XE6H37N08GB EAN: 4058352897652	LP number 59066_830
---	--	--------------------------------------

Dimming levels table	environmental temperature: 15°C	sITeco
-----------------------------	---------------------------------	---------------

Luminous flux [%]	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]start of lifetime	Power consumption [W]end of lifetime	Power consumption [W]average
100	254	254	5910	40.6	41.4	41.0
95	240	252	5623	38.4	39.1	38.8
90	225	250	5309	36.0	36.7	36.4
85	212	247	5034	34.0	34.5	34.2
80	198	245	4734	31.7	32.3	32.0
75	184	242	4430	29.5	30.0	29.8
70	171	240	4143	27.5	27.9	27.7
65	157	236	3831	25.3	25.7	25.5
60	144	233	3537	23.3	23.7	23.5
55	131	230	3240	21.3	21.6	21.5
50	119	226	2963	19.4	19.7	19.5
45	106	222	2659	17.5	17.7	17.6
40	94	218	2375	15.6	15.9	15.8
35	81	212	2063	13.7	13.9	13.8
30	69	206	1772	11.9	12.1	12.0
25	57	199	1478	10.1	10.3	10.2
20	45	191	1180	8.4	8.5	8.4
15	33	179	880	6.6	6.7	6.6
11	23	166	626	5.2	5.2	5.2

Photometric test report

Family Streetlight 21 mini easy LED	Order number: 5XE6H37N08GB EAN: 4058352897652	LP number 59066_830
---	--	--------------------------------------

Luminousfluxs table



Temperature °C	Luminous flux lm	Power consumption W
25.0	5840.0	40.4
5.0	5960.0	40.9
15.0	5910.0	40.6